

HANDMOTION

- SCAPHOID SURGERY SCREW
- SHORT THREADED SCREW


INDICATIONS

HANDMOTION short threaded screws are dedicated to fractures of small bone fragments.


- Scaphoid fractures
- Carpal and metacarpal fractures
- Carpal and metacarpal arthrodesis

TECHNICAL FEATURES

- Auto-compressive, self drilling and self tapping screw;
- 3 diameters : Ø2.25mm, Ø2.6mm, 3.0mm ;
- Cannulated screw : 2.25 and 2.6/3.0mm cannulated screws are guided by 0.8 and 1.0mm K-wires;
- Short threaded screw : 5mm, optimal compression ;
- The cylindro-conical profile of the head allows a non-traumatic insertion of the screw into the cortical bone and optimal compression of the osteotomy, thus avoiding any risk of splitting the cortical bone ;
- Sterile Packaging (Tube SOSAFE) ;
- Material : TA6V.

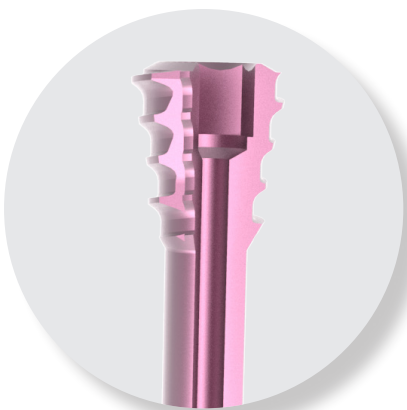

- ➔ Cylindro conical shape head screw
- ➔ Cannulated screw

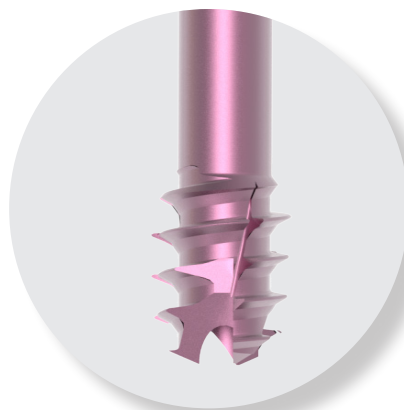

- ➔ Self drilling screw
- ➔ Self tapping screw
- ➔ Auto-compressive screw



- ➔ 3 diameters : Ø2.25, Ø2.6 and Ø3.0mm
- ➔ Short threaded screw : 5mm

IMPLANTS REFERENCES


Non contractual pictures.



Ø2.25mm CANNULATED SCREW*
SHORT THREADED

Ref	Description
H0.9IFT2.25L14-ST	Ø2.25mm self drilling, self tapping, self compressive screw - L 14mm
H0.9IFT2.25L16-ST	Ø2.25mm self drilling, self tapping, self compressive screw - L 16 mm
H0.9IFT2.25L18-ST	Ø2.25mm self drilling, self tapping, self compressive screw - L 18 mm
H0.9IFT2.25L20-ST	Ø2.25mm self drilling, self tapping, self compressive screw - L 20 mm
H0.9IFT2.25L22-ST	Ø2.25mm self drilling, self tapping, self compressive screw - L 22 mm
H0.9IFT2.25L24-ST	Ø2.25mm self drilling, self tapping, self compressive screw - L 24 mm
H0.9IFT2.25L26-ST	Ø2.25mm self drilling, self tapping, self compressive screw - L 26 mm
H0.9IFT2.25L28-ST	Ø2.25mm self drilling, self tapping, self compressive screw - L 28 mm
H0.9IFT2.25L30-ST	Ø2.25mm self drilling, self tapping, self compressive screw - L 30 mm
H0.9IFT2.25L32-ST	Ø2.25mm self drilling, self tapping, self compressive screw - L 32 mm
H0.9IFT2.25L34-ST	Ø2.25mm self drilling, self tapping, self compressive screw - L 34 mm


*Grey anodized



Ø2.6mm CANNULATED SCREW*
SHORT THREADED

Ref.	Description
H1.1IFT2.6L14-ST	Ø2.6mm self drilling, self tapping, self compressive screw - L 14 mm
H1.1IFT2.6L16-ST	Ø2.6mm self drilling, self tapping, self compressive screw - L 16 mm
H1.1IFT2.6L18-ST	Ø2.6mm self drilling, self tapping, self compressive screw - L 18 mm
H1.1IFT2.6L20-ST	Ø2.6mm self drilling, self tapping, self compressive screw - L 20 mm
H1.1IFT2.6L22-ST	Ø2.6mm self drilling, self tapping, self compressive screw - L 22 mm
H1.1IFT2.6L24-ST	Ø2.6mm self drilling, self tapping, self compressive screw - L 24 mm
H1.1IFT2.6L26-ST	Ø2.6mm self drilling, self tapping, self compressive screw - L 26 mm
H1.1IFT2.6L28-ST	Ø2.6mm self drilling, self tapping, self compressive screw - L 28 mm
H1.1IFT2.6L30-ST	Ø2.6mm self drilling, self tapping, self compressive screw - L 30 mm
H1.1IFT2.6L32-ST	Ø2.6mm self drilling, self tapping, self compressive screw - L 32 mm
H1.1IFT2.6L34-ST	Ø2.6mm self drilling, self tapping, self compressive screw - L 34 mm

*Golden anodized



Ø3.0mm CANNULATED SCREW*
SHORT THREADED

Ref.	Description
H1.1IFT3.0L14-ST	Ø3.0mm self drilling, self tapping, self compressive screw - L 14 mm
H1.1IFT3.0L16-ST	Ø3.0mm self drilling, self tapping, self compressive screw - L 16 mm
H1.1IFT3.0L18-ST	Ø3.0mm self drilling, self tapping, self compressive screw - L 18 mm
H1.1IFT3.0L20-ST	Ø3.0mm self drilling, self tapping, self compressive screw - L 20 mm
H1.1IFT3.0L22-ST	Ø3.0mm self drilling, self tapping, self compressive screw - L 22 mm
H1.1IFT3.0L24-ST	Ø3.0mm self drilling, self tapping, self compressive screw - L 24 mm
H1.1IFT3.0L26-ST	Ø3.0mm self drilling, self tapping, self compressive screw - L 26 mm
H1.1IFT3.0L28-ST	Ø3.0mm self drilling, self tapping, self compressive screw - L 28 mm
H1.1IFT3.0L30-ST	Ø3.0mm self drilling, self tapping, self compressive screw - L 30 mm
H1.1IFT3.0L32-ST	Ø3.0mm self drilling, self tapping, self compressive screw - L 32 mm
H1.1IFT3.0L34-ST	Ø3.0mm self drilling, self tapping, self compressive screw - L 34 mm

*Pink anodized

Remark :



Our SoSafe packaging is made of a shatterproof double tube for maximally reliability.
All surgical items can be safely brought from the unsterile into the sterile field.



NEWCLIP TECHNICS
PA de la Lande Saint Martin - 45 rue des Garottières
44115 Haute Goulaine (France)
Tél. : +33 (0)2 28 21 23 25 - Fax : +33 (0)2 40 63 68 37
orders@newcliptechnics.com - www.newcliptechnics.com

Brochure EN - Handmotion - Ed.2 - 10/2013 - Medical device class IIb - CE 0120 SGS UK - Read labeling and instructions before use.