

AI for Detector Design

National Nuclear Physics Summer School
MIT, 2022



Cristiano Fanelli



Lecture 1

Outline

- **Lecture 1 (1.5h)**
 - What this is not (and is) about
 - Complexity of modern detectors
 - How do we design and optimize detectors?
 - Examples
 - Toy example 1
- **Lecture 2 (1.5h)**
 - Multiple competing objectives
 - The ECCE example
 - Examples
 - Toy example 2
- **Lecture 3 (1.5 h)**
 - MOO in HEP/NP
 - Improving the workflow
 - Learning interactions of simulated particles with matter
 - Learning event reconstruction, pattern recognition
 - End-to-end optimization pipelines
 - Conclusions
 - Toy example 3

Useful References

- [1] AI4NP Winter School, 2020 <https://github.org/cfteam>
- [3] AI-optimized detector design for the future Electron-Ion Collider: the dual-radiator RICH case
<https://arxiv.org/abs/1911.05797>
- [4] AI-assisted Optimization of the ECCE Tracking System at the Electron Ion Collider
<https://arxiv.org/abs/2205.09185>
- [5] MODE: White Paper,
<https://arxiv.org/pdf/2203.13818.pdf>
- [6] Machine Learning in Nuclear Physics,
<https://arxiv.org/abs/2112.02309>

What this is (and is not) about


What you will learn:

These lectures provide an overview of SOTA approaches for detector design with AI in NP/HEP. I will discuss what the challenges are and which techniques are used in this emerging area of research and why all this is beneficial for modern complex detector design. Given the multidisciplinarity, it may be also of inspiration for other applications (actually embraces a wealth of use cases)

What you will not learn:

- These are not lectures on Particle Detectors per se
 - For that, a great classic is [Particle Detectors](#), C. Grupen and B. Schwartz
- These are not lectures on simulation toolkit like Geant to simulate detectors
 - <https://geant4.web.cern.ch/>
- These lectures in general assume some knowledge of MC event generators, detector simulation, event reconstruction and particle identification
 - I will only explain how they contribute but I won't go into details
- These lectures are definitely more focused on AI/ML but you won't learn AI/ML in 4.5h
 - I will try to provide some concrete examples and leave code snippets for optimization!

Complexity of Modern Detectors in Nuclear Physics

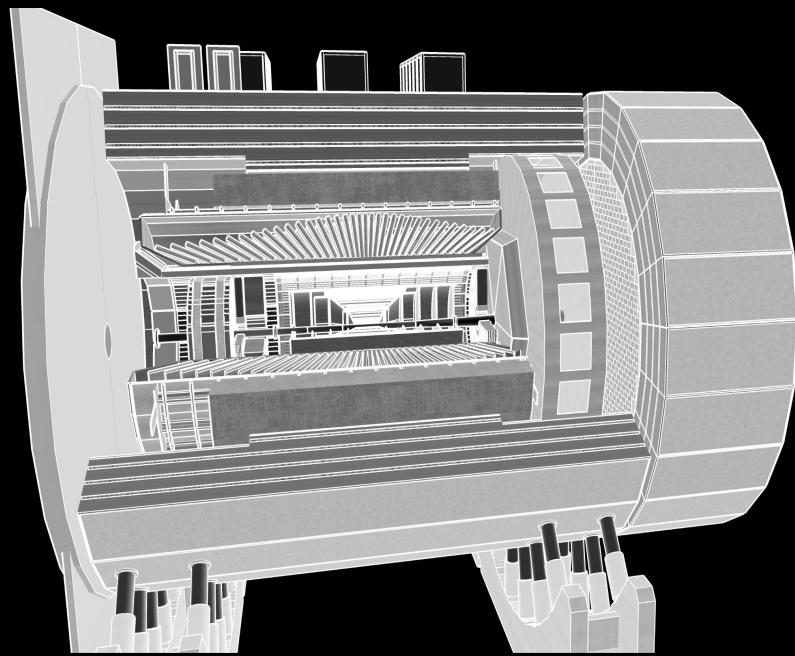

Detector Design with AI

- Do we need AI to design detectors?
 - Naively, no. We have done this in the past without AI.

Detector Design with AI

- Do we need AI to design detectors?
 - Naively, no. We have done this in the past without AI.

The design of measuring instruments can be quite complex, still the optimization can be tractable, i.e. a parametrized model can allow to define a likelihood $L = p(x|\theta)$, where θ are the modeling parameters and x the simulated data. [1]

For instrument whose functionality is based on quantum phenomena — interaction of radiation with matter — the optimization problem is intractable. Access to the generating function of observed data through forward simulation (setting referred to as likelihood-free or simulation-based inference [2])

Over the course of the past eighty years, the intractability of the design optimization problems commonly encountered in particle physics has not prevented physicists from successfully conceiving, commissioning, and operating detectors of huge complexity. [1]

=> Long-standing “paradigms”

[1] A. Baydin,, et al. "Toward machine learning optimization of experimental design." *Nuclear Physics News* 31.1 (2021): 25-28.

[2] K. Cranmer, J. Brehme, G. Louppe, The frontier of simulation-based inference, PNAS Vol 117, No. 48

Detector Design with AI

- Why these lectures then?
 - Accurate simulations are computationally expensive
 - Given the increasing complexity of modern experiments we seek to decrease the computational burden to optimally design detectors
 - Improving the detector design involves often optimizing simultaneous “tasks” in a multidimensional design space
 - Unprecedented opportunity to rethink the design strategy in terms of geometry, material, performance, costs...
 - still leveraging on existing paradigms (e.g., validation);
 - (bonus: are complex detectors designed in the past sub-optimal?)
- In this context, AI-assisted approaches able to outperform manual, brute-force, approaches.
 - Designing detectors with AI is a multidisciplinary effort that combines multiple domains of expertise

Detector Design with AI


- Fundamental nuclear and particle physics research often requires realizing expensive large-scale experiments combining multiple sub-detectors to investigate the building blocks of nature.
 - “*AI techniques that can optimize the design of complex, large-scale experiments have the potential to revolutionize the way experimental nuclear and particle physics is currently done*”.
- More than 50 years have passed since Charpak (Nobel Prize in 1992) revolutionised particle detectors with the construction of a MWPC. Nowadays we can 3D print scintillation detectors and complex detection elements with thin layers of AC-coupled resistive silicon sensors. [2,3]
- Thanks to the fast progress in CS in the past two decades, along with optimization software and the development of DNN, we now have the unique opportunity to integrate these new tools during the design of complex detection systems.
- Using AI will allow to optimize large detectors in NP experiments like the Electron Ion Collider. EIC will be a flagship nuclear physics facility in the US that will be constructed over the next 10 years and it is currently at its design phase. Its R&D program can be one of the first to systematically leverage on AI.
- In the following I will often utilize the Electron Ion Collider detector as a reference for our discussion.

[1] R. Stevens et al., [AI for Science: Report on the Department of Energy \(DOE\) Town Halls on Artificial Intelligence \(AI\) for Science](#)

[2] Y. Mishnayot et al., 3-dimensional printing of scintillating materials, *Rev. Sci. Instrum.*, 85:085102, 2014


[3] G. Giacomini et al., Fabrication and performance of AC-coupled LGADs.

EIC Science

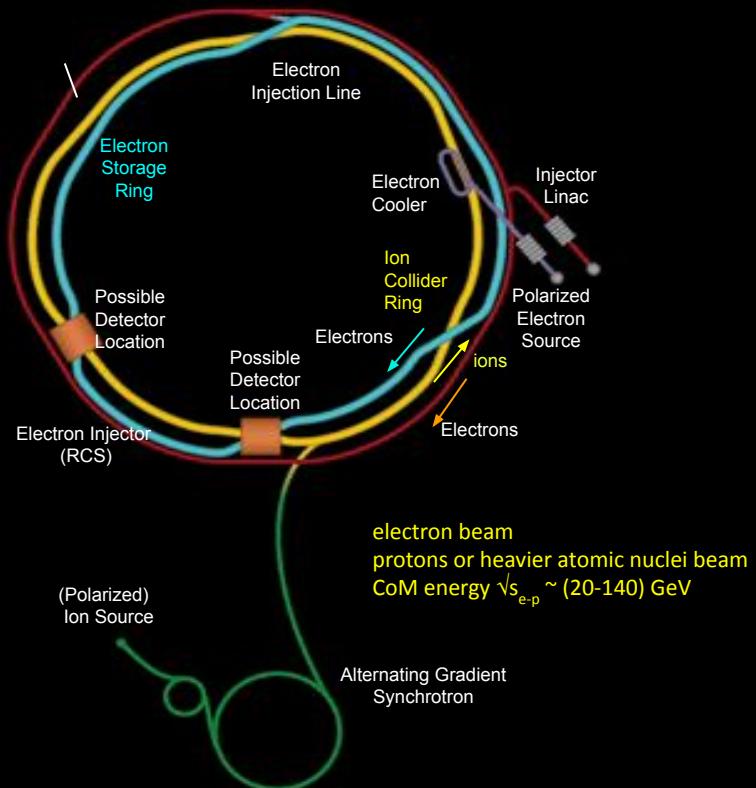

National Academy of Sciences

- **Finding 1:** An EIC can uniquely address three profound questions about nucleons — neutrons and protons — and how they are assembled to form the nuclei of atoms:
 - How does the mass of the nucleon arise?
 - How does the spin of the nucleon arise?
 - What are the emergent properties of dense systems of gluons?
- **Finding 2:** These three high-priority science questions can be answered by an EIC with highly polarized beams of electrons and ions, with sufficiently high luminosity and variable center of mass energy.
- **Finding 3:** An EIC would be a unique facility in the world and would maintain U.S. leadership in nuclear physics
- **Finding 4:** An EIC would maintain U.S. leadership in the accelerator science and technology colliders and help to maintain scientific leadership more broadly.


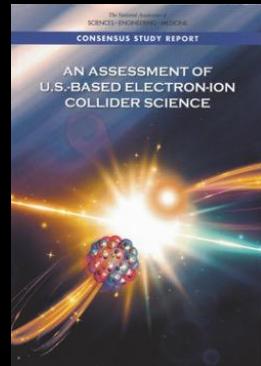


A machine for delving deeper than ever before into the building blocks of matter


EIC Science

EIC Yellow Report (2021) arXiv:2103.05419

- Origin of Nucleon Spin
- Confined motion of partons
- 3D imaging quarks and gluons
- Nucleon mass
- High gluon densities in nuclei
- Quarks and gluons in the nucleus

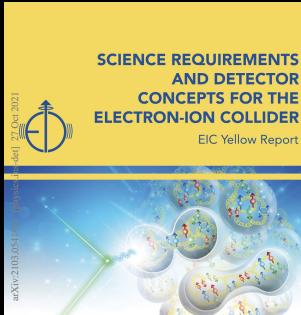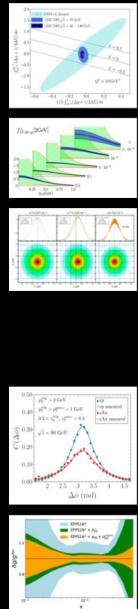


- Light-ion tagging
- Pion/Kaon structure
- Diffractive jets?
- Nuclear modifications and in-medium evolution
 - D/D* reconstruction and heavy-flavor in jets

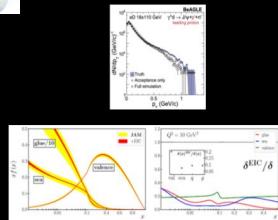

Khalek, R. Abdul, et al. "Science requirements and detector concepts for the electron-ion collider: EIC yellow report." [arXiv:2103.05419](https://arxiv.org/abs/2103.05419), 2021

Slide taken from J. Lajoie, [The ECCE Experiment Workshop VIII Streaming Readout](#), 2021


World-wide interest

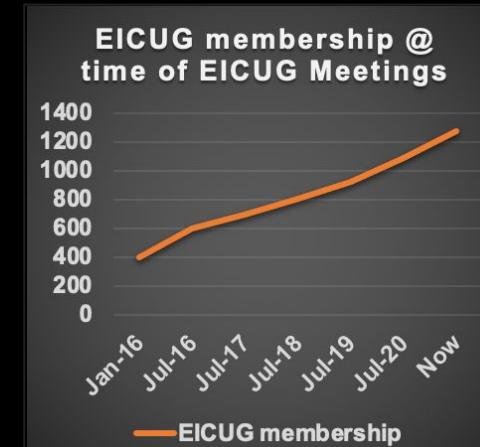

Typical EIC experimental measurements

Inclusive Reactions in ep/eA

- Structure Functions: g_1, F_2, F_L

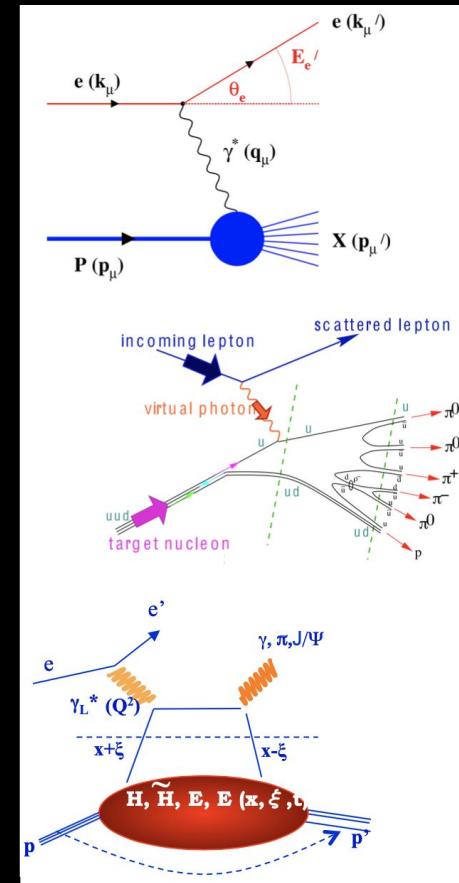


Semi-Inclusive Reactions in ep/eA

- TMDs, Helicity PDFs, FFs; di-hadron correlations; kaon asymmetries, cross-sections, ...

Exclusive Reactions in ep/eA

- DVCS, exclusive VM production (GPDs; parton imaging)

EIC Schedule and Milestones

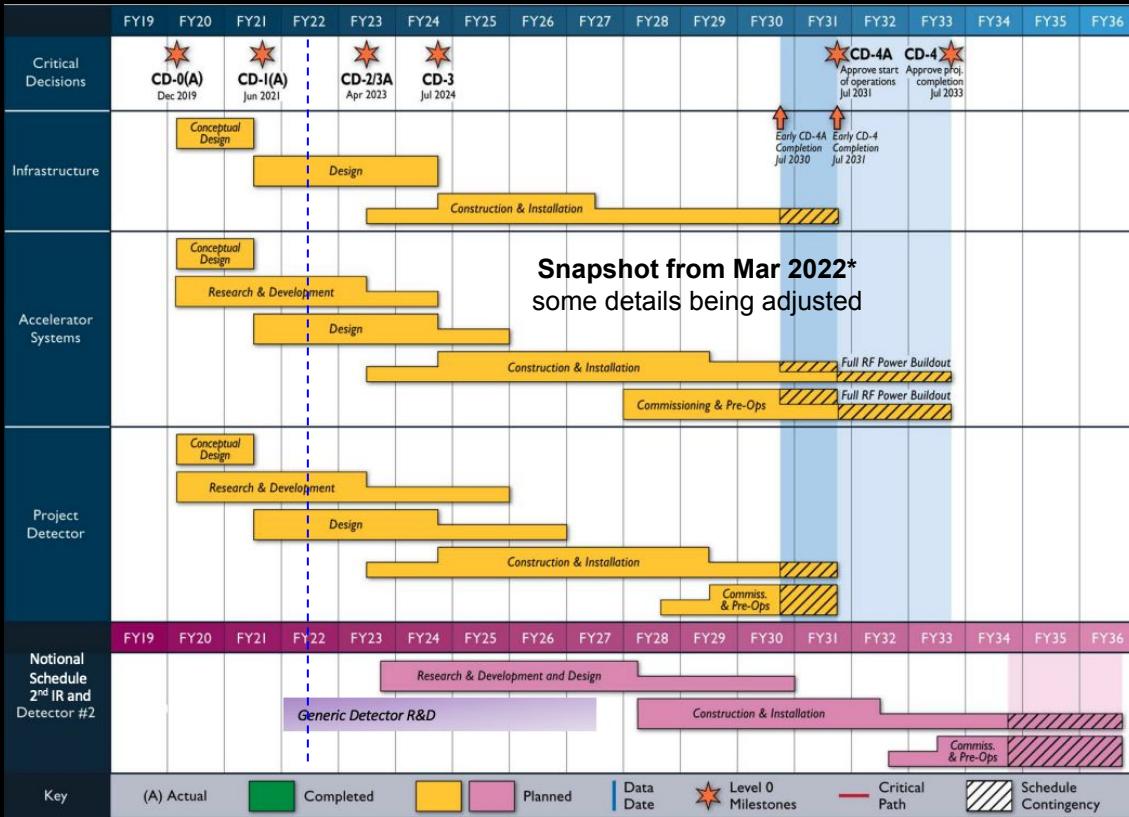

*EIC Schedule, J. Yeck, Mar 2022

Call for Collaboration Proposals
for Detectors at the Electron-Ion Collider

Deadline for submission was
December 1, 2021

Brookhaven National Laboratory (BNL) and the Thomas Jefferson National Accelerator Facility (JLab) are pleased to announce the Call for Collaboration Proposals for Detectors to be located at the Electron-Ion Collider (EIC). The EIC will have the capacity to host two interaction regions, each with a corresponding detector. It is expected that each of these two detectors would be represented by a collaboration.

EIC Detector Proposal Advisory Panel Meeting

Process completed on March 21, 2022

Panel Report

6. Recommendations:

[ECCE Reference Detector](#)

The panel unanimously recommends ECCE as Detector 1. The proto-collaboration is urged to openly accept additional collaborators and quickly consolidate its design so that the Project Detector can advance to CD2/3a in a timely way.

EIC DETECTOR 1 GENERAL MEETING

Following the DPAP process, the EIC Community is moving towards the formation of a scientific collaboration to support the realization of the EIC project detector - temporarily referred to as "Detector-1".

proto-collaborations



Towards
Collaboration

EIC Comprehensive Chromodynamics Experiment

- Proto-collaboration that comprised scientists from 98 institutions
- Develop low-risk, cost-effective, flexible and optimized EIC detector
- Detector concept based on a 1.5 T solenoidal magnet



<https://www.ecce-eic.org>

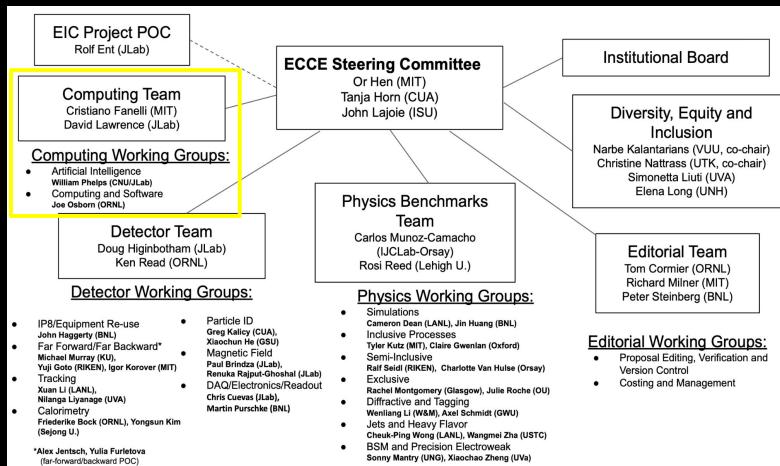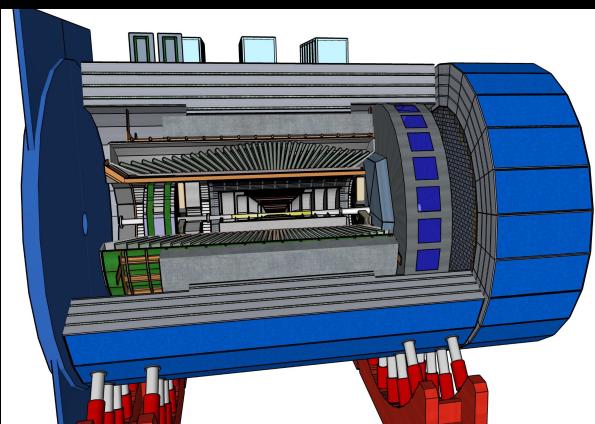

AI-assisted Detector Design at EIC:
the ECCE Tracker Example

Cristiano Fanelli¹, Karthik Suresh²,
on behalf of the ECCE AI Working Group

¹Laboratory for Nuclear Science, Massachusetts Institute of Technology,
Cambridge, MA 02139, USA.

²University of Regina, Regina, SK S4S 0A2, Canada

December 1, 2021

Abstract
The Electron-Ion Collider (EIC) is a cutting-edge nuclear experiment proposed to study the nature of the “glue” that binds the building blocks of the visible matter.

ECCE Computing Plan

Jan C. Bernauer^{1,2,3}, Cameron Dean⁴, Cristiano Fanelli⁵, Jin Huang⁶,
Karthik Suresh⁷, David Lawrence⁸, Josephine Osborne^{9,8}, and Christoph Paul¹⁰

¹Department of Physics and Astronomy, Stony Brook University, Stony Brook, NY, USA

²Jefferson Lab, Newport News, VA, USA

³Center for Frontiers in Nuclear Science, Stony Brook University, Stony Brook, NY, USA

⁴Laboratory for Nuclear Science, Massachusetts Institute of Technology, Cambridge, MA, USA

⁵Brookhaven National Laboratory, Upton, NY, USA

⁶Thomas Jefferson National Accelerator Facility, Newport News, VA, USA

⁷Oak Ridge National Laboratory, Oak Ridge, TN, USA

December 5, 2021

Executive Summary

ECCE Tracking System

Cristiano Fanelli¹, Xuan Li², Nilanga Liyanage³, Karthik Suresh⁴, Sumeet Srivastava⁵, Reynier Cruz-Torres⁶, Cheuk-Ping Wong⁷, Cameron Dean⁸, Jin Huang⁹, X. Zhao¹⁰, W. Li¹¹, E. Brian¹², James Faust¹³, Leo Greiner¹⁴, Walter Sondheim¹⁵, Sebastian Tapia Araya¹⁶, and Friederike Bock¹⁷

¹Laboratory for Nuclear Science, Massachusetts Institute of Technology, Cambridge, MA, USA

²Los Alamos National Laboratory, Los Alamos, NM, USA

³University of Virginia, Charlottesville, VA, USA

⁴Hannover University, Hannover, Germany

⁵Yeshiva University, New York, NY, USA

⁶Argonne National Laboratory, Argonne, IL, USA

⁷Brookhaven National Laboratory, Upton, NY, USA

⁸Thomas Jefferson National Accelerator Facility, Newport News, VA, USA


⁹Oak Ridge National Laboratory, Oak Ridge, TN, USA

¹⁰Florida Institute of Technology, Melbourne, FL, USA

¹¹Rice University, Houston, TX, USA

December 5, 2021


Reference Detector

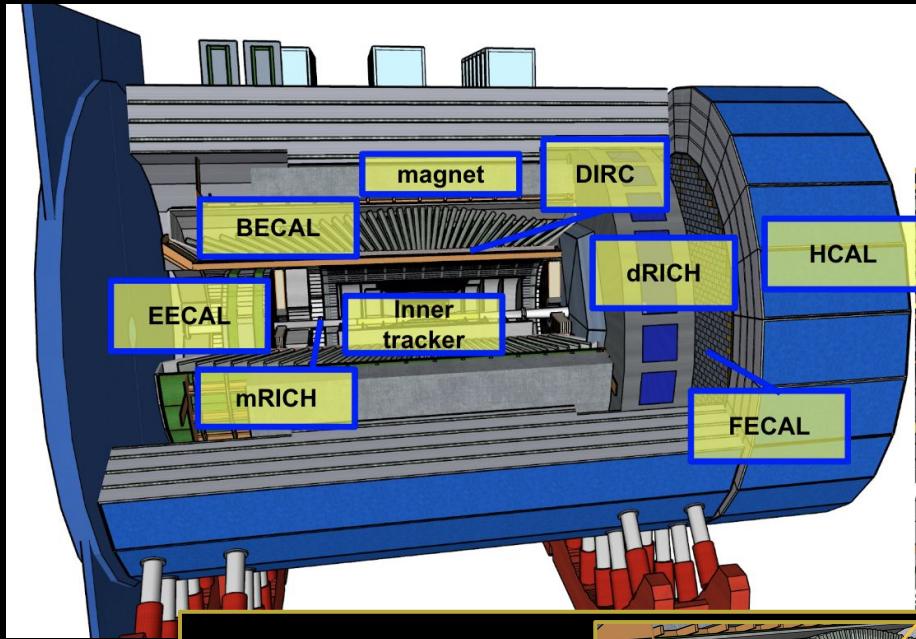

Tracker

Combines:

- ITS-3 Si technology
- Gaseous detectors
- AC-LGAD ToFs

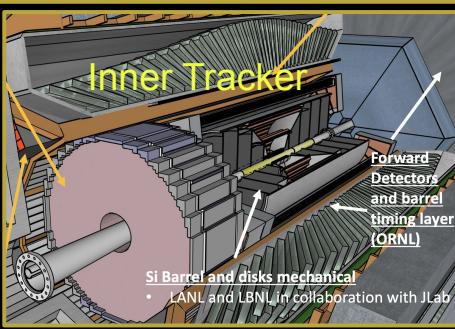

PID with Cherenkov detectors

- dual radiator ring-imaging Cherenkov detector (RICH) in the hadron direction
- DIRC (detection of internally reflected Cherenkov light) in the barrel
- modular RICH in the electron direction.


Simulating these detectors is typically compute expensive, involving many photons that need to be tracked through complex surfaces.

All three rely on pattern recognition of ring images in reconstruction, and the DIRC is the one having the more complex ring patterns!

Reference Detector


We have a reference (ECCE) detector.

Possible updates are currently being investigated (detector-1).

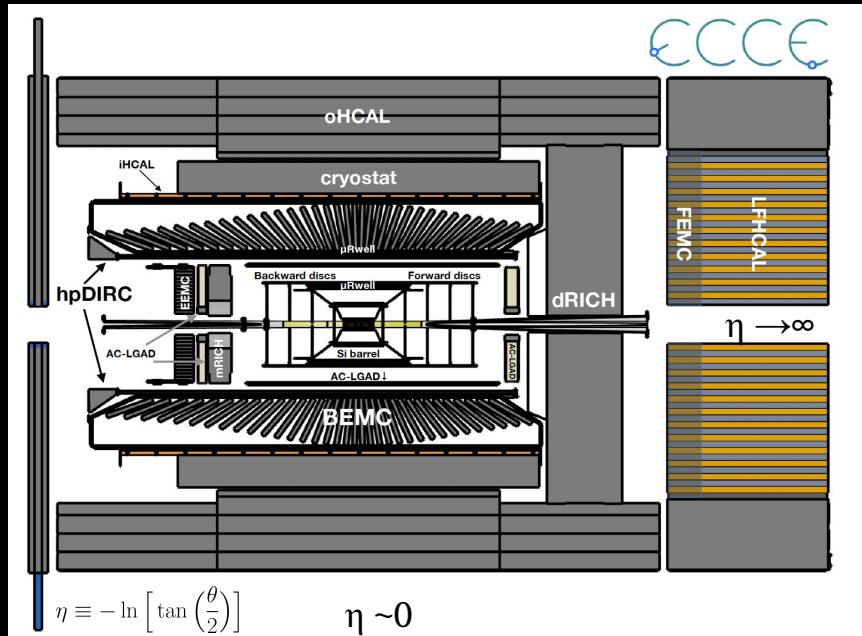

In these lectures I will often refer to these subsystems

Tracker System + PID

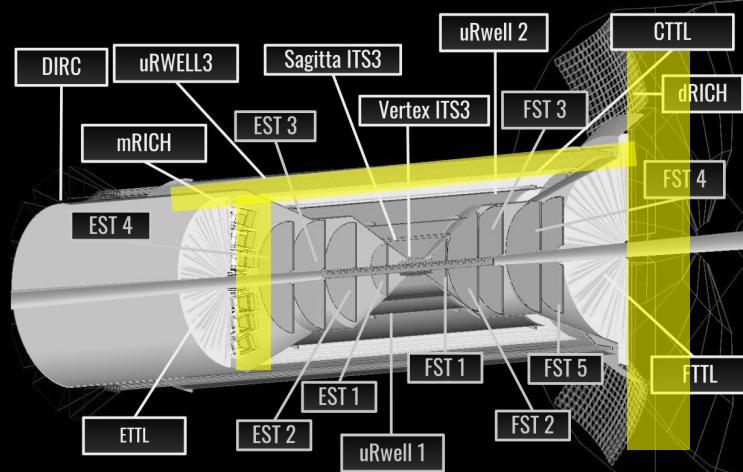

- The tracking system reconstructs charged particle tracks. It combines different technologies.
- Imaging Cherenkov detectors are the backbone of PID in EIC. Compute intensive to simulate / reconstruct.

Ideal vs Real Detectors

Ideal Case:

- Given a process,
 - detect all final state particles with 100% efficiency,
 - determining the particles types with certainty and
 - reconstructing their “true” 4-momenta

Real Case:


- For most particle species we deal with
- decay products, secondary vertices, invariant mass peaks;
- one really never gets 100% acceptance (due to support system, beam pipe, sub-detector frames, cracks, ...)
- as well as a 100% detection efficiency (due to detector imperfections, the limitations of our reconstruction algorithms, DAQ, etc.)
- PID is never 100% accurate and we deal with finite detector resolutions (detector size and technology limitations, costs...)
- Background processes make the overall picture more complicated

How do we detect particles?

- **Long-lived:** through their interaction with the detector material
 - Tracking
 - Calorimetry
 - PID detectors
- **Short-lived:** through measuring their decay products

neutrinos	none	Missing energy
electrons	Ionisation, electromagnetic	Track and EM shower
muons	Ionisation	Penetrating track
p, K, π	Ionisation, hadronic	Track and hadron shower
photons	electromagnetic	EM shower
neutrons, K^0_L	hadronic	hadron shower
B, D	Weak decay	Secondary vertex
$J/\psi, Y, W, Z, H, t$	prompt decay	Invariant mass


Particle Reconstruction

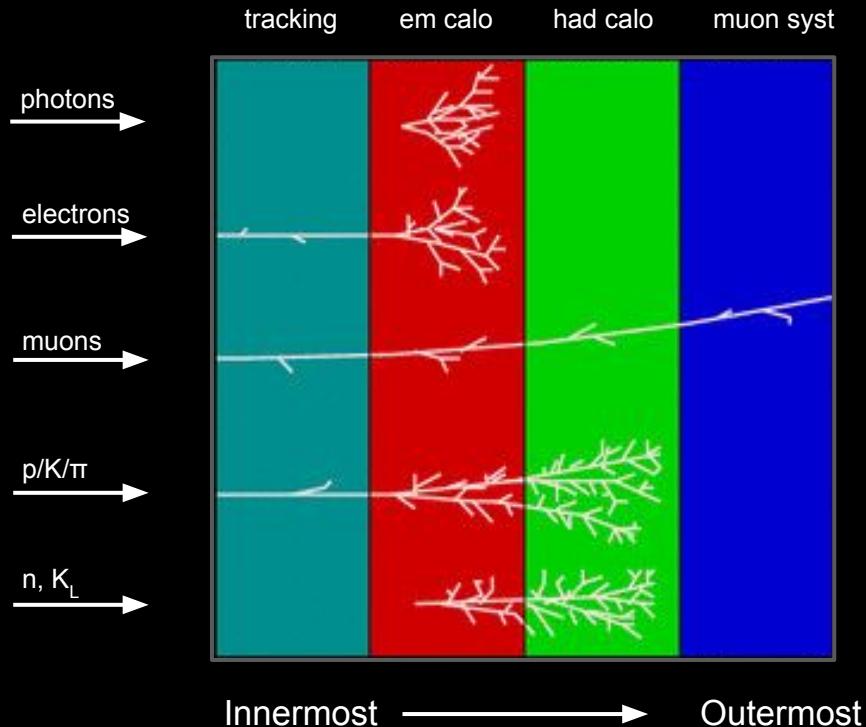

- The tracking system reconstructs charged particle tracks. It combines different technologies.
- Calorimetry measurement is “destructive”
→components belonging to the tracking system are the closest to the IP



Particle Identification with Cherenkov

eta	Nomenclature	electrons/photons		$\pi/K/p$	
		PID	Min E Photon	P-range [GeV/c]	Separation
-3.5 to -2.0	Backward	π suppression up to 1:1E-4	20 MeV	$\leq 10 \text{ GeV}/c$	$\leq 3\sigma$
-2.0 to -1.0	Backward	π suppression up to 1:1E-3 - 1:1E-2	50 MeV		
-1.0 to 1.0	Barrel	π suppression up to 1:1E-2	100 MeV		
1.0 to 3.5	Forward	$3\sigma e/\pi$ up to 15 GeV/c	50 MeV	$\leq 50 \text{ GeV}/c$	

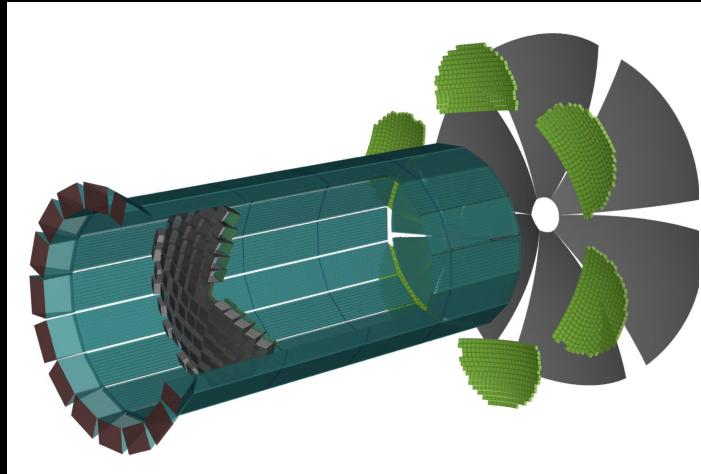

- Cherenkov detectors form the backbone of PID at EIC
 - Currently, all EIC detector designs use a dual radiator ring-imaging Cherenkov detector (RICH) in the hadron direction, a DIRC (detection of internally reflected Cherenkov light) in the barrel, and a modular RICH in the electron direction.
 - Simulating these detectors is typically compute expensive, involving many photons that need to be tracked through complex surfaces.
 - All three rely on pattern recognition of ring images in reconstruction, and the DIRC is the one having the more complex ring patterns!

Particle Identification: DIRC

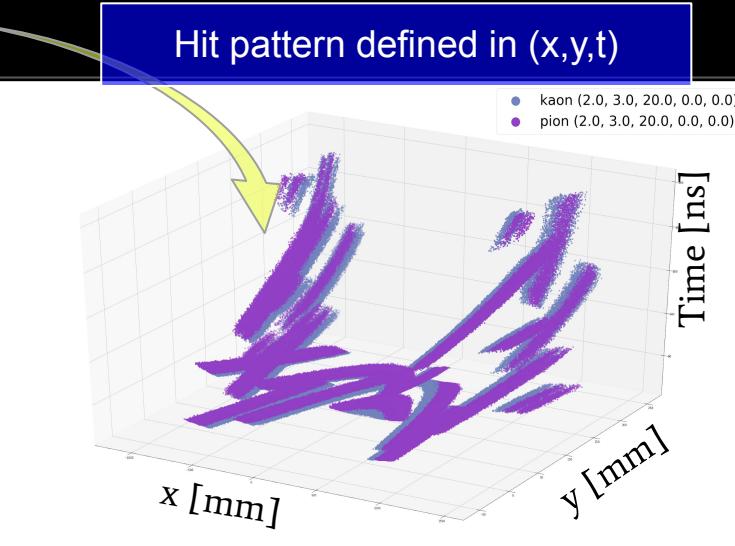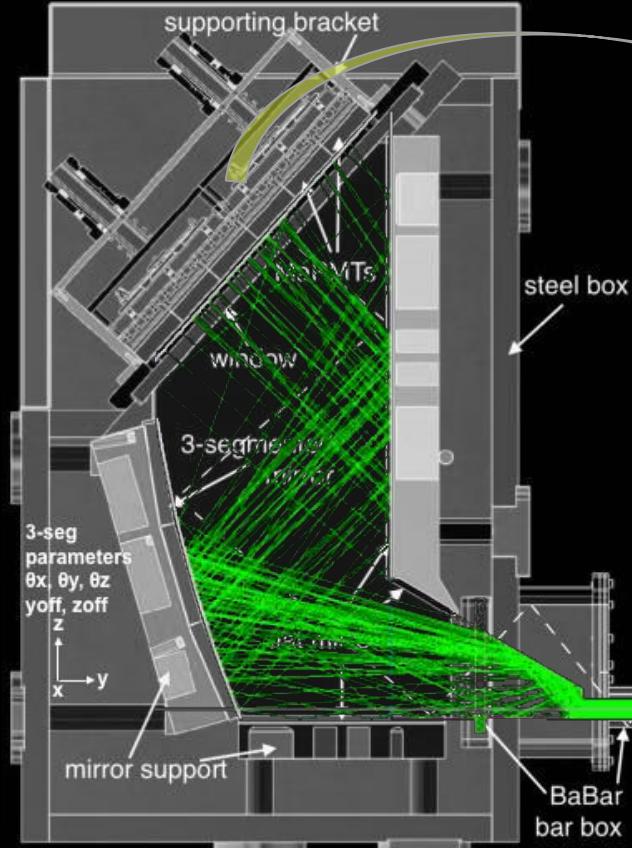


3D (x,y,t) readout allows to separate spatial overlaps.

Patterns take up significant fractions of the PMT in x,y and are read out over 50-100 ns due to propagation time in bars.


H12700 PMTs have a time resolution of O(200 ps) and read-out electronics giving time information in 1 ns buckets.

1PMT made by 64 pixels, each pixel is 6mm x 6mm size


Displayed PDF. Patterns are sparse with variable photon yield

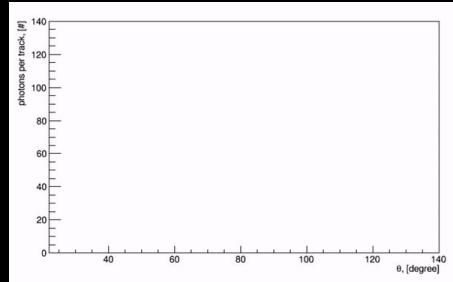

Particle Identification: DIRC

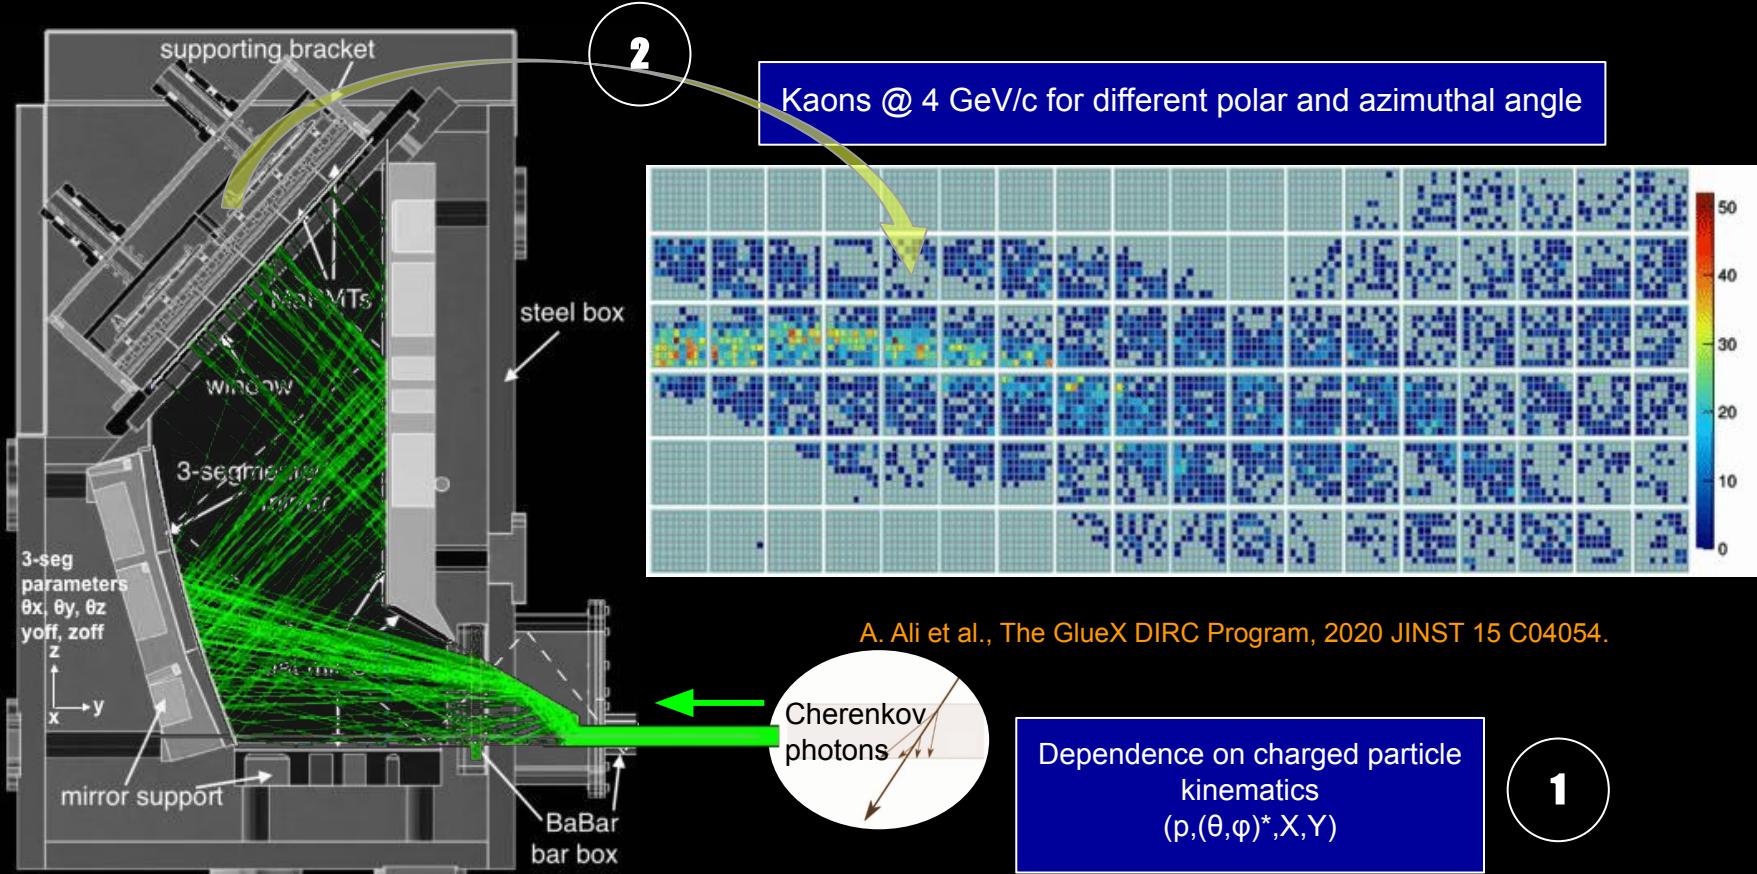


Event Display and Reconstructed Features

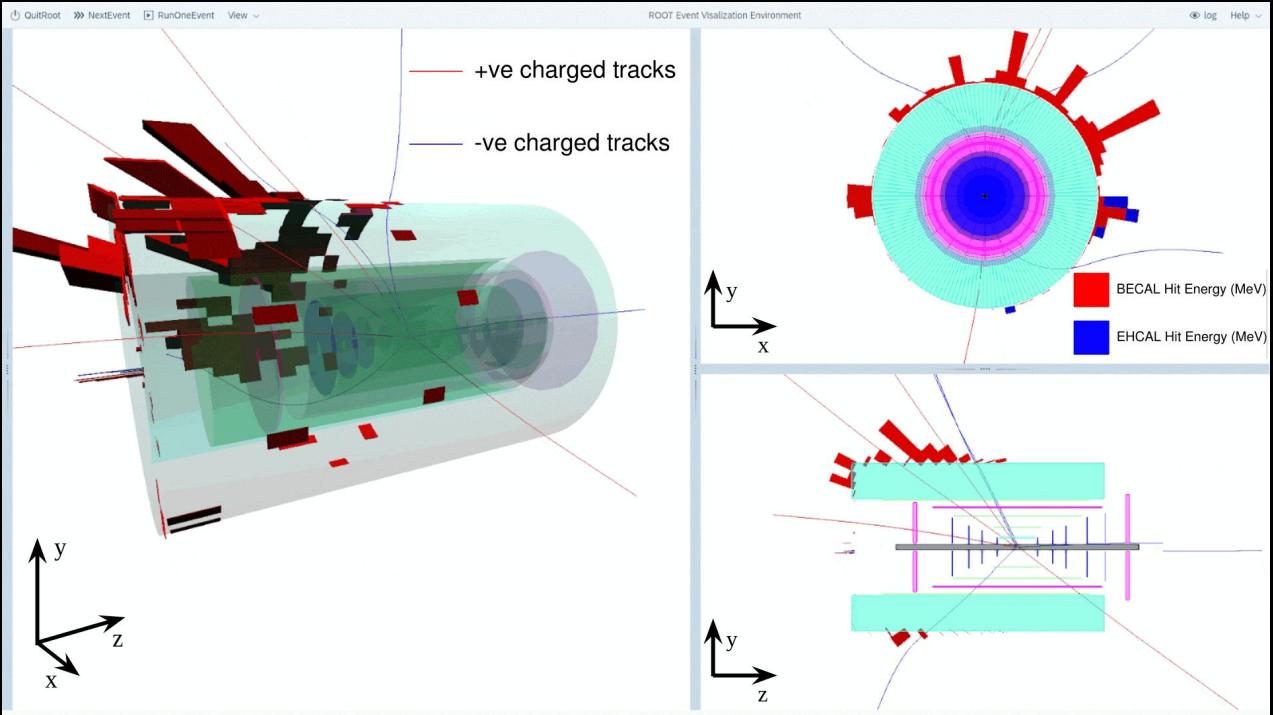


Reconstruction typically deals with relatively large feature space (low and high-level features) combining sub-detectors

For illustrative purposes, showing example of calorimetry (outer layers)

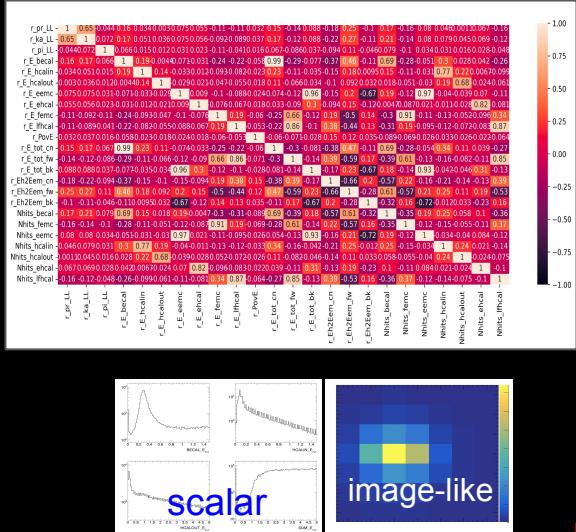

How do we design and optimize Detectors?

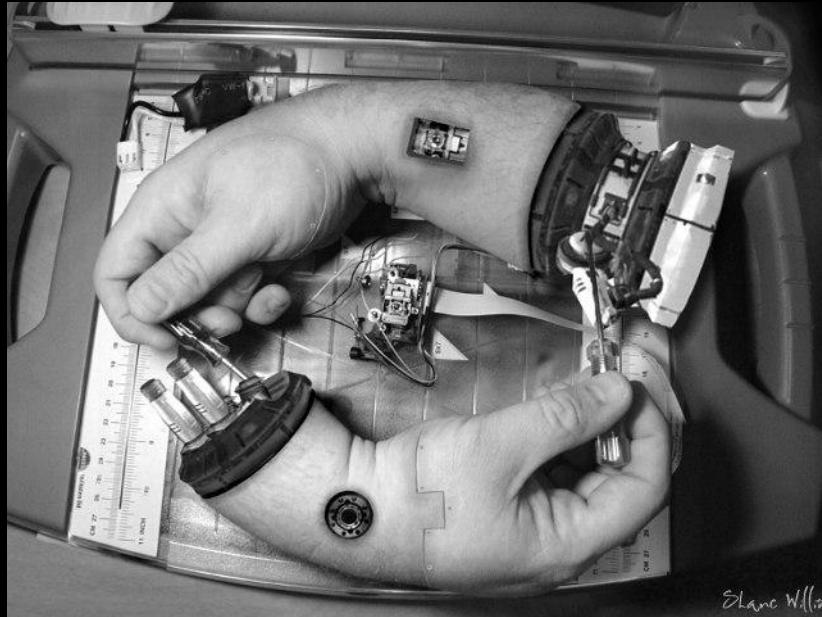

Shane Will

AI for Design

It is a relatively new but active area of research.
Many applications in, e.g., industrial material,
molecular and drug design.

Guo, Kai, et al. *Materials Horizons* 8.4 (2021): 1153-1172.

Table 1 Popular ML methods in design of mechanical materials

ML method	Characteristics	Example applications in mechanical materials design
Linear regression; polynomial regression	Model the linear or polynomial relationship between input and output variables	Modulus ¹¹² or strength ¹²³ prediction
Support vector machine; SVR	Separate high-dimensional data space with one or a set of hyperplanes	Strength ¹²³ or hardness ¹²⁵ prediction; structural topology optimization ¹⁵⁹
Random forest	Construct multiple decision trees for classification or prediction	Modulus ¹¹² or toughness ¹³⁰ prediction
Feedforward neural network (FFNN); MLP	Connect nodes (neurons) with information flowing in one direction	Prediction of modulus ^{97,112} , strength ⁹³ , toughness ¹³⁰ or hardness ⁹³ ; prediction of hyperelastic or plastic behaviors; ¹⁴³ identification of collision load conditions; ¹⁴⁷ design of spinodoid metamaterials ¹⁶³
CNNs	Capture features at different hierarchical levels by calculating convolutions; operate on pixel-based or voxel-based data	Prediction of strain fields ^{104,105} or elastic properties ^{102,103} of high-contrast composites, modulus of unidirectional composites ¹³⁸ , stress fields in cantilevered structures ¹³⁷ or yield strength of additive-manufactured metals; ¹³¹ prediction of fatigue crack propagation in polycrystalline alloys; ¹⁴⁰ prediction of crystal plasticity; ¹²⁹ design of tessellate composites; ¹⁰⁷⁻¹⁰⁹ design of stretchable graphene kirigami; ¹⁵⁵ structural topology optimization ¹⁵⁶⁻¹⁵⁸
Recurrent neural network (RNN); LSTM; GRU	Connect nodes (neurons) forming a directed graph with history information stored in hidden states; operate on sequential data	Prediction of fracture patterns in crystalline solids; ¹¹⁴ prediction of plastic behaviors in heterogeneous materials; ^{142,144} multi-scale modeling of porous media ¹⁷³
Generative adversarial networks (GANs)	Train two opponent neural networks to generate and discriminate separately until the two networks reach equilibrium; generate new data according to the distribution of training set	Prediction of modulus distribution by solving inverse elasticity problems; ¹³⁸ prediction of strain or stress fields in composites ¹³⁹ ; composite design; ¹⁶⁴ structural topology optimization; ¹⁶⁵⁻¹⁶⁷ architected materials design ¹⁴⁵
Gaussian process regression (GPR); Bayesian learning	Treat parameters as random variables and calculate the probability distribution of these variables; quantify the uncertainty of model predictions	Modulus ¹²³ or strength ^{123,124} prediction; design of supercompressible and recoverable metamaterials ¹¹⁰
Active learning	Interacts with a user on the fly for labeling new data; augment training data with post-hoc experiments or simulations	Strength prediction ¹²⁴
Genetic or evolutionary algorithms	Mimic evolutionary rules for optimizing objective function	Hardness prediction; ¹²⁶ designs of active materials; ^{160,161} design of modular metamaterials ¹⁶²
Reinforcement learning	Maximize cumulative awards with agents reacting to the environments.	Deriving microstructure-based traction-separation laws ¹⁷⁴
Graph neural networks (GNNs)	Operate on non-Euclidean data structures; applicable tasks include link prediction, node classification and graph classification	Hardness prediction; ¹²⁷ architected materials design ¹⁶⁸

Z. Zhou et al., *Scientific Reports*, vol. 9, no. 1, pp. 1–10, 2019

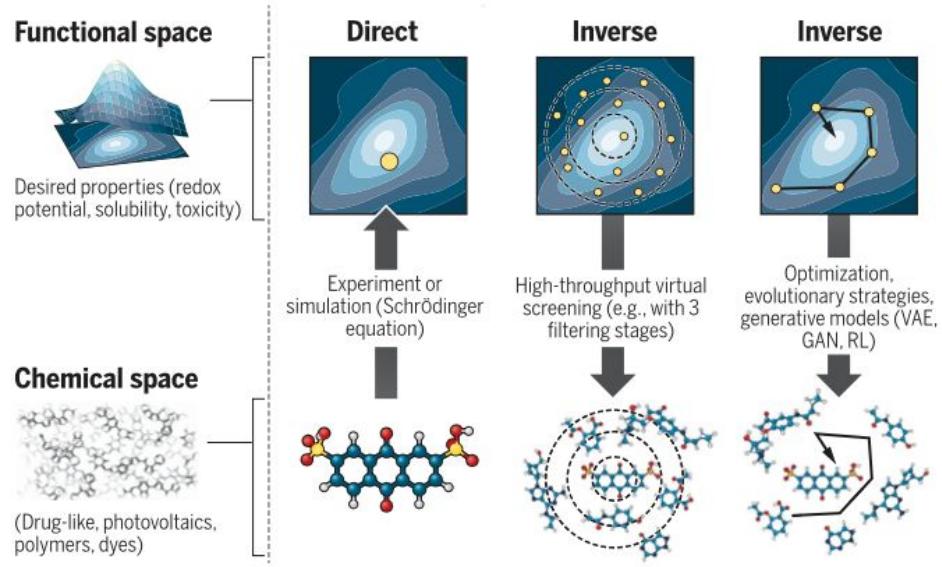


Fig. 2. Schematic of the different approaches toward molecular design. Inverse design starts from desired properties and ends in chemical space, unlike the direct approach that leads from chemical space to the properties.

B. Sanchez-Lengeling, A. Aspuru-Guzik. *Science* 361.6400 (2018): 360-365.

Full Optimization of Detectors/Accelerators

- When it comes to designing detectors and accelerators with AI this is a frontier topic with few examples in the literature.

S. Shirobokov, V. Belavin, M. Kagan, A. Ustyuzhanin, and A.G. Baydin. Black-Box Optimization with Local Generative Surrogates, 2020. arXiv: 2002.04632.

T. Dorigo. Geometry optimization of a muon-electron scattering detector. Physics Open, 4:100022, 2020.

F. Ratnikov. Using machine learning to speed up and improve calorimeter R&D. Journal of Instrumentation, 15(05):C05032, 2020.

E. Cisbani et al. AI-optimized detector design for the future Electron Ion Collider: the dual-radiator RICH case. JINST 15(05):P05009, 2020.

A. Edelen et al. Machine learning for orders of magnitude speedup in multiobjective optimization of particle accelerator systems. Physical Review Accelerators and Beams, 23(4):044601, April 2020. Publisher: American Physical Society. doi:10.1103/PhysRevAccelBeams.23.044601.

D. Koser et al. Input beam matching and beam dynamics design optimization of the IsoDAR RFQ using statistical and machine learning techniques. arXiv:2112.02579 [physics], 2021. (Submitted to Frontiers in Physics). arXiv:2112.02579. [61] F. Van Der Veken et al. Machine learning in accelerator physics: applications at the CERN Large Hadron Collider. In Proceedings of Artificial Intelligence for Science, Industry and Society PoS(AISIS2019), volume 372, page 044. SISSA Medialab, July 2020.

S. Meyer et al. Optimization and performance study of a proton CT system for pre-clinical small animal imaging. Phys. Med. Biol., 65(15):155008, 2020. doi:10.1088/1361-6560/ab8afc.

C. Fanelli et al., AI-assisted Optimization of the ECCE Tracking System at the Electron Ion Collider arXiv:2205.09185, 2022

Full Optimization of Detectors/Accelerators

- When it comes to designing detectors and accelerators with AI this is a frontier topic with few examples in the literature.
 - What follows uses “detector” as example but applies to both detector and accelerator.
- Typically full detector design is studied once the subsystem prototypes are ready (phase **constraints** from the full detector or outer layers are taken into consideration).
- Need to use advanced simulations which are **computationally expensive** (Geant).
- **Many parameters** (and **multiple objective functions**): curse of dimensionality [1].
- Entails establishing a procedural **body of instructions** [2]. The choice of a suitable algorithm is a challenge itself (no free lunch theorem [3]) and always requires some degree of **customization**.

[1] Bellman, Richard. *Dynamic programming*. Vol. 295. RAND CORP SANTA MONICA CA, 1956.

[2] CF et al. *JINST* 15.05 (2020): P05009.

[3] Wolpert, D.H., Macready, W.G., 1997. *Trans. Evol. Comp* 1, 67–82


Characterizing the Detector Design Problem

The detector design problem in NP physics (either collider or fixed target) experiments is typically characterized by:


1. *A number of sub-detectors layers starting from the interaction point;*
2. *A relational ‘hierarchy’ (or coupling) among different components/sub-detectors (e.g., the presence of material in front of a sub-detector; calorimetry after tracking; etc);*
3. *Symmetry (e.g., hermetic detectors with large acceptance like EIC have a ‘cylindrical’ geometry);*
4. *Modularity (e.g., repeated sub-elements within a sub-detector);*
5. *Constraints (e.g., volumes cannot overlap);*
6. *“Heterogeneous” parts (e.g., certain processes like developing showers in calorimeters take longer than others to simulate; point 6 actually encompasses different aspects in the pipeline, see later).*
7. *The detector response is typically noisy and detailed simulations can be compute expensive.*

The Typical Workflow


See invited talk at IAEA
Technical Meeting on AI

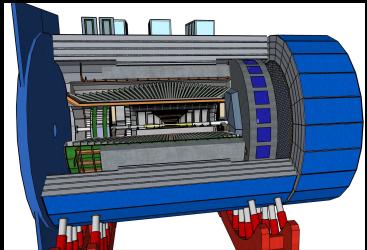

- AI can assist in designing more efficiently detectors (performance, costs).
- It helps **steering** the design (and eventually **fine-tune** it).
- It can capture hidden correlations among design parameters.

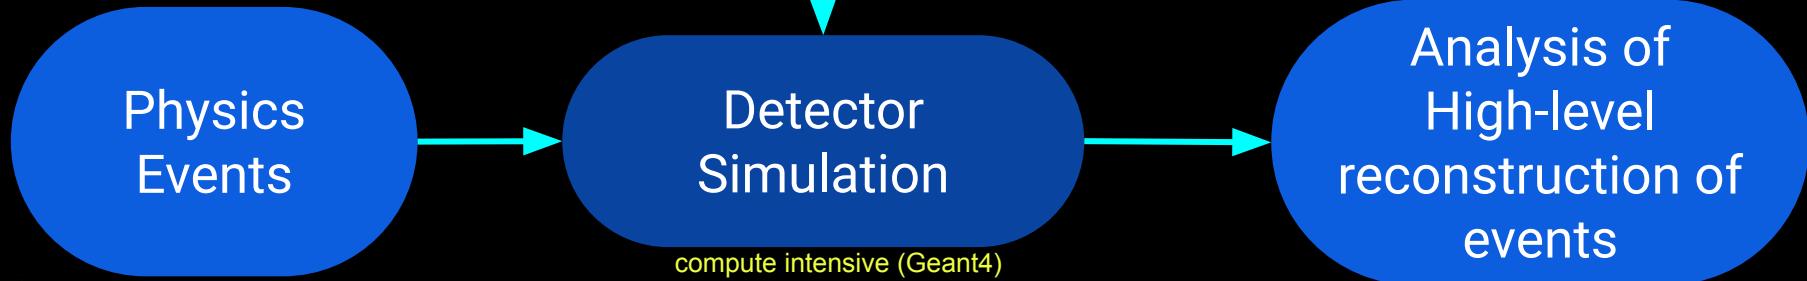

Design Optimization

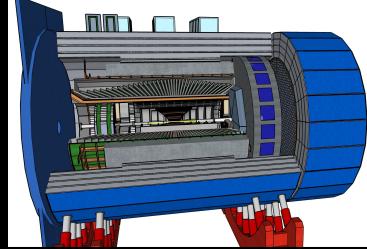


- AI can assist in designing more efficiently detectors (performance, costs).
- It helps **steering** the design (and eventually **fine-tune** it).
- It can capture hidden correlations among design parameters.
- AI-assisted “Optimization” is not necessarily fine-tuning, this is a common misconception
- These techniques can be utilized in different phases of design and R&D
 - E.g., detector modeling can be done with optimization on a reduced set of parameters keeping frozen all the others, before a global optimization
 - Even the global optimization may be approximate but still steer the design towards the most interesting regions
 - Different technology choice/change can be made during the design phase and as part of the decision making, informed by AI — see later discussion on EIC tracking

Bayesian Optimization

- Objective f is a **black-box function** and can be **noisy**.
- Evaluations are **expensive** making grid or exhaustive search impractical.
- f lacks of special structure (e.g. convex), and it has **no gradient information**.

If you don't have the above constraints,
do not use Bayesian Optimization

- We want to determine the optimum of f , no need to improve estimates of regions where f is not optimal. The idea is to build a surrogate function:
 - With a **Prior** over the space of objective functions, to model our black-box function.
 - **Likelihood** \sim probability of observing the data given the function f .
 - The **Posterior** probability is the surrogate objective function. It captures the updated beliefs about the unknown objective.

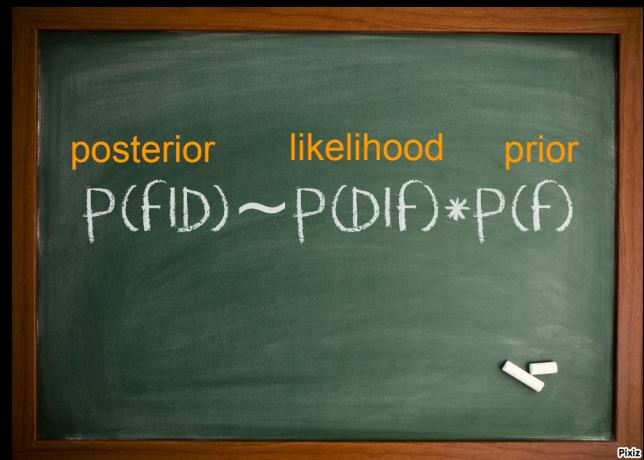


<https://machinelearningmastery.com/what-is-bayesian-optimization/>

<http://krasserm.github.io/2018/03/21/bayesian-optimization/>

<http://krasserm.github.io/2018/03/19/gaussian-processes/>

BO in a nutshell


- BO is a sequential strategy developed for global optimization.
- After gathering evaluations we builds a posterior distribution used to construct an **acquisition function**.
- This cheap function determines what is **next query point**.

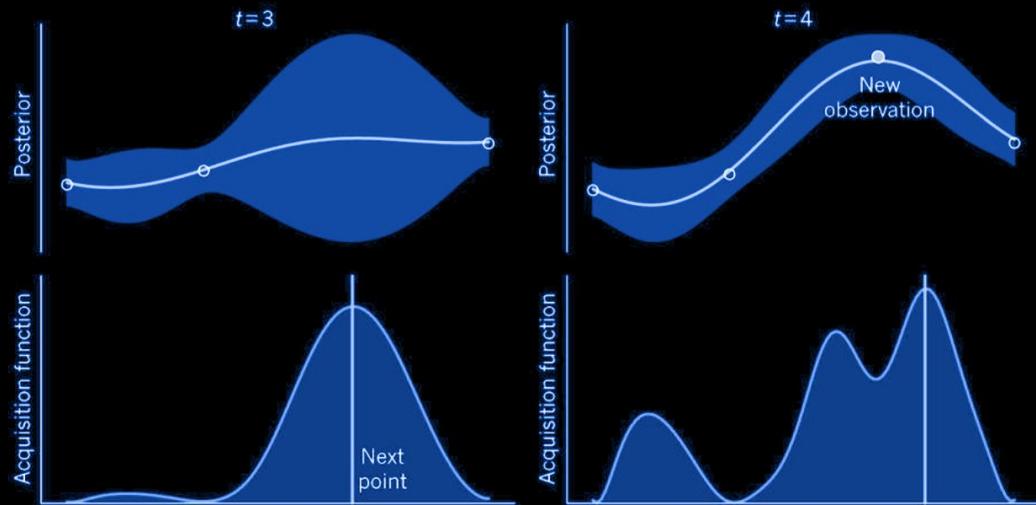

1. Select a Sample by Optimizing the Acquisition Function.
2. Evaluate the Sample With the Objective Function.
3. Update the Data and, in turn, the Surrogate Function.
4. Go To 1.

Extension to multiple objectives

Acquisition Functions

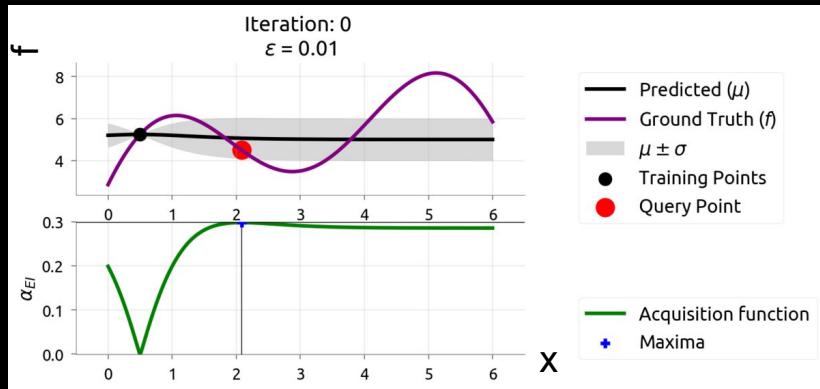

$$EI(x) = \begin{cases} (\mu_t(x) - f(x^+) - \epsilon)\Phi(Z) + \sigma_t(x)\phi(Z), & \text{if } \sigma_t(x) > 0 \\ 0, & \text{if } \sigma_t(x) = 0 \end{cases}$$


Exploitation Exploration

Best found so far

$$Z = \frac{\mu_t(x) - f(x^+) - \epsilon}{\sigma_t(x)}$$



We are sampling x

- **Exploitation:** search where μ is high
- **Exploration:** search where σ is high

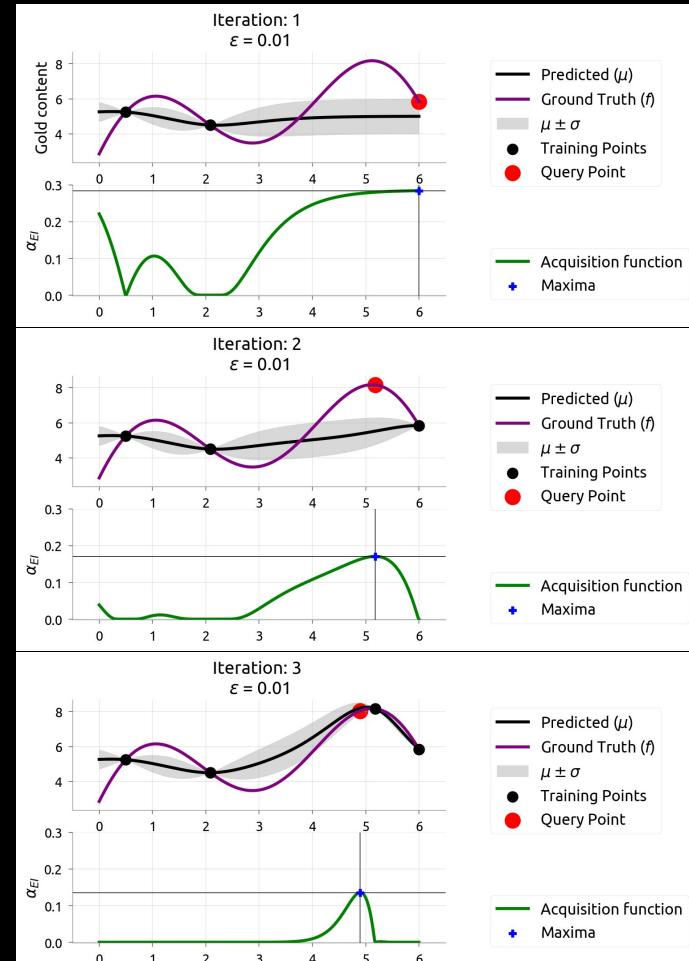

Acquisition Functions

- Many acquisition functions, e.g., Probability of Improvement, Expected Improvement, Upper (Lower) confidence bound, etc
- In most cases, acquisition functions provide knobs for controlling the exploration-exploitation tradeoff
- When optimization is more complex (more dimensions), then a random acquisition might perform poorly

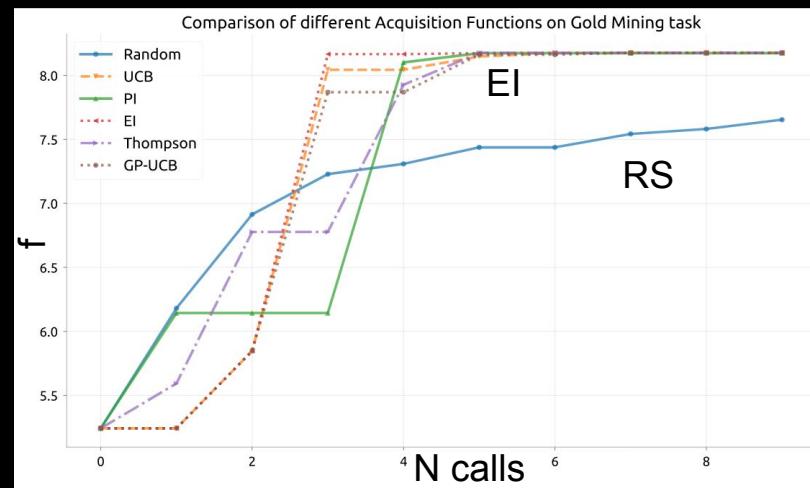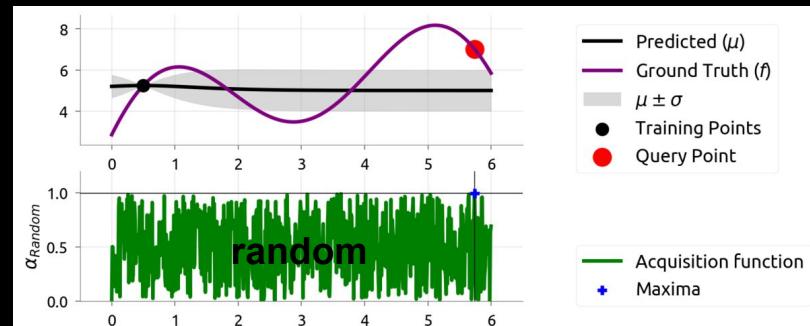


E. Brochu, Eric. V. M. Cora, and N. De Freitas. "A tutorial on Bayesian optimization of expensive cost functions, with application to active user modeling and hierarchical reinforcement learning." *arXiv:1012.2599* (2010).

- <https://distill.pub/2020/bayesian-optimization/>
- <https://distill.pub/2019/visual-exploration-gaussian-processes/>
- <https://www.borealisai.com/en/blog/tutorial-8-bayesian-optimization/>

Dual RICH: case study


E. Cisbani, A. Del Dotto, CF*, M. Williams et al.

"AI-optimized detector design for the future Electron-Ion Collider: the dual-radiator RICH case."
Journal of Instrumentation 15.05 (2020): P05009.

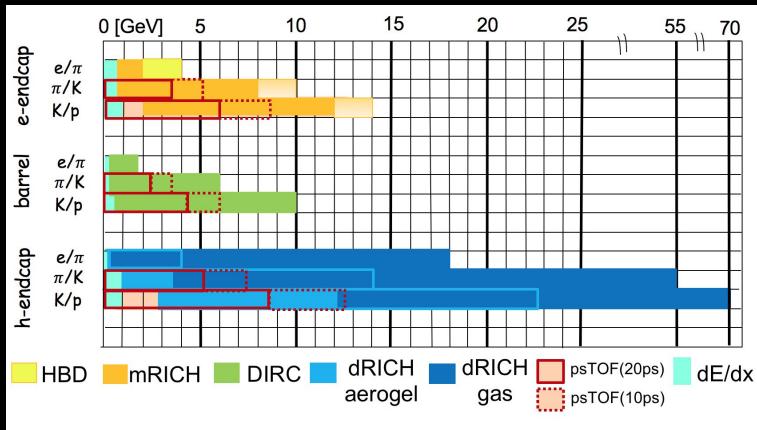

- Continuous momentum coverage.
- Simple geometry and optics, cost effective.
- Legacy design from INFN, see [EICUG2017](#)
 - 6 Identical open sectors (petals)
 - Optical sensor elements: $8500 \text{ cm}^2/\text{sector}$, 3 mm pixel
 - Large focusing mirror


aerogel (4 cm, $n(400 \text{ nm})$: 1.02)
+ 3 mm acrylic filter
+ gas (1.6 m, $n(\text{C}_2\text{F}_6)$: 1.0008)

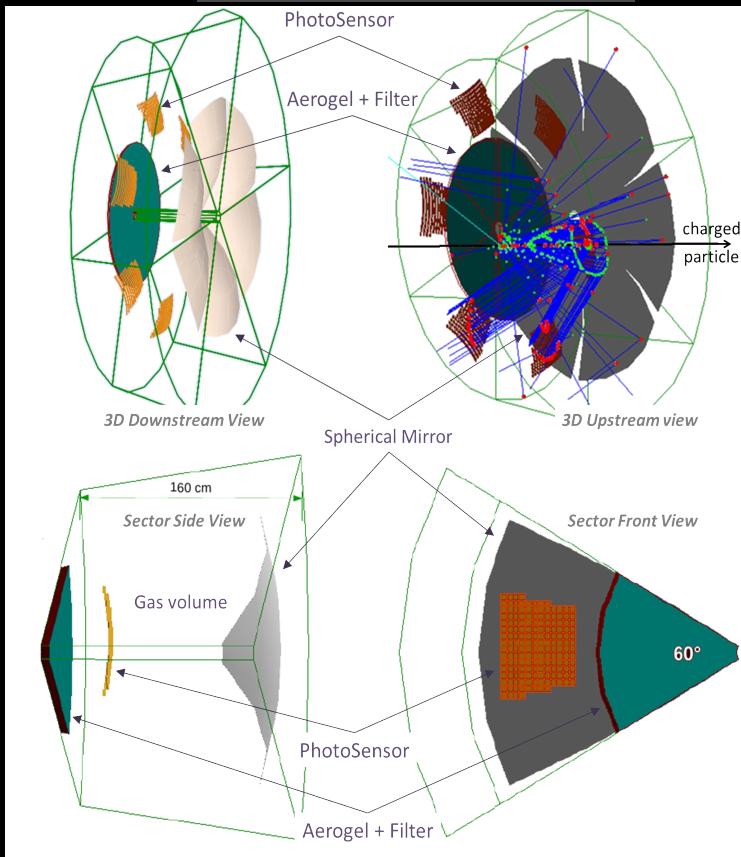

Construction Constraints on Design Parameters

The idea is that we have a bunch of parameters to optimize that characterize the detector design. We know from previous studies their ranges and the construction tolerances.

parameter	description	range [units]	tolerance [units]
R	mirror radius	[290,300] [cm]	100 [μm]
pos r	radial position of mirror center	[125,140] [cm]	100 [μm]
pos l	longitudinal position of mirror center	[-305,-295] [cm]	100 [μm]
tiles x	shift along x of tiles center	[-5,5] [cm]	100 [μm]
tiles y	shift along y of tiles center	[-5,5] [cm]	100 [μm]
tiles z	shift along z of tiles center	[-105,-95] [cm]	100 [μm]
n _{aerogel}	aerogel refractive index	[1.015,1.030]	0.2%
t _{aerogel}	aerogel thickness	[3.0,6.0] [cm]	1 [mm]

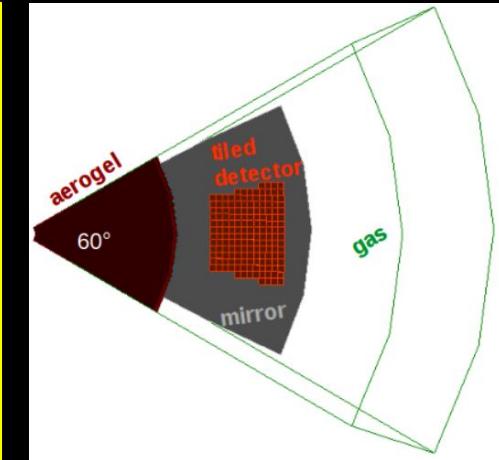

Ranges depend mainly on mechanical constraints and optics requirements.

These requirements can change in the next future based on inputs from prototyping.

Choice of Figure of Merit


Goal is improve the distinguishing power of pions/kaons,
hence:

$$N\sigma = \frac{||\langle\theta_K\rangle - \langle\theta_\pi\rangle||\sqrt{N_\gamma}}{\sigma_\theta^{1p.e.}}$$

$$N_\gamma = (N_\gamma^\pi + N_\gamma^K)/2$$

$$h = 2 \cdot \left[\frac{1}{(N\sigma)|_1} + \frac{1}{(N\sigma)|_2} \right]^{-1}$$

Main contributions to resolution

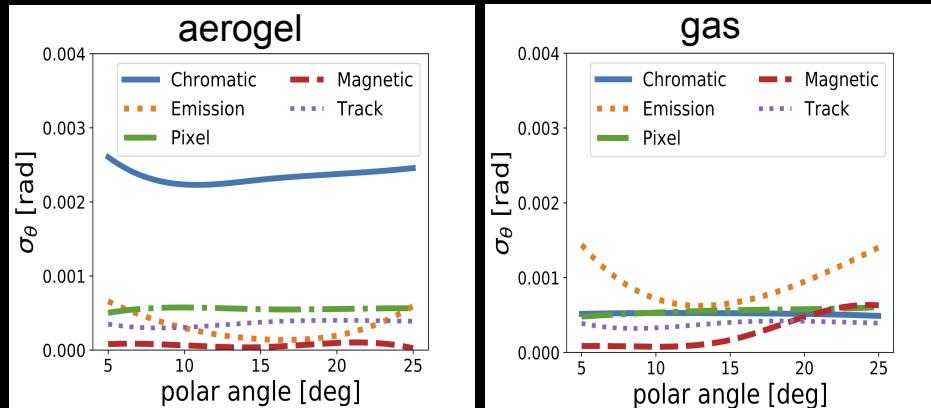



Remember that we do not have an explicit form of the FOM we are trying to optimize as a function of the design parameters


@ $p_1 = 14$ GeV/c (aerogel) and $p_2 = 60$ GeV/c (gas) considering the two parts disentangled

Noise Studies

$$N\sigma = \frac{||\langle\theta_K\rangle - \langle\theta_\pi\rangle||\sqrt{N_\gamma}}{\sigma_\theta^{1p.e.}}$$



- Dedicated studies to characterize the noise as this is an optimization of a noisy function
- We choose N tracks = 400 based on the studies on noise to minimize as much as possible computing time during simulation.

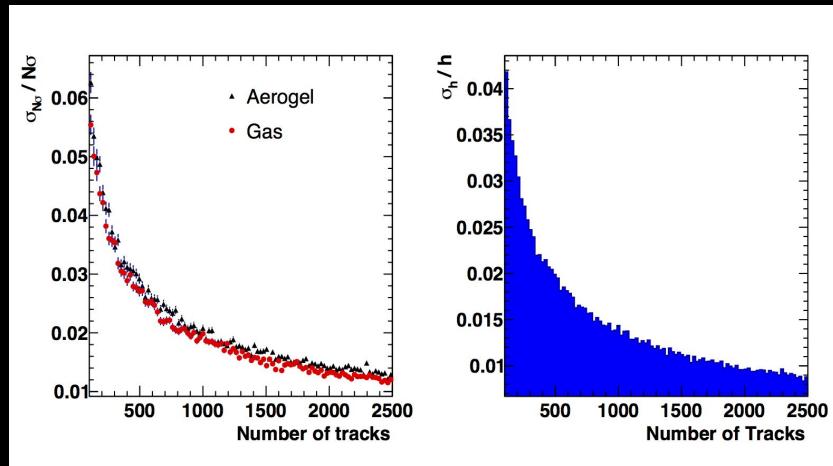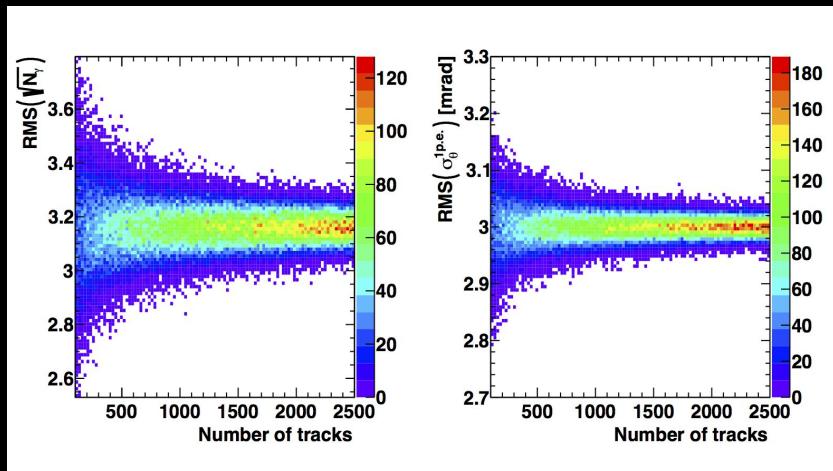

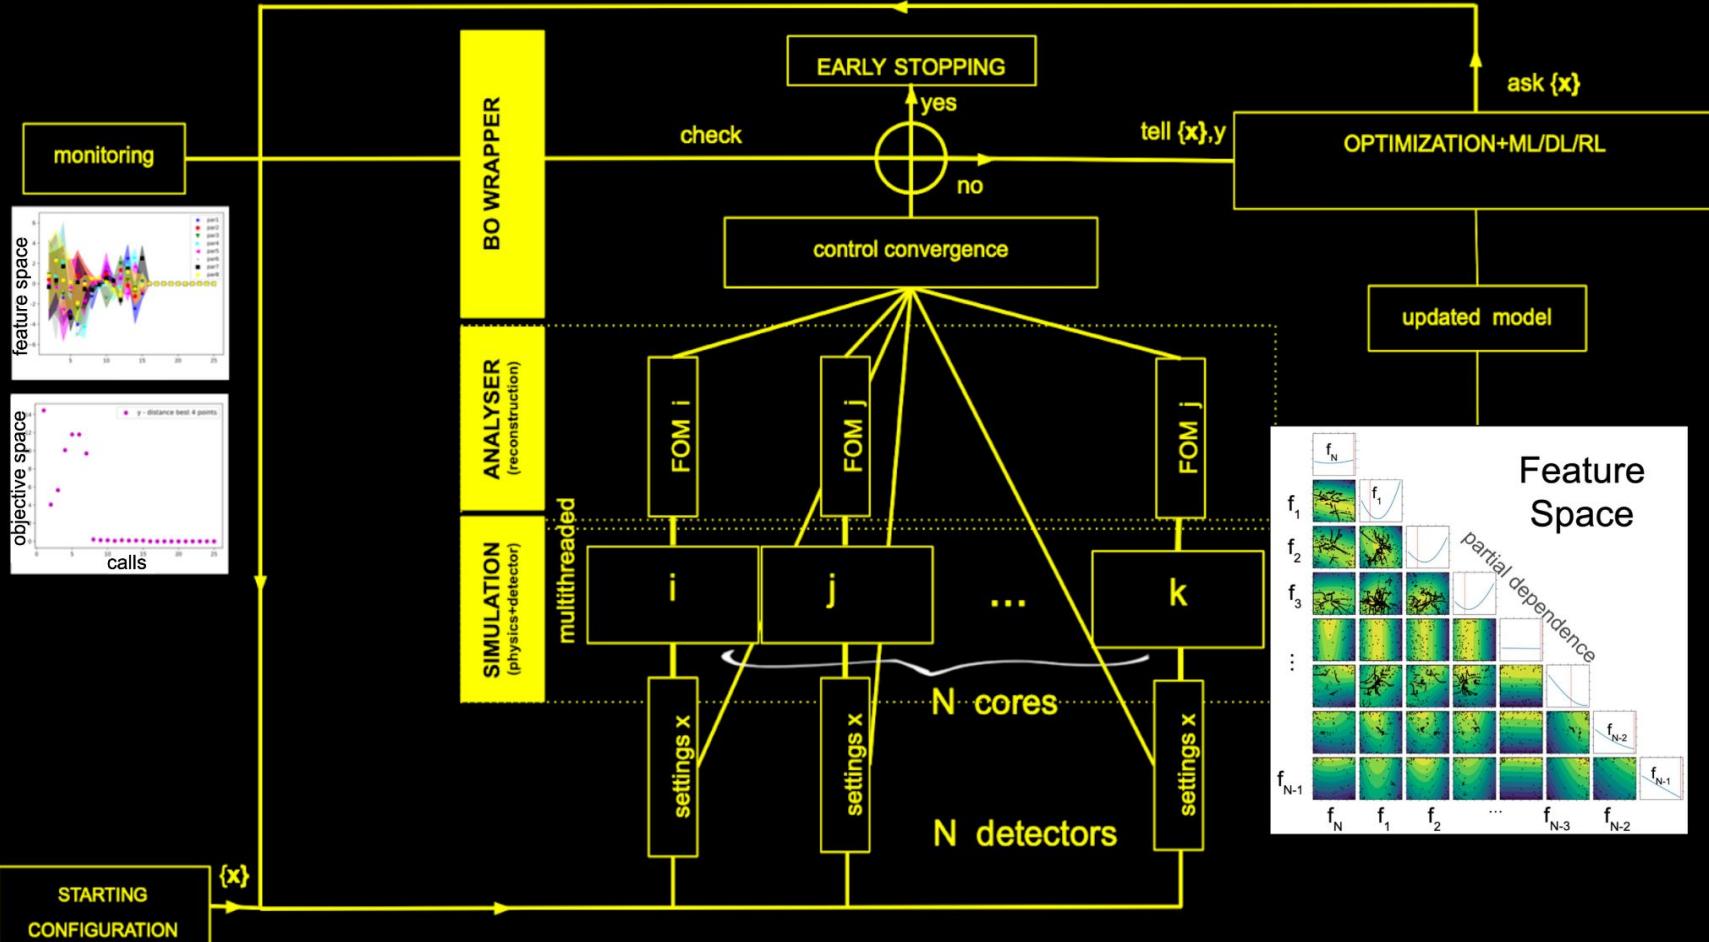


Convergence Criteria

- Can in general be applied in the design space, in the objective space, or looking at the behavior of the acquisition function.
- We defined a set of conditions to ensure convergence:
 - These correspond to the logic AND of booleans on each feature and on the variation of the figure of merit.
 - They are built on standardized Z and Fisher statistics.
- Pre-processing of data required to remove outliers.

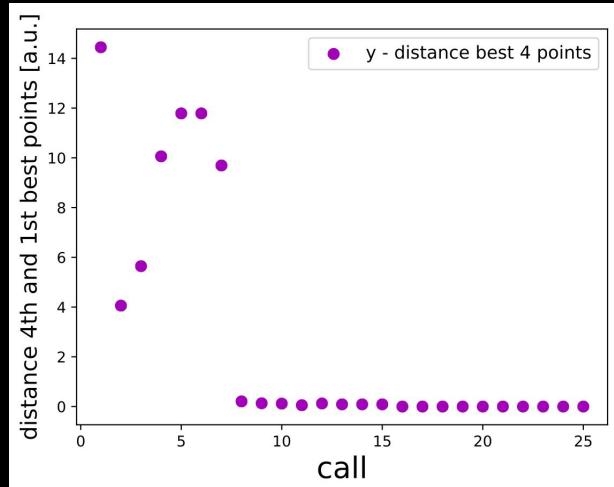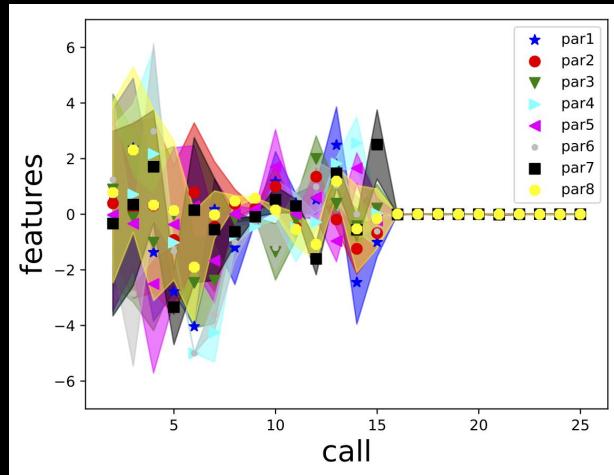

Comparison with Random Search

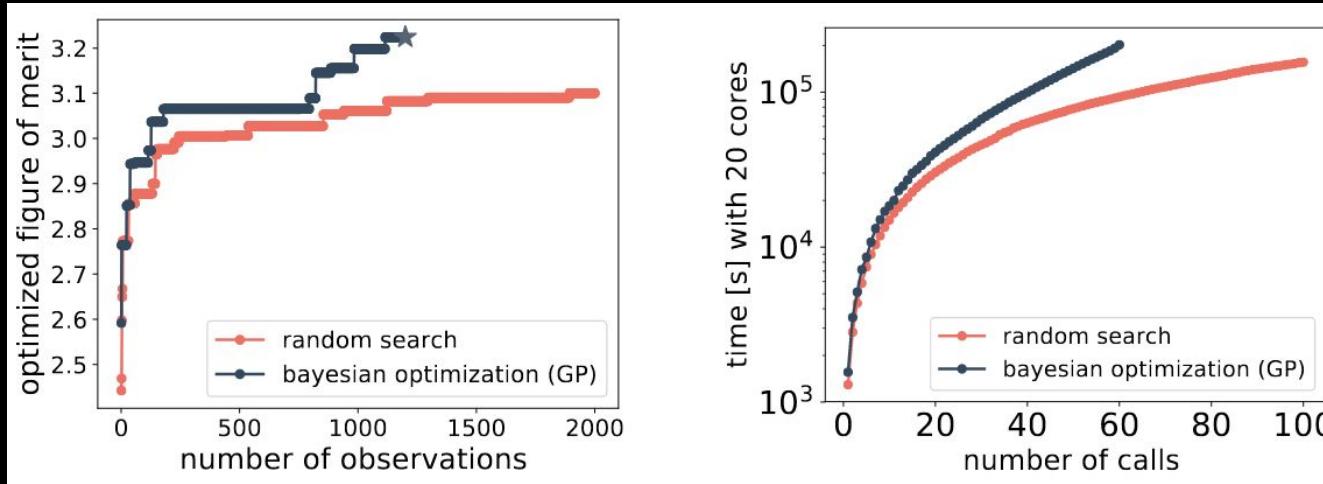


Each call:
400 tracks generated/core
20 cores

1 design point ~ 10 mins/CPU

Budget: 100 calls

- BO with GP scales cubically with number of observations.
- Bayesian optimization methods are more promising because they offer principled approaches to weighting the importance of each dimension.
- For this 8D problem - even with 50 cores, RS looks unfeasible due to the curse of dimensionality.
 - Recall that the probability of finding the target with RS is $1-(1-v/V)^T$, where T is trials, v/V is the volume of target relative to the unit hypercube


dRICH Performance at the optimal design point

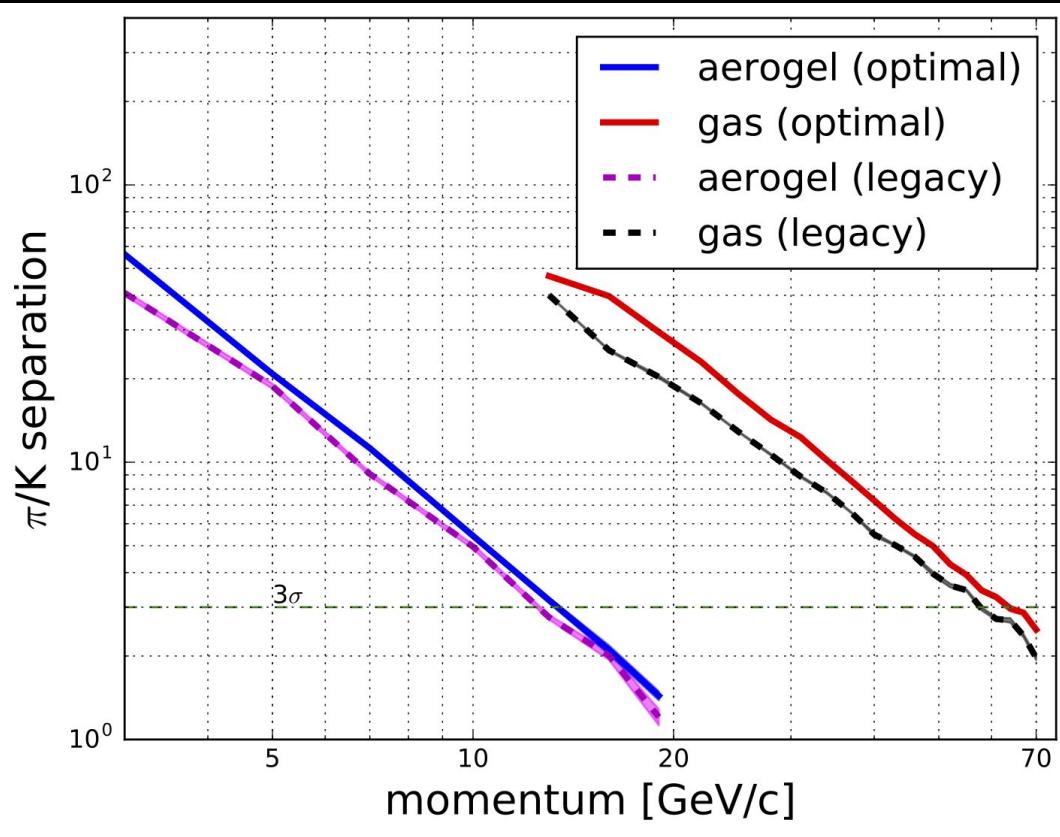

- Statistically significant Improvement in both parts.
- In particular in the gas region where the 5σ threshold shifted from 43 to 50 GeV/c and the 3σ one extended up to
- Notice that before this study we did not know “how well” the legacy design was performing.

Tolerance Regions

- BO provides a model of how the FoM depends on the parameters, hence it is possible to use the posterior to define a tolerance on the parameters (regions ensuring improved PID, see previous slide).

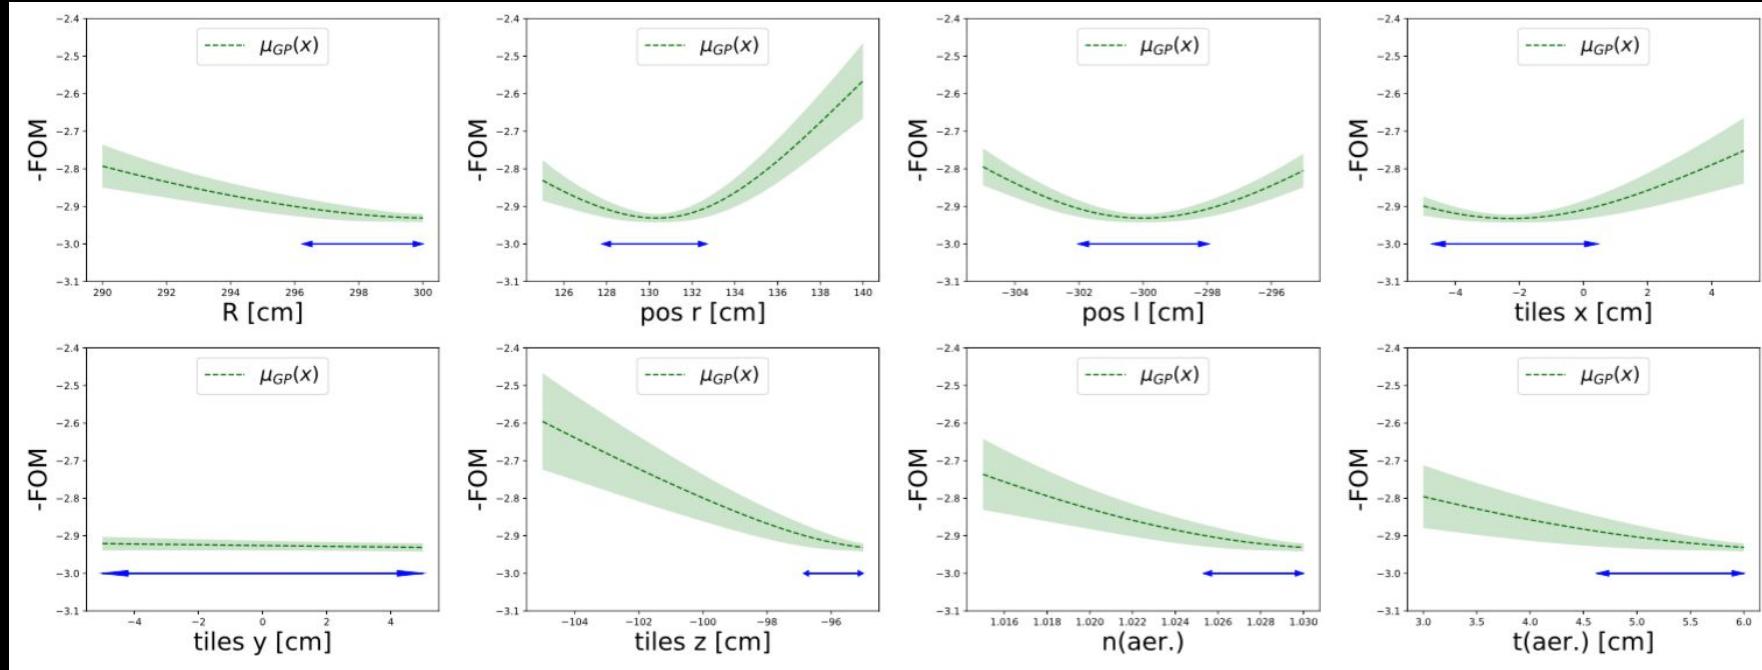

- Larger than the construction tolerances on each parameter.
Notice a small lateral shift of the tiles has negligible impact on the PID capability.

Frameworks and Deployment in the Industry




- [scikit-optimize](#)
- [sigopt](#)
- [hyperopt](#)
- [spearmint](#)
- [MOE](#)
- [BO Torch](#)
- [GPFlowOpt](#)
- [GPyOpt](#)
- [DragonFly](#)
- [Hyperband](#)
- [Smac](#)
- etc

- Bayesian Optimization has been applied to [Optimal Sensor Set](#) selection for predictive accuracy.
- Uber uses Bayesian Optimization for [tuning algorithms via backtesting](#).
- Facebook uses Bayesian Optimization for A/B testing.
- Netflix and [Yelp](#) use Metrics Optimization software like [Metrics Optimization Engine \(MOE\)](#) which take advantage of Parallel Bayesian Optimization.




Other Applications: DIRC Alignment

3D Readout

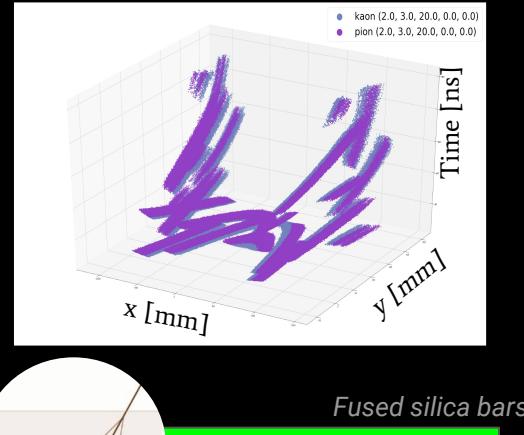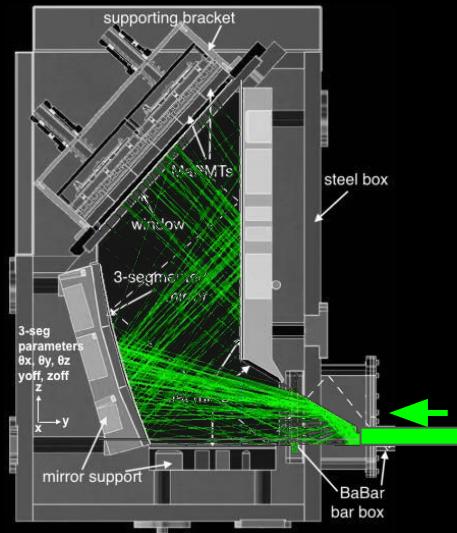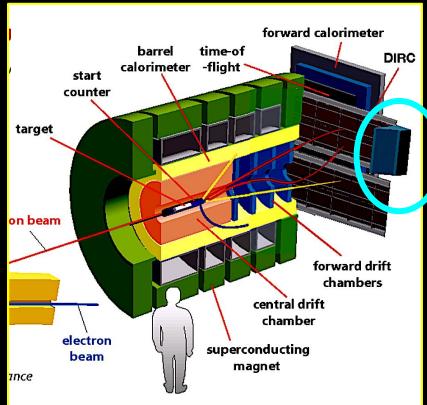

Fused silica bars

Optical box

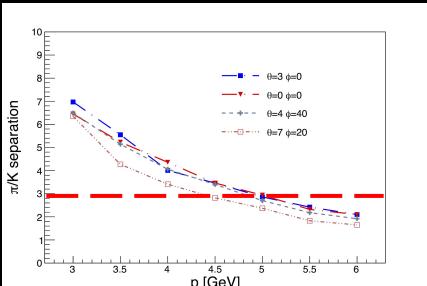

π/K separation with DIRC


3D (x,y,t) readout allows to separate spatial overlaps.

Patterns take up significant fractions of the PMT in x,y and are read out over 50-100 ns due to propagation time in bars.


H12700 PMTs have a time resolution of O(200 ps) and read-out electronics giving time information in 1 ns buckets.

Alignment

Main alignment parameters

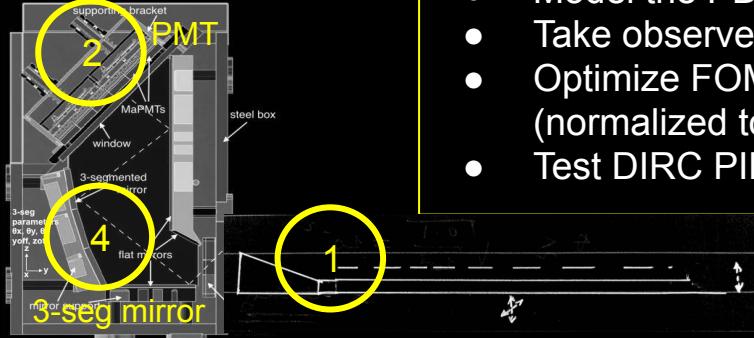

- Select high purity sample of particles at low P (well identified by GlueX PID w/o DIRC)
- Model the PDF as a function of the offsets
- Take observed hits to build Likelihood
- Optimize FOM = logL (normalized to a default alignment)
- Test DIRC PID on larger momentum P

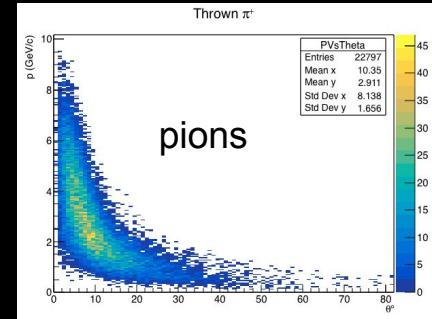


True:

3-seg mirror:
 $\theta_x, \theta_y, \theta_z = (0.25, 0.50, 0.15)$ deg,
 $y = 0.50$ mm;
bar: $z = 2.00$ mm;
PMT: $(r, \theta) = (1.50 \text{ mm}, 1.00 \text{ deg})$

BO-reversed engineered:

3-seg mirror:
 $\theta_x, \theta_y, \theta_z = (0.25, 0.58, 0.12)$ deg,
 $y = 0.59$ mm;
bar: $z = 2.08$ mm;
PMT: $(r, \theta) = (1.87 \text{ mm}, 1.35 \text{ deg})$

Pion rejection vs Kaon efficiency at large P



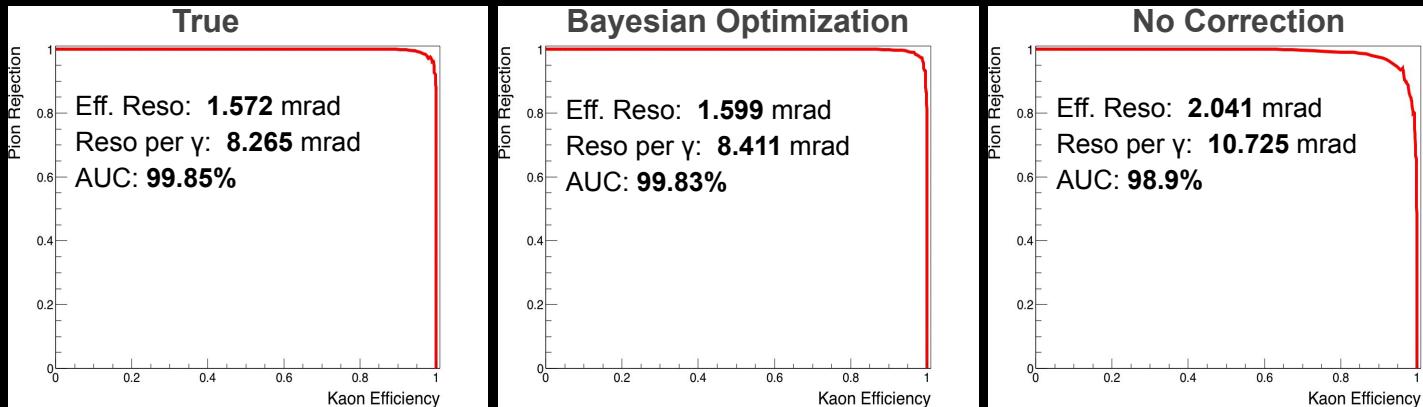


Hyperparameter Tuning

CF and J. Pomponi

Machine Learning: Science and Technology 1.1 (2020): 015010

DeepRICH

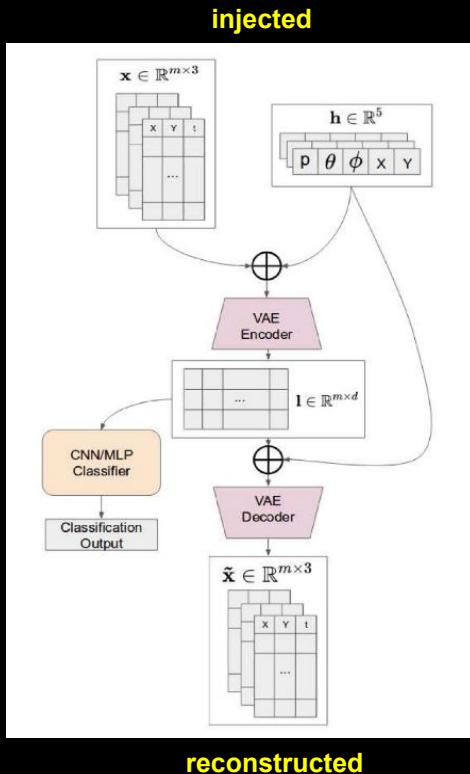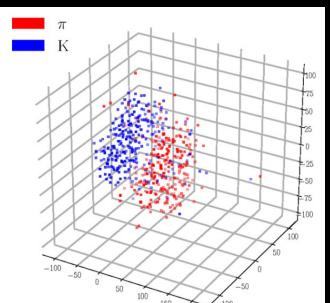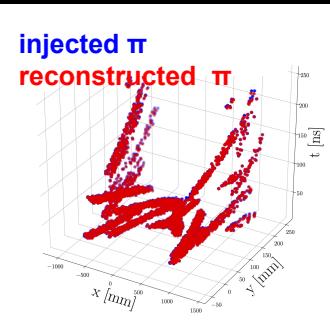

Hyperparameters

Table 2. List of hyperparameters tuned by the BO. The tuned values are shown in the outermost right column. The optimized test score is about 92%.

symbol	description	range	optimal value
NLL	λ_r	$[10^{-1}, 10^2]$	0.784
CE	λ_c	$[10^{-1}, 10]$	1.403
MMD	λ_y	$[1, 10^3]$	1.009
LATENT_DIM	latent variables dimension	$[10, 2000]$	16
var_MMD	σ in $\mathcal{N}(0, \sigma)$	$[0.01, 2]$	0.646
Learning Rate	learning rate	$[0.0001, 1]$	$6.6 \cdot 10^{-4}$

DeepRICH Performance

Table 3. The area under curve (%), the signal efficiency to detect pions ε_S and the background rejection of kaons ε_B corresponding to the point of the ROC that maximizes the product $\varepsilon_S \cdot \varepsilon_B$. The corresponding momenta at which these values have been calculated are also reported. This table is obtained by integrating over all the other kinematic parameters (i.e. a total of ~6k points with different θ, ϕ, X, Y for each momentum).

Kinematics	DeepRICH			FastDIRC		
	AUC	ε_S	ε_B	AUC	ε_S	ε_B
4 GeV/c	99.74	98.18	98.16	99.88	98.98	98.85
4.5 GeV/c	98.78	95.21	95.21	99.22	96.33	96.32
5 GeV/c	96.64	91.13	91.23	97.41	92.40	92.47

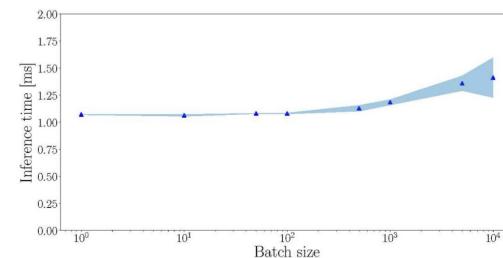


Figure 9. After training, the inference time is almost constant as a function of the batch size, meaning that the effective inference time—i.e., the reconstruction time per particle—can be lower than a μs , the architecture being able to handle 10^4 particles in about 1.4 ms in the inference phase. Notice that the corresponding memory size in the inference phase is approximately equal to the value reported in table 4.

Event generator tuning using BO

- MC event generators contain large number of parameters that must be determined by comparing the output of generator with experimental data.
- Generating enough events is extremely CPU intensive, prohibits performing a simple brute-force grid-based tuning of the parameters.
- MC event generator parameters can be accurately obtained using BO and minimal expert-level physics knowledge.
- A tune of the Pythia 8 event generator using e^+e^- events, with 20 tunable parameters, can be run on a modern laptop in just 2 days.
- Combining the BO approach with expert knowledge should enable faster tuning and facilitate the study discrepancies between MC and experimental data.



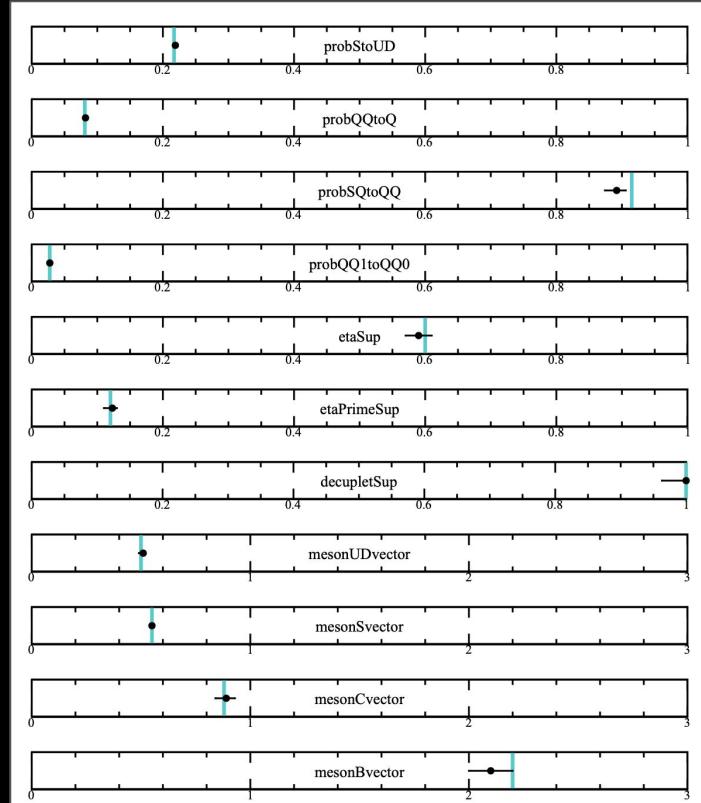


Figure 8. (Black points) Block 3 parameters from our optimal tune compared to their (vertical cyan lines) Monash values. The horizontal-axis ranges are the regions considered by SPEARMINT during tuning.


Toy Model

The screenshot shows a repl.it session with the following components:



- Code Editor:** The file `main.py` contains Python code for a toy model. It imports `detector`, sets up geometry parameters (R=1 cm, pitch=4.0 cm), creates tracks, and displays them. It also includes optimization code using `BO: GP` and `BO: GBRT`.
- Output Window:** Displays two plots: one showing the initial geometry of 16 blue circles in a 4x4 grid, and another showing the detected tracks as yellow circles.
- Convergence Plot:** A line graph titled "Convergence plot" showing the minimum value of the objective function ($\min(f(x))$) versus the number of calls (n). The plot compares three methods:
 - `BO: GP` (blue line with circles): Starts at ~0.35, drops to ~0.25 by call 10, and stabilizes.
 - `BO: GBRT` (green line with circles): Starts at ~0.25 and remains flat until call 30, then drops to ~0.15 by call 45.
 - `random search` (yellow line with squares): Starts at ~0.32 and drops to ~0.25 by call 10, then stabilizes.

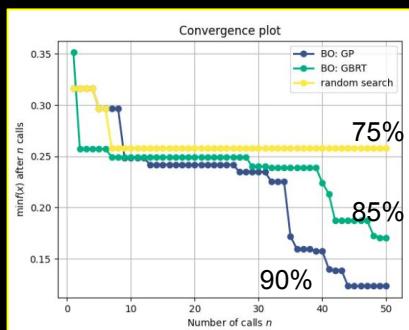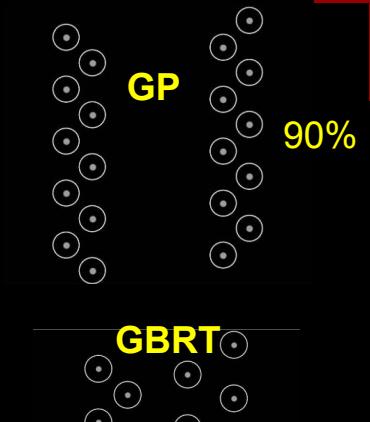

Toy Model

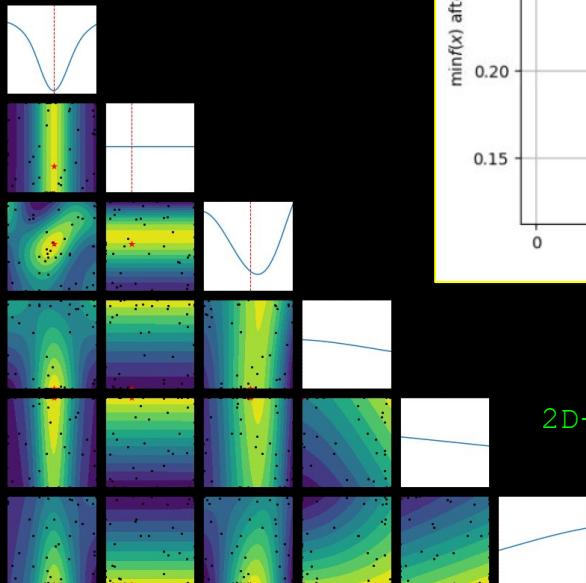

2D-plots of objective function
and partial dependencies

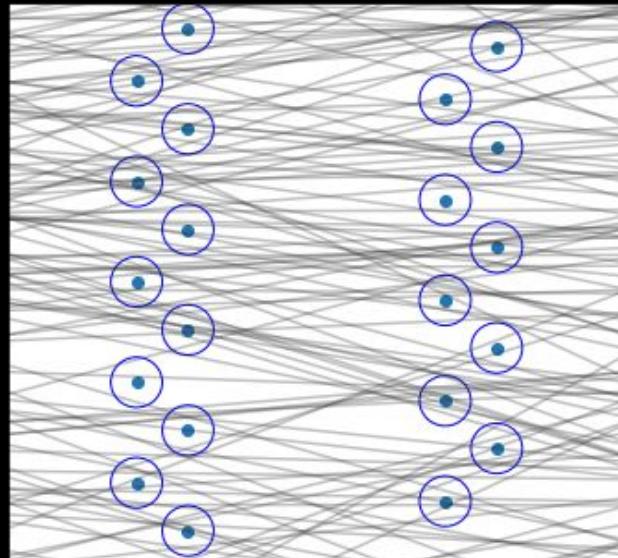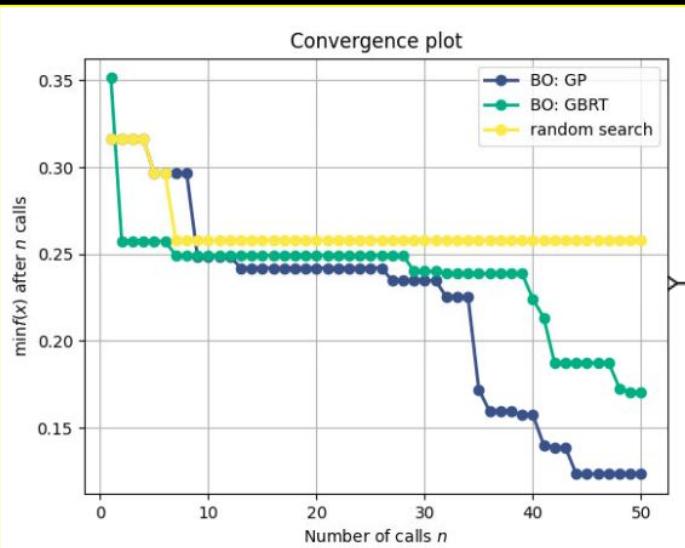


Objective: Efficiency is defined as at least two wires are hit

Backup



Particle Identification with Cherenkov


η	θ	Nomenclature		Tracking					Electrons and Photons			$\tau/\text{K}/\mu$		HCAL		
				Resolution	Relative Momentum	Allowed X/λ_0	Minimum-pT	Transverse Pointing Res.	Longitudinal Pointing Res.	Resolution σ/E	PID	Min E Photons	p-Range (GeV/c)	Separation	Resolution σ/E	Energy
<-4.6																
-4.6 to -4.0		Far Backward Detectors	low-Q2 tagger													
-4.0 to -3.5																
-3.5 to -3.0																
-3.0 to -2.5																
-2.5 to -2.0																
-2.0 to -1.5																
-1.5 to -1.0																
-1.0 to -0.5																
-0.5 to 0.0																
0.0 to 0.5																
0.5 to 1.0																
1.0 to 1.5																
1.5 to 2.0																
2.0 to 2.5																
2.5 to 3.0																
3.0 to 3.5																
3.5 to 4.0																
4.0 to 4.5																
>4.6																
		T e	Instrumentation to separate charged particles from photons													
		Far Forward Detectors	Proton Spectrometer													
		Zero Degree Neutral Detection														

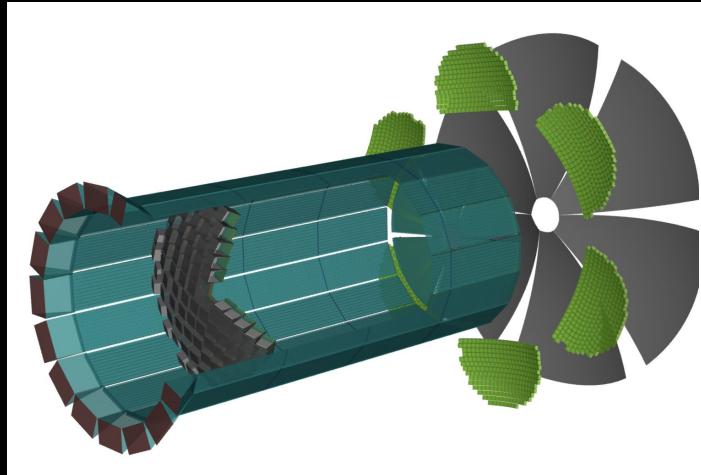


- Cherenkov detectors form the backbone of PID at EIC

- Currently, all EIC detector designs use a dual radiator ring-imaging Cherenkov detector (RICH) in the hadron direction, a DIRC (detection of internally reflected Cherenkov light) in the barrel, and a modular RICH in the electron direction.
- Simulating these detectors is typically compute expensive, involving many photons that need to be tracked through complex surfaces.
- All three rely on pattern recognition of ring images in reconstruction, and the DIRC is the one having the more complex ring patterns!

Electron Ion Collider

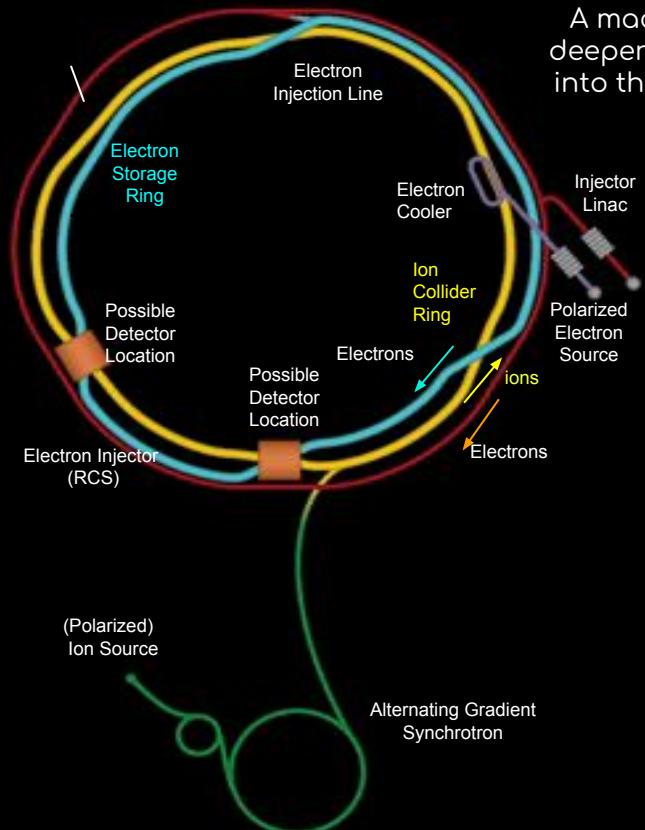

A machine for delving deeper than ever before into the building blocks of matter

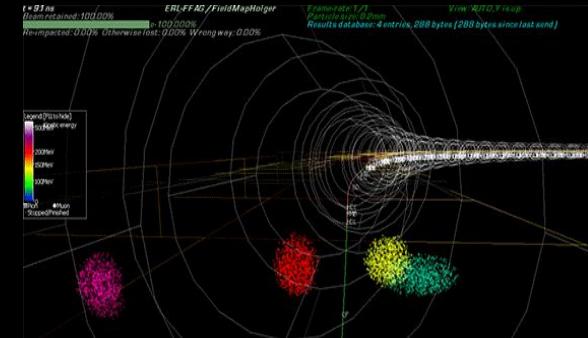


Different energy particles move through the fixed field alternating linear gradient accelerator.



- Beams of electrons and high-energy protons or heavier atomic nuclei
- Wide coverage of CoM energy $\sqrt{s}_{e-p} \sim (20\text{-}140) \text{ GeV}$

Will be constructed over ten years at an estimated cost between \$1.6 and \$2.6 billion

Electron Ion Collider

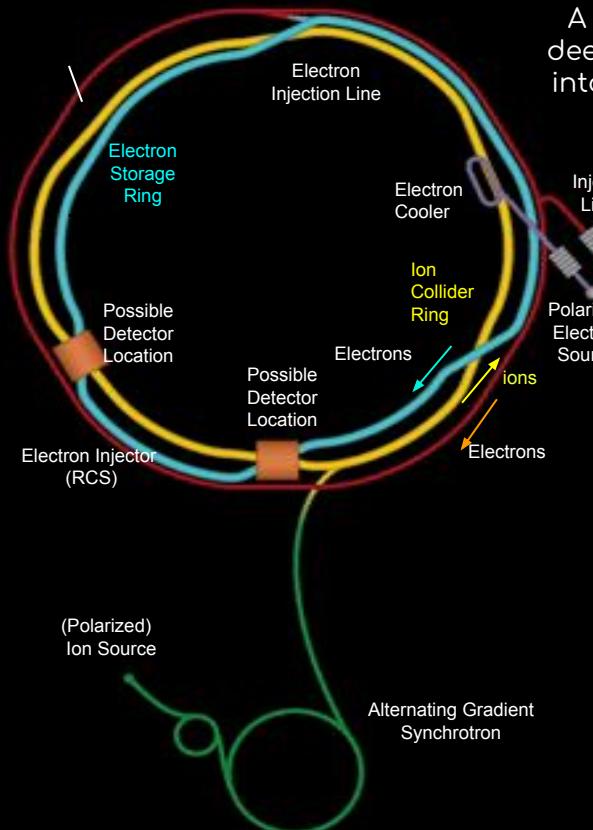

A machine for delving deeper than ever before into the building blocks of matter

Will be constructed over ten years at an estimated cost between \$1.6 and \$2.6 billion

- **Finding 1:** An EIC can uniquely address three profound questions about nucleons — neutrons and protons — and how they are assembled to form the nuclei of atoms:
 - How does the **mass** of the nucleon arise?
 - How does the **spin** of the nucleon arise?
 - What are the **emergent properties** of dense systems of gluons?
- **Finding 2:** These three high-priority science questions can be answered by an EIC with highly polarized beams of electrons and ions, with sufficiently high luminosity and variable center of mass energy.
- **Finding 3:** An EIC would be a unique facility in the world and would maintain U.S. leadership in nuclear physics
- **Finding 4:** An EIC would maintain U.S. leadership in the accelerator science and technology colliders and help to maintain scientific leadership more broadly.



EIC Physics in a Nutshell


- | | |
|--|--|
| <ul style="list-style-type: none"> • Origin of Nucleon Spin • Confined motion of partons • 3D imaging quarks and gluons • Nucleon mass • High gluon densities in nuclei • Quarks and gluons in the nucleus | <ul style="list-style-type: none"> • Light-ion tagging • Pion/Kaon structure • Diffractive jets? • Nuclear modifications and in-medium evolution <ul style="list-style-type: none"> ◦ D/D* reconstruction and heavy-flavor in jets |
|--|--|
-
-
- Khalik, R. Abdul, et al. "Science requirements and detector concepts for the electron-ion collider: EIC yellow report." [arXiv:2103.05419](https://arxiv.org/abs/2103.05419), 2021

Slide taken from J. Lajos, *The ECCE Experiment Workshop VIII Streaming Readout*, 2021

Beam-gas induced background

Courtesy of Y. Furletova

Beam-gas interactions can cause hadronic showers, which produce high multiplicity events in the central detector apparatus


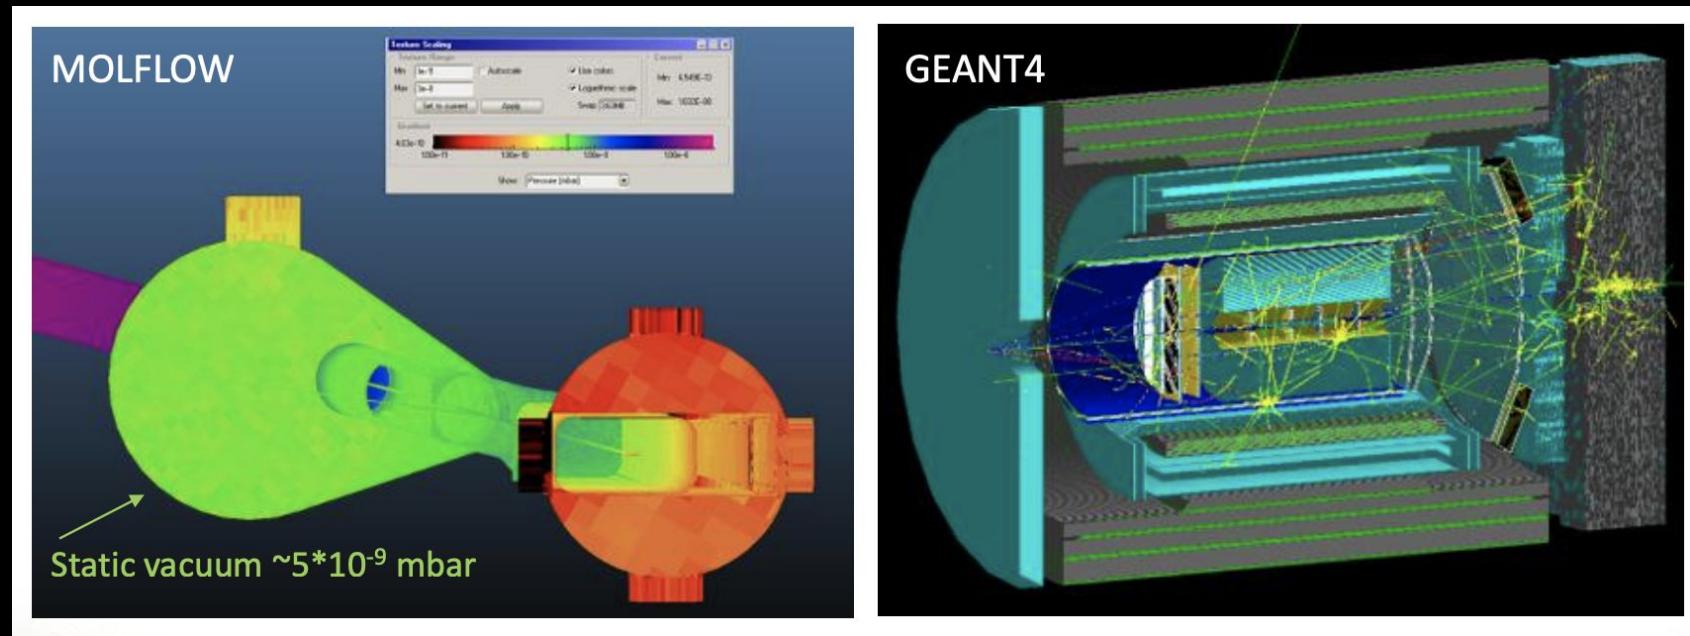


The GEANT simulation shows that for 10^{-9} mbar vacuum the contribution of such events to the data stream is relatively small compared to the physics collisions

Synchrotron radiation


Courtesy of Y. Furletova

Even in a configuration with the crossing angle, incoming electron trajectory bending in the upstream dipole and quadrupole magnetic fields produces substantial synchrotron radiation load

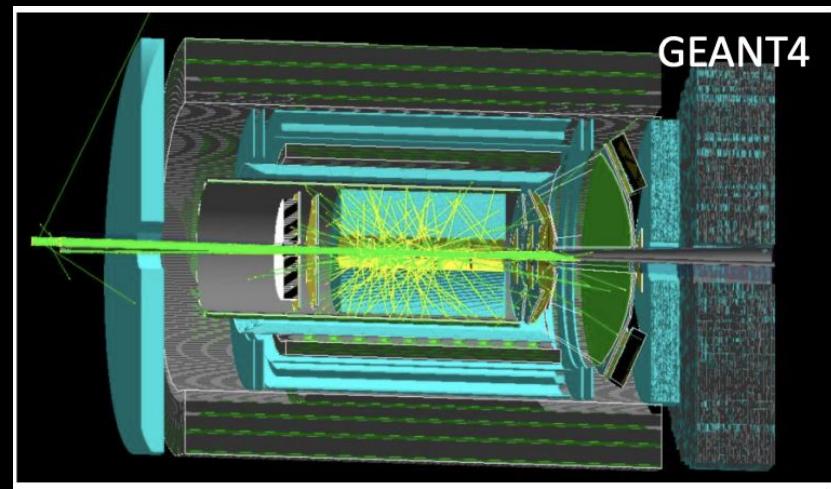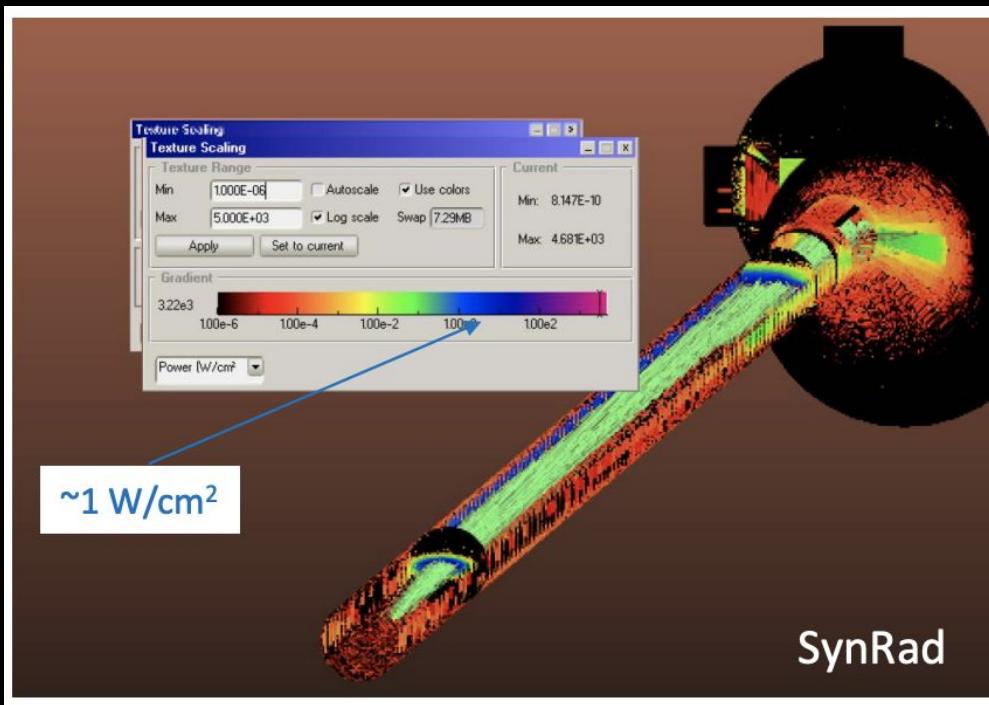

The design of absorbers and masks must be modeled thoroughly

Nucleon Tomography

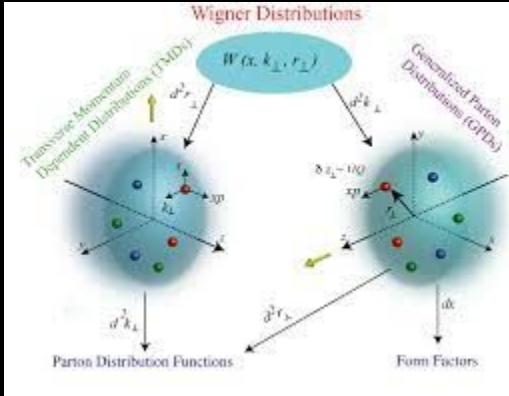

5D tomography:
Wigner distribution—the “mother distribution”

Belitsky, Ji, Yuan (2003);
Lorce, Pasquini (2011)

$$W(x, \vec{k}_\perp, \vec{b}_\perp) = \int \frac{d^2 \Delta_\perp}{(2\pi)^2} e^{i \vec{b}_\perp \cdot \vec{\Delta}_\perp} \int \frac{dz^- d^2 z_\perp}{16\pi^3} e^{ix P^+ z^- - i \vec{k}_\perp \cdot \vec{z}_\perp} \langle P - \frac{\Delta}{2} | \bar{q}(-z/2) \gamma^+ q(z/2) | P + \frac{\Delta}{2} \rangle$$

$\int d\vec{b}_\perp$ $\int d\vec{k}_\perp$

TMD $f(x, \vec{k}_\perp)$ GPD $f(x, \vec{b}_\perp)$ $\int dx$

$\int d\vec{k}_\perp$ $\int d\vec{b}_\perp$ $\int dx$ $F(\vec{b}_\perp)$ Form factor

$f(x)$ PDF Q charge $\int d\vec{b}_\perp$

Overlaps



Credits: E. Cisbani

GEANT4 Overlaps

- There is an option in Fun4All to do overlap checks in GEANT4.
- This is first used for every detector which are used in the simulation — except PID detectors since it takes more time for performing the overlaps there, however, if any of the other subdetectors overlap with PID then, it will report that
- The overlap check outputs are only printed out to kernel, therefore, the output files are checked for the key words “overlap is detected” and the program immediately returns from any simulation

Malformed geometry in GEANT4

- Overlapping volume in Geant4; two possibilities:
 - A daughter volume protruding from its mother volume
 - Two daughter volumes (of a common mother volume) intersect with each other
- Geant4 does not allow such malformed geometries:
 - Each point in space needs to be unambiguously assigned to a physical volume for correct simulation
 - If it belongs to an overlapping region, it is basically undefined

Option to check and avoid overlapping

- By design: constrain geometrical phase space of each volume in such a way to avoid overlapping (this is feasible for relatively simple geometries)
- Use Geant4 dedicated tools:
 - Programmatic commands → `CheckOverlaps()`
 - run-time macro commands → [`/geometry/test`](#) ...
 - Visualization tools → [DAVID](#)
- Use geantino tracking
 - OLAP (Debugging Tool for Overlapping Geometries) [example](#) in <= Geant4.9

GEANT4 Debugging Tools 1

- Check at geometry construction
 - Set [pSurfChk](#) to true in placement constructors, i.e.:
G4PVPlacement(..., G4bool pSurfCk=true)
 - when placed the volume, GEANT4 will check randomly sampled points (1k by default) on the volume surface: either outside mother volume or inside already placed other volumes in the same mother
 - may require significant amount of CPU time (depending on geometry complexity)
- Check after geometry is complete:
 - Directly use **G4bool CheckOverlaps()** method of **G4VPhysicalVolume** when the geometry is complete, on those volumes that can likely overlap

GEANT4 Debugging Tools 2

- Built-in run-time macro commands:
 - **geometry/test/...**
 - can be customized
 - Does not require C++ coding
 - Need to catch messages from macro execution
- Visualization tool: see the “old” DAVID at <https://geant4.kek.jp/~tanaka/>
- Track geantino particles from S1 to S2 and S2 to S1 (for many S1 and S2) and record boundaries of volumes; if they mismatch, likely there are overlaps; see “**examples/extended/geometry/olap**” (in Geant4.9 and older)

Recipe to avoid overlap

- Evaluate “a-priori” potential overlapping situations as much as possible (e.g. supported by visualization tools), then:
 - define geometrical constraints whenever possible to avoid overlaps
 - identify those “critical volumes” that may overlap and cannot be easily constrained
- For these “critical volumes” uses the **CheckOverlaps()** method of **G4VPhysicalVolume** class, after geometry construction by a dedicated instance of the simulator, before running the true simulation/tracking instances.