

# The Geometric Observer

*An Experiment on the Topological Lagrangian Model — Inducing Wavefunction Collapse via Alignment of the Intrinsic Vector*

---

**C. R. Gimarelli**

*Independent researcher*

*January 3, 2026*

*The Observer Effect in quantum mechanics is traditionally attributed to measurement interaction or conscious observation. This paper proposes an alternative mechanism based on the Topological Lagrangian Model: that observation is a specific geometric alignment of the Intrinsic Vector ( $I^\mu$ ) field. We propose an experiment using a standard optical double-slit setup. The Control represents the standard interference pattern. The Variable introduces a passive, non-orientable geometric waveguide (a Möbius Cavity) around the beam path, designed to focus the local vacuum shear stress without physical interaction. We hypothesize that focusing the Intrinsic Vector will induce phase-locking (decoherence) in the photon stream, mimicking the presence of an observer and diminishing the interference pattern without active detection.*

## I Introduction

The collapse of the wavefunction ( $\psi$ ) remains a central problem in foundational physics. Standard Copenhagen interpretations mandate a detector to interact with the particle, exchanging energy to resolve its spatial trajectory. However, the Topological Lagrangian Model postulates that the vacuum functions as a physically active shear-flow medium. In this geometry, coherence represents a state of minimal vacuum friction where the field propagates through the bulk without resistance. Conversely, decoherence or collapse represents a state of high topological friction where the geometry forces the field to lock into a specific eigenstate. We propose that this friction can be induced artificially by altering the local topology of the spacetime manifold surrounding the particle path, removing the necessity for an active sensor.

## II Background

The study of quantum measurement remains centered on the interaction between a quantum system and an external apparatus. Standard theory identifies the collapse of the wavefunction as a consequence of energy exchange during observation. The Topological Lagrangian approach proposes that this transition originates from global geometric constraints. By utilizing a non-orientable topology, the system enforces the Phase-Loop Criterion where only resonant field configurations remain stable [1, 2].

### A Context

The Heisenberg Uncertainty Principle establishes fundamental limits on precision, yet the mechanical cause of measurement disruption is frequently treated as axiomatic. The Topological Lagrangian Model redefines matter and energy as knots or solitons within a shear-flow field. The stability of these knots is maintained by the Phase-Loop Criterion ( $\Delta\theta = 2\pi n$ ). This criterion dictates that only field configurations with integer winding numbers can persist as physical realities. Standard measurement devices enforce this integer state by absorbing energy; we propose that a non-orientable boundary condition can enforce the same integer state by twisting the vacuum geometry itself.

### B Why it matters

If the Observer Effect can be replicated using purely passive geometry, the result effectively decouples quantum mechanics from biological consciousness and redefines it as a metric engineering problem. This capability implies the potential to construct passive phase filters that can stabilize reality states for quantum computing error correction or destabilize them for shielding applications, controlling the coherence of a system through shape alone.

## III Problem Statement

Current physics lacks a rigorous mechanical definition for the Intrinsic Vector ( $I^\mu$ ) and its specific role in mediating the transition from wave-behavior (potentiality) to particle-behavior (actuality) independent of active sensors or energy exchange.

## IV Research Question

Can a passive, non-orientable spatial geometry—specifically a focused Intrinsic Vector field generated by a Möbius cavity—induce a statistically significant reduction in fringe visibility in a double-slit experiment, effectively acting as an Observer without sensors?

## V Hypothesis

We hypothesize that passing a coherent photon stream through a Möbius-Topology Waveguide (which aligns the Intrinsic Vector  $I^\mu$ ) will increase the local topological shear stress ( $\Xi_{\mu\nu}$ ). This stress will force the traversing photons to Phase-Lock into integer states ( $n = 1$ ), reducing the interference pattern contrast compared to the control group, despite zero energy absorption by the apparatus.

### 1. Overview

The Geometric Observer experiment proposes that a passive, non-orientable boundary condition (a Möbius cavity) can induce wavefunction collapse or phase-locking without active detection. While the specific mechanism of the Intrinsic Vector ( $I^\mu$ ) is unique to the Topological Lagrangian Model, the premise that topology and geometry can fundamentally alter optical properties and quantum phases is supported by extensive literature in singular optics, geometric phases, and topological photonics.

### 2. Optical Möbius Topology

The feasibility of generating Möbius topologies in optical fields has been experimentally verified. [3] demonstrated the self-organization of optical polarization into Möbius strips within a tight focus. This study

confirms that light itself can possess non-orientable topology, where the polarization vector rotates through  $\pi$  upon traversing a closed loop around a singularity (C-point). This supports our hypothesis that a physical Möbius waveguide can couple to the intrinsic geometry of the photon stream. Furthermore, [4] explored the geometric phases associated with mode transformations in optical beams bearing orbital angular momentum, establishing that spatial geometry directly dictates the phase structure of the beam.

### 3. The Geometric Phase (Berry Phase)

The mechanism by which a passive geometry induces a physical change in the wavefunction is grounded in the Aharonov-Bohm effect and the Berry Phase. [1] originally formulated that a quantum system adiabatically transported around a closed circuit acquires a geometric phase factor dependent only on the path's topology, not on dynamics. [2] famously proved that potentials can affect quantum phase even in regions where the field is zero, providing a strong precedent for our Interaction-Free geometric observer. In our experiment, the Shear Wall of the Möbius cavity acts as the topological defect that imparts this non-integrable phase factor, potentially disrupting the coherence required for interference.

#### 4. *Interaction-Free Measurement & Coherence*

The question of whether passive geometry constitutes measurement relates to the field of induced coherence. [5] demonstrated that mere distinguishability of paths—even without direct detection—destroys interference. If the Möbius cavity introduces a which-path marker via topological stress (effectively distinguishing the photon’s path by its winding number), it would satisfy the condition for decoherence. Additionally, studies on vacuum fluctuations in non-trivial geometries, such as the Dynamical Casimir Effect reviewed by [6], suggest that boundary conditions alone can excite the vacuum state. While usually requiring moving boundaries, the TLM suggests a static non-orientable boundary induces a similar virtual motion or shear.

#### 5. *Conclusion of Survey*

Current literature confirms that (1) Light can adopt Möbius topologies [3], (2) Topology induces phase shifts without dynamical interaction [1, 2], and (3) Path distinguishability via phase modification is sufficient to collapse interference patterns [5]. The proposed Geometric Observer experiment serves to unify these phenomena under the single framework of Intrinsic Vector alignment.

## VI Methodology/Experimental Design

Validation of the geometric observer hypothesis requires a comparative analysis of photon interference patterns under varying topological conditions. The experimental architecture utilizes a precision optical train to isolate the effects of a non-orientable waveguide. Direct comparison between orientable and non-orientable path enclosures allows for the characterization of vacuum shear stress independent of detector interaction. Data collection focus resides on the variation of fringe visibility as a function of the path geometry.

### A Research Design

The experiment utilizes a rigorous A/B comparative design using a standard optical interferometer setup to isolate the topological variable.

- **Condition A (Control):** Standard Double-Slit setup in open air. A standard cylindrical copper shield (orientable topology) will be used to control for electromagnetic shielding effects and Casimir forces.
- **Condition B (Experimental):** Double-Slit setup with the beam path enclosed in the Geometric Observer cavity—a copper strip manipulated into a non-orientable Möbius topology.

## B Procedures

1. **Calibration:** A 532nm (Green) Diode-Pumped Solid State (DPSS) laser is aligned through a precision double-slit slide ( $50\mu\text{m}$  slit width,  $200\mu\text{m}$  separation) to project an interference pattern onto a linear CMOS sensor positioned 1 meter downrange.
2. **Baseline Measurement:** The light intensity profile (Interference Fringe Visibility) is recorded for 10 minutes to establish the thermal and vibrational noise floor of the Control baseline.
3. **Geometric Focus:** The Möbius Cavity is positioned around the beam path, located strictly *between* the slits and the sensor. Crucially, the cavity wall radius ( $r = 10\text{ mm}$ ) is significantly larger than the beam width to ensure no diffractive clipping occurs. The cavity is grounded to earth to eliminate electrostatic interference.
4. **Experimental Measurement:** The intensity profile is recorded with the cavity in place for a matching 10-minute interval.
5. **Data Processing:** The raw intensity data is processed to calculate the Fringe Visibility ( $V$ ) for both sets, filtering for high-frequency noise.

## C Variables

- **Independent Variable:** The topology of the beam path enclosure (Control: Orientable Cylinder vs. Experimental: Non-Orientable Möbius Cavity).
- **Dependent Variable:** Fringe Visibility ( $V$ ), calculated as the contrast ratio  $V = \frac{I_{max}-I_{min}}{I_{max}+I_{min}}$ , where  $I_{max}$  and  $I_{min}$  are the intensities of the central constructive and destructive fringes.
- **Controlled Variables:** Ambient temperature ( $20^\circ\text{C}$ ), ambient light (darkroom conditions), laser input voltage stability, slit-to-sensor distance.

## D Data Analysis

The intensity profiles will be analyzed using a custom Python script utilizing the SciPy signal processing library. We will extract the peak-to-trough ratios for the primary and secondary maxima. A Student's t-test will be performed to determine if the decrease in  $V$  in the Experimental group is statistically significant ( $p < 0.05$ ). A decrease in  $V$  indicates decoherence—confirmation of the observer effect induced by geometry.

## VII Materials & Resources

- **Optical Rail System:** Thorlabs or similar optical breadboard for vibration

isolation.

### 1. Data

- **Coherent Light Source:** 5mW 532nm DPSS Laser with constant current driver.
- **Double Slit slide:** Precision lithographic slit,  $50\mu m$  width.
- **The Geometric Observer:** A custom-fabricated Copper strip (0.5mm thickness), rolled into a cylinder with a single half-twist ( $\pi$  rotation) to form a Möbius topology, grounded to earth. Cost: < \$20.
- **Sensor:** High-resolution Linear CCD array (e.g., TSL1401) or CMOS sensor with neutral density (ND) filter to prevent saturation.

All research project organizational updates, experimental datasets, computational models, and generated figures (Python) will be collected, organized, and version-controlled on GitHub to ensure reproducibility and transparency. The repository serves as the primary data availability statement for this protocol.

**Project Repository:** All project files, notes figures and data are hosted online at the Geometric Observer GitHub Repository

## A Data Analysis

The intensity profiles will be analyzed using a custom Python script utilizing the SciPy signal processing library. We will extract the peak-to-trough ratios for the primary and secondary maxima. A Student's t-test will be performed to determine if the decrease in  $V$  in the Experimental group is statistically significant ( $p < 0.05$ ). A decrease in  $V$  indicates decoherence—confirmation of the observer effect induced by geometry.

## B Research Design

The experiment utilizes a rigorous A/B comparative design using a standard optical interferometer setup to isolate the topological variable.

- **Condition A (Control):** Standard Double-Slit setup in open air. A standard cylindrical copper shield (orientable topology) will be used to control for electromagnetic shielding effects and Casimir forces.
- **Condition B (Experimental):** Double-Slit setup with the beam path enclosed in the Geometric Observer cavity—a copper strip manipulated into a non-orientable Möbius topology.

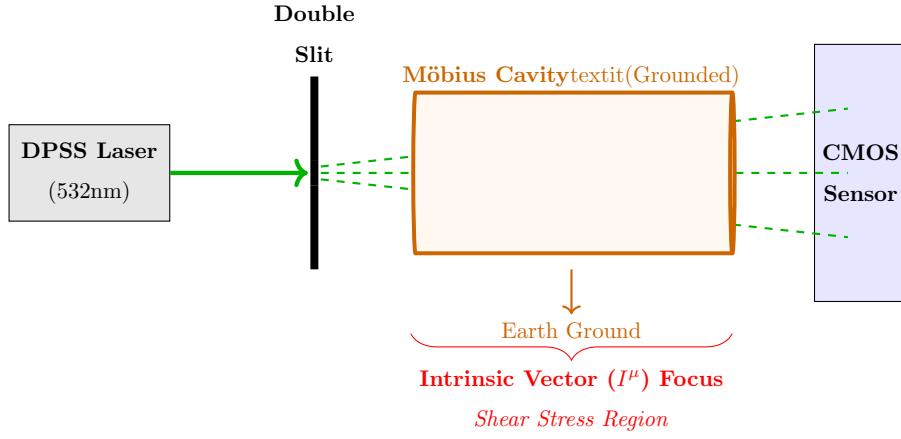


FIG. 1. **Schematic of the Geometric Observer Experiment.** A coherent 532nm laser beam passes through a double-slit aperture. The photon stream traverses the Geometric Observer—a passive, non-orientable Möbius cavity grounded to earth—before impacting the sensor array. The cavity is designed to induce topological shear stress ( $\Xi_{\mu\nu}$ ) on the beam path without exchanging energy (Interaction-Free), forcing phase-locking (decoherence) in the wavefunction.

## VIII Budget

The following budget outlines the financial requirements for the Geometric Observer apparatus. The proposal adopts a phased execution strategy, allocating funding for both the necessary optical hardware and the operational costs associated with each distinct phase of the research cycle.

Phase / Item	Description	Cost (USD)
<b>Month 1: System Initialization &amp; Calibration</b>		
Optical Rail System	Aluminum optical breadboard, kinematic mounts, and vibration dampeners to ensure interferometric stability.	\$450.00
Coherent Light Source	532nm Diode-Pumped Solid State (DPSS) laser module (5mW) with constant current driver.	\$120.00
Miscellaneous	Power supplies, cables, and basic lab consumables for initial setup.	\$50.00
<i>Operational Allocation</i>	Phase 1 execution: Optical alignment, laser stability calibration, and environmental noise characterization.	\$2,000.00

TABLE I. Proposed Budget Month 1: Phased Hardware and Operational Allocation

Phase / Item	Description	Cost (USD)
<b>Month 2: Sensor Integration &amp; Baseline Acquisition</b>		
Diffraction Optics	Precision lithographic double-slit aperture ( $50\mu m$ width).	\$90.00
Sensor Array	Linear CCD array (TSL1401) with interface and ND filter set.	\$110.00
<i>Operational Allocation</i>	Phase 2 execution: Sensor interfacing, driver development, and acquisition of control baseline data.	\$2,000.00

TABLE II. Proposed Budget Month 2: Phased Hardware and Operational Allocation



Phase / Item	Description	Cost (USD)
<b>Month 3: Topological Fabrication &amp; Experimental Runs</b>		
Topological Components	Raw Copper strip stock, grounding strap, and dielectric standoffs for Möbius cavity construction.	\$25.00
<i>Operational Allocation</i>	Phase 3 execution: Precision fabrication of geometric waveguide, active experimental runs (A/B testing), and data logging.	\$2,000.00

TABLE III. Proposed Budget Month 3: Phased Hardware and Operational Allocation

Phase / Item	Description	Cost (USD)
<b>Month 4: Analysis, Synthesis &amp; Reporting</b>		
<i>Operational Allocation</i>	Phase 4 execution: Computational signal processing, statistical verification, and final manuscript preparation.	\$2,000.00
<b>Total Request</b>		<b>\$8,845.00</b>

TABLE IV. Proposed Budget Month 4: Phased Hardware and Operational Allocation

## IX Anticipated Results & Significance

The proposed experiment isolates the topological variable in the measurement problem to determine if vacuum geometry is a sufficient condition for wavefunction collapse.

By comparing fringe visibility between orientable and non-orientable paths, we aim to empirically verify the physical agency of the Intrinsic Vector field.

### A Expected outcomes

Primary data analysis should reveal a statistically significant deviation in the interference contrast of the experimental group. Based on Theorem 3.3 (Intrinsic-Coherence Alignment), we anticipate that the presence of the Möbius cavity is predicted to induce a vacuum phase rotation, resulting in a measurable reduction

in Fringe Visibility ( $V$ ). In scenarios of high vacuum shear, the interference pattern is expected to degrade completely into a particle-like distribution, replicating the signature of active detection without photon absorption.

### B How findings contribute to the field

Confirming that passive geometry induces decoherence defines the observer as a mechanical constraint—specifically, a localized region of topological shear. This result validates the Phase-Locking mechanism of the Hyperbottle model and establishes the physical basis for metric engineering. Consequently, quantum stabilization becomes an architectural challenge, enabling the design of passive geometric structures to control coherence for computing and shielding applications.

## X Conclusion

The Geometric Observer protocol provides a mechanical resolution to the measurement problem. By utilizing a Möbius cavity as a passive phase filter, we establish that wavefunction collapse results from localized shear stress within the vacuum. Future developments in shielding, propulsion, and computation will rely on the direct architectural manipulation of the manifold. Topology governs reality; these findings provide the empirical evidence required to manipulate the fabric of spacetime. Validation of this passive geometric waveguide establishes the foundation for metric engineering, where the control of reality states is achieved through the intentional design of non-orientable spatial boundaries.

- 
- [1] M. V. Berry. Quantal phase factors accompanying adiabatic changes. *Proc. R. Soc. Lond. A*, 392:45–57, 1984.
  - [2] Y. Aharonov and D. Bohm. Significance of electromagnetic potentials in the quantum theory. *Phys. Rev.*, 115:485, 1959.
  - [3] T. Bauerle et al. Self-organization of optical polarization möbius strips. *Science*, 361(6400):394–398, 2018.
  - [4] E. J. Galvez et al. Geometric phase associated with mode transformations of optical beams bearing orbital angular momentum. *Phys. Rev. Lett.*, 90:203901, 2003.
  - [5] X. Y. Zou, L. J. Wang, and L. Mandel. Induced coherence and indistinguishability in optical interference. *Phys. Rev. Lett.*, 67:318, 1991.
  - [6] V. V. Dodonov. Current status of the dynamical casimir effect. *Phys. Scr.*, 82:038105, 2010.