IROS2026 Recap

Frank Liu

2026-10-03

Contents

IROS 2026 at am Glance **EXPORT**

Papers Distribution (count, % of 1,929 papers)

- Based on themes

Theme	Papers	Share
Learning & AI (RL, imitation/demonstration, deep learning)	800	41.5%
Navigation, Planning & Control	511	26.5%
Locomotion & Platforms (legged, aerial, marine, field, soft)	385	20.0%
Manipulation & Grasping	299	15.5%
Perception & Vision	277	14.4%
SLAM, Localization & Mapping	229	11.9%
Multi-Robot & Human-Robot Interaction	227	11.8%
Sensing & Tactile	154	8.0%
Safety	128	6.6%
Mechanism & Design	94	4.9%
Medical & Assistive	88	4.6%

- Based on keywords (count, % of 1,929 papers)

Keyword	Count	%
Reinforcement Learning	198	10.3%
Motion and Path Planning	152	7.9%
Deep Learning for Visual Perception	144	7.5%
Imitation Learning	121	6.3%
Deep Learning in Grasping and Manipulation	117	6.1%
Vision-Based Navigation	117	6.1%
Machine Learning for Robot Control	101	5.2%
Multi-Robot Systems	95	4.9%
Deep Learning Methods	91	4.7%
AI-Enabled Robotics	88	4.6%
Mapping	88	4.6%
Sensor Fusion	81	4.2%
Legged Robots	80	4.1%
Learning from Demonstration	80	4.1%
SLAM	76	3.9%
AI-Based Methods	76	3.9%
Optimization and Optimal Control	75	3.9%
Localization	75	3.9%
Autonomous Vehicle Navigation	74	3.8%
Force and Tactile Sensing	74	3.8%

- Based on applications About 57% of papers are general methods that state no specific application.

Application domain	Papers	Share
Self-driving / Autonomous vehicles	182	9.4%
Humanoid / Legged locomotion	152	7.9%
Aerial / Drones / UAV	122	6.3%
Human-Robot Interaction / Collaboration	122	6.3%
Medical / Surgical / Healthcare	92	4.8%
Marine / Underwater	54	2.8%
Assistive / Rehab / Wearable / Prosthetics	39	2.0%
Manufacturing / Industrial	35	1.8%
Home / Service / Domestic	32	1.7%
Search & Rescue / Disaster / Field	28	1.5%
Agriculture / Forestry	28	1.5%
Warehouse / Logistics	16	0.8%
Construction / Inspection	12	0.6%
Space / Planetary	11	0.6%

- Based on institutions (all papers)

Institution	Papers	Share
Tsinghua University	91	4.7%
Carnegie Mellon University	77	4.0%
Zhejiang University	60	3.1%
HKUST	54	2.8%
National University of Singapore	50	2.6%
Shanghai Jiao Tong University	50	2.6%
Chinese University of Hong Kong	45	2.3%
Purdue University	45	2.3%
MIT	43	2.2%
University of Tokyo	43	2.2%
Georgia Tech	36	1.9%
KAIST	36	1.9%
Northeastern University	36	1.9%
Technical University of Munich	36	1.9%
Harbin Institute of Technology	33	1.7%
Nanyang Technological University	32	1.7%
Beijing Institute of Technology	32	1.7%
University of Michigan	31	1.6%
SUSTech	31	1.6%
University of Southern California	28	1.5%
Beihang University	27	1.4%
Peking University	27	1.4%
ETH Zurich	26	1.3%
Seoul National University	25	1.3%
Tongji University	24	1.2%
Institute of Automation, CAS	24	1.2%

- Based on country / region

Country	Papers	Share
China	571	29.6%
USA	528	27.4%
Japan	119	6.2%
Germany	105	5.4%
Korea	87	4.5%
Singapore	80	4.1%
UK	71	3.7%
Italy	42	2.2%
Switzerland	41	2.1%
Canada	31	1.6%
France	27	1.4%
Netherlands	14	0.7%
Other / Unresolved	456	23.6%

Self-driving Papers Distribution (count, % of 182 papers)

Note: the method table below is over the 62 self-driving *ML-planner* papers (a subset of the 182), not all 182.

- Based on sub-area

Sub-area	Papers	Share
Navigation (high-level: AV navigation, ITS)	104	57.1%
Perception (detection, segmentation, scene understanding)	67	36.8%
Learning methods (RL / DL / representation / imitation)	55	30.2%
Localization, Mapping & SLAM	41	22.5%
Planning & Decision-making	36	19.8%
Prediction & Forecasting	29	15.9%
Safety	19	10.4%
Simulation & Benchmarking	14	7.7%
Multi-agent / V2X	7	3.8%

- Based on method

ML method family	Papers	Share of 62
Reinforcement Learning (RL)	16	25.8%
VLM / LLM / foundation model	15	24.2%
Diffusion / score-based	14	22.6%
Transformer / attention	14	22.6%
Imitation / Behavior Cloning	6	9.7%
MPC + learning / hybrid control	6	9.7%
World model / model-based	5	8.1%
Autoregressive / sequence / tokens	4	6.5%
Vector quantization / codebook	2	3.2%
Flow matching / rectified flow	2	3.2%
Graph neural network	1	1.6%
GAN / VAE / generative (other)	1	1.6%
Inverse RL / IOC / cost learning	1	1.6%
(no specific method matched)	11	17.7%

Papers from Self-Driving Companies

- 1. Bosch (6)
  - [1342] PRISM: Privileged Probabilistic Latent Supervision for End-To-End Autonomous Driving Motion Planning
  - [2464] Super Agents and Confounders: Influence of Surrounding Agents on Vehicle Trajectory Prediction
  - [2700] Leveraging Previous-Traversal Point Cloud Map Priors for Camera-Based 3D Object Detection and Tracking
  - [2962] Streaming Gaussian Encoding for 4D Panoptic Occupancy Tracking
  - [3321] GeoReFormer: Geometry-Aware Refinement for Lane Segment Detection and Topology Reasoning
  - [4566] RCG: Safety-Critical Scenario Generation for Robust Autonomous Driving Via Real-World Crash Grounding
- 2. Honda (3)
  - [387] Differentiable Weights-Varying Nonlinear MPC Via Gradient-Based Policy Learning: An Autonomous Vehicle Guidance Example
  - [1569] What's Hidden Matters: Identifying Planning-Critical Occluded Agents Using Vision-Language Models

  - [3585] Mode-Based Follow–Overtake Planning for Micro-Mobility in Mixed Traffic

- 2. Hyundai (3)
  - [1254] Sparse Recovery Bird's-Eye View Model Soup for Robust Camera-Based 3d Object Detection
  - [4370] PlanRL: A Trajectory Planning Architecture for Reinforcement Learning-based Driving Experts
  - [4896] Continual Reinforcement Learning Framework for Scalable Collision Avoidance and Mitigation System with Packing Strategy

- 2. Waymo (3)
  - [398] Vector Quantization for Trajectory Prediction
  - [3112] 3D Open-Vocabulary Detection Via Visual Alignment and Generative Captions
  - [3593] World-Simulation As Pre-Training for Scalable Dense Perception in Autonomous Driving

- 5. BMW (2)
  - [450] Closing the Navigation Compliance Gap in End-To-End Autonomous Driving
  - [645] GaussianFusionOcc: A Seamless Sensor Fusion Approach for 3D Occupancy Prediction Using 3D Gaussians

- 5. Google (2)
  - [769] DiskChunGS: Large-Scale 3D Gaussian SLAM through Chunk-Based Memory Management
  - [3593] World-Simulation As Pre-Training for Scalable Dense Perception in Autonomous Driving

- 5. Meituan (2)
  - [766] Enabling Scalable Infrastructure-To-Vehicle Data Generation: A High-Fidelity Fusion Pipeline with a Scene Harmonizer for Visual and Logical Consistency
  - [4312] Uncertainty-Aware Auto-Annotation for Multi-Domain 3D Semantic Segmentation

- 5. Mercedes-Benz (2)
  - [706] G2DP: Diffusion Planning with Spatio-Temporal Grid Guidance
  - [2907] Shift & Drift: A Zero-Shot Benchmark for Generalizable and Robust Autonomous Driving Motion Planning
- 5. NVIDIA (2)
  - [1371] FAR-LIO: Enabling High-Speed Autonomy through Fast, Accurate, and Robust LiDAR-Inertial Odometry
  - [3449] Latent-Centroid Steering: Single-Pass Classifier-Free Guidance for Command-Aligned Autonomous Driving
- 5. Shanghai AI Lab (2)
  - [1925] Joint Multi-Agent Motion Forecasting Via Progressive Multi-Scale Decoding Over Dynamic Graphs
  - [4282] SymDrive: Realistic and Controllable Driving Simulator Via Symmetric Auto-Regressive Online Restoration
- 5. Toyota (2)
  - [2974] 3D Lane Detection with Odometry for High-Speed Vehicle Racing
  - [4568] FleetAgent: Teleoperation Assistant for Autonomous Fleets Via Vectorized V2N Messages

Exhibitor distribution (IROS 2026 exhibit hall)

Field	Companies	Share
Humanoid / general-purpose embodied robots	24	13.6%
AI / data / simulation / software (physical AI)	24	13.6%
Manipulators / industrial / cobots	18	10.2%
Education / associations / publishers	15	8.5%
Dexterous hands / grippers / end-effectors	14	7.9%
Tactile / force / haptic sensing	14	7.9%
Actuators / motors / drives / components	12	6.8%
Big tech / industry / government labs	11	6.2%
LiDAR / depth / vision sensors	9	5.1%
Motion capture / tracking	8	4.5%
Quadruped / legged / aerial / field	8	4.5%
Medical / assistive / BCI / prosthetics	6	3.4%
Other / uncategorized	6	3.4%
Autonomous vehicles / driving	4	2.3%
Semiconductors / edge / power / hardware	4	2.3%

Research North Star

1. End-to-end

- [4895] NPPC: Neural Parametric Planning Cost for End-To-End Autonomous Driving P0:EXPORT:R0

  - Summary

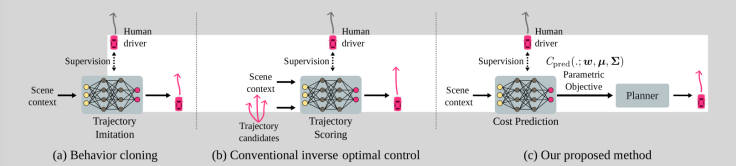


Fig. 1. Comparison of our method with existing end-to-end planning methods. (a) Behavior cloning directly imitates expert trajectories or actions. (b) Conventional inverse optimal control models expert cost to score trajectory candidates. (c) Our NPPC predicts a parametric planning objective to directly guide the downstream planner without restricting it to a predefined set of trajectory candidates.

Problems:

* E2E planners trained by behavior cloning (imitating expert trajectories) suffer from biases and compounding errors in closed loop.

* Inverse Optimal Control (IOC) can help by learning the expert's planning cost, but
  - prior IOC uses hand-crafted cost terms, may not fully capture nuanced human decisions.
  - spatially discrete cost-maps (need rule-based post-processing), they may not accurately capture high-risk regions in the continuous driving space.
  - High-dim neural scorers (limited to ranking predefined trajectory candidates), limited to scoring a set of predefined trajectory proposals during inference, restricting flexibility in the final trajectory.

How:

* predicts a spatio-temporal cost-map as **a weighted sum of radial basis functions (RBFs)** conditioned on the scene

Why interesting:

* parametric learnable cost
* combine rule-based cost and learned cost

– Method

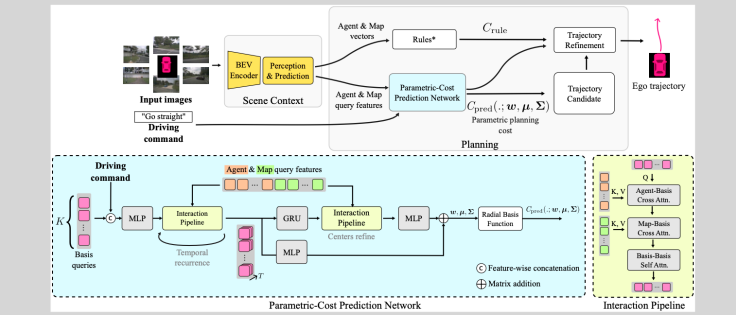


Fig. 2. End-to-end planning pipeline with NPPC. The pipeline consists of two main modules: **scene context**, which extracts agent and map features from camera inputs, and **planning**, which optimizes a radial basis function-based expert cost that captures expert decision-making, alongside additional rule-based subcosts. The parametric-cost prediction network generates this expert cost by attending basis queries with agent and map features in the interaction pipeline to generate K temporal basis parameters: $\boldsymbol{w}, \boldsymbol{\mu}, \boldsymbol{\Sigma}$. $*$: Optional module.

* NPPC predicts a spatio-temporal cost-map as **a weighted sum of radial basis functions (RBFs)** conditioned on the scene (low-dimensional, spatially continuous, learnable cost).
* Because it's low-dim, it plugs directly into downstream planners as an optimization objective with no post-processing, enabling maneuvers beyond predefined candidates.
* IOC
  - cost function: $g(\cdot) = \sum_{k=1}^{K} w_k \phi(\cdot)$

· RBF: $\phi(x, \mu, \Sigma) = \frac{1}{1+(x-\mu)^\top \Sigma^{-1}(x-\mu)}$, where μ is xy-coordinate.

· loss: max-margin loss which is the same as Maximum Margin Planning.

· Sampler: engineered sampler, which could be limit factor.

· Refer to End-to-end Interpretable Neural Motion Planner `https://arxiv.org/pdf/2101.06679`

∗ Planner: sampling, ranking, and **optimization for refinement**. The refinement step is a major difference from previous work as shown in Fig. 1.

– Results SOTA vision-based E2E AD on nuScenes (collision rate -5.7%, curb collision -9.8% open-loop; +3.5% driving score closed-loop, beating BC planners). KAIST. RA-L / IROS 2026.

– Overall max-margin IOC with an learnable/interpretable cost using RBF and optimization for final refinement.

2. Multimodal trajectory generation

- [706] G2DP: Diffusion Planning with Spatio-Temporal Grid Guidance P0:EXPORT

  – Summary

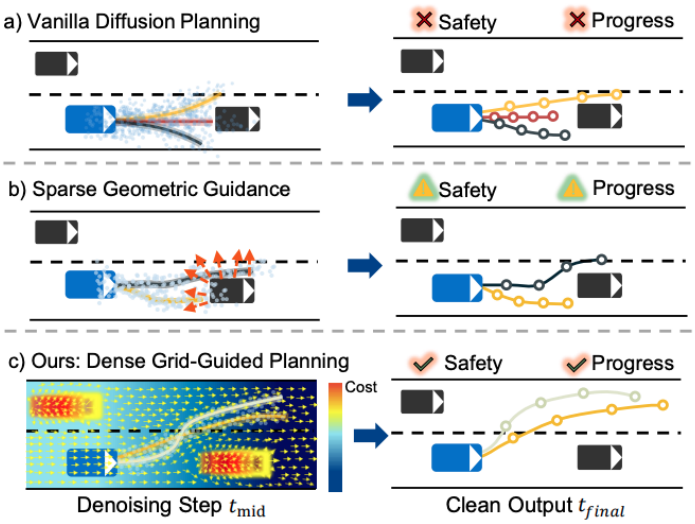


Fig. 1: Diffusion guidance comparison. (a) Vanilla: Lacks explicit constraints, relying solely on learned priors. (b) Sparse: Uses instance-anchored constraints, yielding less smooth trajectories. (c) G2DP (Ours): Employs a dense, distributional spatio-temporal cost volume to proactively steer generation toward safe and route-aligned energy basins.

  - Problem:
    - Diffusion planners model diverse behaviors well but needs explicit guidance for safety/route adherence.
    - Existing guidance using sparse entity-centric geometric queries or post refinement is not good at situational awareness and being fragile in interactive scenes.
  - How
    - builds a differentiable spatio-temporal cost volume and injects dense gradients into the denoising loop
  - Why interesting:
    - representation/guidance idea rather than a new generator
- Method

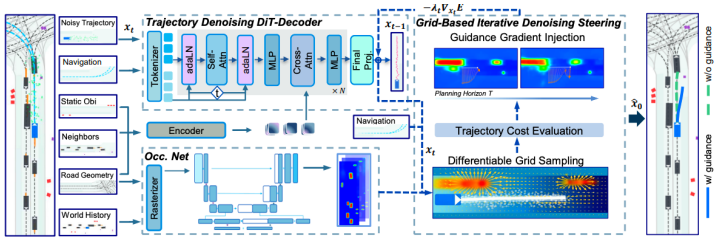


Fig. 2: Model architecture of the G2DP. The system utilizes a DiT-Decoder to process ego future noisy trajectories conditioned on vectorized scene context, alongside an Occupancy Network that predicts occupancy distributions from rasterized history. Crucially, our Grid-Based Iterative Denoising Steering (right) bridges these components. It queries the predicted cost grids at the coordinates of $\mathbf{x}_t$ via differentiable sampling to compute a safety energy term. A guidance gradient $-\lambda_t \nabla_{\mathbf{x}_t} E$ is then injected into the sampling step, actively steering the trajectory away from high-cost regions and preserving route progress.

G2DP (Grid-Guided Diffusion Planning) enforces dense environmental constraints via inference-time guidance. It builds a differentiable spatio-temporal cost volume by fusing probabilistic future occupancy with a route-progress map, formulates it as a continuous safety energy functional, and injects dense gradients into the denoising loop to steer trajectories toward collision-free, progress-optimal regions.

  - ∗ U-net to predict Occ map
  - ∗ Fuse with route-aligned progress (encourage the ego to move forward and stay in the lane): $\psi_t(u,v) = \gamma O_t(u,v) + (1-\gamma)R(u,v)$
  - ∗ To balance safety coverage with robustness, we propose a Top-K footprint aggregation strategy.
  - ∗ Gradient-Based Denoising Steering.
- Result: SOTA on nuPlan (+7.2 reactive score over the strongest IL baseline); top zero-shot transfer to interPlan and DeepScenario (collision avoidance +10.15 over unguided on interPlan). Code available (HangYuu/G2DP). TUM / Mercedes-Benz / KIT. IROS 2026.
  - ∗ Overall: well-rounded closed-loop result with strong zero-shot transfer (evidence of generalization); contribution is a representation/guidance idea rather than a new generator, so impact hinges on how much the dense grid beats cheaper guidance.

- [398] Vector Quantization for Trajectory Prediction P0:EXPORT
  - Summary

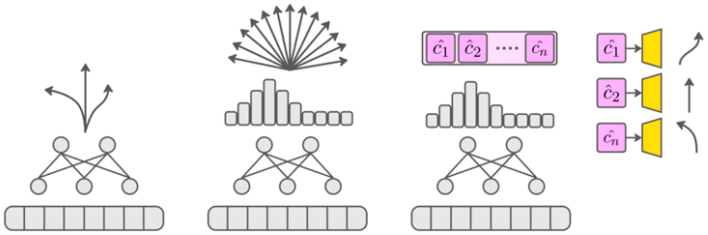


Fig. 1: **Trajectory Decoding Strategies.** Classification-based decoders (middle) avoid the pitfalls of regression (left) such as mode collapse and training instability, but their heuristic classification objectives lack generality. VQTraj (right) revisits framing trajectory decoding as a classification task but leverages powerful discrete latent priors.

- ∗ Problem: motion-forecasting decoders stayed simplistic.
  - · Regression decoders (Winner-Takes-All) suffer training instability and mode collapse;
  - · heuristic classification over hand-crafted clusters/goals gives good mode coverage but poor absolute accuracy;
  - · autoregressive decoders are slow (token-by-token). Planners mostly act on the single most-likely mode, so that mode's quality matters most.
- ∗ How A novel trajectory decoding framework that transforms motion forecasting into a classification problem by learning **discrete latent trajectory priors** via Vector Quantization (VQ).
- ∗ Why interesting We borrow some ideas for training interpretable decision encoder (Codebooks).

– Method

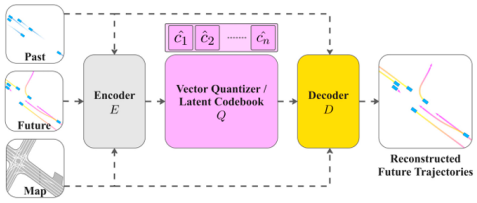


Fig. 2: **Autoencoder Architecture**. The encoder compresses input trajectories into latent codes which are then quantized using FSQ. The decoder reconstructs trajectories from quantized codes. In the process, the vector quantizer learns a codebook of discrete latent priors $\hat{\mathbf{c}}_i,\ i = 1, \ldots, n$.

How to train vector quantizer and trajectory decoder

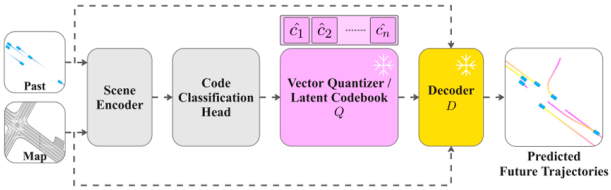


Fig. 5: **VQTraj for Trajectory Decoding**. During downstream training, we freeze the pretrained weights of VQTraj. The codebook and decoder are used to predict future trajectories, while the encoder is used to generate labels for code classification supervision.

How to train scene encoder

VQTraj frames trajectory decoding as **classification over discrete latent trajectory priors learned via Vector Quantization**. An autoencoder with finite-scalar quantization (FSQ) learns a codebook where one code encodes a full trajectory (interpretable, data-driven priors instead of heuristics). Pretrain the autoencoder to reconstruct futures, then reuse it as a drop-in decoder: adapted models just predict a distribution over latent priors.

  * Autoencoder to c, then finite-scalar quantization (FSQ) to get discrete codebook,

– Result Upgrades two SOTA models on Argoverse 2, improving both the top-1 prediction (minADE1, minFDE1) and ranked multimodal predictions (bminFDE6); strong zero-shot cross-dataset transfer to Waymo Open Motion. Waabi / Univ. Toronto. IROS 2026.

5. A safety layer

- [82] Learning a Unified Risk Map for Autonomous DrivingR0:EXPORT

  – Problem

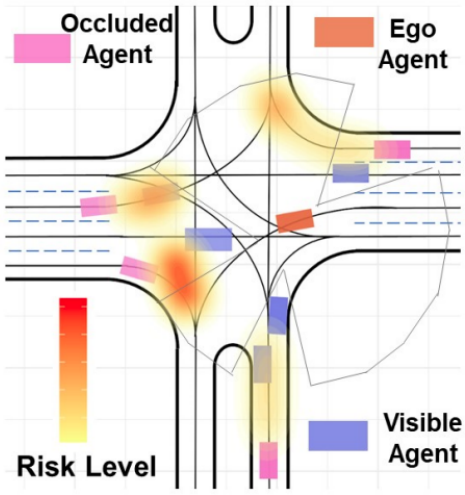


Fig. 1. A unified spatiotemporal risk field integrates traffic flow and collision risks under partial observability. Flow risk is estimated via density from multimodal trajectory distributions, while collision risk is assessed by simulating the ego vehicle's trajectory to identify spatiotemporal hotspots.

- ∗ Occlusion-aware prediction is hard under unobserved-region uncertainty.
- ∗ Prior methods either
  1. overestimate risk (reachable-set, overly conservative) or
  2. predict poorly under high occlusion (trajectory/occupancy prediction).
- ∗ Occluded-interaction scenarios are also scarce in data.
- ∗ Key insight:
  - · model a dense, planner-friendly **unified spatio-temporal risk field** that implicitly marginalizes over the uncertainty
  - · solve the data-scarcity problem with adversarial diffusion-based scenario generation.
- ∗ Why interesting
  - · prediction-planning interface (model risk vs trajectory)
  - · interactive data generation
  - · predict risk

– Method: four interconnected components (Fig. 2).

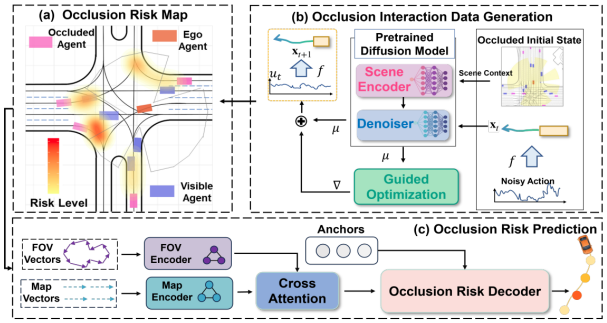


Fig. 2. The framework of the proposed method: (a) a unified spatiotemporal risk field in partially observable environments; (b) an automated occlusion interaction data generator that samples potential occluded agent states and synthesizes realistic yet adversarial interactions using a pretrained diffusion model with guidance-based optimization; (c) a risk prediction model that encodes occlusion-aware environments and decodes probabilistic risk distributions.

* Occlusion risk modeling (the risk field, 0.5 m grid Ω):
  - Flow risk: spatial density of predicted multimodal trajectories (where traffic is likely), distance-decayed by $e^{-\lambda D}$; stationary agents filtered by a speed threshold v_{min}.
  - Collision risk: built from spatio-temporal overlap events where the ego trajectory comes within δ of a predicted trajectory.
  - Fused linearly $R_{total} = \alpha R_{flow} + \beta R_{collision}$, then Gaussian-filtered and normalized.
* Occlusion interaction data generation (diffusion):
  - samples hidden-agent initial states (position/speed) in occluded lane segments from map topology + ego FOV;
  - a pretrained DDPM (transformer scene encoder + denoiser) predicts controls (accel $\dot{v}$, yaw rate $\dot{\psi}$) rolled out via a bicycle model.
  - A **guidance function** $F(u^p) = \lambda_1 \min_t d_{inter} + \lambda_2 \min_t d_{road}$ steers generation toward adversarial-but-realistic (maximize interaction risk vs. SDF road adherence).
* Risk prediction network (lightweight, real-time ~6.67 ms / 150 FPS):
  - ray-traced FOV encoding f_{fov} + vectorized map f_{map} fused by cross-attention;
  - **lane anchors as queries** (QCNet-style) in a transformer decoder output per-anchor, multi-step risk scores (trained with MSE on modeled risk).
* Driving strategy: QP planner with composite cost $C_{total} = w_1 C_{smooth} + w_2 C_{reach} + w_3 C_{risk} + w_4 C_{collision}$, where $C_{risk} =$


$\sum_i R_i v_i^2$ discourages speed in risky regions (slow down before a blind spot).


- Result
  - On WOMD (1000 train / 100 val occlusion scenes, open-loop velocity planning on a fixed reference path), beats SOTA occlusion-prediction baseline OPBP (Scene Informer)
  - Full method: TTCmin 7.72 s, TTCavg 35.14 s.
  - Ablations: O-Risk (same net, no diffusion augmentation) lags (TTCmin 4.91 s), confirming the adversarial diffusion data is a major contributor. Scenario generation is more adversarial than rule-based (-41.2% TTC) while staying more realistic (OnRoad +13.6%, OffRoad dist -56.6%). Fudan / Tongji. Published in IEEE RA-L.


Workshops


Sim2Real **EXPORT**


URL: `https://sim2realgap.github.io/sim2real-and-control-workshop-iros2026/`

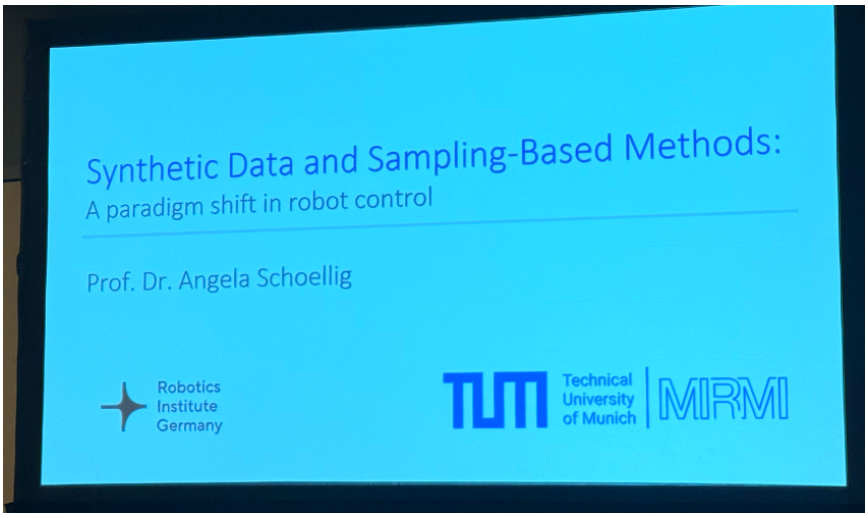


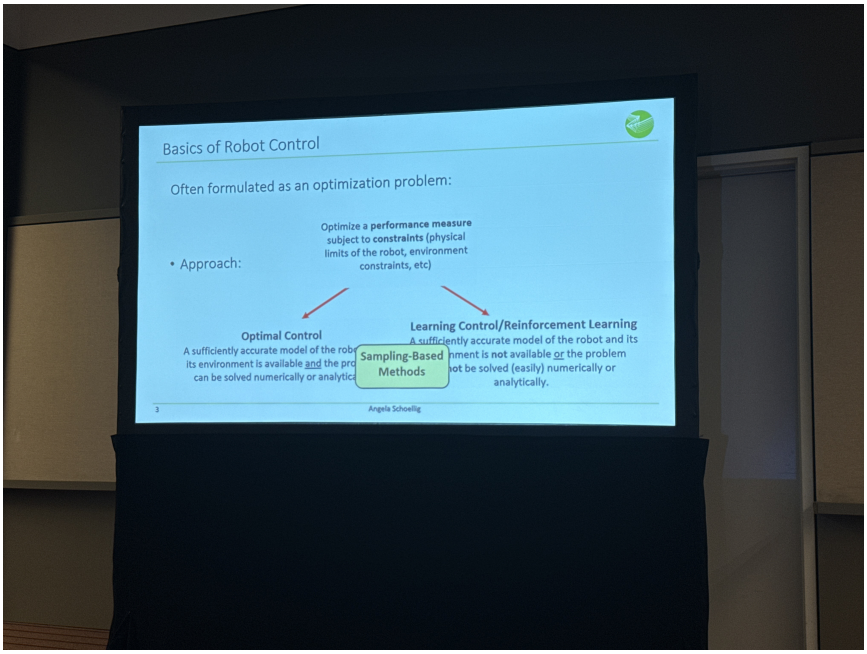
Basics of Robot Control
Often formulated as an optimization problem:
• Approach:
Optimize a performance measure subject to constraints (physical limits of the robot, environment constraints, etc)
Optimal Control
Sampling-Based Methods
Learning Control/Reinforcement Learning
not be solved (easily) numerically or analytically.
3
Angela Schoellig

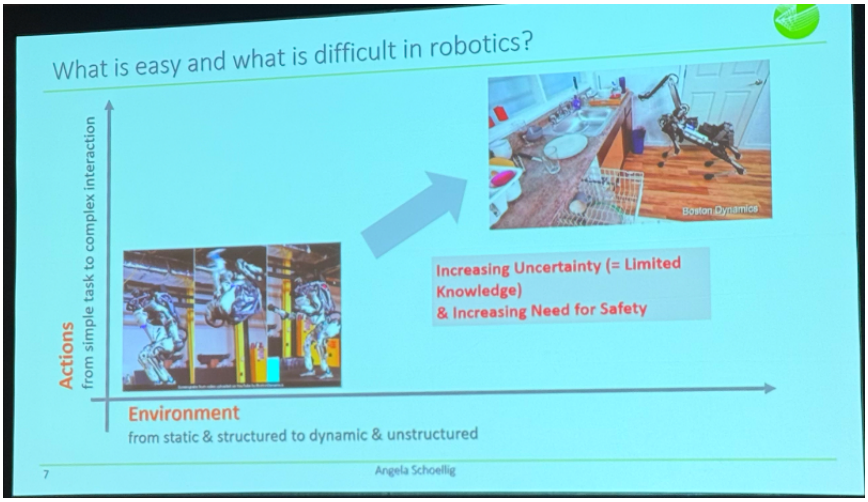

What is easy and what is difficult in robotics?
Actions
from simple task to complex interaction
Boston Dynamics
Increasing Uncertainty (= Limited Knowledge)
& Increasing Need for Safety
Environment
from static & structured to dynamic & unstructured
7
Angela Schoellig

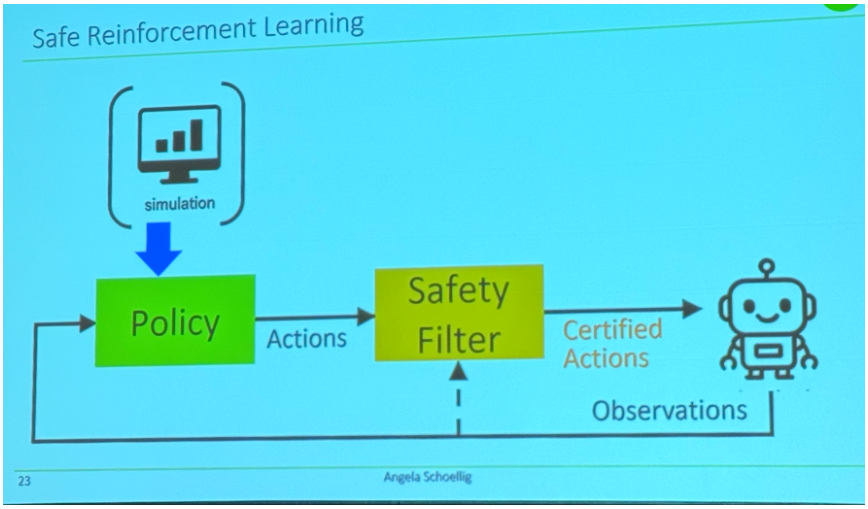
Safe Reinforcement Learning
simulation
Policy
Actions
Safety Filter
Certified Actions
Observations
23
Angela Schoellig

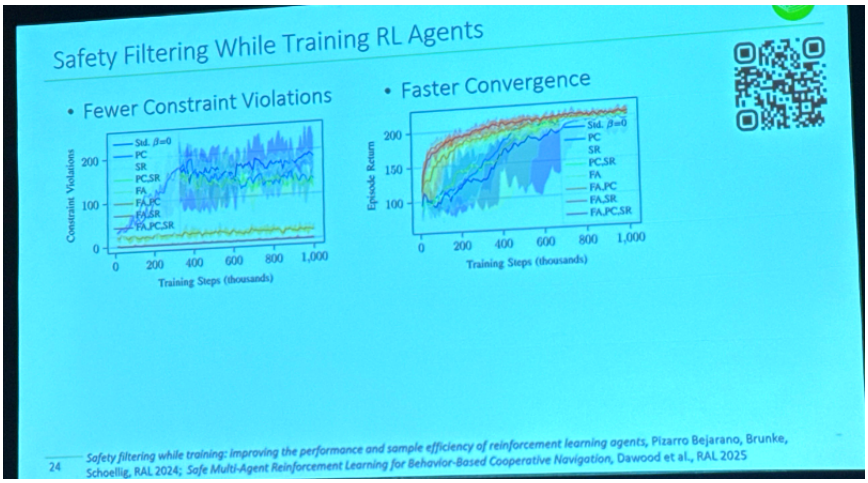
Safety Filtering While Training RL Agents
• Fewer Constraint Violations
• Faster Convergence
Constraint Violations
Episode Return
Training Steps (thousands)
Std, β=0
PC
SR
PC,SR
FA
FA,PC
FA,SR
FA,PC,SR
24
Safety filtering while training: Improving the performance and sample efficiency of reinforcement learning agents, Pizarro Bejarano, Brunke, Schoellig, RAL 2024; Safe Multi-Agent Reinforcement Learning for Behavior-Based Cooperative Navigation, Dawood et al., RAL 2025

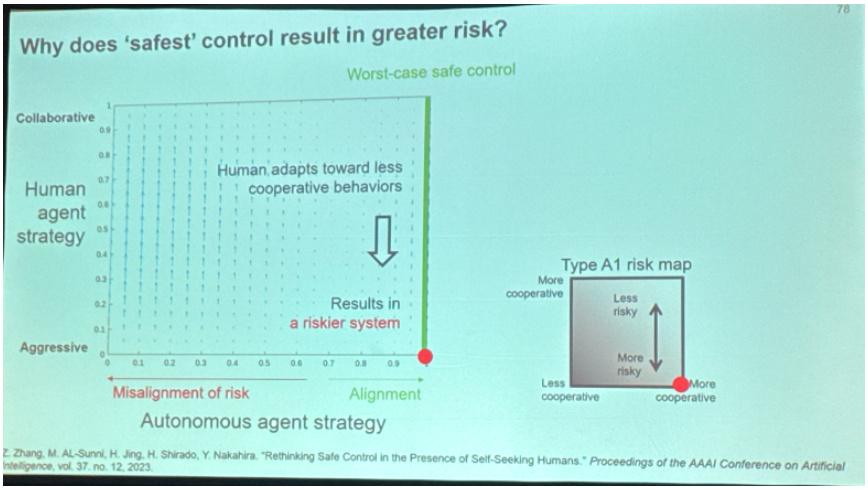


Learning-to-Optimize for Control in Robotics EXPORT

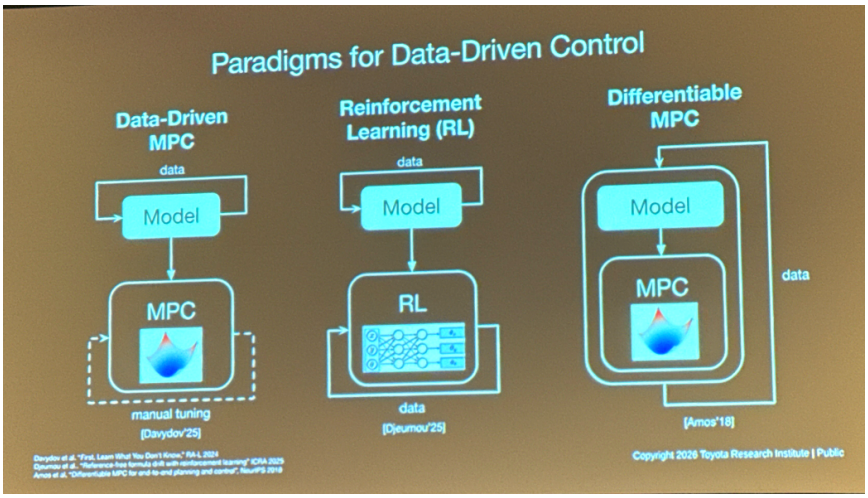

Information Gathering MPC

- **Key insight:** Learning as fast as possible = maximizing information gain

$$\ell_{\text{info}}(x,u) = \sum_{t=0}^{T}\sum_{i=1}^{n} \log\left(1+\phi_i(x_t,u_t)\Lambda_i^{-1}\phi_i(x_t,u_t)\right)$$



- Prioritize visiting states in the feature space with high uncertainty

Info-OCP


$$\min_{x,u} \; -\alpha\ell_{\text{info}}(x,u) + \sum_{t=0}^{T}\ell(x_t,u_t)$$

$$\text{s.t. } x_{t+1} = f_\theta(x_t,u_t)$$
$$x_0 = x_{\text{init}}$$
$$\underline{u} \le u_t \le \bar{u}$$
$$\underline{x} \le x_t \le \bar{x}$$

Lew et al. "Safe Active Dynamics Learning and Control", T-RO '23
Davydov et al. "First, Learn What You Don't Know", RA-L '24


Copyright 2026 Toyota Research Institute | Public


Sequential Information Gathering for Identifying Dynamics

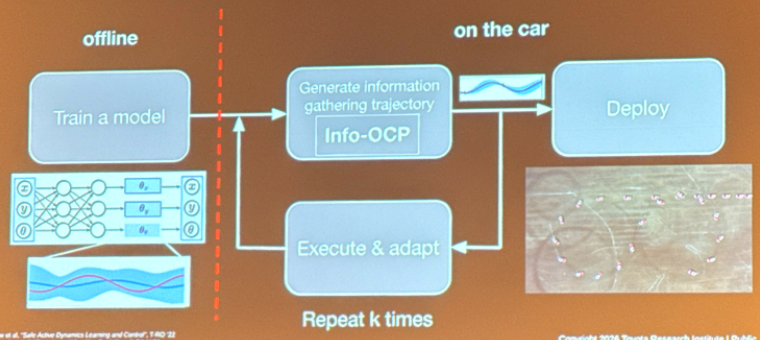

Lew et al. "Safe Active Dynamics Learning and Control", T-RO '23
Davydov et al. "First, Learn What You Don't Know", RA-L '24

Copyright 2026 Toyota Research Institute | Public

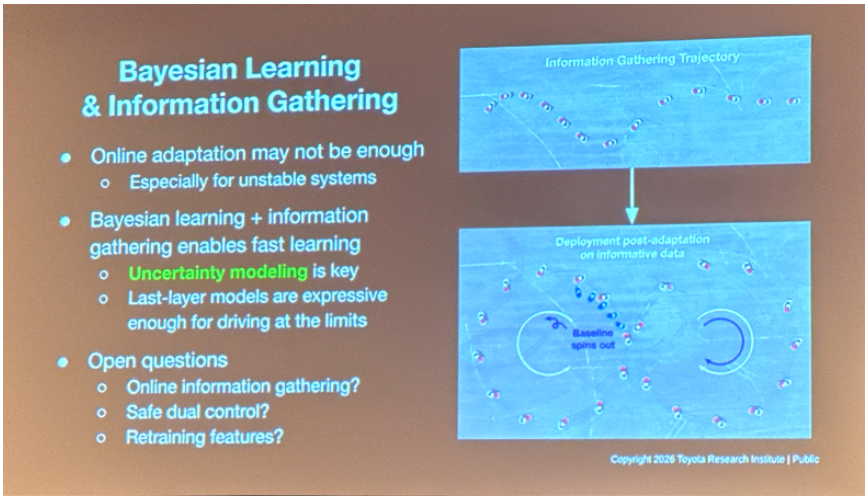

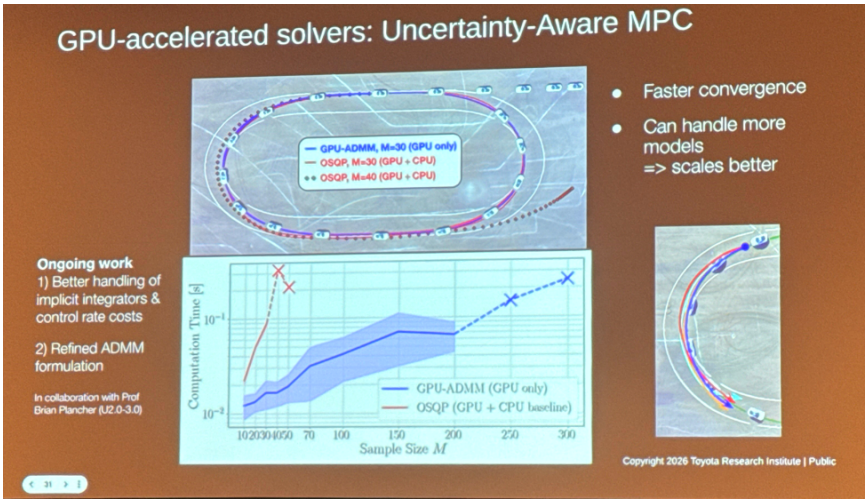

URL: `https://ctrl-l2o-iros2026.github.io/Ctrl-L2O-IROS2026/#contents`
Slides: `https://drive.google.com/file/d/11-1-Jqa470X6eqztOKcmqy4xuMvk9r5x/view`

Other Resource EXPORT

Others' notes: `https://neo-x.github.io/blog/2026/09/28/IROS2026-Reading-List.html`