

CMZ7060 Series Common Mode Choke Coil

Features

- High current SMD type CMCC.
- Good common mode noise suppression.
- Suitable for compact design.

Applications


- Power line, Telecom equipment and etc.

Yint CMCC P/N Information

① ② ③ ④ ⑤ ⑥
• CM Z 7060 A -101 T


- ① CMCC
② Series
③ Size
④ Special code
⑤ Z Value
⑥ Taping information

Dimensions

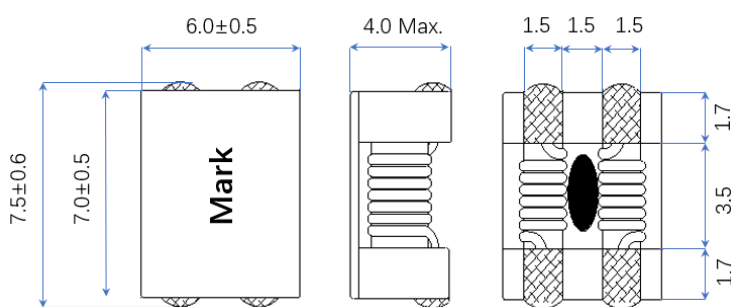

Unit: mm

Recommend Land Pattern

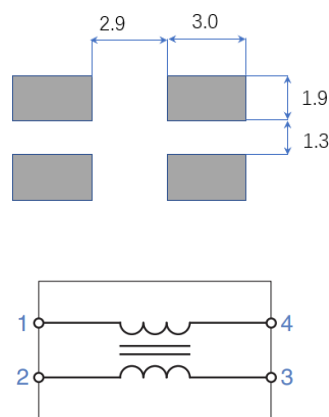

Specification


Yint P/N	Z(Ω)	DCR(mΩ)	IR(MΩ)	Rated Voltage (Vdc) V	Irms (A)
	@100MHZ				
	±25%				
CMZ7060A-400T	70	5	10	125	15.0
CMZ7060A-101T	140	10	10	125	9.0
CMZ7060A-301T	300	10	10	125	5.0
CMZ7060A-501T	600	10	10	125	5.0
CMZ7060A-601T	700	15	10	125	4.0
CMZ7060A-701T	700	15	10	125	4.0
CMZ7060A-102T	1000	17	10	125	3.0
CMZ7060A-132T	1300	21	10	125	2.5
CMZ7060A-222T	2200	50	10	125	1.2
CMZ7060A-272T	2700	63	10	125	1.0
CMZ7060A-302T	3000	75	10	125	0.9

Testing Conditions:

1. All test data is base on 25 °C ambient .
2. Operating temperature range - 40 °C to + 115 °C
3. Irms (A):DC current will cause an approximate ΔT of 40 °C base on 25 °C ambient temperature
4. The part temperature (ambient + temp rise) should not exceed 115 °C under worst cases.

CMZ7060 Series Common Mode Choke Coil

Common Mode & Differential Mode Curve

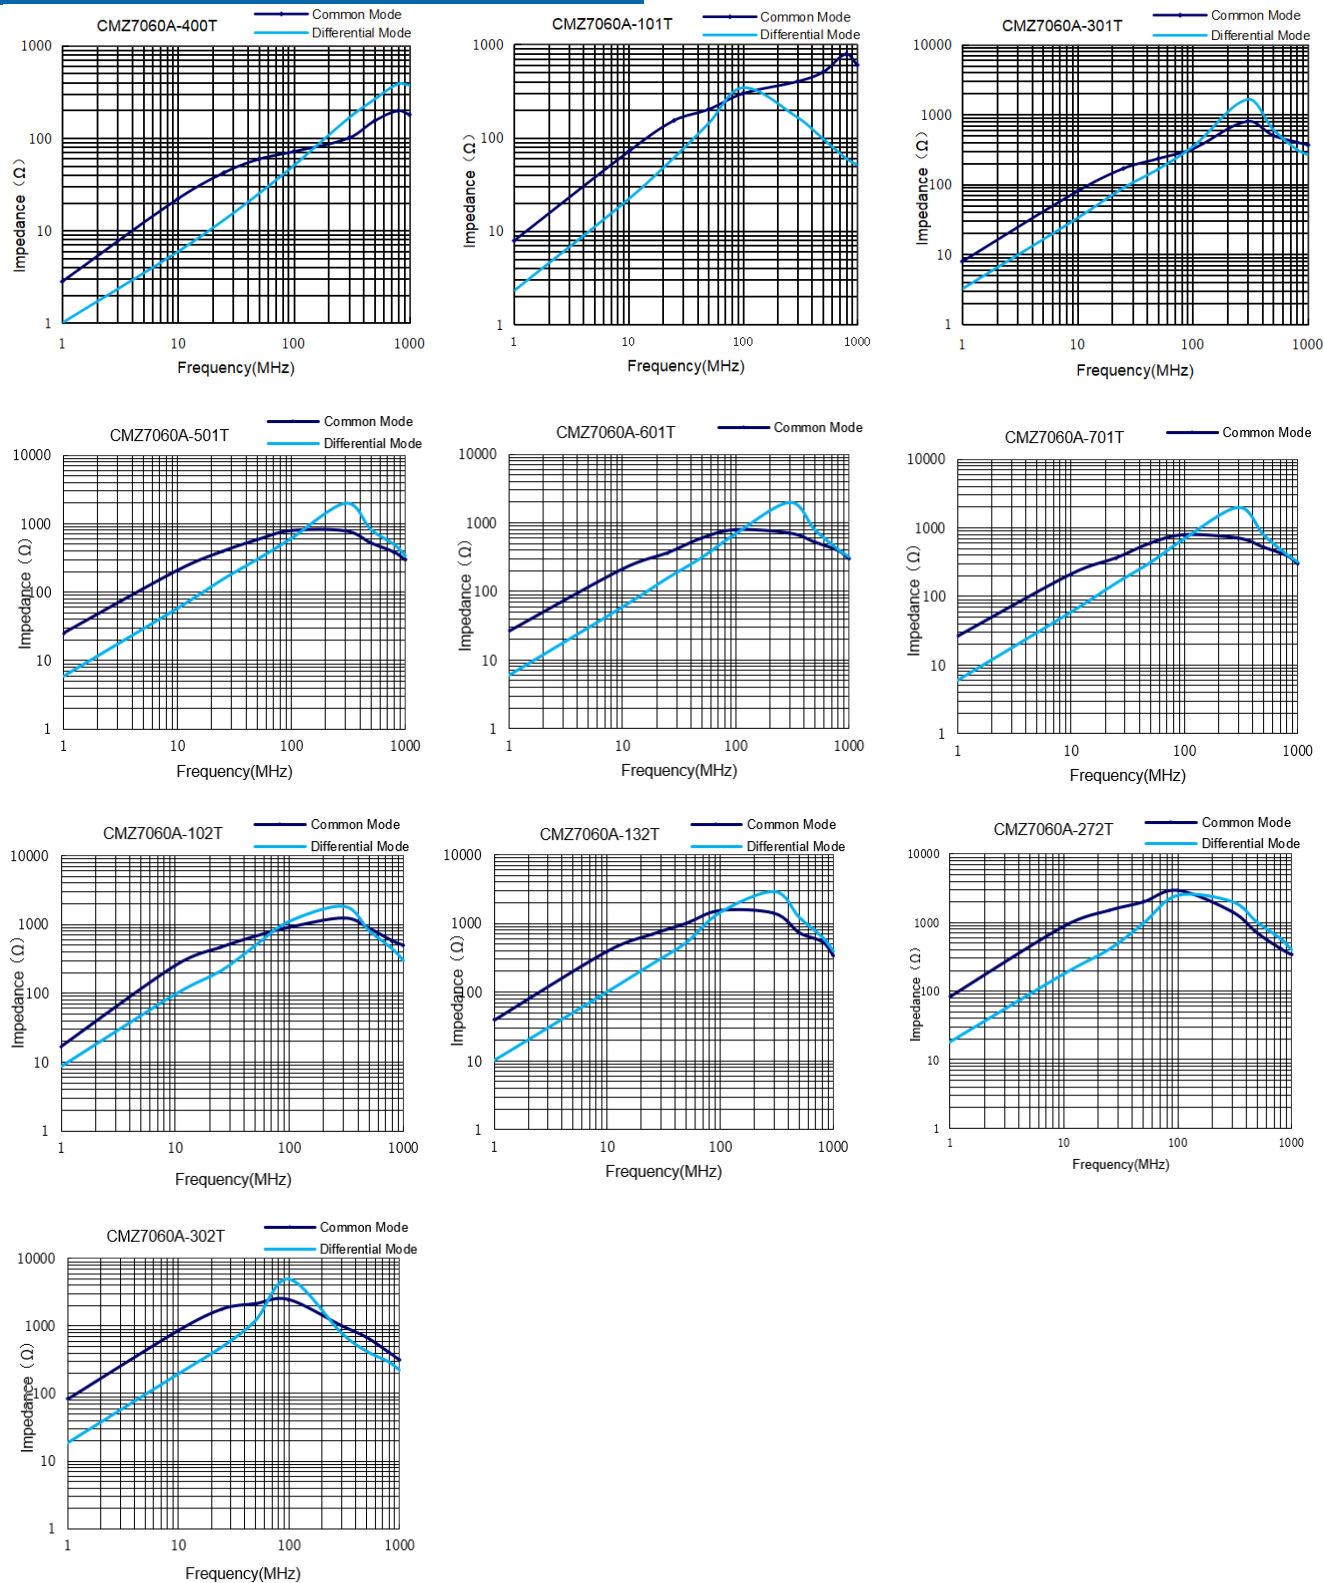

Reel & QTY information

Series	MPQ(Pcs)
CMZ7060	1,500