


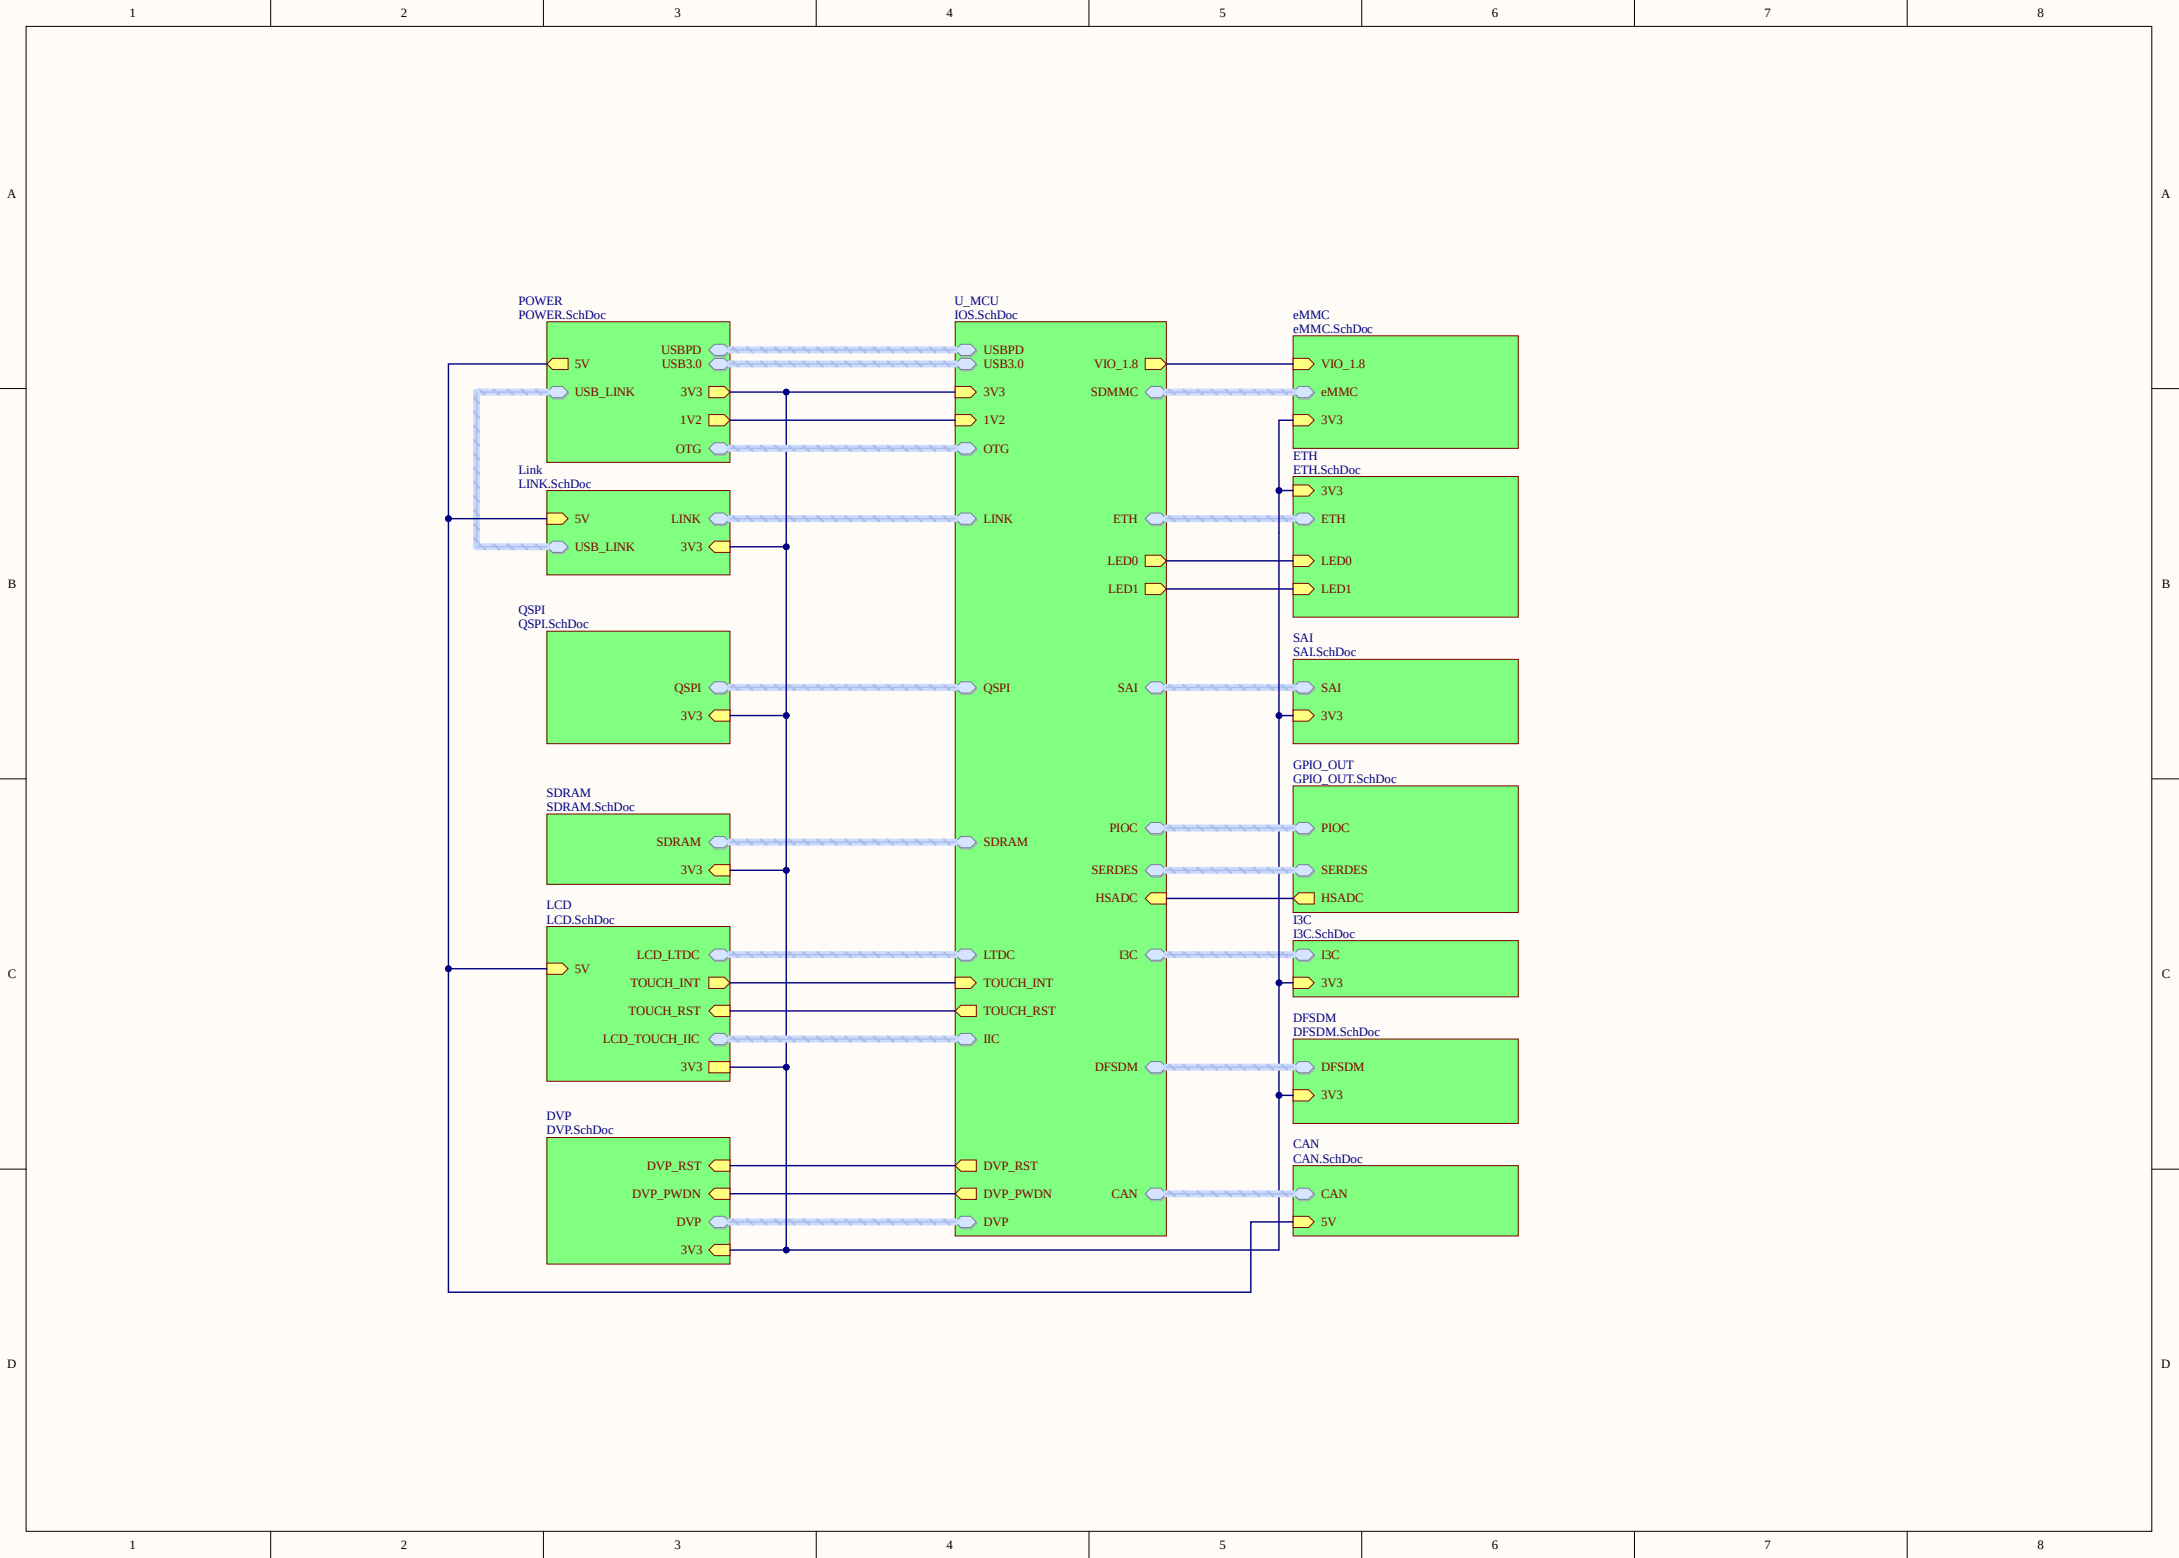


1

2



3

4




A

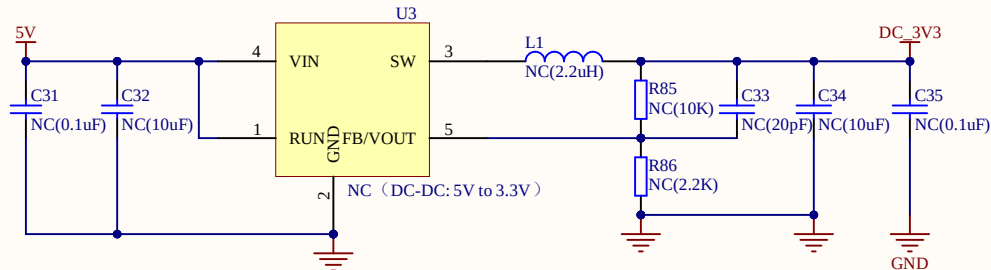

POWER SEL

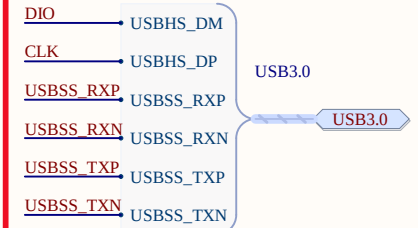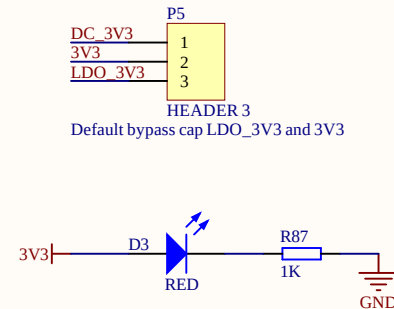

B

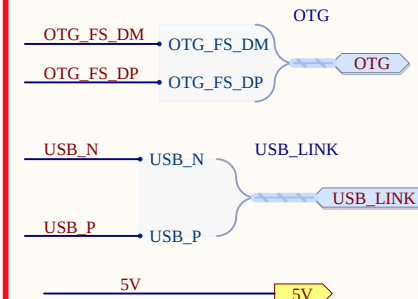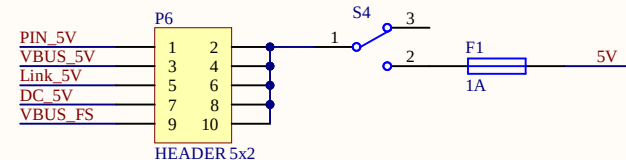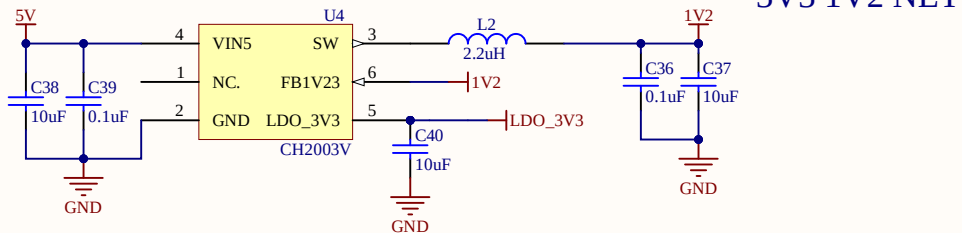





USB SUPPLY

DC SUPPLY


LINK SUPPLY

PIN SUPPLY

C

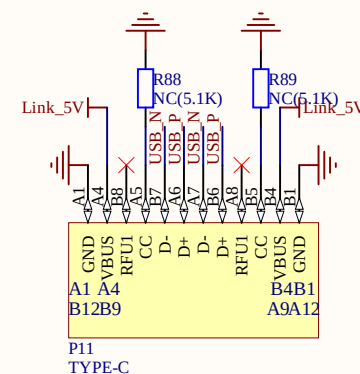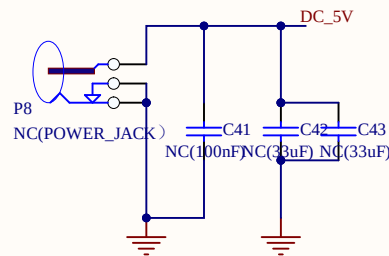

D

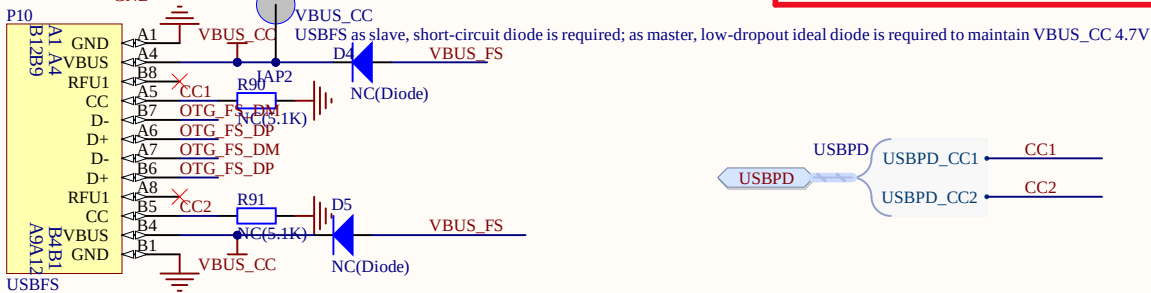

USBPD does not power the MCU, and other methods of powering the system need to be selected additionally when VBUS_CC is induced

CH213K used to protect against power short circuits




1

2



3

4



LINK

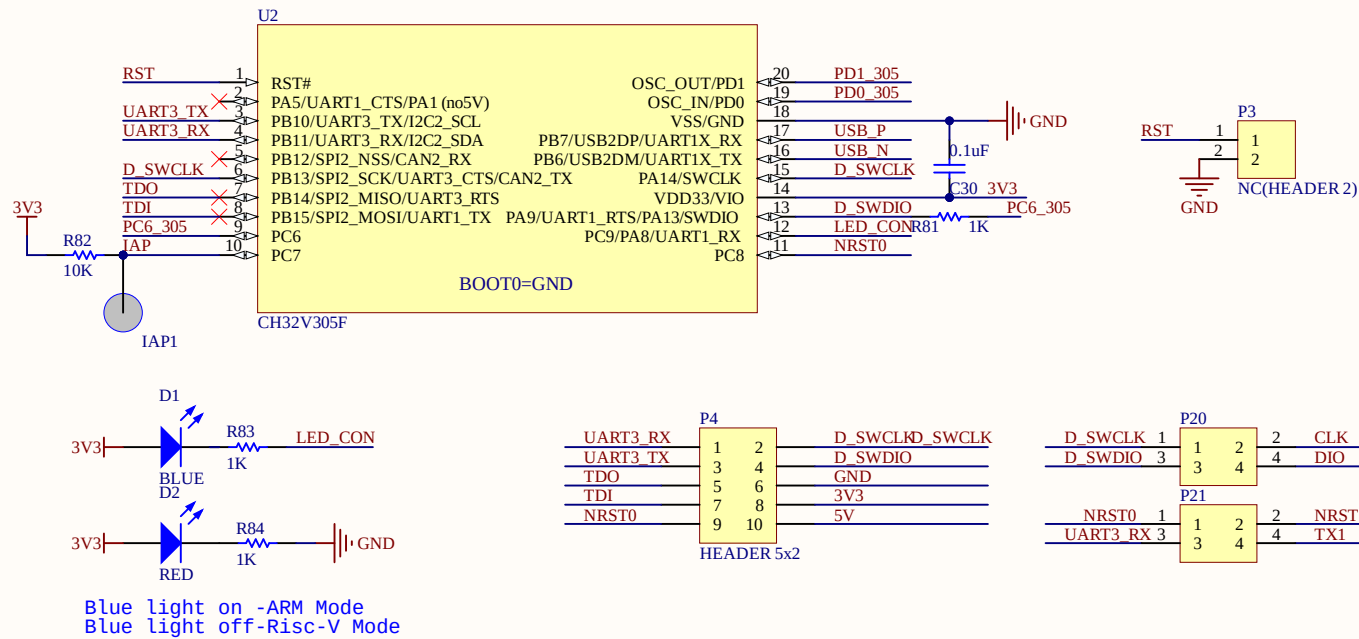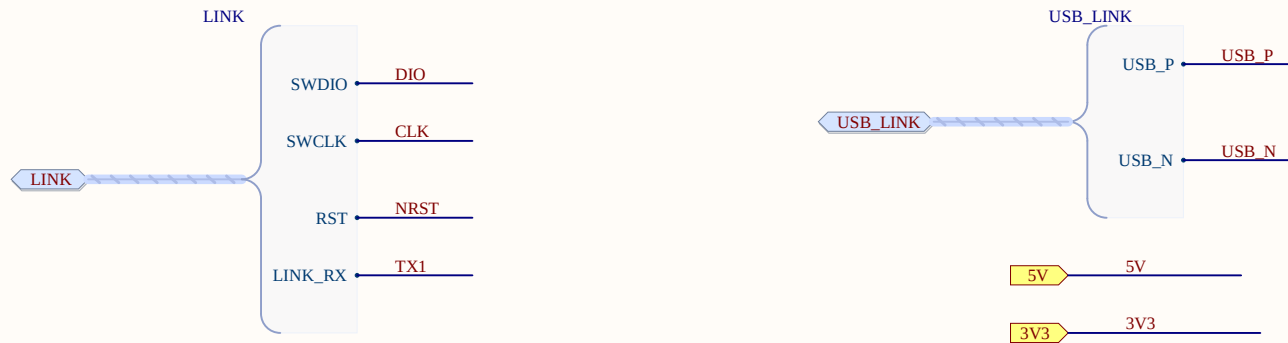

Blue light on -ARM Mode
Blue light off-Risc-V Mode

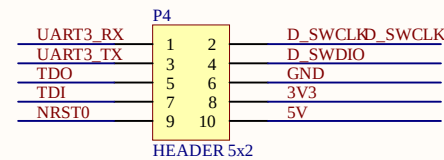

QSPI

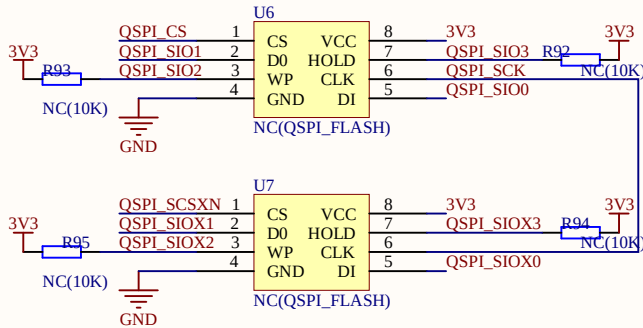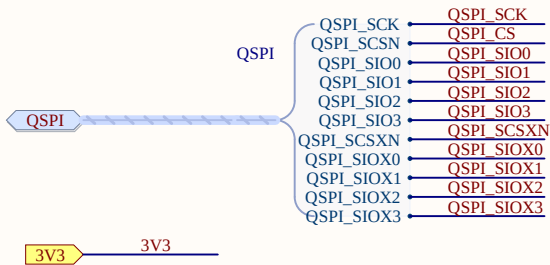

SDRAM


SDRAM

SDRAM_SDCLK	SDRAM_SDCLK
SDRAM_SDNWE	SDRAM_SDNWE
SDRAM_SDNRAS	SDRAM_SDNRAS
SDRAM_CKE0	SDRAM_SDCKE0
SDRAM_SDNCAS	SDRAM_SDNCAS
SDRAM_BA0	SDRAM_BA0
SDRAM_BA1	SDRAM_BA1
SDRAM_DQM1	SDRAM_DQM1
SDRAM_A0	SDRAM_A0
SDRAM_A1	SDRAM_A1
SDRAM_A2	SDRAM_A2
SDRAM_A3	SDRAM_A3
SDRAM_A4	SDRAM_A4
SDRAM_A5	SDRAM_A5
SDRAM_A6	SDRAM_A6
SDRAM_A7	SDRAM_A7
SDRAM_A8	SDRAM_A8
SDRAM_A9	SDRAM_A9
SDRAM_A10	SDRAM_A10
SDRAM_A11	SDRAM_A11
SDRAM_A12	SDRAM_A12
SDRAM_D0	SDRAM_D0
SDRAM_D1	SDRAM_D1
SDRAM_D2	SDRAM_D2
SDRAM_D3	SDRAM_D3
SDRAM_D4	SDRAM_D4
SDRAM_D5	SDRAM_D5
SDRAM_D6	SDRAM_D6
SDRAM_D7	SDRAM_D7
SDRAM_D8	SDRAM_D8
SDRAM_D9	SDRAM_D9
SDRAM_D10	SDRAM_D10
SDRAM_D11	SDRAM_D11
SDRAM_D12	SDRAM_D12
SDRAM_D13	SDRAM_D13
SDRAM_D14	SDRAM_D14
SDRAM_D15	SDRAM_D15

SDRAM


3V3

3V3

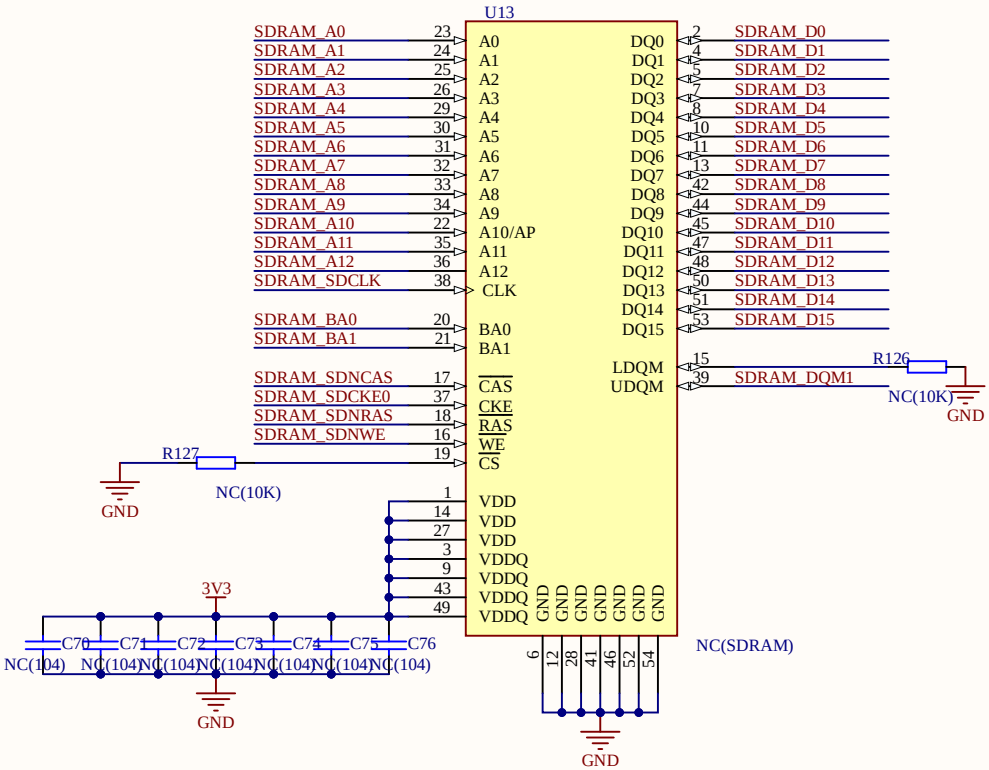

LCD

LCD_LTDC

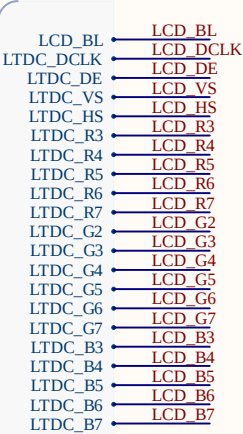

LCD_TOUCH_IIC




TOUCH_INT

TOUCH_RST


3V3

5V

LCD1


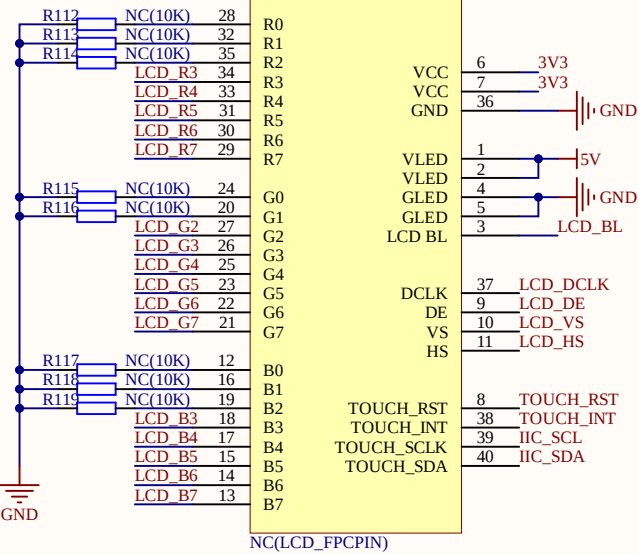


eMMC


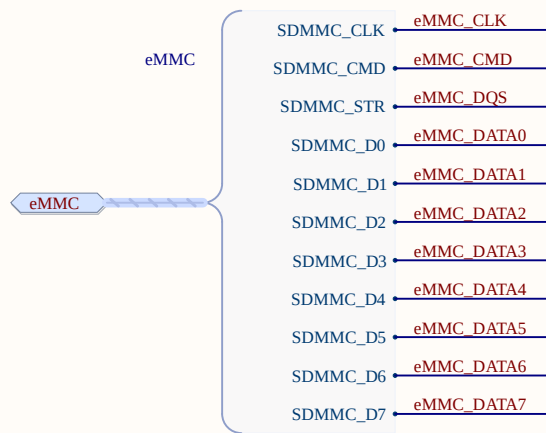


3V3


VIO_1.8

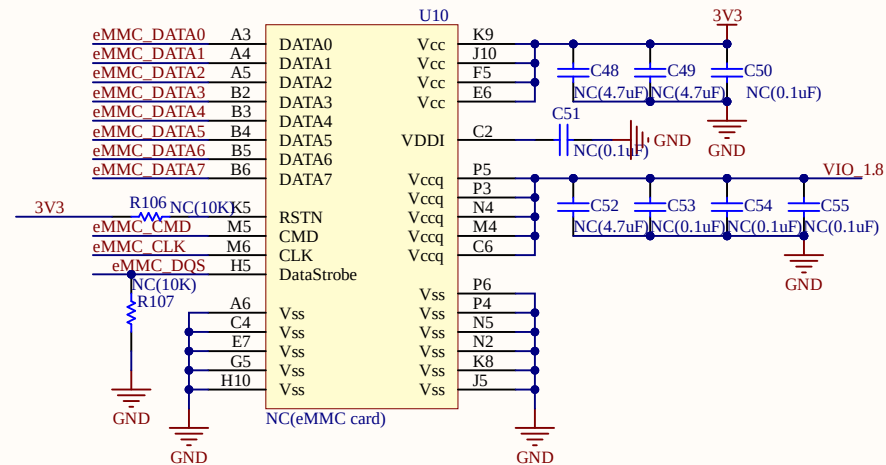

DVP

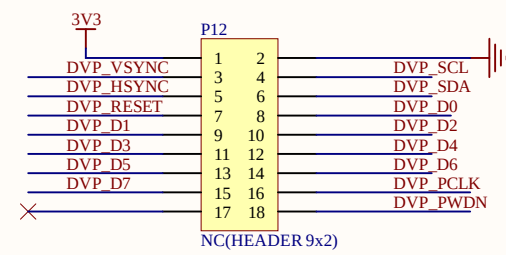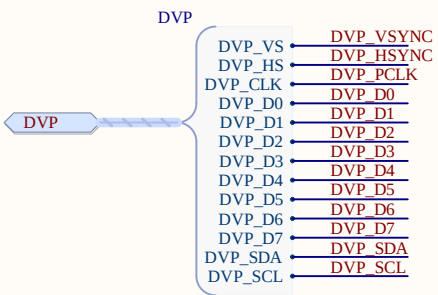


ETH

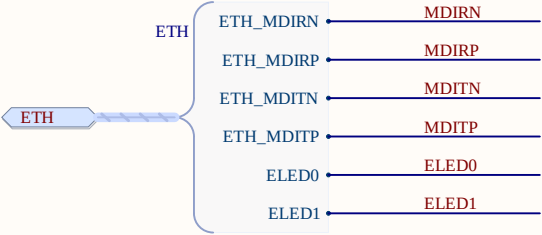



LED0 → ELED0

LED1 → ELED1



3V3 → 3V3

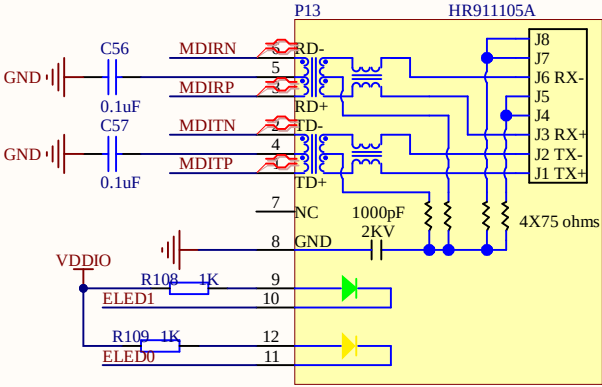



SAI

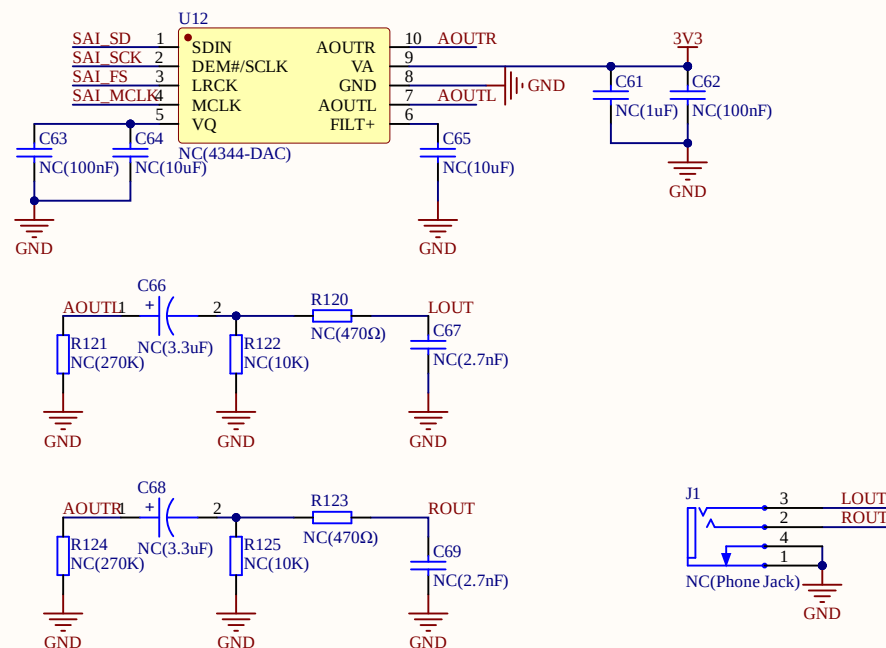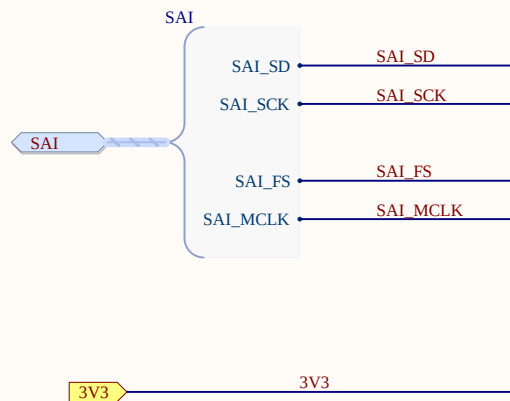




I3C

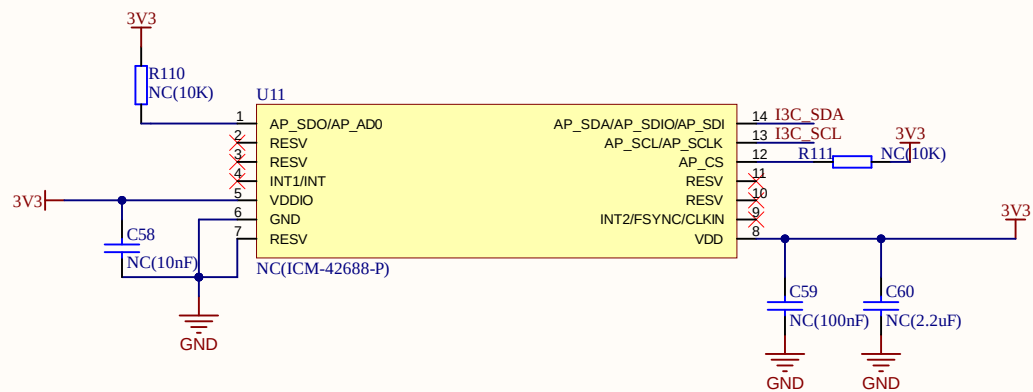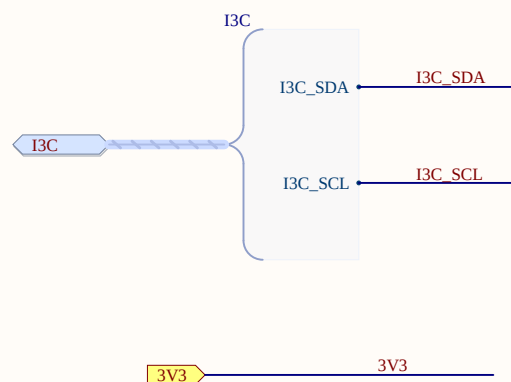


DFSDM

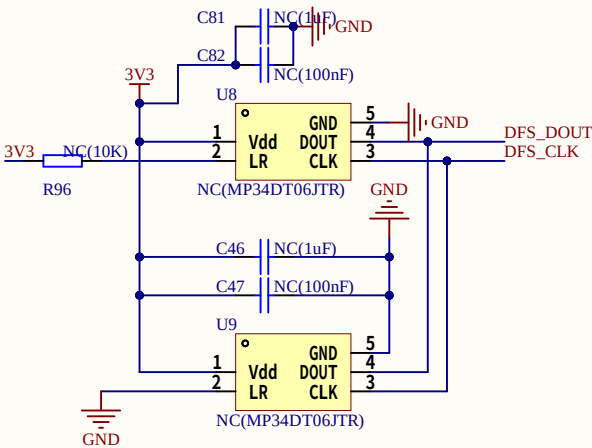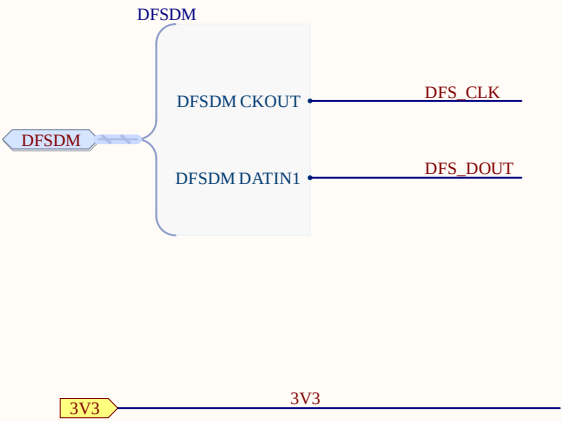


CAN

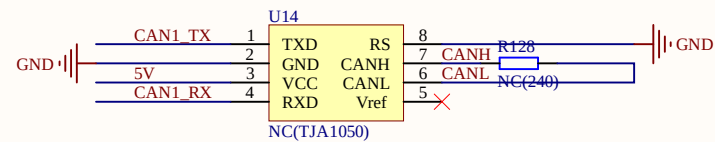

SERDES

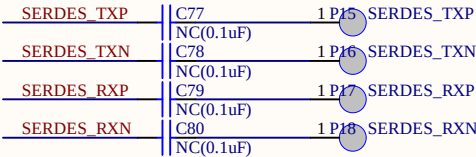

HSADC

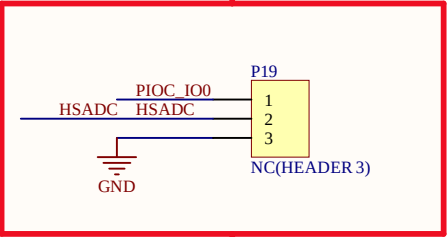

PIOC

