

42.85 68.57

Shops/Contacts, Interlogicx Solutions

9944956802 9894025812

Aurorica

Mr. Chandramani 9443090082

New betwees Aurolec

(> 150 Rs per board.

trus.

o GV


. FR4

Wednesolay

50% ashance

PCB Assembly services.


Metro electronics 9712336798

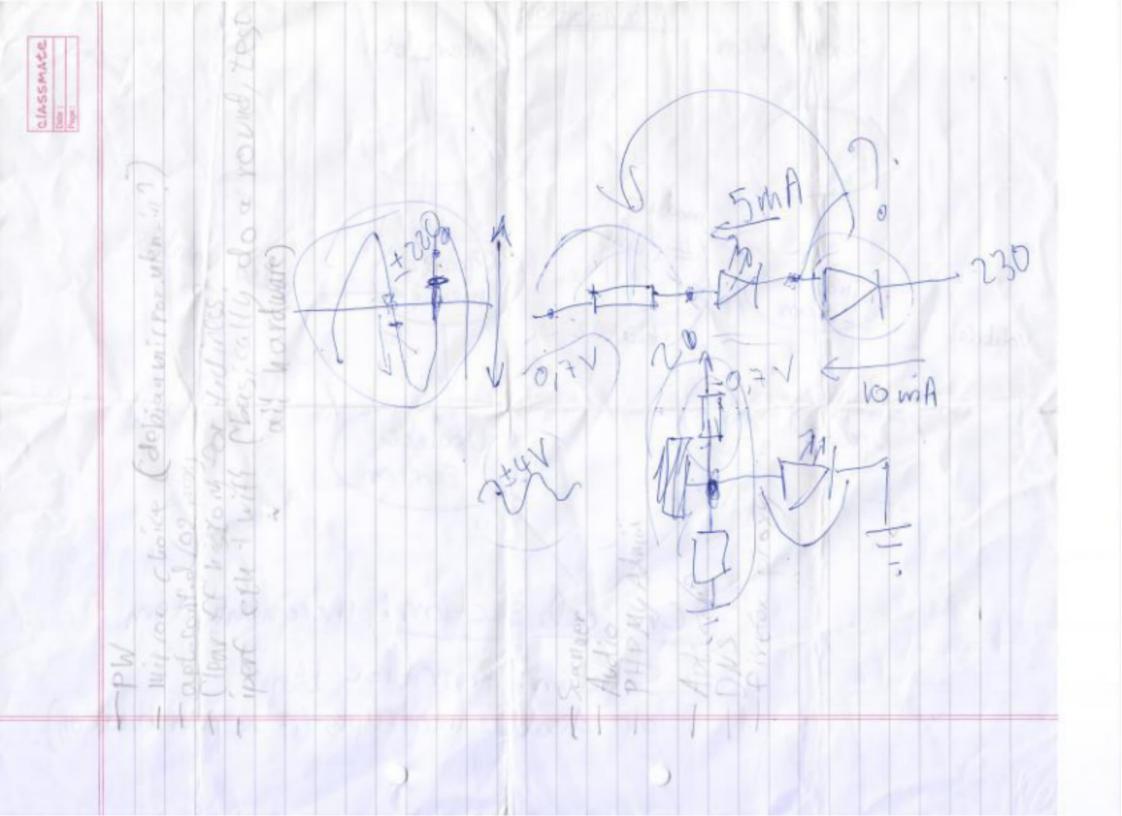

- Battery size MENU - Set 4 threshold (%, 1/ start, stop) V 1imits 10.3-11.3 - Re-calibrate-- Manual override - Charge felly Command - Minimum charge time - % schift lly - Time ch.felly · Battery uscept - Voltage · Check box _ Relay state to select what goes on the -TOC? ~ Mode screen souver - Stats (last time TNEB, TNEB%) 1 of 1 Monday 22 January 2018 09:13 AM

ananda @ aure 49110.org. In

ANANDA @ AUROVILLE. ORG. IN

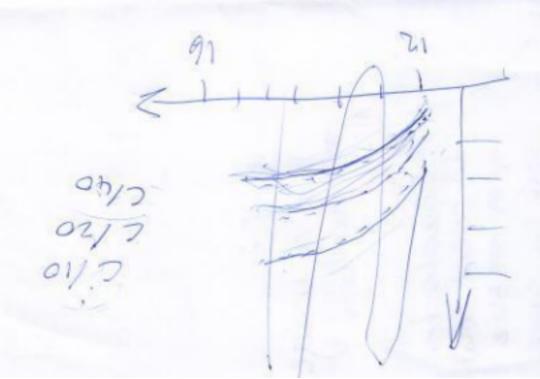

r=0,81002 mm 1=0, 9,65 mm == 0, 459619 mm

9,65 mm

9,65 mm

9,65 mm

9,65 mm

9,65 mm

9,65 mm d= 1,68699# mm Col 1,16 mm Y=0,8202439 mm

0,80mm C)

1,160mm

1,160mm

1,160mm

1,160mm

1,160mm

1,160mm

1,160mm

1,160mm

1,160mm

start old P9.1 * 1 to add, (heck for disabled options. E.g. no delay or no voltage limit. Read battery voltage 10-15 V Decide system Voltage 20-30 20-45 40-60 (50) Read panel voltage Opetermine whether charge controller is Common positive or common negative) V Set variables with teathery Mains charging Starting/stopping/delays/etc. depending on Panel Voltage, day or night / Check if Start voltage has Occurred No Yes - Switch on the charger Start timer set charger on variable to 1. No Yes Stop voltage has occurred check if we have too and or or therein the there is stop voltage has occurred stop vettige and delay has passed no ves Agor @ And Usat voiable & to 7 x to 1

Old ideas

· Delay to avoid constant togeting
0 00 0