

Loadscope

User Guide

A step-by-step walkthrough. Each step is one page — do the thing in the picture.

loadscope.app

support@loadscope.app

Best load in. Predicted dial out.

Drop your range-day CSVs in. Loadscope scores every load you tested, picks the best charge and seating depth, and predicts your dial table — before you confirm it on the line.

What you'll do

- 1 Set up your rifle (once)
- 2 Name your sessions
- 3 Drop your CSVs and Run Import
- 4 View your best powder charge
- 5 See how the score is built
- 6 View your best seating depth
- 7 Check the predicted dial (Range & DOPE)
- 8 Print the Pocket Card

Analysis tool — not load data. Always cross-reference published load data.

See the in-app disclaimer.

STEP 1 · ONCE PER RIFLE

Set up your rifle

Open the Rifle & Setup tab, fill it in, and click Save. Loadscope writes it into your workbook for you.

Rifle & Setup
Loadscope writes this straight into your workbook.

1 RIFLE & SHOOTER

Rifle: Tikka T3X CTR 6.5 CM

Shooter: Demo Shooter

Cartridge: 6.5 Creedmoor

Barrel: 24" 1:8 twist, threaded muzzle

Optic: Leupold Mark 5HD 5-25x56

Chrono: Garmin Xero C1 Pro

Scope click (turret): 0.1 Mil

2 LOAD COMPONENTS

Bullet: .264 / 6.5 mm · Hornady · 140gr ELD-M (.264) · .326 G7

Primer: CCI · BR-2

Brass: Hornady

CBTO (in): 2.224

OAL (in): 2.875

Distance (yd): 100

3 TEST SESSION

Date: 04/12/26

Temp (°F): 68

Conditions / notes: Sunny, light breeze. 1500 ft DA.

4

Save


- 1 Rifle & Shooter — rifle, optic, cartridge, scope-click. Set once; a new load carries it forward.
- 2 Load Components — bullet, powder, primer, brass, seating. The bullet picker also feeds the ballistic solver.
- 3 Test Session — date, temperature, distance, and conditions for this session. Loadscope writes these onto your Pocket Card and into the workbook header.
- 4 Click the orange Save bar. It flashes "Saved" and writes everything into the workbook for you.

STEP 2 · THE ONE THAT TRIPS PEOPLE UP

Name your sessions

This is how Loadscope sorts your data. Name each session <tag> <grains or jump> <powder> — one space between.

- Where to set the name: rename the CSV file directly in Finder (or set the SESSION name in Garmin Xero / LabRadar before you export). Loadscope reads the filename either way.

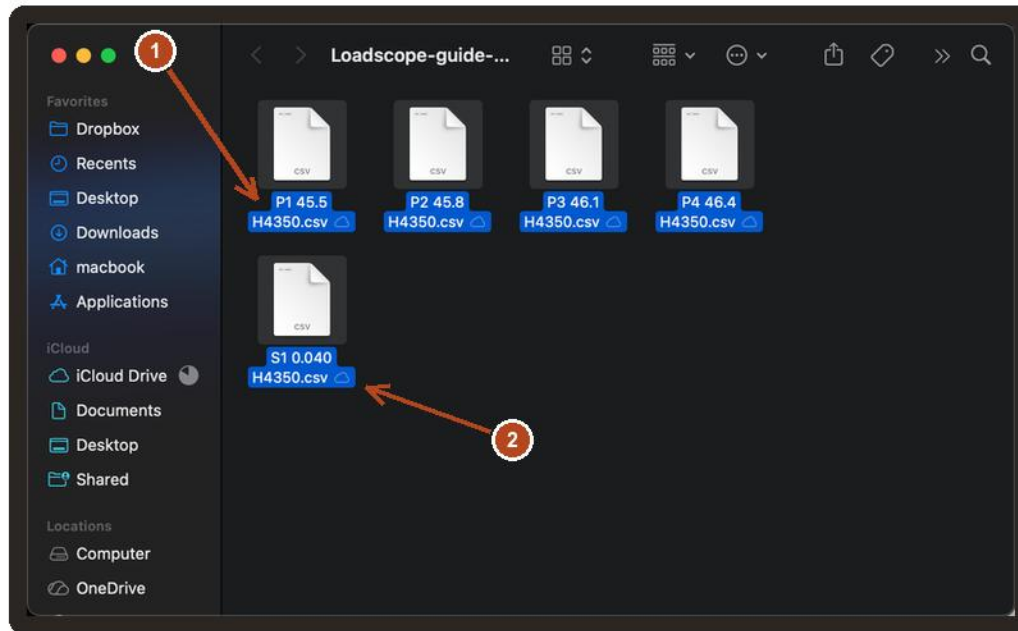


- 1 Powder ladder loads: P-tag + charge in grains + powder. Example: P1 45.5 H4350 — 'P1' is row 1 of the powder log.
- 2 Seating-depth test: S-tag + bullet jump in inches + powder. Example: S1 0.040 H4350 — 'S1' is row 1 of the seating log.

STEP 3 · EVERY RANGE DAY

Drop your CSVs

Get this trip's CSVs onto your Mac, then drag them from the folder into the Loadscope window.

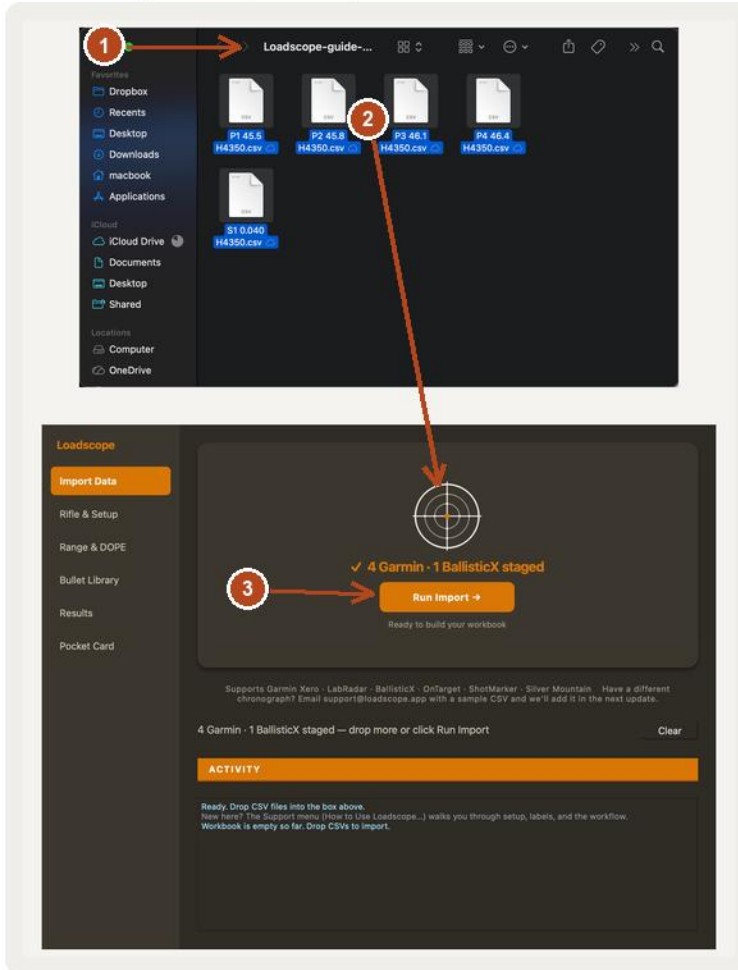

- 1 Open your range-day folder. Select the renamed CSVs from this trip — Cmd-click each, or Cmd-A to grab them all.
- 2 Drag the selection straight onto the Loadscope window. The drop zone highlights and shows what landed.
- 3 Click Run Import. Loadscope backs up your workbook first, then writes the new data and opens it in Excel.

STEP 4 · THE ANSWER

Your best powder charge

The Powder Charge Log tab in your workbook. The red bar at the top is the suggested winner — picked from the loads you tested.

1

SUGGESTED CHARGE → 42.4

Avg Vel: 2780

SD: 2.5

MR: 0.180

Best in: All metrics ✓

Click here to jump to the Charts sheet (Suggested Best Load)

RIFLE & SHOOTER

Rifle: Tikka T3X CTR 6.5 CM

Shooter: Demo Shooter

Cartridge: 6.5 Creedmoor

Barrel: 24" 1:8 twist, threaded muzzle

Optic: Leupold Mark 5HD 5-25x56

Chrono: Garmin Xero C1 Pro

Turret: 0.1 Mil

LOAD COMPONENTS (constants for this powder ladder)

Bullet: Hornady 140gr ELD-M

Powder: H4350

Primer: CCI BR-2

Brass: Hornady

CBTO: 2.224

OAL: 2.875 off lands

Dist: 100 yd

TEST SESSION (date / conditions)

Date: 04/12/2026

Temp: 68

Notes: Sunny, light breeze. 1500 ft DA.

2

3

Load #	Charge (gr)	Shot 1	Shot 2	Shot 3	Shot 4	Shot 5	Avg Vel	ES	SD	Group (in)	Vertical (in)	Vertical SD (in)	Mean Radius (in)	Composite Score	Winner
1	41.5	2710	2718	2705	2720	2715	2715	19	6.7	0.62	0.55	0.2	0.31	0.606	
2	41.8	2732	2748	2725	2740	2738	2737	23	7.8	0.81	0.72	0.26	0.42	1.000	
3	42.1	2755	2762	2750	2768	2760	2760	20	6.4	0.45	0.4	0.14	0.22	0.272	🥈 2nd
4	42.4	2778	2782	2776	2784	2780	2780	8	2.5	0.38	0.32	0.12	0.18	0.001	🏆 WINNER
5	42.7	2798	2805	2795	2812	2800	2803	17	5.6	0.58	0.52	0.18	0.29	0.477	🥉 3rd
6	#N/A								#N/A	#N/A				#N/A	
7	#N/A								#N/A	#N/A				#N/A	
8	#N/A								#N/A	#N/A				#N/A	
9	#N/A								#N/A	#N/A				#N/A	
10	#N/A								#N/A	#N/A				#N/A	

COMPARISON CHARTS

- 1 SUGGESTED CHARGE** — the winning charge weight, scored across velocity flat-spot, SD, mean radius and vertical SD. Need at least 3 charges (plan 5–8 in a ladder).
- 2 Composite Score** — lower is better. The combined, weighted score that picks the winner.
- 3 Winner column** — 1st / 2nd / 3rd ranking so you can see what the runners-up were.

STEP 5 · HOW THE SCORE IS BUILT

Charts — scoring weights

The Charts tab is where the scoring math runs. You can see exactly why a charge won — and tune what matters to you.

- 1 Suggested Best Load — the same winner as the Powder Charge tab, with its scoring breakdown alongside.
- 2 Weights — the blue cells. Defaults: Velocity 0.30, SD 0.20, MR 0.20, Vertical SD 0.30. Edit them to tune what matters most to you (must sum to 1.0).
- 3 Composite Score — each load's normalized score across the four factors, combined with the weights above. Lowest wins.

1

SUGGESTED BEST LOAD — Velocity + SD + Group Cross-Check

SUGGESTED CHARGE: 42.4 gr

Composite: 0.001

SD: 2.5

Group: 0.18

Avg Vel: 2780

Best In: All metrics ✓

→ Save Suggested Load to Library ←

Method: each middle charge of a 3-load window is scored on velocity spread, SD, mean radius (MOA), and Vertical SD (MOA) — each normalized 0-1, 0=best. Combined using the weights below (sum must = 1.0). Lowest composite score wins. Vertical SD falls back to Height, then MR, if the BallisticX export is missing the statistic.

NOTE: Loadscope ranks the charges you entered by your weighted scoring criteria. It does not certify safe charges, recommend loads, or assess pressure. Always cross-reference every charge weight against current published load data from your powder, bullet, and cartridge manufacturers before shooting.

2

WEIGHTS — adjust the blue cells to tune what matters most to you (must sum to 1.0).

Velocity: 0.30

SD: 0.20

MR: 0.20

Vertical SD: 0.30

Sum: 1.0

→ Reset weights to Loadscope defaults ←

3

Powder ladder

Charge	Avg Vel (fps)	SD (fps)	Mean Radius (MOA)	Vertical SD (MOA)	Norm Vel	Norm SD	Norm MR	Norm Vertical SD	Composite Score
41.5	2715	6.7	0.31	0.20	0.558	0.792	0.542	0.571	0.606
41.8	2737	7.8	0.42	0.26	1.000	1.000	1.000	1.000	1.000
42.1	2760	6.4	0.22	0.14	0.163	0.736	0.167	0.143	0.272
42.4	2780	2.5	0.18	0.12	0.001	0.001	0.001	0.001	0.001
42.7	2803	5.6	0.29	0.18	0.465	0.585	0.458	0.429	0.477
	#N/A	#N/A			#N/A	#N/A			
	#N/A	#N/A			#N/A	#N/A			
	#N/A	#N/A			#N/A	#N/A			

loadscope.app

support@loadscope.app

5 / 8

STEP 6 · THE SEATING ANSWER

Your best seating depth

The Seating Depth Log tab. Same logic, but the bar at the top picks the winning jump distance instead of the winning charge.

1

Seating Depth Test — Best Jump Finder

SUGGESTED JUMP → 0.035

Vel: 2781

SD: 0.8

MR: 0.160

Vert: 0.100

Best in: All metrics ✓

[Click here to jump to the Charts sheet \(Suggested Best Load\)](#)

RIFLE & SHOOTER

Rifle: Tikka T3X CTR 6.5 CM

Shooter: Demo Shooter

Cartridge: 6.5 Creedmoor

Barrel: 24" 1:8 twist, threaded muzzle

Optic: Leupold Mark 5HD 5-25x56

Chrono: Garmin Xero C1 Pro

Turret: 0.1 Mil

LOAD COMPONENTS (constants for this seating-depth test)

Bullet: Hornady 140gr ELD-M

Powder: H4350

Primer: CCI BR-2

Brass: Hornady

Charge: 42.4 gr

OAL: 2.875

Dist: 100 yd

TEST SESSION (date / conditions)

Date: 04/11/2026

Temp: 68

Notes: Sunny, light breeze. 1500 ft DA.

2

Test #	Jump (in)	CBTO	Shot 1	Shot 2	Shot 3	Shot 4	Shot 5	Avg Vel	ES	SD	Group (in)	Vertical (in)	Vertical SD (in)	Mean Radius (in)	Winner
1	0.005	2.870	2782	2778	2780	2784	2780	2781	6	2.2	0.55	0.48	0.17	0.652	
2	0.020	2.855	2780	2778	2782	2776	2780	2780	8	2.4	0.41	0.36	0.13	0.338	2nd
3	0.035	2.840	2780	2781	2780	2782	2780	2780.6	2	0.8	0.32	0.27	0.1	0.001	WINNER
4	0.050	2.825	2780	2784	2776	2782	2780	2780	10	3.4	0.48	0.42	0.15	0.559	3rd
5	0.065	2.810	2780	2786	2774	2784	2776	2780	14	5.1	0.62	0.55	0.19	1	
6	#N/A													#N/A	
7	#N/A													#N/A	
8	#N/A													#N/A	
9	#N/A													#N/A	
10	#N/A													#N/A	

→ Save Suggested Load to Library ←

ANALYSIS — Suggested Best Jump (Composite Score)

- 1 SUGGESTED JUMP — the winning bullet jump in inches, scored across the same four factors. Plan at least 3 jumps; 5–7 is plenty.
- 2 Jump (in) — each row's tested jump distance. Loadscope writes this from your renamed S-tag sessions (e.g. S1 0.040 H4350).
- 3 Winner column — 1st / 2nd / 3rd ranking by composite score. Save to Library to keep your confirmed load.

STEP 7 · BEFORE THE LINE

Range & DOPE

From your winning load and the measured muzzle velocity, Loadscope predicts your full dial table — 100 to 1000 yards.

Range Session & DOPE

1 predicted. Type what you dialed (in Mils) and the cell turns solid = confirmed.

Predicted from — BC 0.326 Drag model G7

Temp F 68.0 Press inHg 29.92

Predicted from BC 0.326 G7 (database (Hornady G7)).

Session date: 04/12/26

Range (yd)	Elev	Wind/10mph (Mils)	Notes
100	-0.0	0.1	predicted
200	0.5	0.3	predicted
300	1.1	0.4	predicted
400	1.9	0.6	predicted
500	2.7	0.8	predicted
600	3.6	0.9	predicted
700	4.6	1.1	predicted
800	5.7	1.4	predicted
900	6.9	1.6	predicted
1000	8.2	1.8	predicted

3

G7/G1 BC solver — JBM-validated, good to ~1000 yd with solid inputs. Grey = predicted; always confirm at the range.

- 1 Predicted from your bullet's BC and drag model (G7/G1 solver, validated against JBM). Adjust BC / temp / pressure, hit Update to re-solve.
- 2 Grey, italic = predicted. Type what you actually dialed at the range and the cell turns solid = confirmed.
- 3 Click Save DOPE to write it back. Always confirm by live fire at known distance before you trust it.

STEP 8 · TAKE IT WITH YOU

Pocket Card

A 4×6 range card you can print or save as PDF. Predicted to start; confirmed numbers replace them as you shoot.

- 1 Header — the load, scope, zero, sight height, twist. Everything you need on a card glanced at on the line.
- 2 Dial table — elevation in Mils + clicks, a fixed 10 mph wind reference, drop, velocity, energy, and time of flight per 100 yards. Print the 4×6 card or Save as PDF from the Pocket Card tab. Grey = predicted; confirmed values print solid.

 Loadscope™ POCKET RANGE CARD						
1 Tikka T3X CTR 6.5 CM • Hornady 140gr ELD-M • 42.4gr • 2780 fps Scope: Leupold Mark 5HD 5-25x56 Click: 0.1 Mil Zero: 100 yd Sight Ht: 1.75 in Twist: 1:8 RH						
Range (yd)	Elev — Mils	Wind 10 mph (Mils)	Drop (in)	Vel (fps)	Energy (ft-lb)	TOF (s)
	Mils	Mils				
100	0	0	0	2640	2167	0.11
200	0.1	0.3	3	2503	1948	0.23
300	0.6	0.5	12	2370	1747	0.36
400	1.2	0.7	27	2242	1563	0.5
500	2	0.9	49	2118	1395	0.66
600	2.8	1.2	79	1998	1241	0.83
700	3.7	1.5	117	1881	1101	1.02
800	4.8	1.8	165	1768	972	1.23
900	6	2.1	225	1658	855	1.46
1000	7.3	2.4	297	1551	748	1.71
Generated May 19, 2026						

Questions, bugs, or a new device?

Email support

support@loadscope.app — include your Loadscope version (Support → About Loadscope) and a screenshot if you can.

More help in the app

Support → How to Use Loadscope, and the welcome tour replays anytime.

If you name a file wrong

Loadscope doesn't fail silently — the import log names the file and tells you exactly what to rename it to. Fix the one file and Run Import again.

A different chronograph or target app?

Send a sample CSV to support@loadscope.app — the parser system is built to grow.

Safety

Loadscope is a data-analysis tool, not load data. It does not recommend charges or assess pressure. Always cross-reference every charge against current published load data. Predicted ballistics are an estimate — confirm by live fire. Reloading is inherently dangerous; you assume all risk.