

# **Green Coding**

## **Software energy optimization by understanding the impact of programming languages**



**Mohammed Chakib Belgaid**

**Supervisors:** Pr. Romain Rouvoy  
Pr. Lionel Seinturier

University of Lille

This dissertation is submitted for the degree of

*Doctor of Philosophy*

EDSPI

July 2022



I would like to dedicate this thesis to my loving parents ...



## **Declaration**

I hereby declare that except where specific reference is made to the work of others, the contents of this dissertation are original and have not been submitted in whole or in part for consideration for any other degree or qualification in this, or any other university. This dissertation is my own work and contains nothing which is the outcome of work done in collaboration with others, except as specified in the text and Acknowledgements. This dissertation contains fewer than 65,000 words including appendices, bibliography, footnotes, tables and equations and has fewer than 150 figures.

Mohammed Chakib Belgaid  
July 2022



## **Acknowledgements**

And I would like to acknowledge ...



## **Abstract**

This is where you write your abstract ...



# Contents

|   |            |
|---|------------|
| <b>List of Figures</b>  | <b>xv</b>  |
| <b>List of Tables</b>   | <b>xix</b> |
| <b>1 Motivation</b>   | <b>1</b>   |
| 1.1 Motivation . . . . .  | 2          |
| 1.2 Research Contributions . . . . .                                    | 2          |
| 1.3 Publications . . . . .  | 2          |
| <b>2 Literature Review</b>  | <b>3</b>   |
| 2.1 Benchmarking . . . . .  | 5          |
| 2.1.1 Threats & Challenges . . . . .                                    | 5          |
| 2.1.2 Proposed Solutions . . . . .                                      | 6          |
| 2.2 Energy Measurement . . . . .  | 7          |
| 2.2.1 Hardware Tools . . . . .  | 8          |
| 2.2.2 Software Tools . . . . .  | 10         |
| 2.2.3 Hybrid Tools . . . . .  | 12         |
| 2.3 Programming Languages & Performances . . . . .                      | 12         |
| 2.3.1 Energy . . . . .  | 12         |
| 2.3.2 Python . . . . .  | 13         |
| 2.3.3 JVM . . . . .   | 13         |
| 2.3.4 benchmarking . . . . .  | 14         |
| 2.4 Energy Variation . . . . .  | 14         |
| 2.4.1 Studying Hardware Factors . . . . .                               | 14         |
| 2.4.2 Mitigating Energy Variations. . . . .                             | 16         |
| 2.5 Conclusion . . . . .  | 16         |
| <b>3 A Benchmarking Protocol to Measure Software Energy Consumption</b> | <b>19</b>  |
| 3.1 Motivation . . . . .  | 19         |

|          |   |           |
|----------|---|-----------|
| 3.2      | Reproducibility within the context of energy . . . . .      | 20        |
| 3.2.1    | Docker Vs. Virtual Machine . . . . .                        | 21        |
| 3.2.2    | Docker & Energy . . . . .                                   | 22        |
| 3.2.3    | Conclusion . . . . .  | 23        |
| 3.3      | Improving accuracy by Taming the energy variation . . . . . | 24        |
| 3.3.1    | Experimental Setup . . . . .                                | 24        |
| 3.3.2    | Analysis . . . . .  | 27        |
| 3.3.3    | Docker & Accuracy . . . . .                                 | 27        |
| 3.3.4    | Experimental Guidelines . . . . .                           | 41        |
| 3.3.5    | Threats to Validity . . . . .                               | 44        |
| 3.3.6    | Conclusion . . . . .  | 44        |
| 3.3.7    | Extension . . . . .   | 45        |
| 3.4      | Perspectives / representativeness . . . . .                 | 46        |
| <b>4</b> | <b>Energy footprint of programming languages</b>            | <b>49</b> |
| 4.1      | Remote Procedure Call Frameworks . . . . .                  | 50        |
| 4.1.1    | Research Questions . . . . .                                | 50        |
| 4.1.2    | Experimental protocol . . . . .                             | 50        |
| 4.1.3    | Results and findings . . . . .                              | 52        |
| 4.1.4    | Threads to validity . . . . .                               | 56        |
| 4.1.5    | Conclusion . . . . .  | 56        |
| 4.2      | web Frameworks . . . . .                                    | 56        |
| 4.2.1    | Introduction . . . . .                                      | 57        |
| 4.2.2    | Comparaison between web frameworks . . . . .                | 59        |
| 4.2.3    | energy efficiency in software engineering . . . . .         | 59        |
| 4.3      | Experimental Protocol . . . . .                             | 61        |
| 4.3.1    | Measurement context . . . . .                               | 61        |
| 4.3.2    | workload . . . . .  | 64        |
| 4.3.3    | Metrics . . . . .   | 67        |
| 4.3.4    | extesion . . . . .  | 68        |
| 4.4      | finding and results . . . . .                               | 68        |
| 4.4.1    | overall all statistics . . . . .                            | 69        |
| 4.5      | Threats to validity . . . . .                               | 69        |
| <b>5</b> | <b>The energy behavior of Python</b>                        | <b>73</b> |
| 5.1      | Introduction . . . . .                                      | 73        |
| 5.2      | Motivation . . . . .  | 74        |

|          |  |            |
|----------|--|------------|
| 5.2.1    | python popularity . . . . .                                | 74         |
| 5.2.2    | python gluttony . . . . .                                  | 75         |
| 5.2.3    | use cases . . . . .  | 76         |
| 5.3      | Workload . . . . .   | 78         |
| 5.3.1    | Runtime Classification . . . . .                           | 81         |
| 5.4      | experimental protocole . . . . .                           | 83         |
| 5.4.1    | measurement context . . . . .                              | 83         |
| 5.4.2    | Metrics . . . . .  | 83         |
| 5.4.3    | tests preparation . . . . .                                | 85         |
| 5.4.4    | Extension . . . . .  | 86         |
| 5.5      | Results and finding . . . . .                              | 87         |
| 5.5.1    | python insights . . . . .                                  | 90         |
| 5.5.2    | Python and machine learning . . . . .                      | 91         |
| 5.5.3    | python runtimes . . . . .                                  | 94         |
| 5.6      | Threads to validity . . . . .                              | 100        |
| 5.7      | tools and contributions . . . . .                          | 100        |
| 5.8      | conclusion . . . . .                                       | 100        |
| <b>6</b> | <b>The impact of Java virtual machine on Java programs</b> | <b>101</b> |
| 6.1      | Introduction . . . . .                                     | 101        |
| 6.1.1    | Goal . . . . .   | 101        |
| 6.1.2    | definition of the JVM . . . . .                            | 102        |
| 6.2      | Experimental Protocol . . . . .                            | 102        |
| 6.2.1    | Measurement Contexts . . . . .                             | 102        |
| 6.2.2    | Workload . . . . .   | 103        |
| 6.2.3    | Metrics and measurement . . . . .                          | 105        |
| 6.2.4    | Extension . . . . .  | 106        |
| 6.3      | Experiments & Results . . . . .                            | 106        |
| 6.3.1    | Energy Impact of JVM Distributions . . . . .               | 106        |
| 6.3.2    | Energy Impact of JVM Settings . . . . .                    | 111        |
| 6.4      | Threats to Validity . . . . .                              | 119        |
| 6.5      | Tools and contributions . . . . .                          | 120        |
| 6.6      | Conclusion . . . . .                                       | 120        |
| <b>7</b> | <b>Discussion and Conclusion</b>                           | <b>123</b> |
| 7.1      | Conclusion . . . . .                                       | 123        |
| 7.2      | Summary of Contributions . . . . .                         | 123        |

|  |            |
|--|------------|
| 7.3 Limitations and Challenges . . . . . | 123        |
| 7.4 Future Work . . . . .                | 123        |
| <b>Bibliography</b>                      | <b>125</b> |

# List of Figures

|      |  |    |
|------|--|----|
| 2.1  | electrical cost comparasion between two cpus . . . . .   | 4  |
| 2.2  | The proposed decomposition of an experiment [17] . . . . .   | 8  |
| 2.3  | CPU energy variation for the benchmark CG . . . . .  | 15 |
| 2.4  | the spiral method of energy optimization . . . . .   | 17 |
| 3.1  | Different Methods of Virtualization . . . . .  | 21 |
| 3.2  | energy consumption of Idle system with and without docker [135] . . . . .                              | 22 |
| 3.3  | Execution time & energy consumption of Redis with and without Docker [135]                             | 23 |
| 3.4  | Topology of the nodes of the cluster Dahu . . . . .  | 25 |
| 3.5  | Comparing the variation of binary and Docker versions of aggregated LU, CG and EP benchmarks . . . . . | 28 |
| 3.6  | Energy variation with the normal, sleep and reboot modes . . . . .                                     | 29 |
| 3.7  | STD analysis of the normal, sleep and reboot modes . . . . .   | 30 |
| 3.8  | Energy variation when disabling the C-states . . . . .   | 31 |
| 3.9  | Energy variation considering the three cores pinning strategies at 50 % workload                       | 32 |
| 3.10 | C-states effect on the energy variation, regarding the application processes count . . . . .           | 34 |
| 3.11 | OS consumption between idle and when running a single process job . . . . .                            | 36 |
| 3.12 | The correlation between the RAPL and the job consumption and variation .                               | 37 |
| 3.13 | Energy consumption STD density of the 4 clusters . . . . .   | 40 |
| 3.14 | Energy variation comparison with/without applying our guidelines . . . . .                             | 42 |
| 3.15 | Energy variation comparison with/without applying our guidelines for STRESS-NG . . . . .               | 43 |
| 3.16 | Benchmarking protocol . . . . .  | 46 |
| 3.17 | Example of the Junit Sonar Plugin . . . . .  | 47 |
| 4.1  | Experimental software architecture . . . . .   | 51 |
| 4.2  | Experimental software architecture . . . . .   | 57 |

|      |  |    |
|------|--|----|
| 4.3  | Experimental software architecture . . . . .   | 58 |
| 4.4  | Experimental software architecture . . . . .   | 59 |
| 4.5  | Experimental software architecture . . . . .   | 60 |
| 4.6  | Experimental software architecture . . . . .   | 61 |
| 4.7  | Experimental software architecture . . . . .   | 63 |
| 4.8  | Experimental software architecture . . . . .   | 64 |
| 4.9  | Experimental software architecture . . . . .   | 65 |
| 4.10 | Architecture . . . . .   | 68 |
| 4.11 | Average power consumption for the Single query test . . . . .  | 69 |
| 4.12 | total request vs average power consumption for the Single query test ( size<br>of circles represents the number of clients) . . . . .      | 70 |
| 4.13 | total request vs average power consumption for the multiple queries test ( Size<br>of circles represents the size of the query ) . . . . . | 70 |
| 4.14 | total request vs average power consumption for the update queries test ( Size<br>of circles represents the size of the query ) . . . . .   | 71 |
| 4.15 | total request vs average power consumption for Fortunes test ( Size of circles<br>represents the number of clients) . . . . .              | 71 |
| 4.16 | total request vs average power consumption for plainText test ( size of circles<br>represents the number of clients) . . . . .             | 72 |
| 4.17 | total request vs average power consumption for JSON Serialization test ( size<br>of circles represents the number of clients) . . . . .    | 72 |
| 5.1  | PYPL Popularity of Programming Languages [noa] . . . . .   | 73 |
| 5.2  | Energy consumption of a recursive implementation of Tower of Hanoi pro-<br>gram in different languages [112] . . . . .                     | 75 |
| 5.3  | use cases of python . . . . .  | 77 |
| 5.4  | . . . . .  | 77 |
| 5.5  | Python interpreters . . . . .  | 84 |
| 5.6  | powerapi architecture . . . . .  | 86 |
| 5.7  | energy behaviour based on multiprocessing . . . . .  | 88 |
| 5.8  | energy behaviour based on multiprocessing . . . . .  | 89 |
| 5.9  | energy behaviour based on multiprocessing . . . . .  | 90 |
| 5.10 | energy behaviour of different python loops . . . . .   | 91 |
| 5.11 | energy behaviour of different methodes to change a list . . . . .  | 92 |
| 5.12 | accuracy based on epoch . . . . .  | 92 |
| 5.13 | evolution of average gpu power based on epoch . . . . .  | 93 |
| 5.14 | cumulative energy of fast10 benchmark within different configurations . .  | 93 |

|      |   |     |
|------|---|-----|
| 5.15 | energy consumption of different impelementations using Bit Operation benchmarks (Joule) . . . . . | 94  |
| 5.16 | energy behaviour based on multiprocessing . . . . .   | 95  |
| 5.17 | Mean consumption of different implementations of bit operations (Joule) . .                       | 95  |
| 5.18 | different interpererts optimisation . . . . .   | 96  |
| 5.19 | green factor of pypy . . . . .  | 97  |
| 5.20 | comparaison of pypy vs python vs numba . . . . .  | 98  |
| 5.21 | comparaison of pypy vs python vs numba . . . . .  | 99  |
| 6.1  | JVM architecture . . . . .  | 102 |
| 6.2  | Target scope of Dacapo and Renaissance benchmarks . . . . .                                       | 105 |
| 6.3  | Energy consumption evolution of selected JVM distributions along versions.                        | 107 |
| 6.4  | Energy consumption of the HotSpot JVM along versions. . . . .                                     | 108 |
| 6.5  | Energy consumption comparison across Java benchmarks for HOTSPOT,<br>GRAALVM & J9. . . . .        | 109 |
| 6.6  | Power consumption of Scrabble as a service for HOTSPOT, GRAALVM & J9.110                          | 110 |
| 6.7  | Power consumption of Dotty as a service for HOTSPOT, GRAALVM & J9. .                              | 110 |
| 6.8  | Active threads evolution when using HOTSPOT, GRAALVM, or J9. . . . .                              | 112 |



# List of Tables

|     |   |     |
|-----|---|-----|
| 3.1 | Description of clusters included in the study . . . . .   | 25  |
| 3.2 | STD (mJ) comparison for 3 pinning strategies . . . . .  | 33  |
| 3.3 | STD (mJ) comparison when enabling/disabling the Turbo Boost . . . . .   | 35  |
| 3.4 | STD (mJ) comparison before/after tuning the OS . . . . .  | 38  |
| 3.5 | STD (mJ) comparison with/without the security patch . . . . .   | 39  |
| 3.6 | STD (mJ) comparison of experiments from 4 clusters . . . . .  | 40  |
| 3.7 | Experimental Guidelines for Energy Variations . . . . .   | 41  |
| 4.1 | the number of framework passed per test . . . . .   | 62  |
| 4.2 | Stress levels for each scenario . . . . .   | 66  |
| 5.1 | Comparison of the execution time between different programming languages using the computer language benchmarks game [? ] . . . . . | 76  |
| 5.2 | Classification of Python implementations . . . . .  | 82  |
| 5.3 | Classification of Python implementations . . . . .  | 83  |
| 5.4 | Testing Machine Configuration . . . . .   | 85  |
| 6.1 | List of selected JVM distributions. . . . .   | 103 |
| 6.2 | List of selected open-source Java benchmarks taken from DACAPO and RENAISSANCE. . . . .   | 104 |
| 6.3 | Power per request for HOTSPOT, GRAALVM & J9. . . . .  | 109 |
| 6.4 | Energy consumption when tuning JIT settings on HOTSPOT, GRAALVM & J9114   |     |
| 6.5 | The different J9 GC policies . . . . .  | 116 |
| 6.6 | The different HOTSPOT/GRAALVM GC policies . . . . .   | 116 |
| 6.7 | Energy consumption when tuning GC settings on HOTSPOT, GRAALVM & J9117  |     |
| 6.8 | J-Referral recommendations. . . . .   | 120 |



# Chapter 1

## Motivation

Nowadays, computers are invading our daily life from work to leisure, from fancy smartphone to an embedded peacemaker that regulates the heartbeat of people. As human beings, we are known to use tools to enhance our bodies. And thanks to computers we pushed that step even further where now we are using machines to extend our brains. Some even argue that one day they will replace us, and therefore we created our own ending. Well this is the problem for the future generations. For the moment, the main concern of humanity is to keep this planet liveable until we find another alternative.

Unfortunately those machines doesn't help that much. as according to .... ....

***TODO : add the impact of the ict ..etc***

Researchers are trying to solve this issue through different angles. While some scientists are trying to find an alternative green source to generate energy. others focus on reducing it'sconsumption. In computer science we are concerned with the ladder solution Therefore most of the works are done on tunning the software and the hardware in order to have a more efficient way use this energy. In this thesis we are trying to find a way to make the energy consumption of the computer to be as low as possible. Our approach is to reduce the energy consumption of the software services by changing certain parameters, such as platform, programming language, and/or the design pattern.

The best way to do so is to formulate a theory behind the energy consumption of algorithm, such as the complexity and the o notation. Unfortunately this is not possible in the current state of the art. due to the lack of knowledge about the energy consumption of the algorithms, and the strong correlation between this consumption and the hardware configuration.

Unlike algorithm optimization in the field of performance, which is agnostic toward the platform, the energy consumption of the algorithms is dependent on execution environment. Therefore, for the moment we will start by formulating some hypothesis and explore them using empirical analysis.

Our work will be presented through the following chapters:

1. 1.3: Where we discuss the work done on the energy consumption and optimization in software engineering
2. 3: It will present a set of guidelines and tools to help practitioners measure the energy consumption of their algorithms.
3. : we will present the impact of programming languages on the energy consumption of the algorithms.
4. : it will discuss the behaviour of python and the possible ways to tune it in order to reduce the energy consumption
5. : will present a study on java programming language and the impact of the JVM choice on the energy consumption
6. : as a perspective we introduce the impact of parallelism on the energy consumption on time agnostic cases

....

## 1.1 Motivation

....

## 1.2 Research Contributions

1. Introduces
2. Shows how ....
3. Proposes ...

## 1.3 Publications

1. ...
2. ...
3. ...

# Chapter 2

## Literature Review

Efficiency in energy usage is a well-known topic. In the majority of fields, the purpose is to minimize the energy consumption of electrical devices/components. Modern times even see energy classification (A, B,... F) for Homes, cars and electronic products, to provide the consumer an indication of the energy consumption of his devices, which will reflect on his power bill. This criterions is extended even to the hardware components of computer. figure2.1<sup>1</sup>

In computer science, the objective is essentially same. Numerous studies have been conducted on energy optimization. Some of these studies concentrate on minimizing energy consumption at the hardware level, while others optimize energy consumption via software.

As an example Avgerinou et al. evaluated the development of power use effectiveness (PUE) in data centers thkat belongs to various organizations participating in the European code of conduct for energy efficiency program [7]. The research found a gradual decline in the PUE of data centers, which measures the ratio of the overall energy supplied to the energy used by IT equipment. A low PUE implies that the majority of energy is utilized to power the data center's IT equipment, while just a little amount is needed for cooling and lighting.

we will place a greater emphasis on the software level in order to decrease the amount of energy that is used.more particularly on the execution phase of the program cycle. We will be proceeding through an empirical analysis of the energy consumption of the software while changing some components of the source code without impacting its behavior. In order to do this, we will elaborate a benchmarking process and a set of tools that are intended to assist practitioners in better comprehending and optimizing the energy usage of their applications. Thus, we will begin by examining the state of the art of empirical analysis and

---

<sup>1</sup><https://www.cpubenchmark.net/compare/Intel-i9-12900KS-vs-Intel-i9-12900KF/4813vs4611>

| Intel Core i9-12900KS            |         | Intel Core i9-12900KF |
|----------------------------------|---------|-----------------------|
| Max TDP                          | 150W    | 241W                  |
| Power consumption per day (kWh)  | 0.3     | 0.5                   |
| Running cost per day             | \$0.075 | \$0.120               |
| Power consumption per year (kWh) | 109.5   | 175.9                 |
| Running cost per year            | \$27.38 | \$43.98               |

*Shown CPU power usage is based on linear interpolation of Max TDP (i.e. max load). Actual CPU power profile may vary.*

Figure 2.1: electrical cost comparasion between two cpus

retrieving the best empirical experimentation methodologies in the research field. Then, we will narrow these practices down to computer science so that we can finally adapt them to energy consumption.

Section 2.1 will discuss the pitfalls and best practices associated with empirical research before applying them to our field of interest. After that Section ?? describes software energy measurements. It provides examples of hardware and software measuring instruments and describes their differences, benefits, and drawbacks. It also examines the sources of energy measurement variations, which represent a significant obstacle to achieving precise readings and a higher accuracy. Then, in section 2.3, we will go through some of the previous work on improving the energy consumption of softwares.

## 2.1 Benchmarking

This section will go through the flaws and best practices of empirical research before applying them to our topic of study.

### 2.1.1 Threats & Challenges

A successful benchmark must meet three criteria. First, it must be **reproducible** in order for others to imitate it. Second, the findings should be **accurate**, which implies that we should expect the same results each time we run the benchmark. Finally, it should **represent** reality. In other words, the experiment's findings should be applicable outside of the research lab as well. The aim of **representativeness** in this thesis is the manufacturing environment. As a result, the experiments should reflect what happens in production contexts.

#### Reproducibility

The reproducibility of experiments is often ranked as one of the most difficult difficulties faced by researchers. This issue has been one of the major tools science has used to help establish the validity and importance of scientific findings since the Philosophical Transactions of the Royal Society were established in 1665 [63]. In point of fact, many of the outcomes cannot be duplicated,<sup>2</sup> which led to a *replication crisis*. As this crisis hit most of the empirical studies, most of the reviews now include reproducibility as one of the minimal standard for judging scientific merit.[122] One of the criterions supporting reproducibility is the publication of the dataset and the algorithms run on the raw data to conclude the results. There is even some disagreement about what the terms "reproducibility" or "replicability" by themselves mean [56]. According to [46], *replicability* extends *reproducibility* with the ability to collect a new raw dataset comparable to the original one by re-executing the experiment under similar condition, instead of just the ability to get the same results by running the statistical analyses on the original data set.

#### Accuracy

According to Oxford, *accuracy* means "technical The degree to which the result of a measurement, calculation, or specification conforms to the correct value or a standard". In my case, this means the ability to run the benchmark multiple times with a low variation.

---

<sup>2</sup>Trouble at the lab, The Economist, 19 October 2013; [www.economist.com/news/briefing/ 21588057-scientists-think-science-self-correcting-alarming-degree-it-not-trouble](http://www.economist.com/news/briefing/21588057-scientists-think-science-self-correcting-alarming-degree-it-not-trouble).

## Representativeness

As obvious as it seems, the reason of executing benchmarks is to validate ideas so we can use them in the real life. However, this means that those benchmarks have to represent reality somehow. Basically, when we aim to benchmark something, we create a mock up version of the situation that we want it to work. First, we can talk about the benchmarking and their selection, then we will talk about the stress benchmark for some applications, and finally we will bring this representativeness in our case and how can we get closer to the energy consumption behavior of a software between the benchmark environment and the production one. Recently, the research community has been investigating typical "crimes" in systems benchmarking and established guidelines for conducting robust and reproducible evaluations [140].

### Impact of these challenges in the empirical research

In their work [141], Van-der-Kouwe *et al.* investigated 50 papers published in top venues to find out that Tier-1 papers commit an average of five benchmarking crimes. To analyze the magnitude of the phenomenon, they have identified a set of 22 "benchmarking crimes" that threaten the validity of the system.

### 2.1.2 Proposed Solutions

In the book "Measuring computer performance: a practitioner's guide" [90], Lilja examines performance indicators and gives in-depth treatment of benchmark program tactics. He provides clear explanations of the basic statistical methods required for interpreting measured performance data. He also outlines the overall 'design of experiments' method and demonstrates how to collect the most information with the least amount of work. This practical book will appeal to anybody seeking a comprehensive, yet intuitive, grasp of computer system performance analysis. Mytkowicz et al. made an evaluation of 133 studies from ASPLOS, PACT, PLDI, and CGO, to find out that none of the experimental findings papers appropriately considered measurement bias. Which can lead to incorrect results from an experiment if a seemingly insignificant feature of the experimental design is altered. They treated this problem by proposing two strategies for detecting measurement bias by using causal analysis and preventing it with setup randomization [109].

Bukh wrote a book about computer performance analysis, where he discussed some familiar topics that are relevant to statistical analysis, such as null hypotheses, chi squared tests, regression, discrete event simulation, Bayes' theorem, how and when to use them for experimental design, measurement, simulation, and modeling for computer systems.

the article [21] provides an intellectual framework for understanding the pervasiveness of mistake in the scientific discovery process and presents methodological, cultural, and system-level techniques for minimizing the frequency of often seen errors.

another article [121] expands on this line of thought by evaluating the uncertainty caused by replications in new research. They offer strategies for capturing uncertainty in inferential investigations, such as cross-study validation and ensemble models.

In their paper[137], the authors find that, even though it's a big move in the right direction, journal policies that require authors to give back digital scholarly objects after publication, like the data and code that back up the claims, don't get more than half of these objects back. Then, using these artifacts, about a fourth of the published computational claims in the study could be made. They suggest putting out the claims in the literature and the digital scholarly objects that back them up at the same time.

Another work, to make unify the benchmarking methodology across different research works in the field of computer science, we can cite the paper [17]. In their approach they divided any empirical experiment into four components:

1. *measurement contexts* that indicate the software and hardware components that will alter or remain constant during the experiment.
2. *workloads* which identify the benchmarks to use in the experiment, as well as their inputs;
3. *metrics* that specify the attributes to be measured and how to assess them.
4. *Data analysis* show how to examine data and evaluate the outcomes of the analysis to offer insight into the assertions that arise from the study.

Figure ?? shows the four component presented in the article [17]

## 2.2 Energy Measurement

To be able to reduce the energy cost of running programs we should first be able to estimate this energy consumption. Many studies have been conducted to estimate a such energy consumption. that varies from static analysis of the source code to infer its energy consumption like Pereira et al. where they provided a tool to highlight the most energy consuming parts of the code [123]. The main advantage of this approach is to be able to estimate the energy consumption of a program without running it. Unlike the complexity of programs, the energy consumption is highly related the execution environment. Therefore, static analysis might not

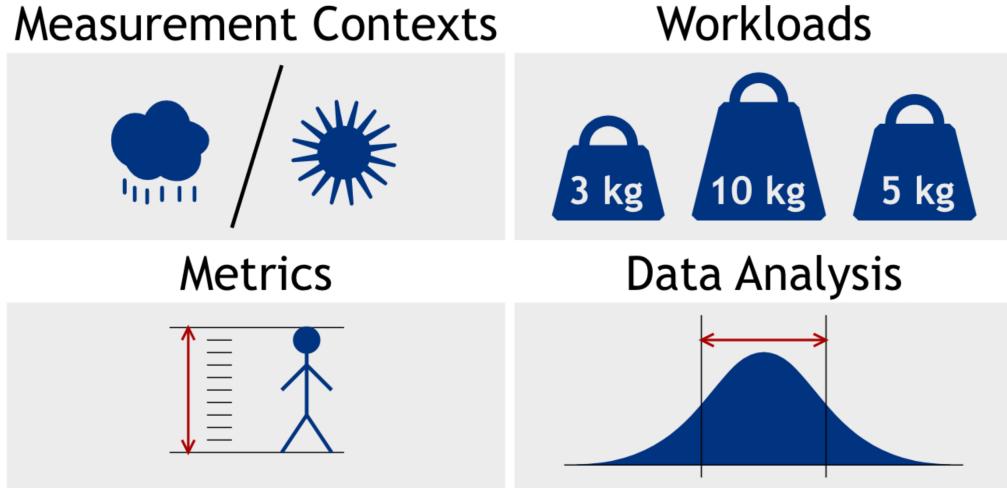


Figure 2.2: The proposed decomposition of an experiment [17]

represent the real behavior of the same program when it is run in the production environment. To treat the problem of representativeness, many researchers tend to measure the energy consumption of the programs while they are running them. Hence we will get more accurate results. there is a variety of tools to measure such energy, and they cover a large spectrum of usage depends on how **accurate** and **precise** those results are needed to be in tone hand, and the price that practitioners are ready to pay for a such accuracy/precision. Below we will present some tools that are well known in the literature and discuss their main advantages / drawbacks for our case.

### 2.2.1 Hardware Tools

according to Hackenberg et al. there are four main criterions to evaluate an energy measurement tool [60]

- *spatial granularity: the more specific the target of monitoring we are able to measure, the more efficient we can do optimization since we will know what causes the pitfalls of the energy consumption.*
- temporal granularity: same as spatial granularity, temporal granularity helps us to identify the sequence of code that need to be optimized.
- *scalability: this is mainly related to the cost of the tools and the ease of their integration for our system.*
- accuracy: to eliminate extra hazards and get more representative measurement.

We believe that accuracy can be extracted from those criterions since it is a result of the combination of the two first ones. therefore, we will focus more on the first 3 criterions from later on. In the following section, we will discuss some of the well known tools that are used in literature.

Nowadays, most of the high performance computing systems (HPC) implements a tool to report the energy consumption of the nodes for the sake of monitoring and administration. Those tools are mainly integrated withing the power supply units (PSU) or the power distribution units (PDU). Then, they provide an interface and a log to follow the history of the energy consumption. Despite their scalability and ease of integration. Such tools lack both in spatial and temporal granularity since they monitor the whole energy of the nodes, and most of the times they have a very low sampling frequency. Most of those tools are provided directly by the manufacturers. Such as *IBM EnergyScale technology [102, 26, Caldeira et al.]* or Dell poweredge [94], MEGware Cluststafe [20]. As said earlier, the true purpose of those tools is more monitoring than analyzing the energy consumption. WattsUp Pro, is a device that can be installed between the power source of the machine and the system under test. It allows a sampling frequency up to 1 Hz and has a internal memory to store a wide variety of data, such as the maximum voltage, current, that later can be exported via USB port for personal usage or lined to some graph programs like Logger Pro or LabQuest. The main advantage of this tool is the ability to monitor the energy consumption from a different device which will reduce the risk of interference with the energy consumption of the test [70]

despite his high temporal granularity, wattsup pro lacks in term of spatial granularity since it monitors the energy consumption of the whole system. To have a finer granularity we need to isolate the energy consumption of each component. For this, we will need more intrusive tools such.

PowerMon and its upgraded version powerMon2 [14] are based on an micro-controller chip that can monitor up to 6 channel (8 for powermon2), simultanetly. Therefore, we are able to monitor the power consumption of 4 devices at the same time. The frequency sample of this tool is up to 50 Hz, with an accuracy of 1.2%. Powermore2 comes with smaller size that can fit within 3.5 inches rack drive.

PowerInsight [85] is another fine-grained measurement tool that is based on an ARM bagelbone processor [35], which is able to measure up to 30 channel simultaneously with a frequency of 1KHz per channel.

On the other hand, GreenMiner [69], powerpack [55] in the other hand is an api that synchronizes the data gathered from other monitoring tools such as Watt's Up Pro, NI and RadioShack pro and the lines of code.

Other monitor tools have been realized by the manufactures, such as IBM Power executive [81], which allows their customer to monitor the power consumption and thermal behavior of the of BladeCenter systems in the data center.

as we see in The CPU is the part responsible of the most energy consumption of softwares. hence the finer we go to measure this energy consumption the better it is for our work. Fortunately, Intel and later AMD proposed a tool that estimate the power consumption of different part of the CPI based on counter performances. RAPL (*RUnning Average Power Limit*) [59, 61] is a set of registers that was introduced by Intel in their CPU since Sandy bridge generation, and later it was followed by AMD, since Family 17h Zen. It is capable of monitoring different components of CPU, such as DRAM, cores, and the integrated GPU for desktop processors.

The advantage of such an approach is that the absence of any intrusive measurement tools. Furthermore, they have a high temporal granularity with a sampling frequency up to 1 KHz [71].

With similar approach, we can find NVIDIA reporting tools, such as GPU TESLA [24] and the NVML library [50].

### 2.2.2 Software Tools

Software-based measurement tools are based on other hardware tools to monitor energy use. Granularity is the core value of these technologies, unlike hardware tools, which only provide the total energy usage of the system/component (computer, server, motherboard, etc.) for most cases. Because they are frequently constructed on empirical estimations and data learning methods, they drop in accuracy.

Many software measuring tools understand the behavior of a power model and provide estimates of energy usage. This model is then used to allocate the observed energy consumption among different execution entities, such as processes, control groups, threads, or even code lines.

The first examples of software measurement tools are PowerAPI [36], SmartWatts formula [52] and SelfWatts [53]. These tools collect global energy consumption measurements from RAPL and use other system events such as cache misses/hits and CPU frequency evolution (DVFS) via a sensor to construct a power model of the control groups (system control groups, docker containers, kubernetes pods, etc.) using a Ridge regression. The model continuously learns and improves its precision of real-time energy usage data with a maximum frequency of 100 Hz. The instrument has a decentralized, lightweight design. Only the lightest sensors required for data collection and transmission are put into the monitored devices. The SmartWatts formula is then executed on the primary server in order to

construct the model that permits assigning the energy usage for each operating control group. PowerAPI is only compatible with Linux on a bare-metal physical computer.

WattWatcher [86] is a multi-core power measuring framework that provides process-level energy measurements. This program uses power models to predict process energy usage. It uses CPU events which are passed from the measured node to a model generator node in order to construct the power model. It works by combining a description of the CPU with a list of the hardware events through multiple calibration phases in order to build a robust model.

Joulemeter [82, 75] is a Microsoft software that estimates the energy usage of Windows running applications down to the process level by using power models (for CPU, memory, and drives). It employs low-overhead power models to infer power consumption from resource utilization during runtime, and it provides power limiting features for virtual machines. Previous Joulemeter tests [76] demonstrated that the instrument provides a less accurate estimation of energy use that differs greatly from the real one. To adjust its models to the hardware on which it operates, Joulemeter must first go through a calibration step. It is able to only monitor one process at a time with a frequency of 1 Hz.

jRAPL is another example of an energy measurement tool estimating tool that has been utilized in a variety of publications[58, 92]. This software enables for the energy usage of Java programs, functions, or even a block of code lines to be profiled and measured. The measurements are heavily reliant on the data supplied by RAPL. As a result, the global energy consumption collected by RAPL between two timestamps (the start and finish of the code to measure) is used to calculate the energy consumption of the Java code. Tests using jRAPL should be done on a well-configured machine to minimize the impact of the operating system and user operations on the overall energy consumption of jRAPL.

Another process-level energy usage measuring tool is Jolinar [74, 113]. The tool does not need a calibration phase and relies on pre-established power models based on hardware metrics (TDP, disk I/O rate, and so on). These settings must be identified and supplied by the user for his machine. Jolinar is only capable of measuring the energy consumption of one application at a time. At the end of the execution, the tool provides the CPU, DRAM, and disk energy usage of the main process.

Jalen [114] is another tool that profiles and monitors the energy usage of a Java program. Unlike jRAPL, Jalen is able to cover the scope down to the function level. It gathers data using code instrumentation and statistical sampling at a predetermined pace. Because of the overhead that code instrumentation may incur, the authors recommend utilizing the second option. Every 10 ms, Jalen records the JVM's stack trace together with the CPU time of

threads and computes statistics about method calls. These statistics are then utilized to calculate each method's energy usage.

selfwatts [53] powerjoular [111]

### 2.2.3 Hybrid Tools

Simgrid simulation of power consumption of parallel application using simgrid [67]

impact of manufacturing process on the energy variation [34]

different energy consumption between identical processors [ idle and hight load ][146]

the temperature is the main raison a high energy variation [148]

external factors are impact on the energy variation [107]

the place of the server in the room doesn't affect the energy variation [45]

comparaison of three measuring tools and they did exhebit 10% variation each time [72]

low-cost scalable variation-aware algorithm [72]

reducing the energy variation by disabling turbo boost [4]

reducing the energy consumption in parallel systems [30]

[99]

## 2.3 Programming Languages & Performances

### 2.3.1 Energy

energy comparaison of programming languages in the game benchmark by debian [125]

toward green ranking [39]

java vs kotlin in web performances [22]

rosetta code [110] [103]

network energy comparaison [10]

Aequitas [133]

vm placement [105]

Mishra et al.

static cost of Vms [83]

carbon footprint of training neural network [138]

SPELL, the energy leaks detector tool [124]

impact of energy profiling on software [75]

impact of maintainability on software energy evolution [27]

definition [147]

comparison [29]

empirical study [42]  
impact of website implementation on energy consumption [127] [97]  
PHP [16] [41]  
simulation of web cache [28]  
java spring analysis [54]  
performance [104]  
cross compiler benchmarking [151]

### 2.3.2 Python

web frameworks on python [Pankiv]  
hope library [6]  
bytecode effect [15]  
numba [40]  
intel python [88]  
python 2 vs 3 [106]  
python runtime performances [132] [108]  
static vs dynamic languages [Pang et al.]  
concurrent benchmark framework [120]

### 2.3.3 JVM

java vs python [44]  
hotspot vs J9 [115] - same but for big queries [32]  
constant overheating of the jvm [84]  
infer the energy cost based on the byte code instructions [95]  
java collection energy footprint [129] [51]  
java classes energy footprint [64]  
framework to reduce java collections [96]  
energy consumption of java dev tools [13]  
Microbenchmarks on jvm [93] [13]  
android automatic refactoring to reduce energy consumption [12] [134]  
java vs native c in android [38]

### 2.3.4 benchmarking

NAS [Bailey et al.] statistics [66] benchmark crimes [141] microservices [57] impact of webservers on web applications energy [98]

## 2.4 Energy Variation

In theory, using identical CPU, same memory configuration, similar storage and networking capabilities, should increase the accuracy of physical measurements. Unfortunately, this is not possible when it comes to measuring the energy consumption of a system. Applying the benchmarking guidelines and repeating the same experiment with in the same configuration are not sufficient to reproduce the the same energy measurements, not only between identical machines, but even within the same machine. This difference—also called *energy variation* (EV)—has become a serious threat to the accuracy of experimental evaluations.

Figure 2.3 illustrates this variation problem as a violin plot of 20 executions of the benchmark *Conjugate Gradient* (CG) taken from the *NAS Parallel Benchmarks* (NBP) suite [9], on 4 nodes of an homogeneous cluster (the cluster Dahu described in Table 3.1) at 50 % workload. We can observe a large variation of the energy consumption, not only among homogeneous nodes, but also at the scale of a single node, reaching up to 25 % in this example.

Some researchers started investigating the hardware impact of the energy variation of power consumption. As an example, one can cite [19, 139] who reported that the main cause of the variation of the power consumption between different machines is due to the **CMOS** manufacturing process of transistors in a chip. [68] described this variation as a set of parameters, such as CPU Frequency and the thermal effect.

### 2.4.1 Studying Hardware Factors

This variation has often been related to the manufacturing process [33], but has also been a subject of many studies, considering several aspects that could impact and vary the energy consumption across executions and on different chips. On the one hand, the correlation between the processor temperature and the energy consumption was one of the most explored paths. Kistowski *et al.* showed in [77] that identical processors can exhibit significant energy consumption variation with no close correlation with the processor temperature and performance. On the other hand, the authors of [149] claimed that the processor thermal effect is one of the most contributing factors to the energy variation, and the CPU temperature and the energy consumption variation are tightly coupled.

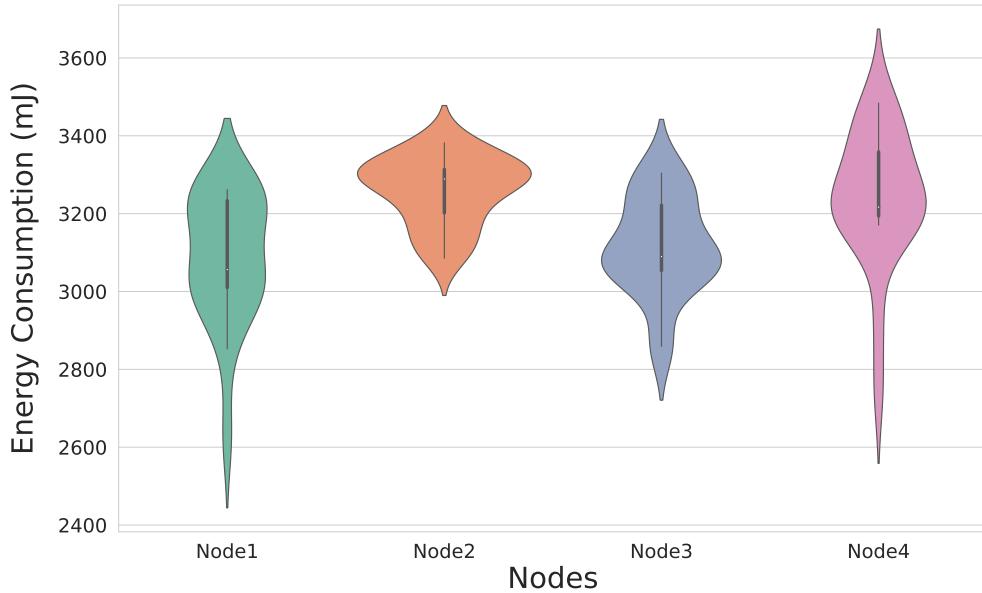


Figure 2.3: CPU energy variation for the benchmark CG

***TODO : add the corelation value***

This exposes the processor temperature as a delicate factor to consider while comparing energy consumption variations across a set of homogeneous processors.

The ambient temperature was also discussed in many papers as a candidate factor for the energy variation of a processor. In [144], the authors claimed that energy consumption may vary due to fluctuations caused by the external environment. These fluctuations may alter the processor temperature and its energy consumption. However, the temperature inside a data center does not show major variations from one node to another. In [49], El Mehdi Dirouri *et al.* showed that switching the spot of two servers does not affect their energy consumption. Moreover, changing hardware components, such as the hard drive, the memory or even the power supply, does not affect the energy variation of a node, making it mainly related to the processor. This result was recently assessed by [149], where the rack placement and power supply introduced a maximum of 2.8 % variation in the observed energy consumption.

Beyond hardware components, the accuracy of power meters has also been questioned. Inadomi *et al.* [73] used three different power measurement tools: RAPL, Power Insight<sup>3</sup>

<sup>3</sup><https://www.itssolution.com/products/trellis-power-insight-application>

and BGQ EMON. All of the three tools recorded the same 10 % of energy variation, that was supposedly related to the manufacturing process.

### 2.4.2 Mitigating Energy Variations.

Acknowledging the energy variation problem on processors, some papers proposed contributions to reduce and mitigate this variation. In [73], the authors introduced a variation-aware algorithm that improves application performance under a power constraint by determining module-level (individual processor and associated DRAM) power allocation, with up to  $5.4 \times$  speedup. The authors of [62] proposed parallel algorithms that tolerate the variability and the non-uniformity by decoupling per process communication over the available CPU. Acun *et al.* [5] found out a way to reduce the energy variation on Ivy Bridge and Sandy Bridge processors, by disabling the Turbo Boost feature to stabilize the execution time over a set of processors. They also proposed some guidelines to reduce this variation by replacing the old—slower—chips, by load balancing the workload on the CPU cores and leaving one core idle. They claimed that the variation between the processor cores is insignificant. In [31], the researchers showed how a parallel system can be used to deal with the energy variation by compensating the uneven effects of power capping.

In [100], the authors highlight the increase of energy variation across the latest Intel micro-architectures by a factor of 4 from Sandy Bridge to Broadwell, a 15 % of run-to-run variation within the same processor and the increase of the inter-cores variation from 2.5 % to 5 % due to hardware-enforced constraints, concluding with some recommendations for Broadwell usage, such as running one hyper-thread per core.

## 2.5 Conclusion

As we have seen in the state of the art, many methods have been proposed to reduce the energy footprint of the the ICT, which they can be applied in different parts of the lifecycle of the program, from consumption to the execution. Furthermore, the execution phase took attention of many researchers because it is the part where the most energy is consumed. This thesis will focus on that aspect as well. However, unlike the most work that have been done on the hardware aspect, we will target the software impact on this energy, starting from the choice of the programming language up to how to tune some features of a frameworks in order to make the software consumes less energy. To do so we use the empirical approach due to its consistency for the moment. Unlike the performance, which is essentially related to

the complexity of the algorithm, the energy consumption is more impacted by the hardware. Therefore, to optimize the energy consumption we choose a spiral method based on 3 phases:

1. execute the code,
2. measure the program,
3. infer the guidelines.

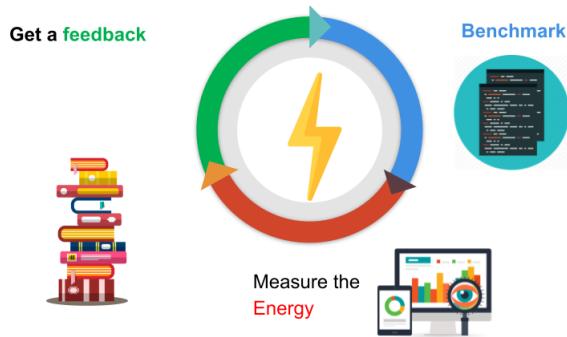


Figure 2.4: the spiral method of energy optimization

The aim of this work is to present a set of guidelines to create a benchmarking system to measure the energy consumption of different programs. After that, we will use this system to compare the energy consumption of different programming languages. We will extend the work of Pereira et al. to a closer distance to production environment by comparing a set of use cases. Starting by GRPC framework, and a set of Web Frameworks. Finally, we will discuss the impact of the execution environment on the energy consumption of two of the most famous programming languages Java and Python and present how tuning the Virtual Machine can reduce the energy consumption.



# **Chapter 3**

## **A Benchmarking Protocol to Measure Software Energy Consumption**

### **3.1 Motivation**

Empirical measurements are critical to capture the effect of developers' choices on software energy consumption. To accomplish this, one should not overlook the benchmarking pitfalls highlighted in the state of the art. Furthermore, when it comes to evaluating the energy consumption of software, other challenges occur, such as the impact of hardware, the difference between the machines used for measurements and those that may apply the results, and so on. Moreover, considerable advances in computer science have resulted in an increase in the number of obsolete results. Addressing all of them becomes significantly more difficult in studies that compare multiple treatments.

Furthermore, between the exploratory experiment and the published results, there may have been the appearance of new candidates as well as the evolution of others. As a result, it is not only necessary to assure the "reproducibility" of the results, but it is also essential to provide room for new candidates. As a result, we'd like to present "Extension," a new approach for leveraging experimentation. The ability to give not only the tools needed to replicate the tests but also to integrate more candidates, workloads, or important key performance indicators

This chapter covers ways to overcome empirical analysis challenges in energy consumption studies. First, we'll go through the three components of a successful benchmark within the energy consumption experiment. Section 3.2 will therefore concentrate on the "reproducibility" issue and how to deliver reproducible experiments without interfering with the energy measurement. Section 3.3 will discuss accuracy in software energy consumption.

Finally, Section ?? will discuss tools for introducing new candidates, workloads, or other key performance indicators.

Regarding the "representativeness" of the benchmarks, we will elaborate in the section entitled Perspectives.

## 3.2 Reproducibility within the context of energy

This section discusses various techniques to encapsulate the systems-under-test in order to assure the reproducibility of an experiment.

**Virtual Machines** The very first choice should be to use *Virtual Machines* (VM), which allow researchers to select the most appropriate tools, software, and operating system that they are most comfortable with without incurring the cost of changing the actual working environment, giving them more control over dependencies and the execution environment. Furthermore, adopting a VM addresses the *replication crisis* since virtual images allow even the most sophisticated architecture to be simply replicated by instantiating a copy of the image.

This option, however, comes at a cost.

Because of the hypervisor, software will be built on two kernels: one for the virtual machine (guest) and one for the host machine, resulting in a visible overhead and a negative influence on the performance of the system-under-test.

As a result, we cannot use VM for performance-related tests.

Isolation is another drawback of VM.

While this feature protects the experimental setting from unwanted interference from the outside world, it is possible that this interaction is required—especially if the experiment is dependent on an external source such as energy monitors .

**Containers** Another option would be to use something that allows us to benefit from the host OS's isolation while simultaneously simplifying replication as proposed by VM and the direct interface with the hardware provided by the traditional techniques.

Containers provide such an advantage by ensuring application separation and ease of replication. Figure 3.1 depicts the architectural differences between virtualization and container technologies. There are three main types of virtualisation.

- Type 1: runs on the hardware directly. It is primarily utilized by cloud providers where there is no host OS and only VMs that run on the open-source Xen or VMware ESX hypervisors.

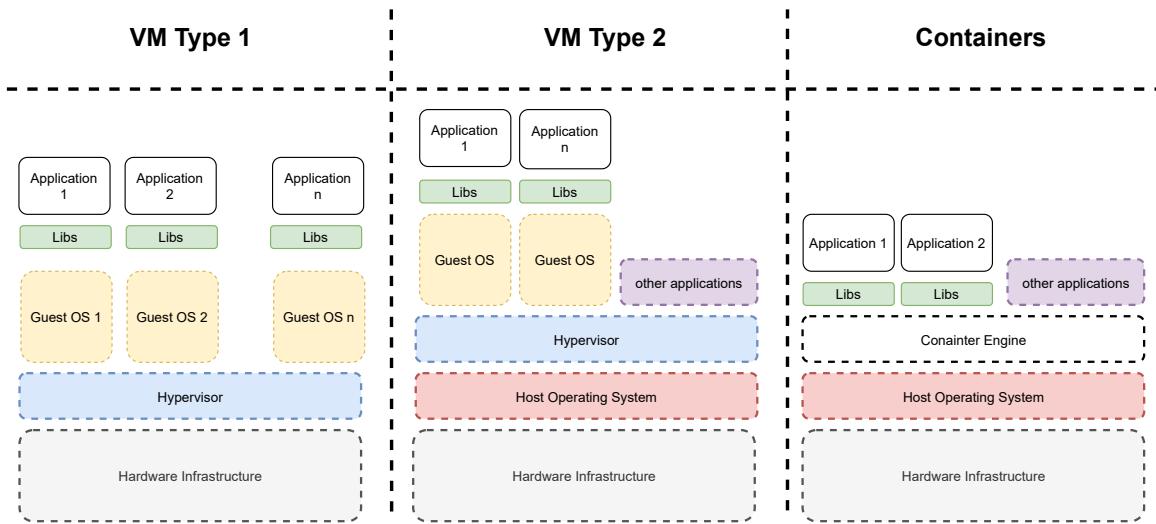


Figure 3.1: Different Methods of Virtualization

- Type 2: runs on top of the host operating system and is most commonly found on personal computers.

VMware server and virtualBox are notable examples of this category, and most researchers' experiments use them. However, because of the two operating systems, the applications are typically slower.

- Containers: run their operating systems on the host kernel rather than their own , which makes them smaller, faster, and more efficient in terms of hardware utilization. one can cite *Docker*, *Linux LXC*, or *LXD* [3].

### 3.2.1 Docker Vs. Virtual Machine

Despite the fact that Type 1 is more performant than Type 2, the latter is the most used in research, as most researchers tend to conduct their experiments on their own machines. Docker, on the other hand, is the most well-known container technology. In our case, we are more likely to promote Docke for two reasons:

1. As previously stated [143] [reference Morabito (2015) and van Kessel et al. (2016)], we require a lightweight orchestrator to limit the overhead on energy usage of our experiments [143] [cite Morabito (2015) and van Kessel et al. (2016)],
2. We need to communicate with the host OS because we are using hardware sensors to measure the energy consumption..

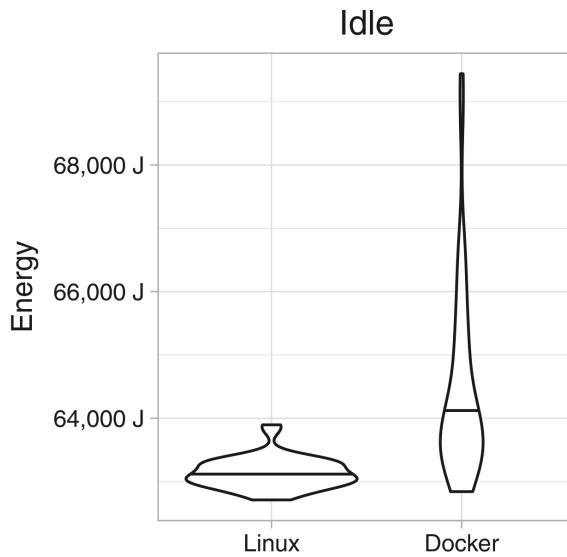


Figure 3.2: energy consumption of Idle system with and without docker [135]

A special notice to virtualwatts. A framework that enables us to retrieve the energy consumption of a virtual machine.

### 3.2.2 Docker & Energy

Now that we've decided to use container technology to enclose our tests, what effect will this have on the amount of energy our tests use?

Using research from [135] who examined how adding the Docker layer affected energy consumption. Santos et al. *et al.* conducted their experiment by running numerous benchmarks both with and without Docker. They contrasted the energy usage and execution time that resulted. The first step was to observe the effects of the orchestrator and the Docker daemon while there was no work to be done. Then, they use the following benchmarks in their experiments:

- Wordpress,
- Redis,
- PostgreSQL.

The values below show the system under test's energy consumption while it is idle. Docker has an overhead of roughly 1,000 joules, as seen in Figure 3.2

Yet, as seen in Figure 3.3, Docker increased the execution duration of the benchmark by 50 seconds, which led to a significant rise in the energy usage. According to the authors, this

overhead is primarily caused by the Docker deamon and not by the fact that the application is in a container.

Furthermore, they calculated the cost of this extra energy, which was less than 0.15\$ in the worst-case scenario, which is insignificant in comparison to the benefits of Docker for isolation and reproducibility.

To summarize, Docker-based software tends to consume more energy since it takes longer to execute. The execution of the Docker deamon causes an increase in average power consumption of only **2 Watts**. This overhead can reach up to 5% in IO-intensive applications, while it is barely visible in CPU- or DRAM-intensive workloads.

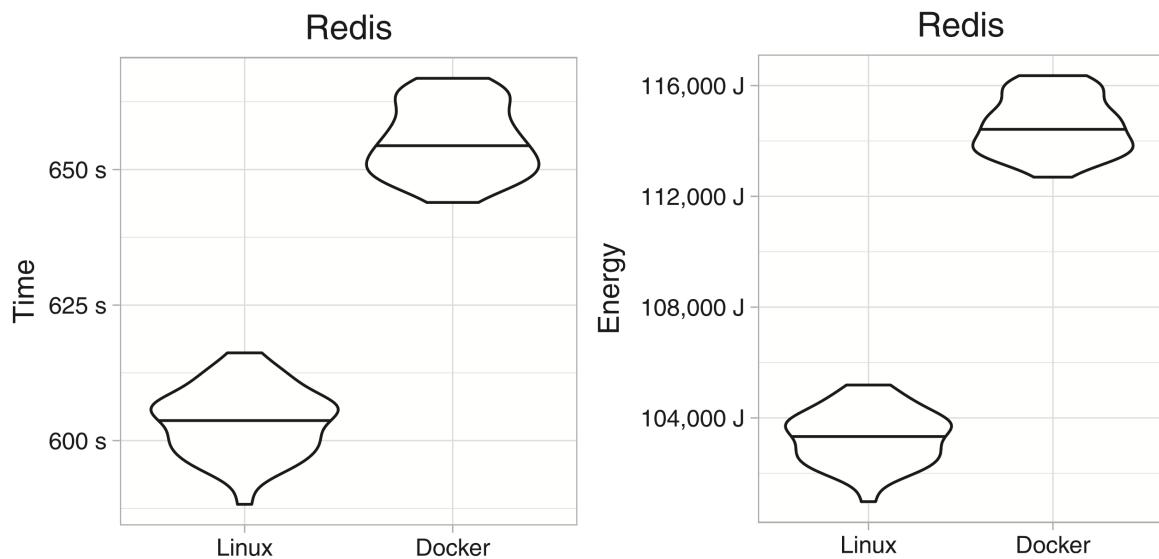


Figure 3.3: Execution time & energy consumption of Redis with and without Docker [135]

### 3.2.3 Conclusion

As can be seen, the introduction of the supervisor has increased the impact of Docker on energy, which will be applied equitably to all experiments. Therefore when it comes to comparison analysis, it will mitigate its impact automatically. Furthermore, because we have access to the host Hardware, we do not need to worry about capturing the SUT's energy use. As a result, we will use Docker as an encapsulation solution for all of our experiments. It would ensure the reproducibility of our experiments in a simple and straightforward manner.

### 3.3 Improving accuracy by Taming the energy variation

While the previous section aimed to ensure the reproducibility of our software energy consumption experiments, this section will provide a collection of tips and tools to help you increase the accuracy of these experiments. We are well aware of the effect that hardware has on energy fluctuations. However, we feel that there is still an opportunity for practitioners to minimize this energy variance by employing solely tuneable factors. To that end, we conducted a series of empirical studies utilizing state-of-the-art recommendations to discover which controllable elements can limit the variations of benchmark energy usage.

In this section we will try to answer the following Research questions.

**RQ 1:** Does the benchmarking protocol affect the energy variation?

**RQ 2:** How important is the impact of the processor features on the energy variation?

**RQ 3:** What effect does the operating system have on energy variation?

**RQ 4:** Does the choice of processor make a difference in reducing the energy variation?

#### 3.3.1 Experimental Setup

This section describes our detailed experimental environment, covering the cluster configuration and the benchmarks we used to justify our experimental methodology.

##### Measurement Context

There are three main contexts.

- different machines with different settings;
- different machines with the same settings ;
- the same machine.

We used the platform Grid5000 (G5K) [11, 101], which is a large, flexible testbed for experiment-driven research that is spread out across all of France, to meet these needs. Grid5000 has several clusters that are made up of 4 to 124 identical machines with different configurations for each cluster. For our experiment, we looked at four groups. Our main criterion was the CPU configuration. The table below 3.1, presents a description of the four cluster that have been chosen for our experiments.

Table 3.1: Description of clusters included in the study

| Cluster  | Processor                | Nodes | RAM     |
|----------|--------------------------|-------|---------|
| Dahu     | 2× Intel Xeon Gold 6130  | 32    | 192 GiB |
| Chetemi  | 2× Intel Xeon E5-2630v4  | 15    | 768 GiB |
| Ecotype  | 2× Intel Xeon E5-2630Lv4 | 48    | 128 GiB |
| Paranoia | 2× Intel Xeon E5-2660v2  | 8     | 128 GiB |

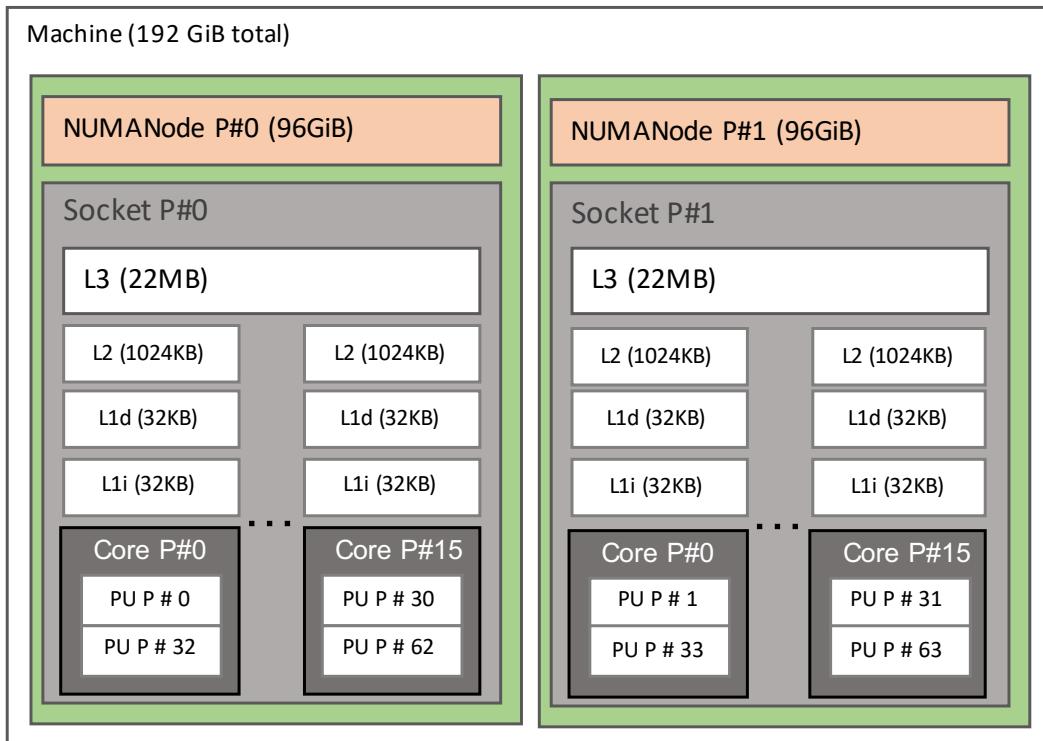


Figure 3.4: Topology of the nodes of the cluster Dahu

As most of the nodes are equipped with two sockets (physical processors), we use the acronym CPU or socket to designate one of the two sockets and PU for the *processing unit*. For our study we consider hyper-threads as distinct PUs.

Figure 3.4 shows the detailed topology of a node in the cluster Dahu. as an example.

## Workload

We picked the benchmarks based on two criteria.

First, **scalability**: We wanted to learn as much as possible about the experiment in the time we had, so we needed some benchmarks that could grow or shrink with the number of PUs and work in different situations. The second criterion is whether or not the workload

is **representative**. As stated in the challenges, a workload must represent the production enviromenet or the experiment would be inconsistent [17].

To meet these criteria, we looked at the "state of the art" and found the most common benchmarks used to test the performance of hardware. We then chose the ones that could be scaled up. Our candidate is emphNAS Parallel Benchmark (NPB v3.3.1) [9]: one of the most used benchmarks for *HPC*. We used the applications (LU), the *Conjugate Gradient* (CG) and *Embarrassingly Parallel* (EP) computation-intensive benchmarks in our experiments, with the C data class. Further more we have used other applications to validate our results using more applications such as Stress-ng v0.10.0,<sup>1</sup> pbzip2 v1.1.9,<sup>2</sup> linpack<sup>3</sup> and sha256 v8.26<sup>4</sup>.

## Metrics & Measurement Tools

Our metric for the accuracy of the test is the Standard deviation aka **STD** of the energy consumption. Therefore whether the tests consumes more or less energy is out of our scope. To study this variation we need first a tool to measure the energy consumption. For this we used POWERAPI [37], which is a power monitoring toolkit that is based on *Intel Running Average Power Limit* (RAPL) [79]. The advantage of PowerAPI is that it reports the Energy consumption of CPU and DRAM at a socket level.

Our testbeds are run with a minimal version of Debian 9 (4.9.0 kernel version)<sup>5</sup> where we install Docker (version 18.09.5), which will be used to run the RAPL sensor and the benchmark itself. The energy sensor collects RAPL reports and stores them in a remote MON-GODB instance, allowing us to perform *post-mortem* analysis in a dedicated environment. Using Docker makes the deployment process easier on the one hand, and provides us with a built-in control group encapsulation of the conducted tests on the other hand. This allows POWERAPI to measures all the running containers, even the RAPL sensor consumption, as it is isolated in a container.

Every experiment is conducted on 100 iterations, on multiple nodes and using the 3 NPB benchmarks we mentioned, with a warmup phase of 10 iterations for each experiment. In most cases, we were seeking to evaluate the *STandard Deviation* (STD), which is the most representative factor of the energy variation. We tried to be very careful, while running our experiments, not to fall in the most common benchmarking "crimes" [140]. As we study the STD difference of measurements we observed from empirical experiments, we use the

---

<sup>1</sup><https://kernel.ubuntu.com/~cking/stress-ng>

<sup>2</sup><https://launchpad.net/pbzip2/>

<sup>3</sup><http://www.netlib.org/linpack>

<sup>4</sup><https://linux.die.net/man/1/sha256sum>

<sup>5</sup><https://github.com/grid5000/environments-recipes/blob/master/debian9-x64-min.yaml>

bootstrap method [48] to randomly build multiple subsets of data from the original dataset, and we draw the STD density of those sets, as illustrated in Figure 3.5. Given the space constraints, this paper reports on aggregated results for nodes, benchmarks and workloads, but the raw data we collected remains available through the public repository we published.<sup>6</sup> We believe this can help to achieve better and more reliable comparisons. We mainly consider 3 different workloads in our experiments: single process, 50 %, and 100 %, to cover the low, medium and high CPU usage when analyzing the studied parameters effect, respectively. These workloads reflect the ratio of used PU count to the total available PU.

### 3.3.2 Analysis

In this part, we aim to establish experimental guidelines to reduce the CPU energy variation. We therefore explore many potential factors and parameters that could have a considerable effect on the energy variation.

### 3.3.3 Docker & Accuracy

As the state of the art assesses the impact of Docker on the energy consumption, one can also consider its impact on accuracy. In other words:

**RQ:** does Docker affect the energy variation of the experiments?

To answer this question we conducted a preliminary experiment by running the same benchmarks LU, CG and EP in a Docker container and a flat binary format on 3 nodes of the cluster Dahu to assess if Docker induces an additional variation. Figure 3.5 reports that this is not the case, as the energy consumption variation does not get noticeably affected by Docker while running a same compiled version of the benchmarks at 5 %, 50 % and 100 % workloads. In fact, while Docker increases the energy consumption due to the extra layer it implements [47], it does not noticeably affect the energy variation. The *standard deviation* (STD) is even slightly smaller ( $STD_{Docker} = 192mJ, STD_{Binary} = 207mJ$ ), taking into account the measurements errors and the OS activity.

#### **RQ 1: Benchmarking Protocol**

To achieve a robust and reproducible experiment, practitioners often tend to repeat their tests multiple times, in order to analyze the related performance indicators, such as execution time, memory consumption or energy consumption. We therefore aim to study the bench-

---

<sup>6</sup><https://github.com/anonymous-data/Energy-Variation>

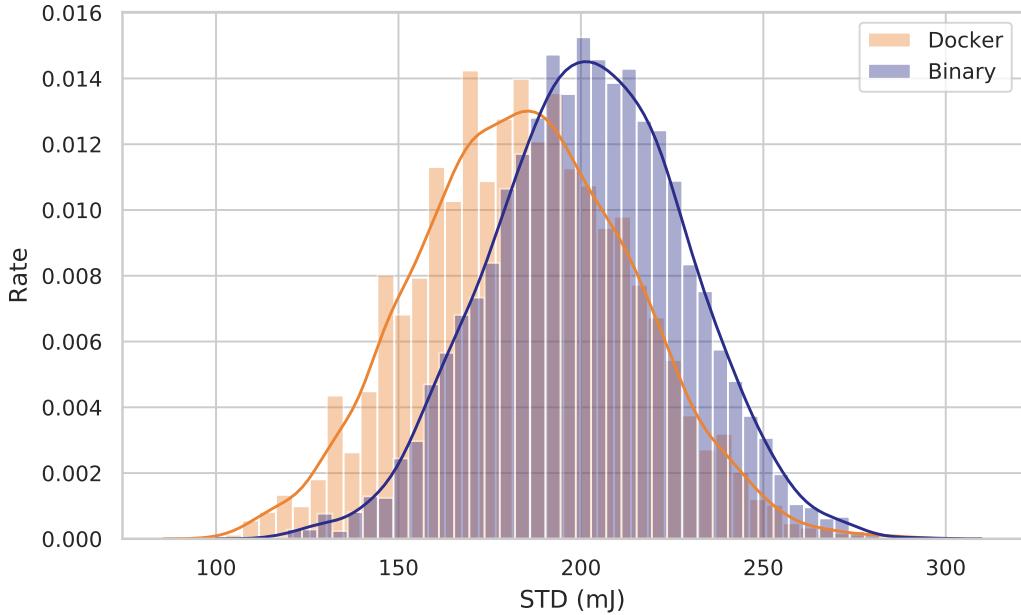


Figure 3.5: Comparing the variation of binary and Docker versions of aggregated LU, CG and EP benchmarks

marking protocol to identify how to efficiently iterate the tests to capture a trustable energy consumption evaluation.

In this first experiment, we investigate if changing the testing protocol affects the energy variation. To achieve this, we considered 3 execution modes: In the "normal" mode, we iteratively run the benchmark 100 times without any extra command, while the "sleep" mode suspends the execution script for 60 seconds between iterations. Finally, the "reboot" mode automatically reboots the machine after each iteration. The difference between the normal and sleep modes intends to highlight that the CPU needs some rest before starting another iteration, especially for an intense workload. Putting the CPU into sleep for several seconds could give it some time to reach a lower frequency state or/and reduce its temperature, which could have an impact on the energy variation. The reboot mode, on the other hand, is the most straightforward way to reset the machine state after every iteration. It could also be beneficial to reset the CPU frequency and temperature, the stored data, the cache or the CPU registries. However, the reboot task takes a considerable amount of time, so rebooting the node after every single operation is not the fastest nor the most eco-friendly solution, but it deserves to be checked to investigate if it effectively enhances the overall energy variation or not.

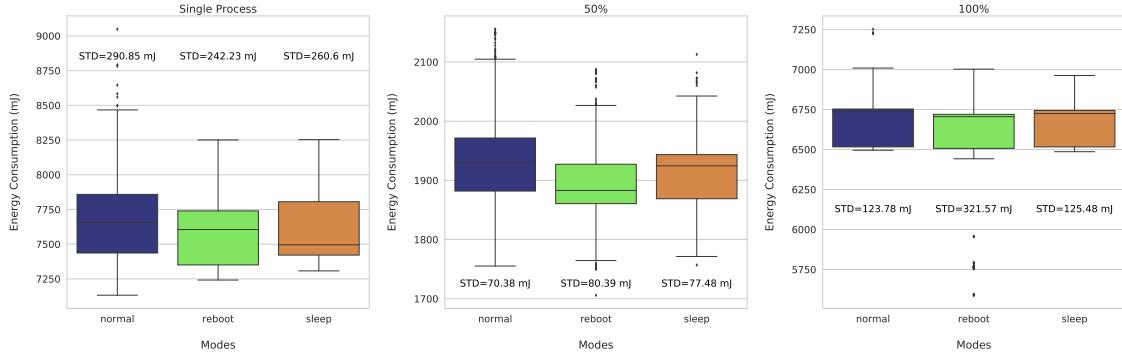


Figure 3.6: Energy variation with the normal, sleep and reboot modes

Figure 3.6 reports on 300 aggregated executions of the benchmarks LU, CG and EP, on 4 machines of the cluster Dahu (cf. Table 3.1) for different workloads. We note that the results have been executed with different datasets sizes (B, C and D for single process, 50 % and 100 % respectively) to remedy to the brief execution times at high workloads for small datasets. This justifies the scale differences of reported energy consumptions between the 3 modes in Figure 3.6. As one can observe, picking one of these strategies does not have a strong impact on the energy variation for most workloads. In fact, all the strategies seem to exhibit the same variation with all the workloads we considered—*i.e.*, the STD is tightly close between the three modes. The only exception is the reboot mode at 100 % load, where the STD is 150 % times worst, due to an important amount of outliers. This goes against our expectation, even when setting a warm-up time after reboot to stabilize the OS.

In Figure 3.7, we study the standard deviation of the three modes by constituting 5,000 random 30-iterations sets from the previous executions set and we compute the STD in each case, considering mainly the 100 % workload as the STD was 150 % higher for the reboot mode with that load. We can observe that the considerable amount of outliers in the reboot mode is not negligible, as the STD density is clearly higher than the two other modes. This makes the reboot mode as the less appropriate for the energy variation at high workloads.

To answer RQ 1, we conclude that the benchmarking protocol **partially affects** the energy variation, as highlighted by the reboot mode results for high workloads.

## RQ 2: Processor Features

The C-states provide the ability to switch the CPU between more or less consuming states upon activities. Turning the C-states on or off have been subject of many discussions [145], because of its dynamic frequency mechanism but, to the best of our knowledge, there have been no fully conducted C-states behavior analysis on CPU energy variation.

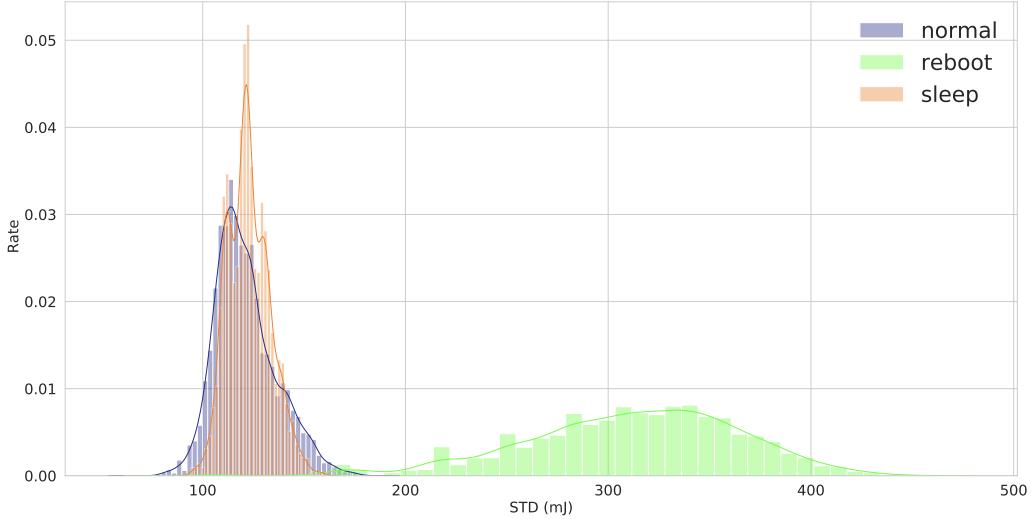


Figure 3.7: STD analysis of the normal, sleep and reboot modes

We intend to investigate how much the energy consumption varies when disabling the C-states (thus, keeping the CPU in the C0 state) and at which workload. Figure 3.8 depicts the results of the experiments we executed on three nodes of the cluster Dahu. On each node, we ran the same set of benchmarks with two modes: C-states on, which is the default mode, and C-states off. Each iteration includes 100 executions of the same benchmark at a given workload, with three workload levels. We note that our results have been confirmed with the benchmarks LU, CG and EP.

We can clearly see the effect that has the C-states off mode when running a single-process application/benchmark. The energy consumption varies 5 times less than the default mode. In this case, only one CPU core is used among  $2 \times 16$  physical cores. The other cores are switched to a low consumption state when C-states are on, the switching operation causes an important energy consumption difference between the cores, and could be affected by other activities, such as the kernel activity, causing a notable energy consumption variation. On the other hand, switching off the C-states would keep all the cores—even the unused ones—at a high frequency usage. This highly reduces the variation, but causes up to 50 % of extra energy consumption in this test ( $Mean_{C\text{-states-off}} = 11,665mJ, Mean_{C\text{-states-on}} = 7,641mJ$ ).

At a 100 % workload, disabling the C-states seems to have no effect on the total energy consumption nor its variation. In fact, all the cores are used at 100 % and the C-states module would have no effect, as the cores are not idle. The same reason would apply for the 50 % load, as the hyper-threading is active on all cores, thus causing the usage of most of them.

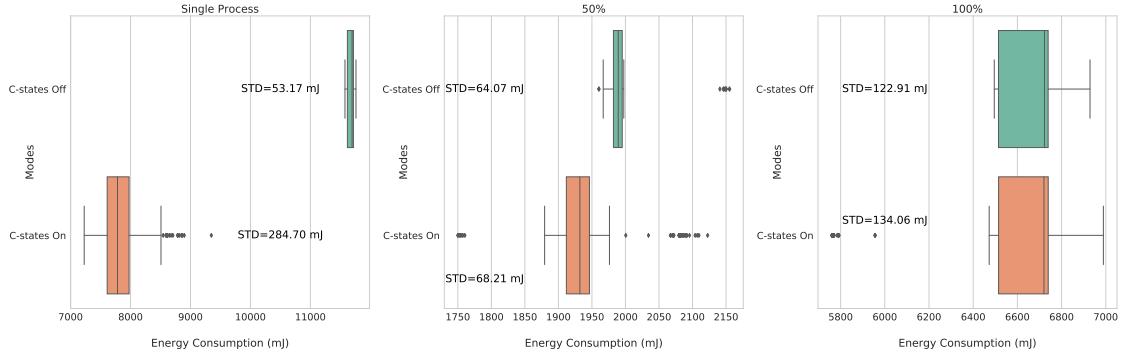


Figure 3.8: Energy variation when disabling the C-states

For single process workloads, disabling the C-states causes the process to consume 50 % more energy as reported in Figure 3.8, but reduces the variation by 5 times compared to the C-states on mode. This leads to mainly two questions: Can a process pinning method reduce/increase the energy variation? And, how does the energy consumption variation evolve at different PU usage level?

**Cores Pinning** To answer the first question, we repeated the previous test at 50 % workload. In this experiment, we considered three cores usage strategies, the first one (S1) would pin the processes on all the PU of one of the two sockets (including hyper-threads), so it will be used at 100 %, and leave the other CPU idle. The second strategy (S2) splits the workload on the two sockets so each CPU will handle 50 % of the load. In this strategy, we only use the core PU and not the hyper-threads PU, so every process would not share his core usage (all the cores are being used). The third strategy (S3) consists also on splitting the workload between the two sockets, but considering the usage of the hyper-threads on each core—*i.e.*, half of the cores are being used over the two CPU. Figure 3.9 reports on the energy consumption of the three strategies when running the benchmark CG on the cluster Dahu. We can notice the big difference between these three execution modes that we obtained only by changing the PU pinning method (that we acknowledged with more than 100 additional runs over more than 30 machines and with the benchmarks LU and EP). For example, S2 is the least power consuming strategy. We argue that the reason is related to the isolation of every process on a single physical core, reducing the context switch operations. In the first and third strategy, 32 processes are being scheduled on 16 physical cores using the hyper-threads PU, which will introduce more context switching, and thus more energy consumption.

We note that even if the first and third strategies are very similar (both use hyper-threads, but only on one CPU for the first and on two CPU for the third), the gap between them is

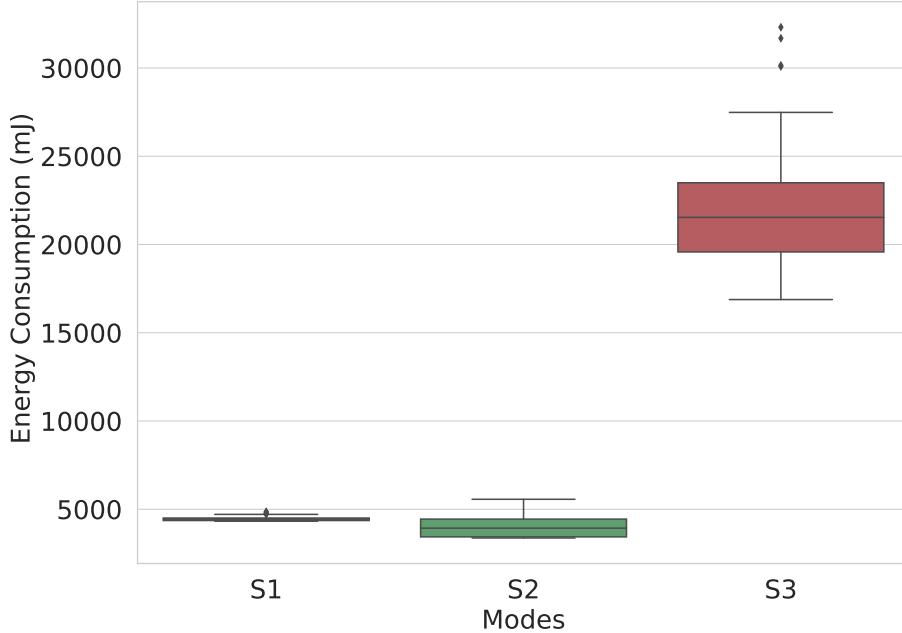


Figure 3.9: Energy variation considering the three cores pinning strategies at 50 % workload

considerable variation-wise, as the variation is 30 times lower in the first strategy ( $STD_{S1} = 116mJ, STD_{S3} = 3,452mJ$ ). This shows that the usage of the hyper-threads technology is not the main reason behind the variation, the first strategy has even less variation than the second one and still uses the hyper-threading.

The reason for the S1 low energy consumption is that one of the two sockets is idle and will likely be in a lower power P-state, even with the disabled C-states. The S2 case is also low energy consuming because by distributing the threads across all the cores, it completes the task faster than in the other cases. Hence, it consumes less energy. The S3 is a high consuming strategy because both sockets are being used, but only half the cores are active. This means that we pay the energy cost for both sockets being operational and for the experiments taking longer to run because of the recurrent context switching.

Our hypothesis regarding the worst results that we observed when using the third strategy is the recurrent context switching, added to the OS scheduling that could reschedule processes from a socket to another, which invalids the cache usage as a process can not take profit of the socket local L3 cache when it moves from a CPU to another (cf. Figure 3.4).

Moreover, the fact that the variation is 4–5 times higher when using the strategy S2 compared to S1 ( $STD_{S1} = 116mJ, STD_{S3} = 575mJ$ ), gives another reason to believe that swapping a process from a CPU to another increases the variation due to CPU micro differ-

Table 3.2: STD (mJ) comparison for 3 pinning strategies

| Strategy      | S1 | S2  | S3    |
|---------------|----|-----|-------|
| <b>Node 1</b> | 88 | 270 | 1,654 |
| <b>Node 2</b> | 79 | 283 | 2,096 |
| <b>Node 3</b> | 58 | 287 | 1,725 |
| <b>Node 4</b> | 51 | 229 | 1,334 |

ences, cache misses and cache coherency. While the mean execution time for the strategy S3 is very high ( $MeanTime_{S3} = 46s$ ) compared to the two other strategies ( $MeanTime_{S1} = 11s$ ,  $MeanTime_{S2} = 7s$ ), we see no correlation between the execution time and the energy variation, as the S1 still give less variations than S2 even if it takes 36 % more time to run.

Table 3.2 reports on additional aggregated results for the STD comparison on four other nodes of the cluster Dahu at 50 %, with the benchmarks LU, CG and EP. In fact, the CPU usage strategy S1 is by far the experimentation mode that gave the least variation. The STD is almost 5 times better than the strategy S2, but is up to 10 % more energy consuming ( $Mean_{S1} = 4469mJ$ ,  $Mean_{S2} = 4016mJ$ ). On the other hand, the strategy S3 is the worst, where the energy consumption can be up to 5 times higher than the strategy S2 ( $Mean_{S2} = 4016mJ$ ,  $Mean_{S3} = 21645mJ$ ) and the variation is much worst (30 times compared to the first strategy). These results allow us to have a better understanding of the different processes-to-PU pinning strategies, where isolating the workload on a single CPU is the best strategy. Using the hyper-threads PU on multiple sockets seems to be a bad recommendation, while keeping the hyper-threading enabled on the machine is not problematic, as long as the processes are correctly pinned on the PU. Our experiments show that running one hyper-thread per core is not always the best to do, at the opposite of the claims of [100].

**Processes Threshold** To answer the second question regarding the evolution of the energy variation at different levels of CPU usage, we varied the used PU's count to track the EV evolution. Figure 3.10 compares the aggregated energy variation when the C-states are on and off using 2, 4 and 8 processes for the benchmarks LU, CG and EP. This figure confirms that disabling the CPU C-states does not decrease the variation for all the workloads, as we can clearly observe, the variation is increasing along with the number of processes. When running only 2 processes, turning off the C-states reduces the STD up to 6 times, but consumes 20 % more energy ( $Mean_{C-states-on} = 10,334mJ$ ,  $Mean_{C-states-off} = 12,594mJ$ ). This variation is 4 times lower when running 4 processes and almost equal to the C-states on mode when running 8 processes. In fact, running more processes implies to use more CPU cores, which

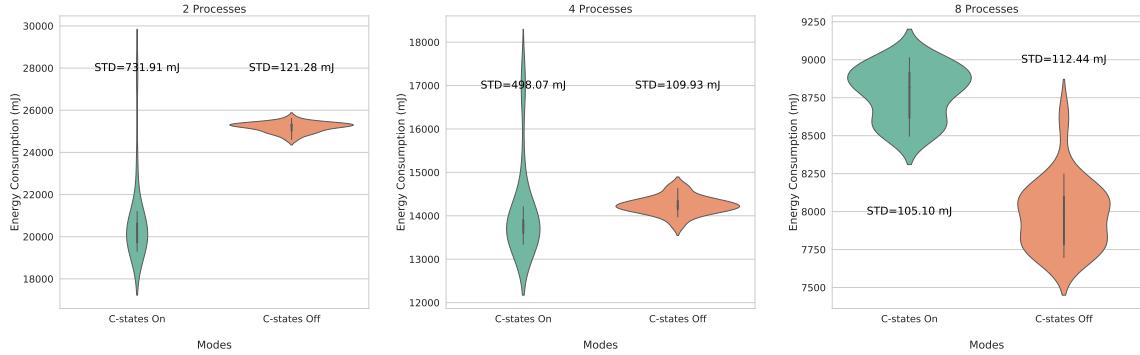


Figure 3.10: C-states effect on the energy variation, regarding the application processes count

reduces the idle cores count, so the cores will more likely stay at a higher consumption state even if the C-states mechanism is on.

In our case, using 4 PU reduces the variation by 4 times and consumes almost the same energy as keeping the C-states mechanism on ( $Mean_{C\text{-states}\text{-on}} = 7,048mJ$ ,  $Mean_{C\text{-states}\text{-off}} = 7,119mJ$ ). This case would be the closest to reality as we do not want to increase the energy consumption while reducing the variation, but using a lower number of PU still results in less variation, even if it increases the overall energy consumption.

We note that disabling the C-states is not recommended in production environments, as it introduces extra energy consumption for low workloads (around 50 % in our case for a single process job). However, our goal is not to optimize the energy consumption, but to minimize the energy variation. Thus, disabling the C-states is very important to stabilize the measurements in some cases when the variation matters the most. Comparing the energy consumptions of two algorithms or two versions of a software systems is an example of use case benefiting from this recommendation.

**Turbo Boost** The Turbo Boost—also known as *Dynamic Overclocking*—is a feature that has been incorporated in Intel CPU since the Sandy Bridge micro-architecture, and is now widely available on all of the Core i5, Core i7, Core i9 and Xeon series. It automatically raises some of the CPU cores operating frequency for short periods of time, and thus boost performances under specific constraints. When demanding tasks are running, the operating system decides on using the highest performance state of the processor.

Disabling or enabling the Turbo Boost has a direct impact on the CPU frequency behavior, as enabling it allows the CPU to reach higher frequencies in order to execute some tasks for a short period of time. However, its usage does not have a trivial impact on the energy variation. Acun *et al.* [5] tried to track the Turbo Boost impact on the Ivy Bridge and the

Table 3.3: STD (mJ) comparison when enabling/disabling the Turbo Boost

| Turbo Boost | Enabled | Disabled |
|-------------|---------|----------|
| EP / 5 %    | 310     | 308      |
| CG / 25 %   | 95      | 140      |
| LU / 25 %   | 204     | 240      |
| EP / 50 %   | 84      | 79       |
| EP / 100 %  | 125     | 110      |

Sandy Bridge architectures. They concluded that it is one of the main responsible for the energy variation, as it increases the variation from 1 % to 16 %. In our study, we included a Turbo Boost experiment in our testbed, to check this property on the recent Xeon Gold processors, covering various workloads.

The experiment we conducted showed that disabling the Turbo Boost does not exhibit any considerable positive or negative effect on the energy variation. Table 3.3 compares the STD when enabling/disabling the Turbo Boost, where the columns are a combination of workload and benchmark. In fact, we only got some minor measurements differences when switching on and off the Turbo Boost, and where in favor or against the usage of the Turbo Boost while repeating tests, considering multiple nodes and benchmarks. This behavior is mainly related to the *thermal design power* (TDP), especially at high workloads executions. When a CPU is used at its maximum capacity, the cores would be heating up very fast and would hit the maximum TDP limit. In this case, the Turbo Boost cannot offer more power to the CPU because of the CPU thermal restrictions. At lower workloads, the tests we conducted proved that the Turbo Boost is not one of the main reasons of the energy variation. In fact, the variation difference is barely noticeable when disabling the Turbo Boost, which cannot be considered as a result regarding the OS activity and the measurement error margin. We cannot affirm that the Turbo Boost does not have an impact on all the CPU, as we only tested on two recent Xeon CPU (clusters Chetemi and Dahu). We confirmed our experiments on these machines 100 times at 5 %, 25 %, 50 % and 100 % workloads.

We conclude that CPU features **highly impact** the energy variation as an answer for RQ 2.

### RQ 3: Operating System

The *operating system* (OS) is the layer that exploits the hardware capabilities efficiently. It has been designed to ease the execution of most tasks with multitasking and resource sharing. In some delicate tests and measurements, the OS activity and processes can cause a significant overhead and therefore a potential threat to the validity. The purpose behind this

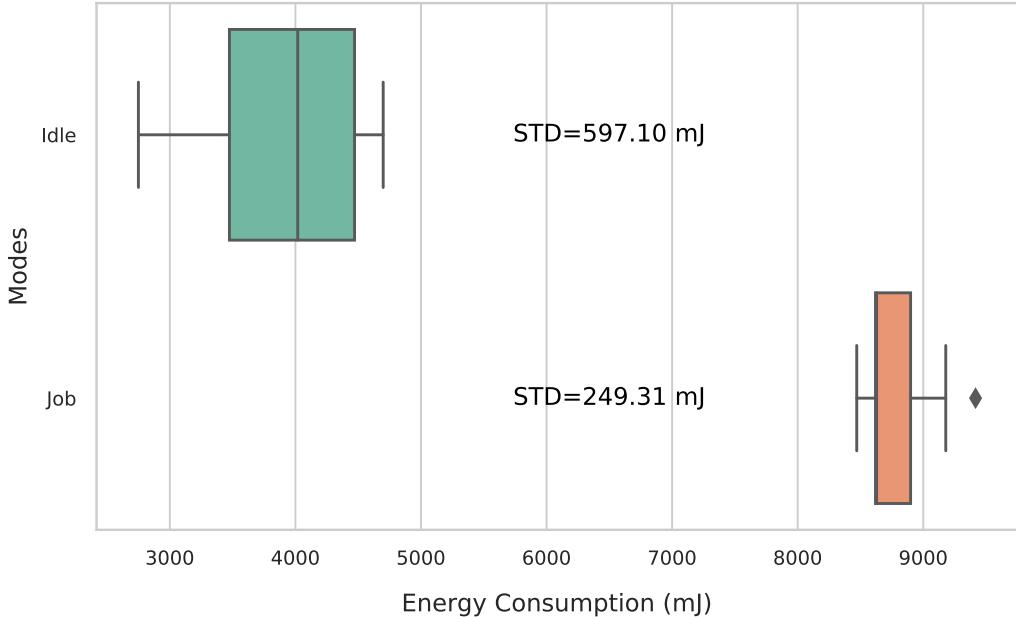


Figure 3.11: OS consumption between idle and when running a single process job

experiment is to determine if the sampled consumption can be reliably related to the tested application, especially for low-workload applications where CPU resources are not heavily used by the application.

The first way to do is to evaluate the OS idle activity consumption, and to compare it to a low workload running job. Therefore, we ran 100 iterations of a single process benchmark EP, LU and CG on multiple nodes from the cluster Dahu, and compared the energy behavior of the node with its idle state on the same duration. The aggregated results, illustrated in Figure 3.11, depict that the idle energy variation is up to 140 % worst than when running a job, even if it consumes 120 % less energy ( $Mean_{Job} = 8,746mJ$ ,  $Mean_{Idle} = 3,927mJ$ ). In fact, for the three nodes, randomly picked from the cluster Dahu, the idle variation is way more important than when a test was running, even if it is a single process test on a 32-cores node. This result shows that OS idle consumption varies widely, due to the lack of activity and the different CPU frequencies states, but it does not mean that this variation is the main responsible for the overall energy variation. The OS behaves differently when a job is running, even if the amount of available cores is more than enough for the OS to keep his idle behavior when running a single process.

Inspecting the OS idle energy variation is not sufficient to relate the energy variation to the active job. In fact, the OS can behave differently regarding the resource usage when running a task. To evaluate the OS and the job energy consumption separately, we used

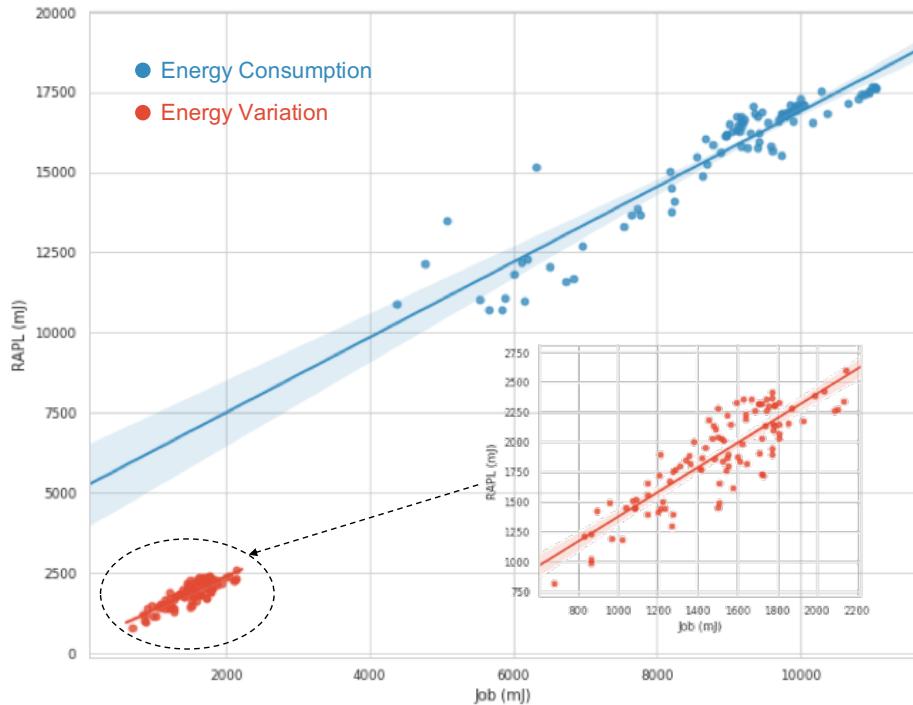


Figure 3.12: The correlation between the RAPL and the job consumption and variation

the POWERAPI toolkit. This fine-grained power meter allows the distribution of the RAPL global energy across all the Cgroups of the OS using a power model. Thus, it is possible to isolate the job energy consumption instead of the global energy consumption delivered by RAPL. To do so, we ran tests with a single process workload on the cluster Dahu, and used the POWERAPI toolkit to measure the energy consumption. Then, we compared the job energy consumption to the global RAPL data. We calculated the Pearson correlation [2] of the energy consumption and variation between global RAPL and POWERAPI, as illustrated in Figure 3.12. The job energy consumption and variation are strongly correlated with the global energy consumption and variation with the coefficients 93.6 % and 85.3 %, respectively. However, this does not completely exclude the OS activity, especially if the jobs have tight interaction with the OS through the signals and system calls. This brings a new question on whether applying extra-tuning on a minimal OS would reduce the variation? As well as what is the effect of the Meltdown security patch—that is known to be causing some performance degradation [80, 91]—on the energy variation?

**OS Tuning** An OS is a pack of running processes and services that might or not be required its execution. In fact, even using a minimal version of a Debian Linux, we could list many OS running services and process that could be disabled/stopped without impacting

Table 3.4: STD (mJ) comparison before/after tuning the OS

| Node | EP        | CG      | LU       |
|------|-----------|---------|----------|
| N1   | 1370 -9 % | 78 +7 % | 128 +2 % |
| N2   | 1278 -7 % | 64 -1 % | 120 +9 % |
| N3   | 1118 +1 % | 83 +2 % | 93 +7 %  |

the test execution. This extra-tuning may not be the same depending on the nature of the test or the OS. Thus, we conducted a test with a deeply-tuned OS version. We disabled all the services/processes that are not essential to the OS/test running, including the OS networking interfaces and logging modules, and we only kept the strict minimum required to the experiment’s execution. Table 3.4 reports on the aggregated results for running single process measurements with the benchmarks CG, LU and EP, on three servers of the cluster Dahu, before and after tuning the OS. Every cell contains the *STD* value before the tuning, plus/minus a ratio of the energy variation after the tuning. We notice that the energy variation varies less than 10 % after the extra-tuning. We argue that this variation is not substantial, as it is not stable from a node to another. Moreover, 10 % of variation is not a representative difference, due to many factors that can affect it as the CPU temperature or the measurement errors.

**Speculative Executions** Meltdown and Spectre are two of the most famous hardware vulnerabilities discovered in 2018, and exploiting them allows a malicious process to access others processes data that is supposed to be private [80, 91]. They both exploit the speculative execution technique where a process anticipates some upcoming tasks, which are not guaranteed to be executed, when extra resources are available, and revert those changes if not. Some OS-level patches had been applied to prevent/reduce the criticality of these vulnerabilities. On the Linux kernel, the patch has been automatically applied since the version 4.14.12. It mitigates the risk by isolating the kernel and the user space and preventing the mapping of most of the kernel memory in the user space. Nikolay *et al.* have studied in [136] the impact of patching the OS on the performance. The results showed that the overall performance decrease is around 2–3 % for most of the benchmarks and real-world applications, only some specific functions can meet a high performance decrease. In our study, we are interested in the applied patch’s impact on the energy variation, as the performance decrease could mean an energy consumption increase. Thus, we ran the same benchmarks LU, CG ad EP on the cluster Dahu with different workloads, using the same OS, with and without the security patch. Table 3.5 reports on the STD values before disabling the security patch. A minus means that the energy varies less without the patch being applied, while a plus means

that it varies more. These results help us to conclude that the security patch's effect on the energy variation is not substantial and can be absorbed through the error margin for the tested benchmarks. In fact, the best case to consider is the benchmark LU where the energy variation is less than 10 % when we disable the security patch, but this difference is still moderate. The little performance difference discussed in [80, 91] may only be responsible of a small variation, which will be absorbed through the measurement tools and external noise error margin in most cases.

Table 3.5: STD (mJ) comparison with/without the security patch

| Node | EP         | CG      | LU       |
|------|------------|---------|----------|
| N1   | 269 +2 %   | 83 +1 % | 108 -6 % |
| N2   | 195 +1 %   | 84 -5 % | 121 -9 % |
| N3   | 223 +/-1 % | 72 -4 % | 117 +8 % |
| N4   | 276 +3 %   | 60 +0 % | 113 -3 % |

To answer RQ 3, we conclude that the OS **should not be the main focus** of the energy variation taming efforts.

#### RQ 4: Processor Generation

Intel microprocessors have noticeably evolved during these last 20 years. Most of the new CPU come with new enhancements to the chip density, the maximum Frequency or some optimization features like the C-states or the Turbo Boost. This active evolution caused that different generations of CPU can handle a task differently. The aim of this experiment is not to justify the evolution of the variation across CPU versions/generations, but to observe if the user can choose the best node to execute her experiments. Previous papers have discussed the evolution of the energy consumption variation across CPU generations and concluded that the variation is getting higher with the latest CPU generations [Wang et al., 100], which makes measurements stability even worse. In this experiment, we therefore compare four different generations of CPU with the aim to evaluate the energy variation for each CPU and its correlation with the generation. Table 3.6 indicates the characteristics of each of the tested CPU.

Table 3.6 also shows the aggregated energy variation of the different generations of nodes for the benchmarks LU, CG and EP. The results attest that the latest versions of CPU do not necessarily cause more variation. In the experiments we ran, the nodes from the cluster Paranoia tend to cause more variation at high workloads, even if they are from the latest generation. While the Skylake CPU of the cluster Dahu cause often more energy

Table 3.6: STD (mJ) comparison of experiments from 4 clusters

| Cluster | Dahu    | Chetemi   | Ecotype    | Paranoia   |
|---------|---------|-----------|------------|------------|
| Arch    | Skylake | Broadwell | Broadwell  | Ivy Bridge |
| Freq    | 3.7 GHz | 3.1 GHz   | 2.9 GHz    | 3.0 GHz    |
| TDP     | 125 W   | 85 W      | 55 W       | 95 W       |
| 5%      | 364     | 210       | <b>75</b>  | <b>76</b>  |
| 50%     | 98      | 86        | <b>49</b>  | 244        |
| 100%    | 119     | 116       | <b>106</b> | 240        |

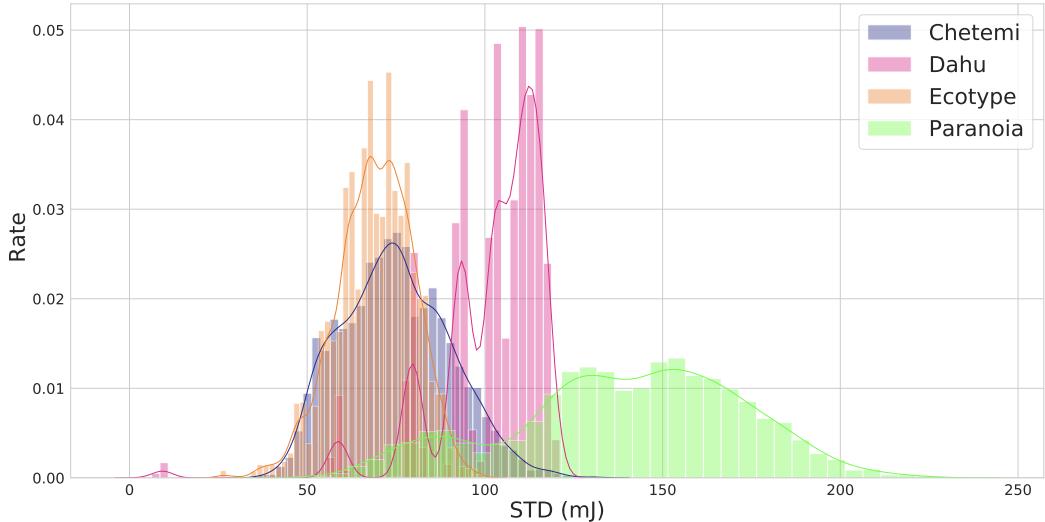


Figure 3.13: Energy consumption STD density of the 4 clusters

variation than Chetemi and the Ecotype Broadwell CPU. We argue that the hypothesis "*the energy consumption on newer CPU varies more*" could be true or not depending on the compared generations, but most importantly, the chips energy behaviors. On the other hand, our experiments showed the lowest energy variation when using the Ecotype CPU, these CPU are not the oldest nor the latest, but are tagged with "L" for their low power/TDP. This result rises another hypothesis when considering CPU choice, which implies selecting the CPU with a low TDP. This hypothesis has been confirmed on all the Ecotype cluster nodes, especially at low and medium workloads.

Figure 3.13 is an illustration of the aggregated STD density of more than 5,000-random values sets taken from all the conducted experiments. This shows that the cluster Paranoia reports the worst variation in most cases, and that Ecotype is the best cluster to consider to get the least variations, as it has a higher density for small variation values.

We conclude on **affirming RQ 4**, as selecting the right CPU can help to get less variations.

### 3.3.4 Experimental Guidelines

To summarize our experiments, we provide some experimental guidelines in Table 3.7, based on the multiple experiments and analysis we did. These guidelines constitute a set of minimal requirements or best practices, depending on the workload and the criticality of the energy measurement precision. It therefore intends to help practitioners in taming the energy variation on the selected CPU, and conduct the experiments with the least variations.

Table 3.7: Experimental Guidelines for Energy Variations

| Guideline   | Load         | Gain       |
|---|--------------|------------|
| Use a low TDP CPU   | Low & medium | Up to 3×   |
| Disable the CPU C-states  | Low          | Up to 6×   |
| Use the least of sockets in a case of multiple CPU  | Medium       | Up to 30×  |
| Avoid the usage of hyper-threading whenever possible  | Medium       | Up to 5×   |
| Avoid rebooting the machine between tests   | High         | Up to 1.5× |
| Do not relate to the machine idle variation to isolate a test EC, the CPU/OS changes its behavior when a test is running and can exhibit less variation than idle | Any          | —          |
| Rather focus the optimization efforts on the system under test than the OS  | Any          | —          |
| Execute all the similar and comparable experiments on a same machine. Identical machines can exhibit many differences regarding their energy behavior             | Any          | Up to 1.3× |

Table 3.7 gives a proper understanding of known factors, like the C-states and its variation reduction at low workloads. However, it also lists some new factors that we identified along the analysis we conducted in Section, such as the results related to the OS or the reboot mode. Some of the guidelines are more useful/efficient for specific workloads, as showed in our experiments. Thus, qualifying the workload before conducting the experiments can help in

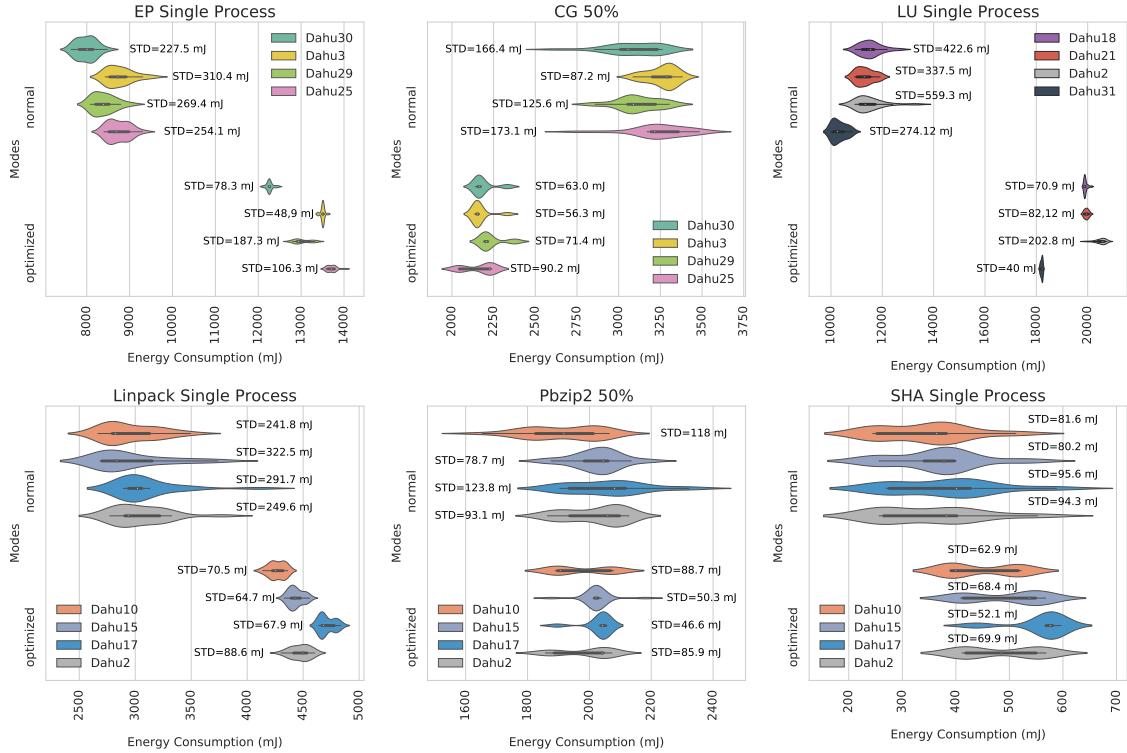


Figure 3.14: Energy variation comparison with/without applying our guidelines

choosing the proper guidelines to apply. Other studied factors are not been mentioned in the guidelines, like the Turbo Boost or the Speculative execution, due to the small effect that has been observed in our study.

In order to validate the accuracy of our guidelines among a varied set of benchmarks on one hand, and their effect on the variation between identical machines on the other hand, we ran seven experiments with benchmarks and real applications on a set of four identical nodes from the cluster Dahu, before (normal mode where everything is left to default and to the charge of the OS) and after (optimized) applying our guidelines. Half of these experiments has been performed at a 50 % workload and the other half on single process jobs. The choice of these two workloads is related to the optimization guidelines that are mainly effective at low and medium workloads. We note that we used the cluster Dahu over Ecotype to highlight the guidelines effect on the nodes where the variation is susceptible to be higher.

Figure 3.14 and 3.15 highlight the improvement brought by the adoption of our guidelines. They demonstrate the intra-node STD reduction at low and medium workloads for all the benchmarks used at different levels. Concretely, for low workloads, the energy variation is

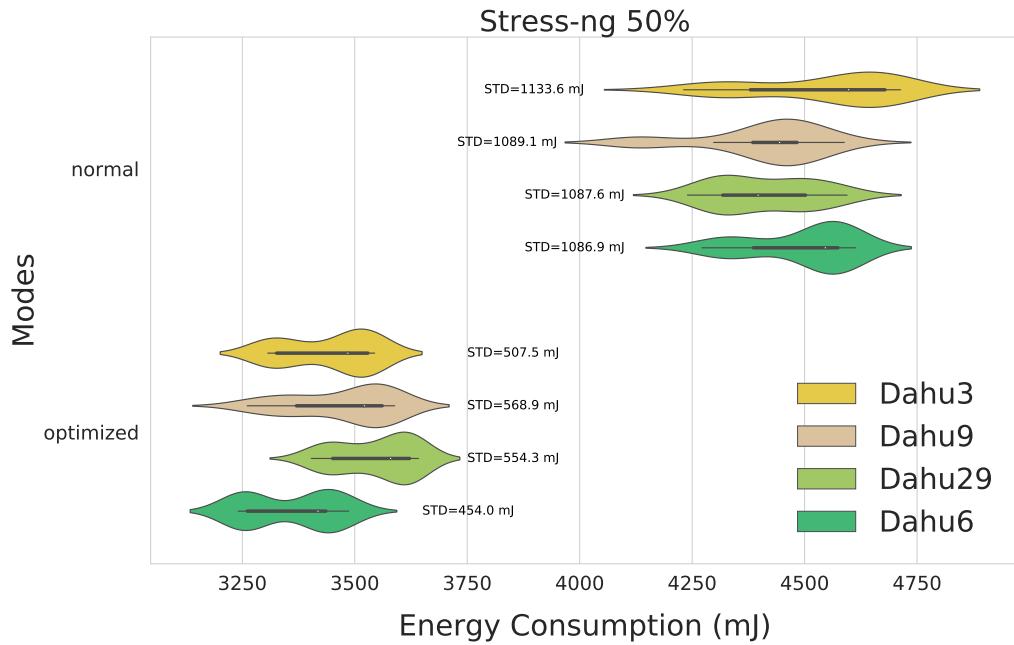


Figure 3.15: Energy variation comparison with/without applying our guidelines for STRESS-NG

2–6 times lower after applying the optimization guidelines for the benchmarks LU and EP, as well as LINPACK, while it is 1.2–1.8 times better for Sha256. For this workload, the overall energy consumption after optimization can be up to 80 % higher due to disabling the C-states to keep all the unused cores at a high power consumption state ( $Mean_{LU-normal-Dahu2} = 11,500mJ$ ,  $Mean_{LU-optimized-Dahu2} = 20,508mJ$ ). For medium workloads, the STD, and thus variation, is up to 100 % better for the benchmark CG, 20–150 % better for the pbzip2 application and up to 100% for STRESS-NG. We note that the optimized version consumes less energy thanks to an appropriate core pinning method.

Figures 3.14 and 3.15 also highlight that applying the guidelines does not reduce the inter-nodes variation in all the cases. This variation can be up to 30 % in modern CPU [Wang et al.]. However, taming the intra-node variation is a good strategy to identify more relevant mediums and medians, and then perform accurate comparisons between the nodes variation. Even though, using the same node is always better, to avoid the extra inter-nodes variation and thus improve the stability of measurements.

### 3.3.5 Threats to Validity

A number of issues affect the validity of our work. For most of our experiments, we used the Intel RAPL tool, which has evolved along Intel CPU generations to be known as one of the most accurate tools for modern CPU, but still adds an important overhead if we adopt a sampling at high frequency. The other fine-grained tool we used for measurements is POWERAPI. It allows to measure the energy consumption at the granularity of a process or a Cgroup by dividing the RAPL global energy over the running processes using a power model. The usage of POWERAPI adds an error margin because of the power model built over RAPL. The RAPL tool mainly measures the CPU and DRAM energy consumption. However, even running CPU/RAM intensive benchmarks would keep a degree of uncertainty concerning the hard disk and networking energy consumption. In addition, the operating system adds a layer of confusion and uncertainty.

The Intel CPU chip manufacturing process and the materials micro-heterogeneity is one of the biggest issues, as we cannot track or justify some of the energy variation between identical CPU or cores. These CPU/cores might handle frequencies and temperature differently and behave consequently. This hardware heterogeneity also makes reproduction complex and requires the usage of the same nodes on the cluster with the same OS.

### 3.3.6 Conclusion

In this part, we conducted an empirical study of controllable factors that can increase the energy variations on platforms with some of the latest CPU, and for several workloads. We provide a set of guidelines that can be implemented and tuned (through the OS GRUB for example), especially with the new data centers isolation trend and the cloud usage, even for scientific and R&D purposes. Our guidelines aim at helping the user in reducing the CPU energy variation during systems benchmarking, and conduct more stable experiments when the variation is critical. For example, when comparing the energy consumption of two versions of an algorithm or a software system, where the difference can be tight and need to be measured accurately.

Overall, our results are not intended to nullify the variability of the CPU, as some of this variability is related to the chip manufacturing process and its thermal behavior. The aim of our work is to be able to tame and mitigate this variability along controlled experiments. We studied some previously discussed aspects on some recent CPU, considered new factors that have not been deeply analyzed to the best of our knowledge, and constituted a set of guidelines to achieve the variability mitigating purpose. Some of these factors, like the

C-states usage, can reduce the energy variation up to 500 % at low workloads, while choosing the wrong cores/PU strategy can cause up to 30× more variability.

We believe that our approach can also be used to study/discover other potential variability factors, and extend our results to alternative CPU generations/brands. Most importantly, this should motivate future works on creating a better knowledge on the variability due to CPU manufacturing process and other factors.

### 3.3.7 Extension

We propose to extend the benchmarking framework suggested by the *Collaboratory on Experimental Evaluation of Software and Systems in Computer Science*<sup>7</sup> to address those limitations. Instead of only presenting the four primary aspects of their guidelines that were mentioned in state of the art 2.1.2, we propose an abstract model to describe an empirical experiment:

*context*: the hardware and the software configuration for the actual experiment, the purpose of this part is to provide extra information to help readers have a better judgement on the results and to be able reproduce the experiment while diminishing the impact of the external factor . An *orchestrator* which its job to run the experiment. The orchestrator provides three interfaces:

Workload interface : Which provides a set of functions that should be implemented by the workload and called by the each candidate in the experiment. Observer interface : provides a set of metrics that are collected by the orchestrator during the experimentation. note that some of those metrics are external, such the energy consumption of the system , execution time, execution stack ..etc .

Figure3.16 explains in detail the relation ship within each component of the Protocol. First of all, we should start with the orchestrator which is the kernel of the experiment. Most of the time this kernel should represent the constants parts of the experiment. The orchestrator is responsible for the following for the coordination between the workload and the candidate, therefore it provides an interface that is implemented by each workload. Later this interface will be provided to each candidate by the orchestrator. Like this we will remove any bias of dependency between the workload and the candidates, which will allow us to extend both parts without any change in the code. Instead of retrieving the data directly from the experiment, we suggest to use an observer to allow the extension of the metrics, this observer in general should be outside the experiment to be able to gather as many informations without impacting the the code.

---

<sup>7</sup><http://evaluate.inf.usi.ch/>

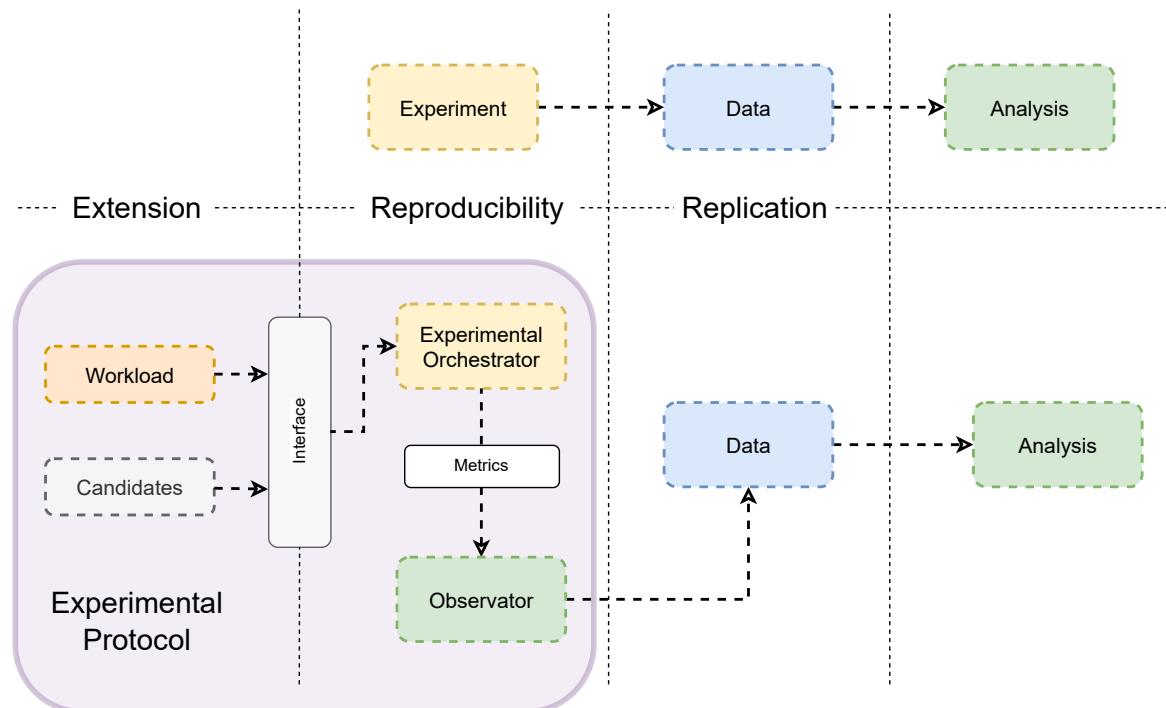


Figure 3.16: Benchmarking protocol

### 3.4 Perspectives / representativeness

By the end of this study, we have gathered enough guidelines to make the tests more reproducible, accurate and extensible. We created a set of new tests named **energy tests** which are more similar to performance tests. Thanks to the work of two interns [Mamadou and Adrien] we created a CI/CD platform to measure the energy consumption of Java projects and we could track the evolution of the this energy across different stages of the project. In the figure below we see an example of this plugin. For more details please visit the gitlab repository<sup>8</sup><sup>9</sup>.

<sup>8</sup><https://gitlab.inria.fr/mamdiall/J-Joules>

<sup>9</sup><https://gitlab.inria.fr/mamdiall/jjoules-plugin>

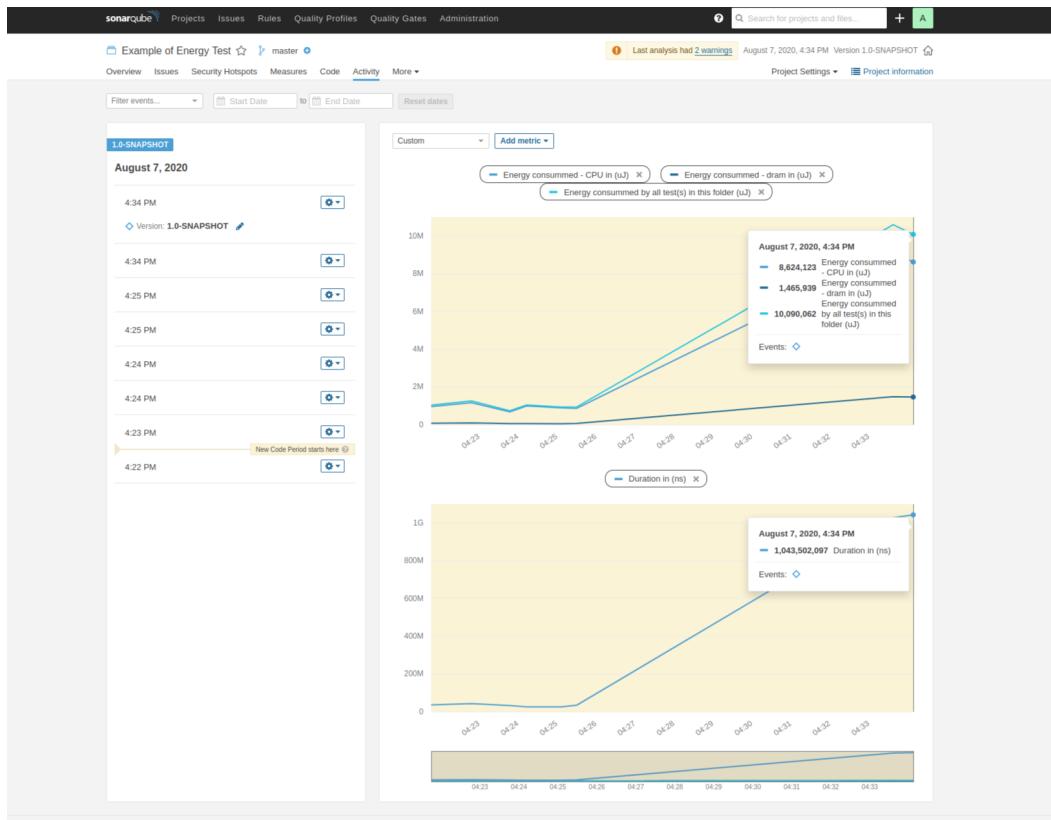


Figure 3.17: Example of the Junit Sonar Plugin



# **Chapter 4**

## **Energy footprint of programming languages**

In this chapter, we talk about how the programming language affects how much energy the software consumes. We suggest starting with general microbenchmarking and watching how each programming language performs with the CPU and memory. The main goal of this chapter is to advise developers on how to choose a programming language based on their project's needs in order to make their product use the least amount of energy possible. For such a question, no answer is evidenced. But there are some features we can take from each programming language, such as:

- performance
- community support
- scalability
- energy consumption
- memory usage

As we saw in the last chapter, one of the most important things about a test is how well it REPRESENTS the production environment. Therefore, we extend this study to include real-world use cases, with two case studies provided in the parts that follow.

## 4.1 Remote Procedure Call Frameworks

### introduction

With the emergence of cloud technologies, many protocols wanted to take the lead. Nowdays, most of the architectures are based on multi-services and microservices. And, to have higher versatility of developers multiple companies choose to be open to different programming languages. Basically, it would be more efficient if we take advantage of each programming language to satisfy a specific need. However, the challenge nowadays is to make the bridge between those platforms. We have many initiatives, such as OpenAPI, that try to create a taxonomy for RESTful APIs. Other approaches implement all the different interfaces of the protocol by themselves, such as RPC.

#### 4.1.1 Research Questions

In this section, we first explore the ease of implementation of this protocol then we will try to answer the following research questions:

**RQ 1:** How do RPC implementations consume with regards to the size of the incoming request?

**RQ 2:** How do RPC implementations consume with regards to the number of concurrent clients?

#### 4.1.2 Experimental protocol

##### measurement context

**Hardware settings** All the experiments are run on the cluster paravance of the G5K platform. This cluster is composed of 72 identical machines, each one is equipped with 2 Intel Xeon E5-2630 V3, with 128 GB of RAM. For more accuracy, our SUT (*System Under Test*) is equipped with a minimal version of Debian 9 (4.9.0 kernel version), which enforces the core processes required for the purpose of our experiment. Furthermore, we used Docker containers technology for reproducibility of the experiments and the isolation of the servers.

**Client and server environments** To limit the impact of the network on the experiments, we run both the client and the server on the same machine. However, we isolate each part on a separate socket, in order to reduce the effect that the client might have on the server and *vise versa*. To do so, for each iteration, we always run the same client on socket 0 and the

server that we want to test on socket 1. Both the server and the client use the whole socket for their experiment. In addition, all the additional services, such as the kernel and HwPC sensor, are run on socket 0. Therefore, the only process being executed in socket 1 is the server that we benchmark and monitor.

## metrics

**Energy measurements** To report on the energy consumption, we used HwPC sensor [TOCITE], which is based on Intel RAPL technology, one of the most accurate tools to measure the energy consumption of the CPU and DRAM [TOCITE]. For better accuracy, we ran the HwPC sensor with a frequency of 10 Hz, and we used the same machine for all the experiments in order to reduce the variability [TOCITE].

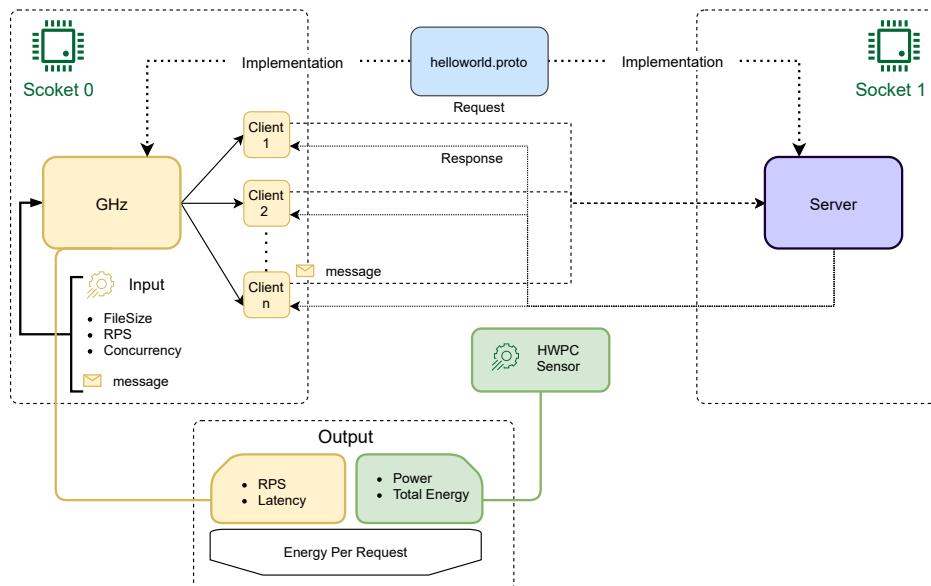


Figure 4.1: Experimental software architecture

**performances** For better accuracy and more details, We use an updated version of the open source RPC benchmarking tool, named GHZ (<https://ghz.sh/>). The modified version allows us to monitor the average power for each request from both the server and the client sides. The new version is available in the repository<sup>1</sup>.

<sup>1</sup>[https://github.com/chakib-belgaied/energy\\_ghz](https://github.com/chakib-belgaied/energy_ghz)

## workload

The purpose of the experiment is to analyse the behaviour of different GRPC implementations. therefore we have two kind of workloads

**number of clients** : this is the number of concurrent clients that we want to test. It is automatically handled with the ghz client

**payload** : the size of each request . this varries from 50 Bytes up to 10 MB.

The client consumes the protocol description which can be found if the file `helloworld.proto` to generate an implementation for the message and then forks multiple instances that send the same request to the server

## candidates

The server implementations are based on the official implementation by Google for most of the languages. Each server uses 16 cores and is limited to 512 MB of RAM. each implementation is created through a docker image, which will allow us to add new implementations easily.

## Extension

: for the sake of exteding the experement we provide a github repository <sup>2</sup> that containes the implementation of the experement. Adding **candidates** can be achieved by creating a new docker image and putting it in a new folder named after the language. As for the **workload** it can be extended easly by adding new files in the folder **payload**.

### 4.1.3 Results and findings

[RQ 1:] How do RPC implementations react to the size of the data ? The purpose of this question is to study the behaviour of the server when transferring large objects. To do so, we send 80,000 requests to the server whose size scales from 10 bytes up to 10 Megabytes, which results in 10,000 requests per size per server. To eliminate extra factors, we let the server handle the rate at which it can answer each request. However, we put a 20 seconds timeout limit for each request. Therefore, our boundary condition is only the number of requests received by the server. For this experiment, we investigate 4 observable variables :

---

<sup>2</sup>[https://github.com/chakib-belgaid/energy\\_benchmarking\\_grpc2](https://github.com/chakib-belgaid/energy_benchmarking_grpc2)

1. the average power consumption during the process: this will indicate the overall behaviour of the server in working mode for long durations,
2. the tail latency for the 99th percentile, which indicates how performant is the server,
3. the average number of requests per second, which indicates the average number of clients that the server can handle,
4. the average energy cost of a single request: unlike the first indicator, this one shows how green is the implementation taking performance into consideration.

The above figure depicts the overall behaviour of each framework based on the size of request (payload). For each framework, we can distinguish three modes, and they all depend on the payload size:

1. Stress free mode when the server has enough resources to satisfy the requests because they require a memory less than a certain threshold (depends on the language and the platform),
2. Escalation mode when the requests tend to be bigger, however the server can still manage to handle them, and here where we can see a change in the energetic and performance behaviour,
3. Broken state mode when the requests are much heavier and the server break—like 10 MB.

### **Stress free mode**

In this mode, the compiled languages tend to consume less resources (average power). JVM-based languages tend to consume more energy, especially Scala. However, we do not observe the same behaviour when it comes to efficiency. Unlike the other interpreted programming languages, PHP performances could be compared to the compiled ones, such as CPP or GO, and even better to some others, such as Swift. JVM-based languages tend to have better performances than the interpreted ones. Furthermore, OpenJDK has shown more efficiency than GraalVM []. Overall, we can have 3 groups when it comes the cost of each request:

- Energy-efficient class: C++, GO, RUST, ELIXIR, and PHP,
- Middle class: Most of the interpreted languages and VM-based ones,
- Energy-greedy class: Crystal and Scala.

### Escalation mode

In this mode, the behaviour of the server depends on the payload. We observe three behaviours:

1. Drop in performances without an increased power, such as .Net core, Java micro-naut, Crystal, and Dart. In this case, the server keeps using the same resources, and sometimes less, because it takes more time to handle the less requests. This class of languages tend to be the most energy consuming when it comes to the cost per request,
2. Increase in power without affecting the performances: such as Go, .Net. The energy consumption of a single request, is affected slightly but still increase,
3. Increase in power and drop in performances: Despite the increase of the power consumption, the server becomes slightly slower, which increases the cost of the energy cost per request. This cost is still better than the first case, which concludes that the servers in the first category are on the verge of breaking.

We can mention the case of Elixir that kept scaling despite the lack of performances compared to other compiled languages (Go, CPP).

### Broken state mode

Only four of the 25 configurations could parse the 10 MB files, and only 1 from those could achieve a 76% acceptance rate which is Elixir, the other 3 had less than 3% success rate (Rust, Swift and Dart). The rest could be divided into two categories:

- Timeout where requests took too much time that the client canceled them, in this category we find most of dynamic codes, such as OpenJDK and Kotlin,
- Size of request exceeded the maximum size when the implementation could not handle requests with large size, as observed with .Net, Go, .Net core, CPP, PHP, Scala, Nodejs, Ruby, Python.

[RQ 2:] How do RPC implementations react to the number of clients ?

### Power behaviour

Based on the heatmap, we can distinguish two modes:

- Low number of clients when the number of concurrent clients is below 100,
- Moderate to high number of clients when the number of clients exceeds 100.

**Lite mode** The benchmarked implementations can be grouped into two classes:

1. Energy-efficient frameworks where most of the framework's power consumption is around 33 Watts.
2. Energy-greedy frameworks where the average power consumption is higher than 37 Watts.

In each programming category, we observe both energy-efficient and energy-greedy behaviours. Therefore, we conclude that it depends more on the implementation of the library itself, rather than the category of the programming language. Scala and Kotlin are an excellent example to support this hypothesis, as both of them run on the same virtual machine as Java (OpenJDK 16.1). Yet, their average power is 130% higher than the Java implementation.

**Stressed mode** Although the same classes remained the same, not all the languages had the same evolution and here we can clearly observe a correlation with the category of the programming language rather than the implementation itself. We can clearly highlight that VM-based languages have a significant increase (double) in the average power consumption after they receive more than 100 concurrent clients. Except PHP, all the interpreted and compiled languages preserved their energetic behaviour. Our hypothesis points to the JIT, since it compiles the code and makes it run faster, hence stressing the CPU. A interesting behaviour has been noticed for the GraalVM: the decrease of energy consumption when increasing the number of the clients. This is related to the drop of the performances, which was probably due to the bottleneck situation where the GraalVM could not handle more than 100 clients simultaneously.

## Performance Behaviour

In this section, we study only the number of requests per seconds processed by the server without looking at its energy. We consider three observable variables:

- Satisfaction ratio: how many requests have been satisfied among the total requests,
- Request Per Seconds: The number of the requests that have been answered from the server,
- Tail Latency at 99%: one of the best metrics to evaluate the performances of a server.

**Satisfaction ratio** Most of the considered frameworks satisfy all the requests, by either reducing the number of requests per second or by increasing the processing time. However, there are some frameworks that have chosen a different approach, such as Dart or Scala, where the choice was to keep a certain limit of latency even if not all the requests are answered. Furthermore, we tend to observe this behaviour among other frameworks, such as Python or Asynchronous NodeJs, when the number of the client exceeds 800.

**RPS** Most of the servers hit their RPS limit after 5 clients and 100 clients for vm based servers, and after this the number keeps constant, which will decrease the average RPS per client. .Net server is the most performant, followed by Java and Go, while Python and Ruby are the least performant.

**Tail Latency** The increase in the number of requests per second, does not necessarily mean a lower latency. As one can notice in Table ??, until the 1000 clients, Go provides the least latency beside .Net. GraalVM provides the highest latency, on average. However, Dart tends to become slower when we increase the number of clients, until we pass the 600 simultaneous clients, and there it changes its behaviour, instead of satisfying most the requests it notify the clients directly that the server is saturated, hence a drop in satisfaction ratio, and an amelioration for the average latency.

### Energy Per Request

Now, after we made a separation between the energy and the performances, we have seen that most of the performance servers tend to be energy-greedy, so we propose to investigate this trade-off between energy and performances. To do so, we report on an average cost of a single request, in Joules. Except GraalVM when the cost of the a single request increases with when we add more clients, all the frameworks report on a constant cost, Java, .net and go are the most energy efficient, while Python and Ruby may cost up to 10x more. Therefore, we conclude that the number of clients does not impact the energy significantly. Then, we study how the payload size of the requests impact the energy consumption of the framework.

#### 4.1.4 Threads to validity

#### 4.1.5 Conclusion

## 4.2 web Frameworks

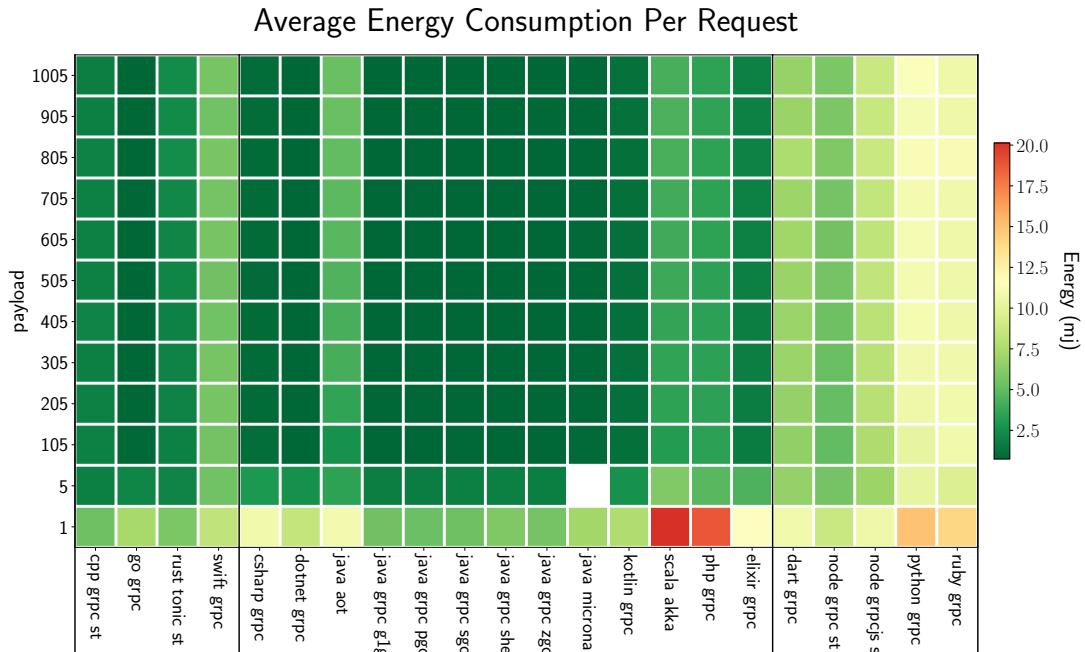


Figure 4.2: Experimental software architecture

### 4.2.1 Introduction

Nowadays, web applications are dominating online systems. From Google, to Facebook and others, web applications are widely deployed across organizations and continuously accessed by end-users, both for their personal and professional daily tasks. In practice, the development of these web applications heavily rely on a wide ecosystem of *web frameworks*, which are intended to ease and foster the development process. However, once deployed, the applications developed with such web frameworks do not exhibit the same performances, as reported by the *Web Framework Benchmarks* periodically published by the TECHEMPOWER company.<sup>3</sup> Thanks to such benchmarks, developers can take informed decisions on the most performing technology to adopt to implement their web applications. Unfortunately, one can regret that developers and benchmark providers focus mostly on popularity and performance criteria when picking a web framework, with less considerations for the resource consumption implications of their choice. This is all the more regrettable that cloud providers are more and more adopted by developers to host these web applications. While cloud providers offer a convenient elastic provision of resources to scale according to application requirements, this convenience may induce critical cost for their business.

<sup>3</sup><https://www.techempower.com/benchmarks>

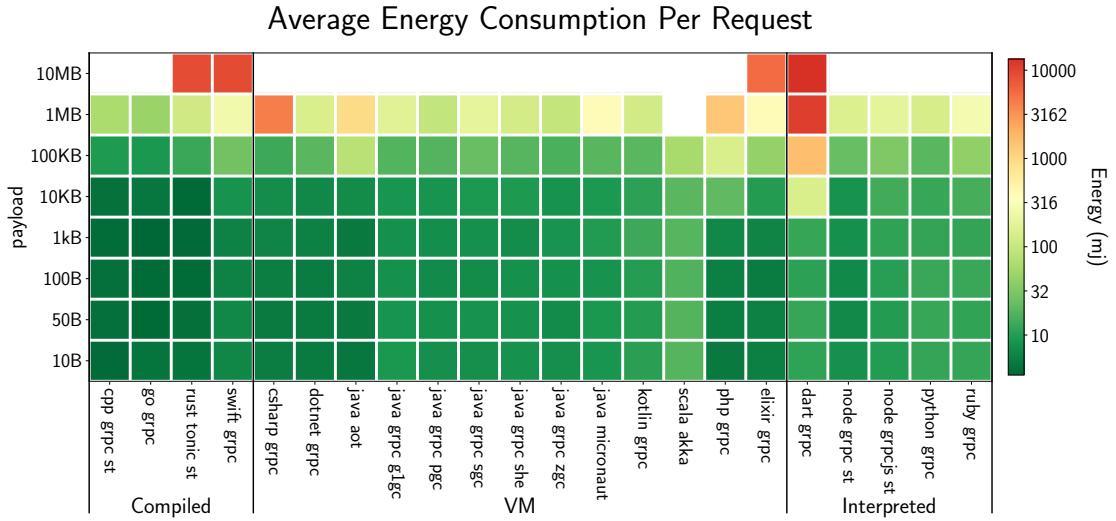


Figure 4.3: Experimental software architecture

Beyond the economical cost of web applications, one can also question the more global impact of web applications on worldwide carbon emissions. Given the tremendous success of web applications, their deployment has severely increased over last years, thus causing a rebound effect on the power consumption of server infrastructure—being hosted or supported by cloud providers. While one can challenge the relevance of features that are continuously deployed by developers to keep engaging end-users, reconciling economical and environmental concerns remains an open challenge to address.

Given this context, this paper intends to contribute to this challenge by investigating the energy footprint of web frameworks. In particular, we aim to support the developers of web applications with relevant guidelines that can help them to choose the web framework that is not only the most popular or provide the best performances, but also exhibits a low energy footprint. By minimizing the energy consumed to process user requests, with no service quality penalty, developers can reduce the operational cost of their web applications and contribute to reduce worldwide carbon emissions of ICT.

To achieve this objective, we leverage the TECHEMPOWER *Web Framework Benchmarks* to incorporate server-side energy measurements obtained from a software-defined power meter, named POWERAPI [1]. These measurements are then analyzed in depth to understand the key criteria that can amper the power consumption of web frameworks and derive

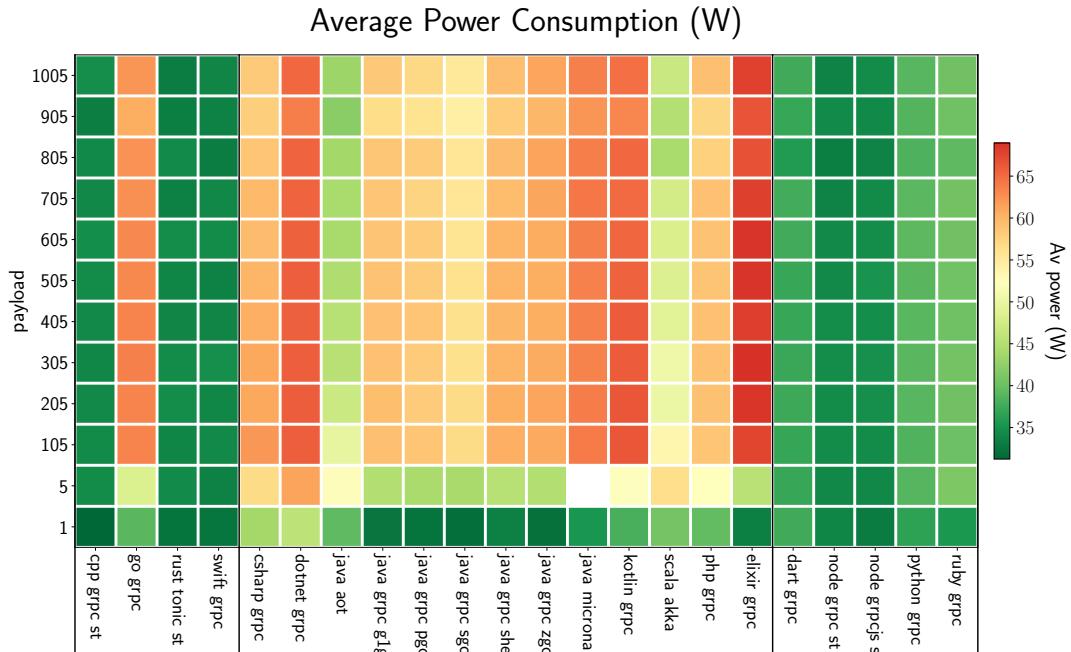


Figure 4.4: Experimental software architecture

guidelines to can help developers to pick the most energy efficient web frameworks according to their requirements.

The remainder of this paper is organized as follows.

### 4.2.2 Comparaison between web frameworks

Many studies have been conducted to compare the performance of web frameworks.

We can cite [54] where they made a comparison between two of the most famous java frameworks, Play and Spring, or the work of [16] when they compare different PHP frameworks using 6 criterions intrinsic durability, industrialized solution, technical adaptability, strategy, technical architecture, and Speed, In the previous paper we find that all those 6 criterions have their own wait when it comes to choose which framework to take for a project. In our study we want to push a 7th criterion that impacts the economic outcome of the project.

### 4.2.3 energy efficiency in software engineering

In their paper [126] the authors studied the impact of programming languages on energy, time, and Memory by using the CLBG benchmark, where they executed 10 different benchmarks [

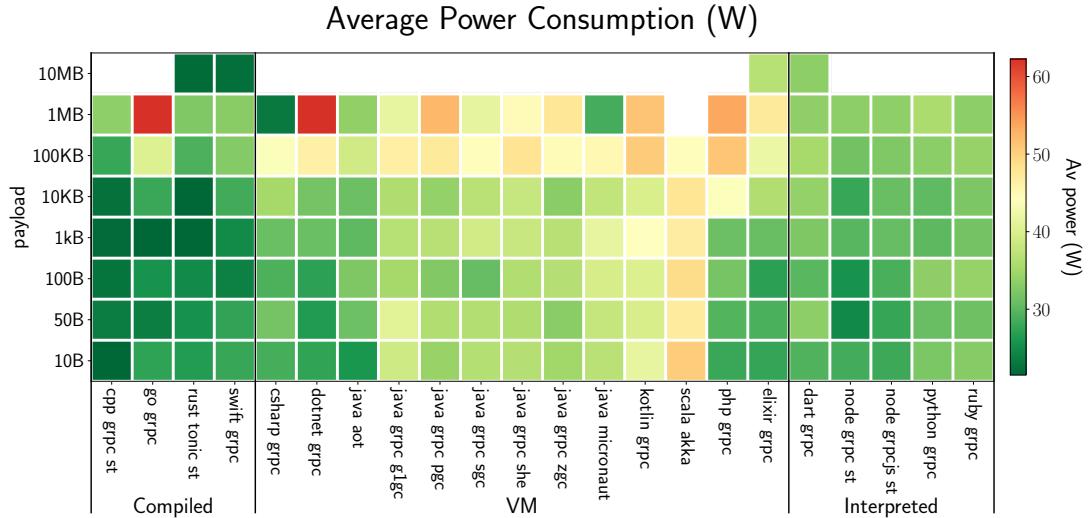


Figure 4.5: Experimental software architecture

add citation] accross 27 wel-know programming languages [ add reference] the work of the authors was an extension of the a research marled by [ add sitation[6 in the authers paper ]]. we continued their work with measuring the impact of programming languages choice in real life application instead of microbenchmark

Irene et al.[98] investigated the impact of web servers on energy when handleling web applications . they analysed 7 applications executed within 4 serveces with 38 different scenarios . the authors showed that the energy greatly depends on the web server , howverver the impact of the application may influence this energitical behaviour of the server.

In their approach they used measured the energy consumption during the integration tests and for us we measure with a simulation of a website when there is a client in another machine that requests the website, therefore we isolate the energy consumption of the server from the the client's one.

Other works have been done on the client side, as an example [127] as they concluded that theres is a variation among the different websites and the impact of the browser on this energy.

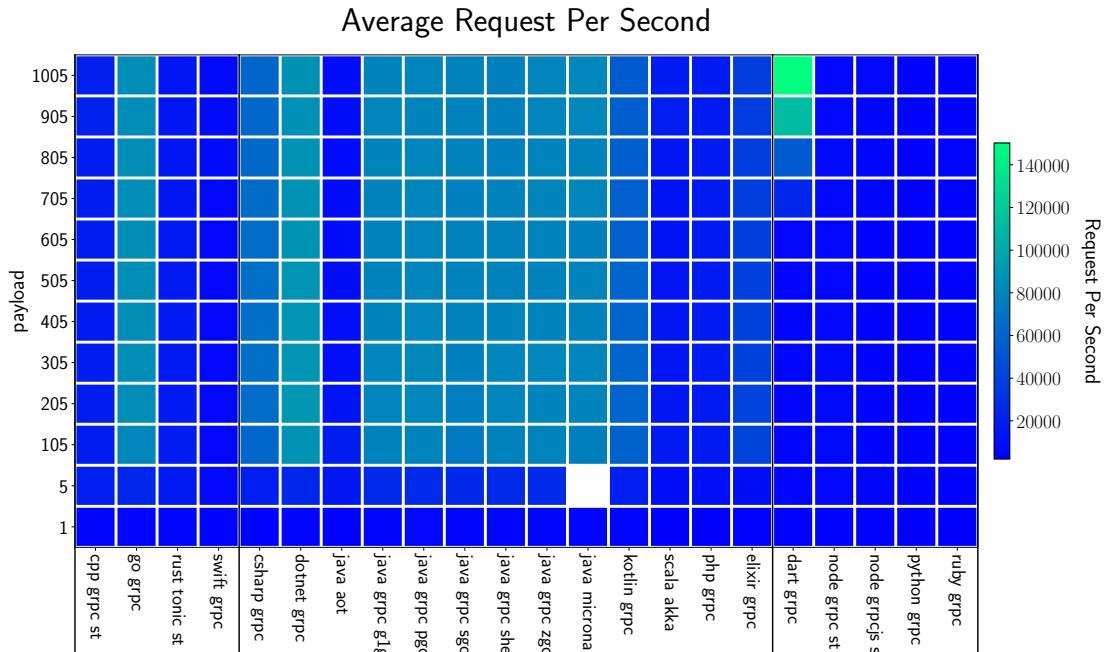


Figure 4.6: Experimental software architecture

## 4.3 Experimental Protocol

In this section, we describe the environment used during the experiments covering hardware material, experiments of the framework and the methodology.

### 4.3.1 Measurement context

The purpose of this exmeperiment is to highlight the impact of the technology stack of developping a website on the energy consumption while its execution.

Table ?? highlights the number of frameworks used in the experiment and they passed each category of tests. As we see in the table below, some of the frameworks worked on certain conditons while they failed on other tests such as nickel from rust, while nickel might be one of the greenest rust framework, it doens't work with databases. Therefore, it can be used within all the situations, but if the website doesnt interact with a database then it might be the best choice.

many reasons are behind the failure, either there were no implementation or just there were some errors while handling the request.

***TODO : we decided to skip the idle part in the validation test since it is not relevant***

Table 4.1: the number of framework passed per test

| Language    | Bb  | Query | Update | Plaintext | Fortune | Json | Total |
|-------------|-----|-------|--------|-----------|---------|------|-------|
| c           | 1   | 1     | 1      | 6         | 1       | 5    | 15    |
| c#          | 21  | 20    | 14     | 12        | 14      | 17   | 98    |
| c++         | 27  | 16    | 14     | 20        | 13      | 25   | 115   |
| cfml        | 2   | 1     | 1      | 1         | 1       | 2    | 8     |
| clojure     | 8   | 8     | 5      | 6         | 7       | 8    | 42    |
| common lisp | 2   | /     | /      | /         | /       | 2    | 4     |
| crystal     | 3   | 1     | /      | 2         | /       | 2    | 8     |
| d           | 3   | 2     | 1      | 2         | 1       | 3    | 12    |
| dart        | /   | /     | /      | 2         | /       | 2    | 4     |
| elixir      | 1   | 1     | /      | /         | /       | 1    | 3     |
| erlang      | 3   | 2     | /      | 3         | 1       | 3    | 12    |
| f#          | /   | /     | /      | 4         | 2       | 8    | 14    |
| go          | 19  | 18    | 16     | 15        | 15      | 19   | 102   |
| groovy      | 1   | /     | /      | 1         | /       | 2    | 4     |
| haskell     | 1   | 1     | 1      | 2         | 1       | 2    | 8     |
| java        | 20  | 20    | 18     | 26        | 21      | 26   | 131   |
| javascript  | 19  | 19    | 16     | 14        | 17      | 14   | 99    |
| julia       | /   | /     | /      | 1         | /       | 1    | 2     |
| kotlin      | 10  | 9     | 6      | 5         | 5       | 10   | 45    |
| lua         | 1   | 1     | /      | 1         | 1       | 2    | 6     |
| nim         | /   | /     | /      | 2         | /       | 3    | 5     |
| ocaml       | 4   | 4     | 3      | 1         | 2       | 5    | 19    |
| perl        | 2   | /     | /      | 1         | /       | 2    | 5     |
| php         | 22  | 18    | 15     | 10        | 12      | 14   | 91    |
| prolog      | /   | /     | /      | 1         | /       | 1    | 2     |
| python      | 31  | 21    | 15     | 17        | 16      | 30   | 130   |
| racket      | 1   | /     | /      | /         | /       | /    | 1     |
| ruby        | 23  | 15    | 11     | 8         | 12      | 19   | 88    |
| rust        | 8   | 7     | 6      | 9         | 8       | 10   | 48    |
| scala       | 7   | 6     | 3      | 8         | 5       | 11   | 40    |
| swift       | 2   | 2     | /      | 2         | /       | 2    | 8     |
| typescript  | 4   | 2     | 2      | 3         | 2       | 6    | 19    |
| v           | /   | /     | /      | 1         | /       | 1    | 2     |
| vala        | /   | /     | /      | 1         | /       | 2    | 3     |
| vb          | 2   | 2     | 2      | 1         | 2       | 1    | 10    |
| total       | 248 | 197   | 150    | 188       | 159     | 261  | 1203  |

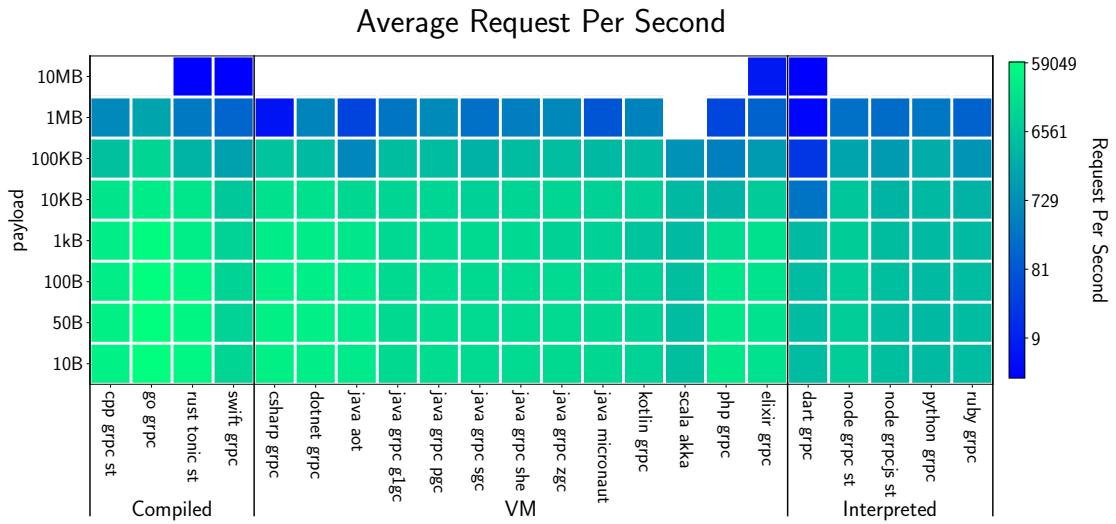


Figure 4.7: Experimental software architecture

- orchestrator : the part that is responsible for creating docker images, selecting the benchmarks and launching the tests;
- web server : or the system under test (SUT) is the machine responsible for launching the framework by means of the pre-installed powermeter;
- database server : offers the same data base that will be used by all the frameworks during the tests
- client machines : To avoid the bottleneck on the client's side, client requests are sent from another machine (one or many) that simulates hundreds of concurrent connections to the framework.
- recorder : the party responsible for collecting the power data from the SUT and the performance metrics collected by the clients ***TODO: add link to the measurement process***

The tests have been executed in machines from the cluster chetemi of the ***ADD Reference: Grid500*** plateform . ***TODO: add hardware description***

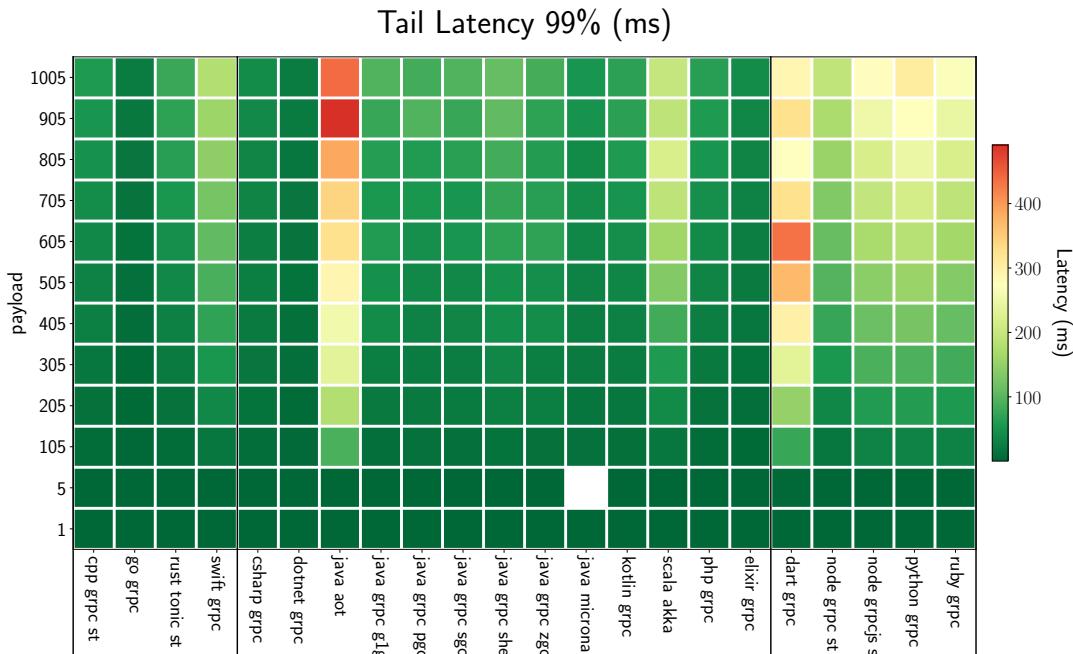


Figure 4.8: Experimental software architecture

**Note** It has been proven in cite that docker does not influence on the energy cosumption. Thus, using its containers and isolation allow to avoid any alteration of the operation system after testing one benchmark and to take advantage of its reproducibility.

### 4.3.2 workload

To mesure compare the energy consumption and performance effeciency between mutiple frameworks, each framework used to implement the samewebsite answering the same urls and requesting the same database. Then we run the same algorithim for all implelentations.

1. lunch the framework
2. wait for 20s for the warmup
3. measure the average power when the framework is in idle state
4. using multiple clients. we send the same request in simultaneously during 20s
5. increase the number of parallel request
6. measure the enrgy during this execution

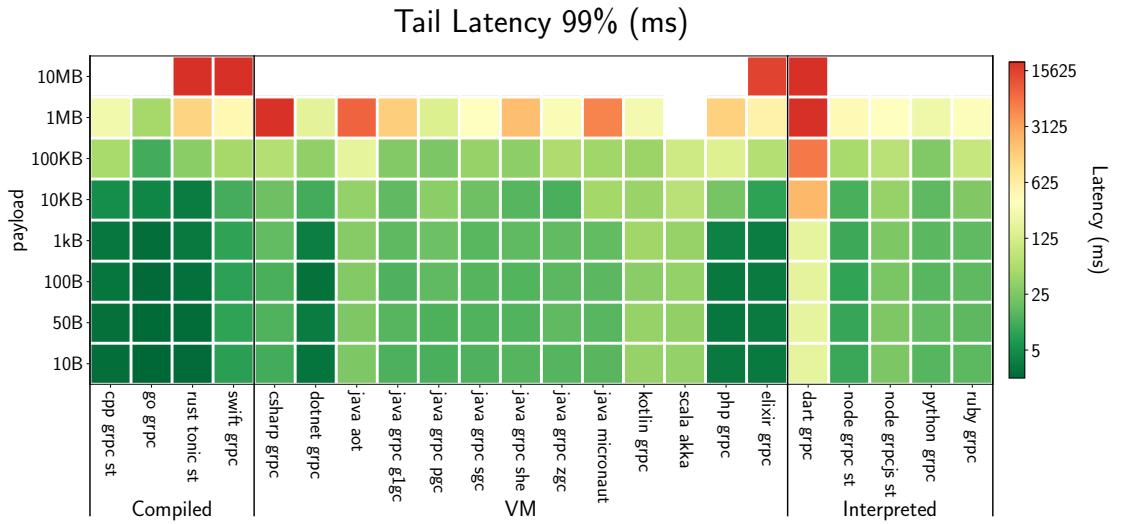


Figure 4.9: Experimental software architecture

7. change the request type

8. repeat from 3 rd step

the section will detail each type of experiments and the purpose behind it giving some examples of the expected response

### Test categories

We have 7 categories of tests :

**Idle** In this test we measure the idle energy consumption of the framework: this reflects the average energy consumption of an application during the periods when we have no clients. For example, a company website beyond working hours or a small website at night.

**Single query** During this test, each request is processed by fetching a single row from a simple database table. That row is then serialized as a JSON response.

**Multiple queries** this test aims to test the behaviour of a framework when it processes multiple entries from the database. Therefore each request is processed by fetching multiple

rows from a simple database table and serializing these rows as a JSON response. In this case we use the maximum number of clients which is 512512

**Fortunes** In this test, the framework's ORM is used to fetch all rows from a database table containing an unknown number of Unix fortune cookie messages (the table has 12 rows, but the code cannot have foreknowledge of the table's size). An additional fortune cookie message is inserted into the list at runtime and then the list is sorted by the message text. Finally, the list is delivered to the client using a server-side HTML template. The message text must be considered untrusted and properly escaped and the UTF-8 fortune messages must be rendered properly.

**Update queries** This test exercises database writes. Each request is processed by fetching multiple rows from a simple database table, converting the rows to in-memory objects, modifying one attribute of each object in memory, updating each associated row in the database individually, and then serializing the list of objects as a JSON response. same as the multiple queries we use here the maximum number of clients which is 512512

The response is analogous to the multiple-query test.

**Plain text** In this test, the framework responds with the simplest of responses: a "Hello, World" message rendered as plain text. The size of the response is kept small so that gigabit Ethernet is not the limiting factor for all implementations. HTTP pipelining is enabled and higher client-side concurrency levels are used for this test.

**JSON Serialization** In this test, each response is a JSON serialization of a freshly-instantiated object that maps the key message to the value "Hello, World!"

For each one of the above scenarios we consider different level of stress table shows the different levels for each scenario.

Table 4.2: Stress levels for each scenario

| Scenario           | type of stress                           | level 1 | level 2 | level 3 | level 4 | level 5 | level 6 | level 7 |
|--------------------|--|---------|---------|---------|---------|---------|---------|---------|
| Single query       | Number of parallel clients               | 16      | 32      | 64      | 128     | 256     | 512     | /       |
| Multiple queries   | Number of rows to read from the database | 1       | 5       | 10      | 15      | 20      | 30      | 50      |
| Update queries     | Number of rows to update in the database | 1       | 5       | 10      | 15      | 20      | 30      | 50      |
| Fortunes           | Number of parallel clients               | 16      | 32      | 64      | 128     | 256     | 512     | /       |
| JSON Serialization | Number of parallel clients               | 16      | 32      | 64      | 128     | 256     | 512     | /       |
| Plain text         | Number of parallel clients               | 256     | 1024    | 4096    | 16384   | 32384   | /       | /       |

To add extra scenarios one might implement a python class that handles the metadata of the workload, such as the query route, the query parameters and the expected results.

### 4.3.3 Metrics

We focus on comparing the energitical behaviour of different frameworks in multiple scenarios

To measure the energy consumption of those frameworks, we launch each one for a fixed duration, then all the clients send multiple requests simultaneously. We calculate the number of satisfied responses which reflects the performance of the framework, the average latency and the global energy consumed during the whole period to deduce the energy cost of each request.

#### Runtime Measurements

- energy measurement : we use **ADD Reference: powerapi**, a software powermeter to gather the runningg power of the SUT, after we project the timestamps of each experiment phase to calculate the energy consumption of the framework during this phase. Energy is an integral of power over time, so we use a numerical apporoach to estimate this energy. **TODO: add formula** after this we devide the calculated energy per number of responses during this phase we have 4 metrics :
  - Total cost of the energy during each period
  - Total number of requests
  - Average latency
  - Average energy cost per request

#### Architecture

The aim is to compare the energy consumption of different frameworks. For this we consider the framework as a blackbox and we take into account the response to the 6 previous requests using the same database. In order to isolate the energy consumption of the framework the test is run in a seperate machine with the minimum services and the powermeter. Figure 4.10 illustrates the architecture of our system

**Bias analysis** we are aware of bias analysis regarding the estimation of the total energy cost , the interference of other system processess during the execution and some external events. Thus, we run experiments multiple times and compute the average.

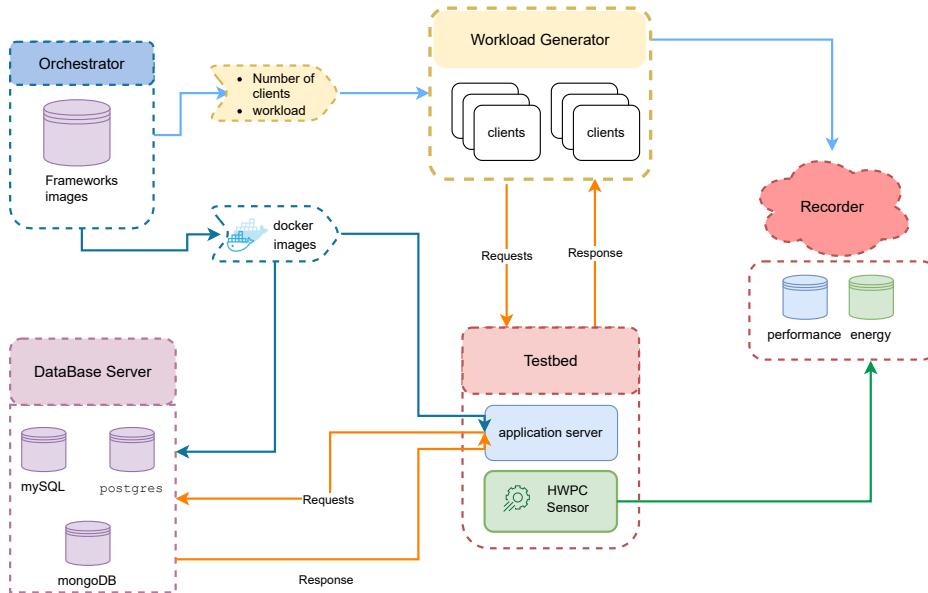


Figure 4.10: Architecture of the experiments

#### 4.3.4 extesion

To follow the guidelines that we presented in chapter 3 we provide a github repository<sup>4</sup> where one can add extra **candidates** by creating a new project using the option –new. then they have just to fill the template and provide the docker image file.

to configure the **workload** we provide the option –concurrency-levels and –duration. As for the choice of the database it is added in the docker image.

## 4.4 finding and results

Overall we had 8750 test. and all can be found in the repository<sup>5</sup>. In this section we will use the previous results to answer the following questions

- is there a dominant programming langauges when it comes to , energy consmption and latency ?
- which class of programming language is perfromring well ?
- is there a correlation between the energy consumption and the latency ?
- is there an impact of the server when it comes to change the data base ?

<sup>4</sup><https://github.com/chakib-belgaid/FrameworkBenchmarks>

<sup>5</sup><https://github.com/chakib-belgaid/frameworks-benchmarks-results>

since most of the companies use the same stack, we wont be aggregating the results since it may lead to confusion. the best example, if we compare the average energy consumption for each programming langauge, this wont reflect in reality specially when we have two frameworks on the opposit sides of the spectrum.

#### 4.4.1 overall all statistics

In order to determine which framewrok/stack is perfroming well we need to establish some general idea about the average energy consumption and latency of the frameworks. Instead of giving just the raw energy consumption of those frameworks we will provide some green factors to determine which one is ecofriednly and which one is gluton. In this part we will discuss the Average behaviour of the frameworks, highlight some tendecies and elimante the outliers. As we said in the threats to validity, being an outlier in this case doenst mean that the framework is not performing well, it just means that the framework is not performing well in the same way as the others within the context of this experiment.

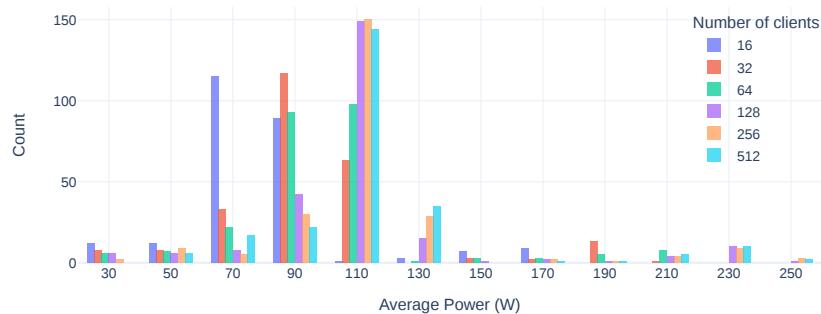


Figure 4.11: Average power consumption for the Single query test

## 4.5 Threats to validity

We are aware of the bias inducted by the implementation of a candidates, therefore we propose the framework ( see the part of extension) to allow the readers to confirm themselves any new hypothesis. regarding a new framework , an new workload a new database ..etc

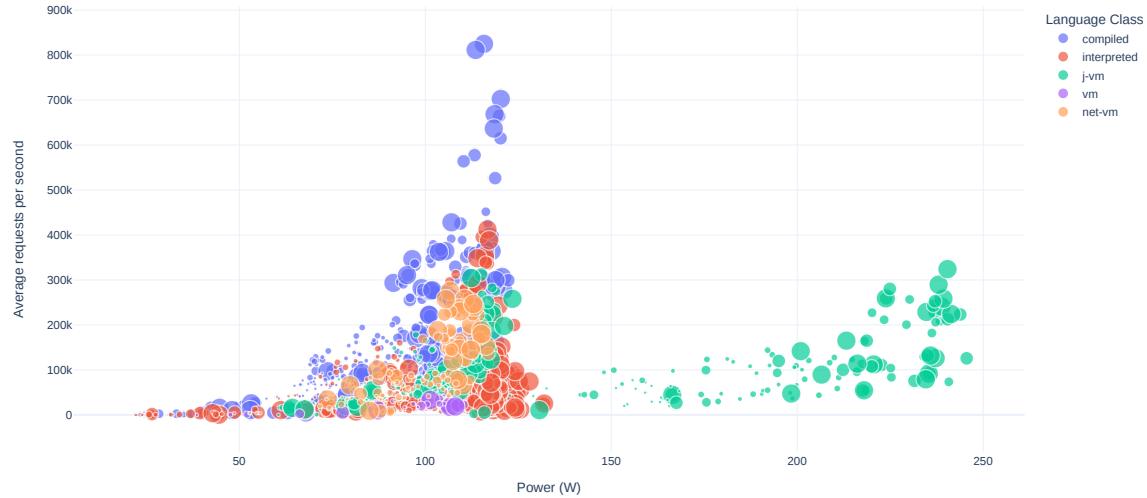


Figure 4.12: total request vs average power consumption for the Single query test ( size of circles represents the number of clients)



Figure 4.13: total request vs average power consumption for the multiple queries test ( Size of circles represents the size of the query )



Figure 4.14: total request vs average power consumption for the update queries test ( Size of circles represents the size of the query )

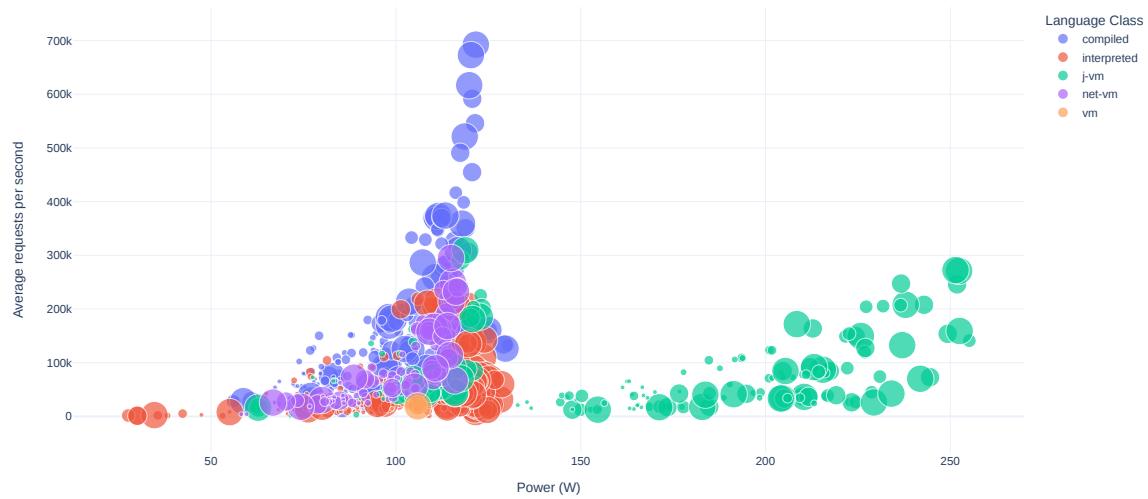


Figure 4.15: total request vs average power consumption for Fortunes test ( Size of circles represents the number of clients)

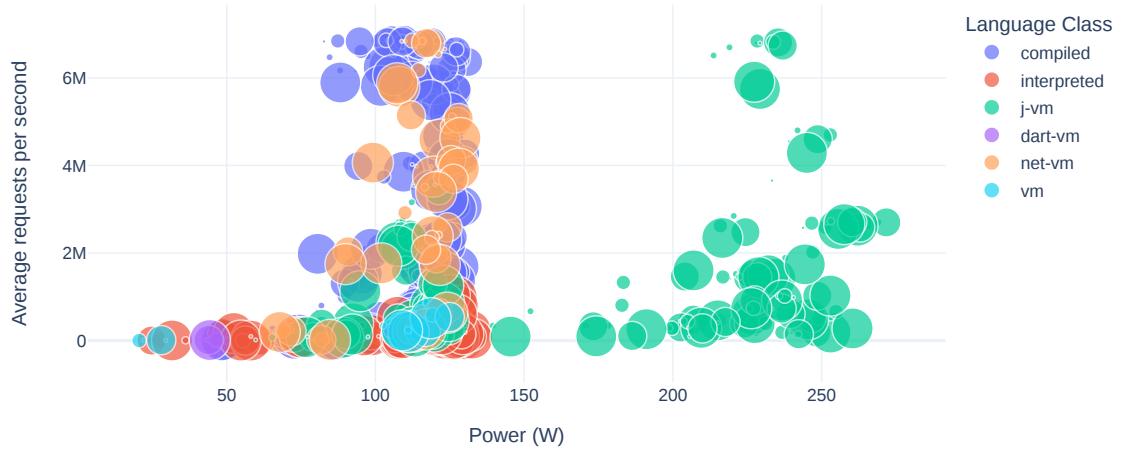


Figure 4.16: total request vs average power consumption for plainText test ( size of circles represents the number of clients)

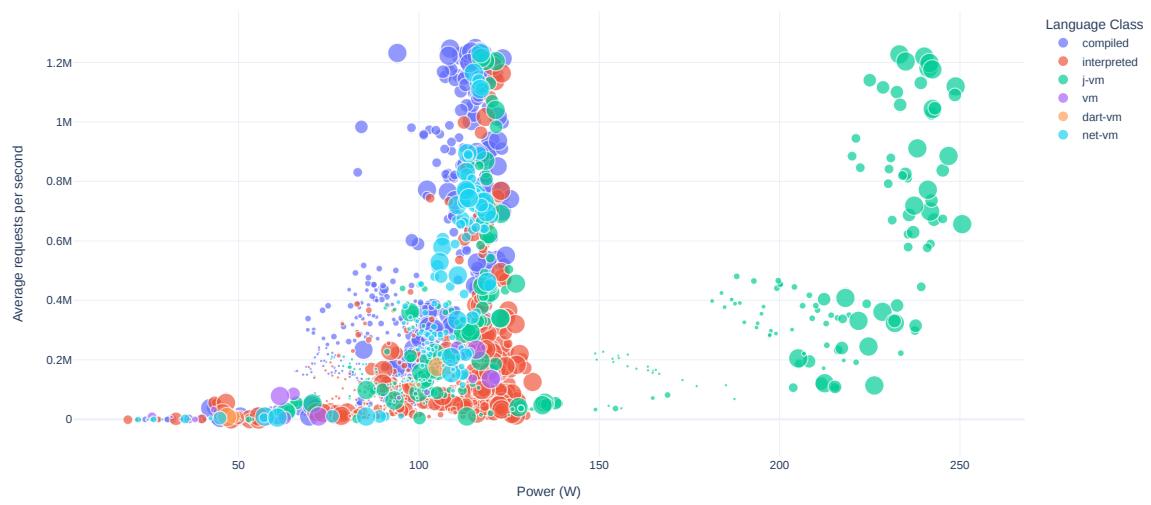


Figure 4.17: total request vs average power consumption for JSON Serialization test ( size of circles represents the number of clients)

# Chapter 5

## The energy behavior of Python

### 5.1 Introduction

Dynamic programming languages, with the exception of Perl, have surpassed compiled programming languages in terms of popularity among software system developers over the past decade (cf. Figure 5.1). However, it remains unclear whether this category of dynamic programming languages can truly compete with compiled ones in terms of power consumption.

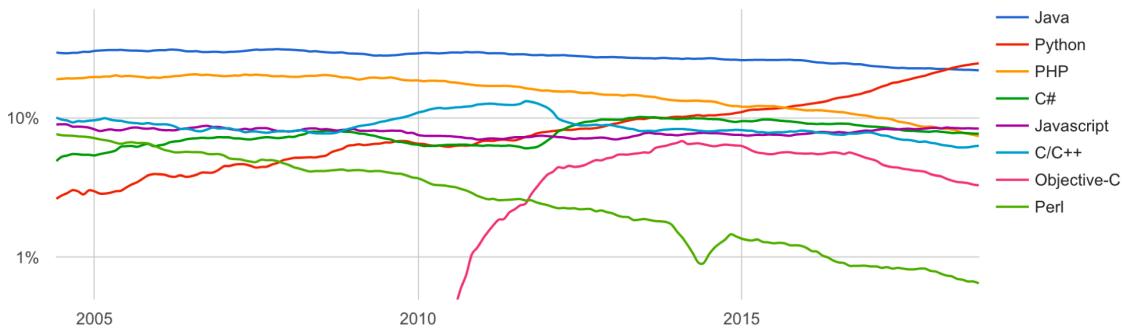


Figure 5.1: PYPL Popularity of Programming Languages [noa]

In particular, Noureddine *et al.* [112] in 2012, and then Pereira *et al.* [126] in 2017, conducted empirical power measurements on this topic, and both concluded that compiled programming languages overcome dynamic ones when it comes to power consumption. According to their experiments, an interpreted programming language like Python can impose up to a 7,588 % energy overhead compared to C [126] (cf. Figure 5.2). In this chapter, we therefore explore the oblivious optimizations that can be applied to Python legacy applications in order to reduce their energy footprint. As Python is widely adopted

by software services deployed in public and private Cloud infrastructures, we believe that our contributions will benefit to wide diversity of legacy systems and not only favorably contribute to reduce the carbon emissions of ICT, but also reduce their cloud invoice for the resources consumed by these services. More specifically, this chapter focuses on runtime optimizations that can be adopted by developers to leverage the power consumption of Python applications. We start by studying the impact of some of programmers choice such as the type of data structures or loops, on the global energy consumption of the execution code. Then we discuss some other factors such as level of concurrency etc. later we will talk about another non intrusive ways to optimize the energy consumption of this code. One kind of those optimizations includes alternative interpreters and some libraries that are dedicated to optimize the code without changing its structures such as *ahead-of-time* (AOT) compilation and *just-in-time* (JIT) libraries that are maintained by the community.

In particular, Noureddine in 2012 and Pereira in 2017 conducted empirical power measurements on this topic, and both concluded that compiled programming languages consume less power than dynamic ones. They found that a programming language that is interpreted, like Python, can use up to 7,584 times more energy than C. As a result, in this chapter, we will look at the obvious optimizations that may be done to Python legacy programs to lower their energy footprint. Since Python is used by many software services in both public and private cloud infrastructures, we think that our contributions will help a wide range of legacy systems by reducing ICT carbon emissions and lowering cloud bills for the resources used by these services. This chapter focuses on runtime improvements that developers can employ to reduce the power consumption of Python applications. We start by looking at how the choices made by programmers, like the type of data structure or loop, affect how much energy the code as a whole uses. Then we discuss additional topics, such as the level of concurrency, and so on. We will discuss another non-intrusive technique to optimize this code's energy consumption. Alternative interpreters and libraries dedicated to optimizing code without affecting its structures, such as ahead-of-time (AOT) compilation and just-in-time (JIT) libraries maintained by the community, are examples of these optimizations.

## 5.2 Motivation

### 5.2.1 python popularity

Nowdays, Python seems to attract a large community of developers interested in data analysis, web development, system administration, machine learning—according to a survey conducted

in 2018 by JetBrains<sup>1</sup> one can fear that the wide adoption of dynamic programming languages, like Python, in production may critically hamper the power consumption of ICT.

As the popularity of such dynamic programming languages partly builds on the wealth and the diversity of their ecosystem (*e.g.*, the NumPY, SciKit Learn, and Panda libraries in Python), one cannot reasonably expect that developers will likely move to an alternative programming language mostly for energy considerations. Rather, we believe that a better option consists in leveraging the strength of this rich ecosystem to promote energy-efficient solutions in order to improve the power consumption of legacy software systems.

### 5.2.2 python gluttony

the simplicity, flexibility and the clarity of Python code led this programming language to a huge success. Therefore, a larger community and a wide range of support and libraries that allowed it to touch several fields like data analyses, machine learning, natural language processing, web development, astrophysics etc.

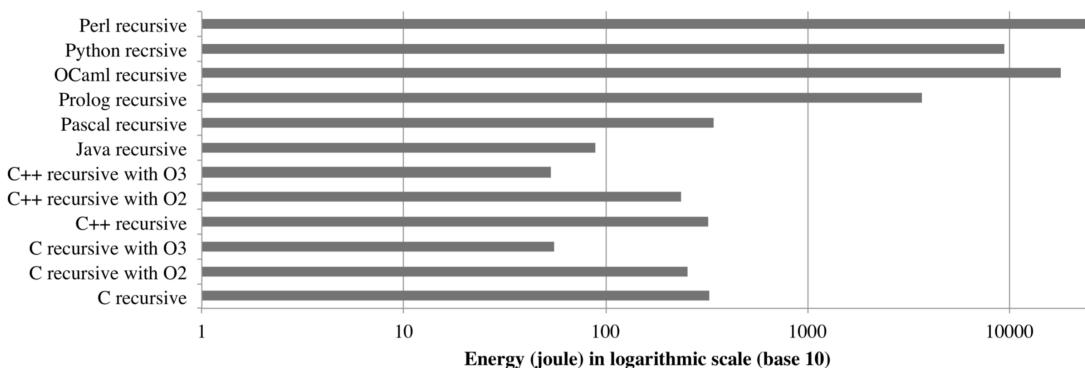


Figure 5.2: Energy consumption of a recursive implementation of Tower of Hanoi program in different languages [112]

However, and according to [128] and [112]. Python tends to be one more energy hungry . In figure 5.2, python consumes 30 times more than C or C++. The test was done on an implementation of hanoi test<sup>2</sup> 30 disks.

Python consumes a lot of energy mainly because it is slow in execution. Its Flexibility and simplicity caused it to drop off in performances, because Python gains its flexibility from being a dynamic language, therefore it needs an interpreter to execute its programs, which makes them much slower compared to the other ones that are written in compiled programming languages such as C and C++ or semi-compiled languages like Java.

<sup>1</sup><https://www.jetbrains.com/research/python-developers-survey-2018/>

<sup>2</sup>[https://en.wikipedia.org/wiki/Tower\\_of\\_Hanoi](https://en.wikipedia.org/wiki/Tower_of_Hanoi)

As shown in Table 5.1, one can see that in the most of the test cases Python takes more time to execute -the only case that he wasn't the last one was in the benchmark regex-redux where he beaten Go-, and in some cases the gab was huge such as in the n-body test where python took around 100 times more than C++.

|                    | C    | C++   | Java | python | Go    |
|--------------------|------|-------|------|--------|-------|
| pidigits           | 1.75 | 1.89  | 3.13 | 3.51   | 2.04  |
| reverse-complement | 1.75 | 2.95  | 3.31 | 16.76  | 4.00  |
| regex-redux        | 1.45 | 1.66  | 10.5 | 15.56  | 28.69 |
| k-nucleotide       | 5.07 | 3.66  | 8.66 | 79.79  | 15.36 |
| binary-trees       | 2.55 | 2.63  | 8.28 | 92.72  | 28.90 |
| fasta              | 1.32 | 1.33  | 2.32 | 62.88  | 2.07  |
| Fannkuch-redux     | 8.72 | 10.62 | 17.9 | 547.23 | 17.82 |
| n-body             | 9.17 | 8.24  | 22.0 | 882.00 | 21.00 |
| spectral-norm      | 1.99 | 1.98  | 4.27 | 193.86 | 3.95  |
| Mandelbrot         | 1.64 | 1.51  | 6.96 | 279.68 | 5.47  |

Table 5.1: Comparison of the execution time between different programming languages using the computer language benchmarks game [? ]

### 5.2.3 use cases

to reduce the energy consumption of python we started by targeting the main usage of this programming language, which is revealed to be data sciences and web development. Figure 5.3 illustrate a study made by the jetbrain company on python developers <sup>3</sup>. In this survey, multiple answers were accepted.

### Goal

To reduce the energy consumption of python programs, we decided to start with studying its behaviour during the most common use cases. After this we will target the structures of the language itself in the hope to find some generic guidelines for more generic purpose as ? did in their paper [? ]. After this we will measure the energy consumption of different python implementation for the goal of finding a non intrusive way to enhance this energy efficiency.

---

<sup>3</sup><https://www.jetbrains.com/lp/python-developers-survey-2020/><sup>4</sup>,

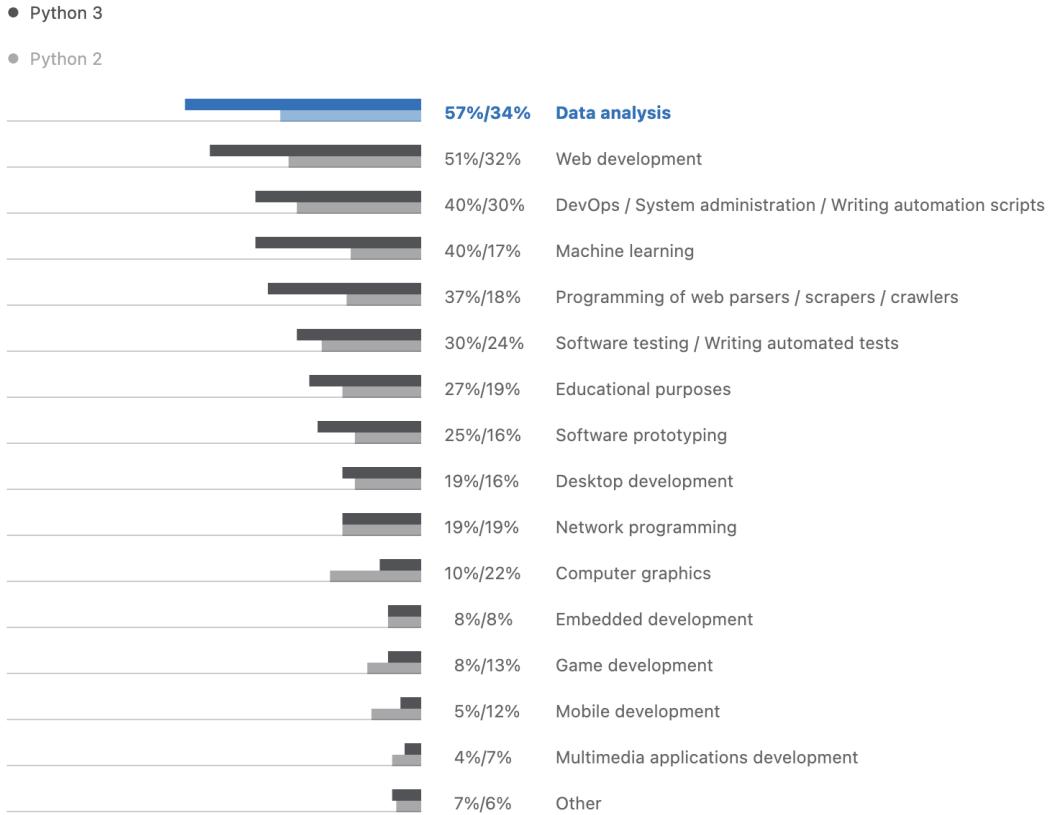


Figure 5.3: use cases of python

**Energy measurement** As we know, the energy of a program is the integrale of its power overtime. For us ower case, we used Intel *Running Power Average Limit* (RAPL) [79] to collect the power samples of the running tests,

We used used POWERAPI [37], to report Data collected by intel Rapl and send it into another machine that we call computing machine. then we calculate the Energy using the the trapezoidal rule.

#### 5.4

$$E = \int_b^a P(t)dt \simeq \sum_{k=1}^n \frac{P(t_{k-1}) + P(t_k)}{2} \quad (5.1)$$

Figure 5.4

figure 5.6 shows the architecture of our testing model.

The reason of separation between data collection and energy calculation is to minimise any interference with the test so our sensor is a light c program running inside a docker container.

## 5.3 Workload

: for this chapter we are considering 4 separated, yet related studies . First we are going to see the energy behaviour of python within two study cases. Web servers and Machine learning. later we will dig deeper into the energy consumption of python basic structures where finally we will conclude with the impact of python interpreter on the energy consumption. Due to the lack of support for most of non conventional python interpreters, our main focus was only on micro benchmarks. Except pypy most of the python implementations don't support extra python libraries, Despite that most of the cases those extra implementations were made to optimize a specific library such as numba with numpy, or intelpython with machine learning algorithms.

**preliminary studies** for the first studies we used only the official version of python. because the goal was mainly to highlight the impact of the structure of code on the energy consumption. One main inconvenient of the previous method to reduce the energy consumption, is the hard work that should be done in order to alter the existing code base in order to reduce the energy consumption. To avoid such hustle we tried to find a non intrusive way to make the python code more ecofriendly without changing its structure. One aspect of python is the fact that it is an interpreted language which led many works to create their own implementation of the interpreter to enhance one or many aspect of the python code. in the following section we will discuss the impact of those implementations on the energy consumption of python programs, and in which case, one should use a non conventional interpreter to save the energy consumption of their program.

To do so, we gathered a list of interpreters, transpilers and some optimization libraries. the following list, presents the most famous ones .

1. **CPython:**<sup>5</sup> a Python interpreter written in C programming language. It is the reference interpreter of Python. CPython compiles the source code into a bytecode and then interprets it. The CPython project still supports both versions of Python 2 and 3;

---

<sup>5</sup><https://www.python.org/><sup>6</sup>,

2. **PyPy:**<sup>7</sup> An alternative implementation of the Python interpreter. It is written using *RPython* in order to use the JIT. It compiles the most used portions of the Python code into a binary code for better performance. To benefit from these optimizations, the program has to be executed for at least for few seconds so the JIT has enough time to warm up, the JIT optimization will be applied only the code written by the programmer and not external libraries;
3. **Cython:**<sup>8</sup> a static compiler for Python. It translates the Python code into a C code, and then compiles it using a C compiler. It also support(s) an extended version of the Python language that allows programmers to call *C functions*, declare *C types* and use static types which will help the translation of Python objects into native types, such as integers, float, which often means a better performances, since native C libraries are almost all the time faster than the python written once [126].
4. **Intel Python:**<sup>9</sup> A customized interpreter developed by Intel in order to enhance performances of Python programs. It is dedicated to data sciences, high-Performance computing. It uses some Intel kernel libraries, such as Math Kernel Library (Intel MKL<sup>10</sup>) and data analytics acceleration library (Intel DAAL<sup>11</sup>). It supports both versions of Python;
5. **Active Python:**<sup>12</sup> developed by the ActiveState company, it provides a standardized Python distribution to ensure license compliance, security, compatibility and performance. Therefore, ActivePython has its own built-in packages (more than 300 packages) and supports both versions of Python;
6. **IronPython:**<sup>13</sup> A .Net-based Python interpretation platform written in C# in order to be used over the .Net vm or mono, it benefits from all the optimizations of .Net virtual machine, such as the JIT and garbage collector mechanisms.
7. **GraalPython:**<sup>14</sup> A Python interpreter that is based on GraalVM<sup>15</sup> (a universal virtual machine developed by oracle for running applications written in different program-

---

<sup>7</sup><http://pypy.org>

<sup>8</sup><https://github.com/cython/cython>

<sup>9</sup><https://software.intel.com/en-us/distribution-for-python>

<sup>10</sup><https://software.intel.com/en-us/mkl>

<sup>11</sup><https://software.intel.com/en-us/intel-daal>

<sup>12</sup><https://www.activestate.com/products/activepython/>

<sup>13</sup><https://ironpython.net>

<sup>14</sup><https://github.com/graalvm/graalpython/>

<sup>15</sup><https://www.graalvm.org/docs/why-graal/>

ming languages). For the time being, it only supports Python 3 and it is still in the experimental stage;

8. **Jython:**<sup>16</sup> Implementation of Python programming language written in Java for the *Java virtual machine* (JVM). Similar to IronPython and GraalPython, it leverages the optimization mechanisms provided by the JVM to enhance the Python programs;
9. **MicroPython:**<sup>17</sup> a lightweight Python version dedicated to embedded systems and micro-controllers;
10. **Nuitka:**<sup>18</sup> a Python compiler written in Python that generates a binary executable from Python code. It translates the Python code into a C program that is then compiled into a binary executable;
11. **Numba:**<sup>19</sup> a library that includes JIT compiler in order to enhance the performances of Python functions using the industry-standard LLVM compiler library;
12. **Shedskin:**<sup>20</sup> a static transpiler that translates implicitly statically typed python into C++ code.
13. **Hope** [6]: a Python library that aims to introduce JIT compiler into the Python code;
14. **Parakeet** [? ]: a runtime accelerator for an array-oriented subset of Python;
15. **Stackless Python:**<sup>21</sup> an interpreter that focus on enhancing multi-threading programming.
16. **Pyjion:**<sup>22</sup> JIT API for CPython, same purpose as Parakeet and Hope.
17. **Pyston:**<sup>23</sup> performance-oriented Python implementation built using LLVM and modern JIT techniques. the project is funded by dropbox;
18. **Grumpy:**<sup>24</sup> a source-to-source transpiler that translates the Python code into a Go code that will be compiled to a binary executable. It also offers an interpreter called

---

<sup>16</sup><https://jython.github.io>

<sup>17</sup><http://micropython.org>

<sup>18</sup><http://nuitka.net/pages/overview.html>

<sup>19</sup><https://numba.pydata.org>

<sup>20</sup><https://github.com/shedskin/shedskin>

<sup>21</sup><https://github.com/stackless-dev/stackless/wiki>

<sup>22</sup><https://github.com/microsoft/pyjion>

<sup>23</sup><https://blog.pyston.org>

<sup>24</sup><https://github.com/google/grumpy>

*grumprun* which can directly execute the Python code. Unfortunately, we cannot use it because the project is already outdated (last commit is in 2017) and it has a lot of limitation in term of supporting the Python language, such as some built-in functions and standard libraries;

19. **Psyco**:<sup>25</sup> a JIT compiler for Python;
20. **Unladen Swallow**:<sup>26</sup> an attempt to (use) LLVM as JIT compiler for CPython.

### 5.3.1 Runtime Classification

Before futher proceeding with the list of candidate runtimes for Python applications, we propose a classification according to several criterions:

**Type** refers to the category of runtime infrastructure that supports the execution of a Python application. In particular, we consider 3 types of environments: *Interpreter*, *Compiler* and *Library*. *Interpreter* refers to the class of environment that does not require any preprocessing of Python source code. *Compiler* introduces a compilation phase prior to the execution of the application. Finally, *Library* induces some modification of the source code.

**Runtime** refers to the technology supporting the execution of a Python application. This technology can refer to the programming language used to program the interpreter, the target language for a compiler or a library.

**JIT optimisation** refers to the support of *just-in-time* compilation in the runtime infrastructure supporting the execution of the application.

**GC optimisation** refers to the support of *garbage collection* in the runtime infrastructure supporting the execution of the application.

**Python version(s)** refers to the list of Python source code versions supported by the runtime environment.

We should explain the classification of these runtimes

There are other implementations that we didn't considerate because either the project aborted many years ago or it has a very limited support for python features. After the collection of those implementation we filtered them. in order to keep only the versions

---

<sup>25</sup><http://psyco.sourceforge.net>

<sup>26</sup><https://unladen-swallow.readthedocs.io/en/latest/>

Table 5.2: Classification of Python implementations

| <b>Name</b>      | <b>Type</b> | <b>Runtime</b> | <b>Optimisations</b> |           | <b>Python</b> |          |
|------------------|-------------|----------------|----------------------|-----------|---------------|----------|
|                  |             |                | <b>JIT</b>           | <b>GC</b> | <b>2</b>      | <b>3</b> |
| CPython          | Interpreter | C              | –                    | –         | ✓             | ✓        |
| Intel Python     | Interpreter | C              | –                    | –         | ✓             | ✓        |
| ActivePython     | Interpreter | C              | –                    | ✓         | ✓             | ✓        |
| PyPy             | Interpreter | Python         | ✓                    | ✓         | ✓             | ✓        |
| IronPython       | Interpreter | .Net           | ✓                    | ✓         | ✓             | ✓        |
| GraalPython      | Interpreter | GraalVM        | ✓                    | ✓         | –             | ✓        |
| Jython           | Interpreter | Java           | ✓                    | ✓         | ✓             | –        |
| Stackless Python | Interpreter | python         | –                    | –         | ✓             | –        |
| MicroPython      | interpreter | c              | –                    | –         | –             | ✓        |
| Pyston           | interpreter | LLVM           | ✓                    | –         | ✓             | –        |
| Unladen Swallow  | Interpreter | LLVM           | ✓                    | –         | ✓             | –        |
| Cython           | Compiler    | C              | –                    | –         | ✓             | ✓        |
| Nuitka           | Compiler    | C              | –                    | –         | ✓             | ✓        |
| Shedskin         | Compiler    | C++            | –                    | –         | ✓             | ✓        |
| Grumpy           | Compiler    | Go             | –                    | –         | ✓             | ✓        |
| Numba            | Library     | C              | ✓                    | –         | ✓             | ✓        |
| Hope             | Library     | python         | ✓                    | –         | ✓             | ✓        |
| Psyco            | Library     | python         | ✓                    | –         | ✓             | ✓        |
| Pyjion           | Library     | .NET Core      | ✓                    | –         | ✓             | ✓        |
| Parakeet         | library     | C              | –                    | –         | ✓             | –        |

Table 5.3: Classification of Python implementations

| Version  | Interpreter   | Transpiler/Compiler            | Jit library                                    |
|----------|---|--------------------------------|--|
| Python 2 | Cpython2<br>Pypy2<br>Pyton<br>Ironpython<br>Jython<br>Micropython<br>Pysec<br>StacklessPython | Cython2<br>Shesdskin<br>Grumpy | Numba 2<br>Hope<br>Parakeet<br>Psyco<br>Pyjion |
| Python 3 | Cpython3<br>Pypy3<br>GraalPython  | Nuitka                         | Numba3   |

that are still maintained and support most of python features. and we classified them into 3 categories depending of their integration with the python code. In the 5.3 we describe the implementations that we kept and the version of each implementation and its category.

## 5.4 experimental protocole

As we have discussed in the previous chapter 3. instead of running the tests, the idea was to design a system that allows practitioners to reproduce and extends our tests. and then we use the same system to run answer some of researchs question.

### 5.4.1 measurement context

**Hardware settings** all our tests have been executed in a Dell PowerEdge C6420 server machine. A summary of its hardware is listed in table 5.4. The machine is equipped with a minimal version of Debian 9 (4.9.0 kernel version) where we install Docker (version 18.09.5).

**software settings** For the sake of reproducibility, each experiment runs within a Docker container. for each test we create a docker image.

### 5.4.2 Metrics

Our focus will be mainly on CPU energy consumption because it is ten folds more than the DRAM one, since it is finite job benchmarking, time is highly correlated within the energy,

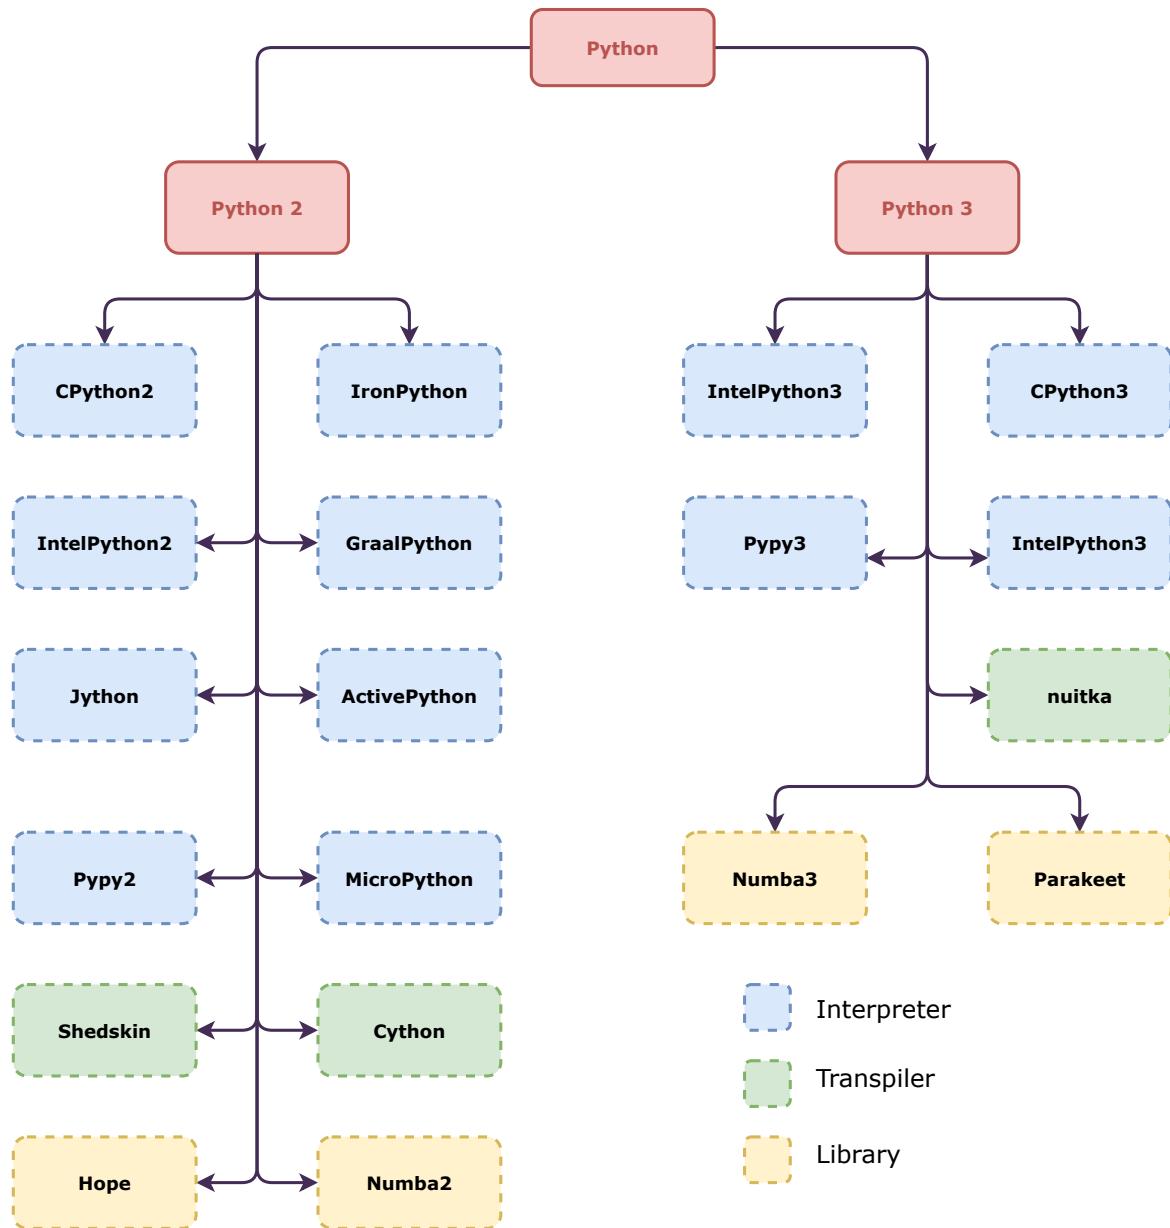


Figure 5.5: Python interpreters

|         |   |
|---------|---|
| CPU     | Intel Xeon Gold 6130 (Skylake, 2.10GHz, 2 CPUs/node, 16 cores/CPU)  |
| Memory  | 192 GiB   |
| Storage | 240 GB SSD SATA Samsung MZ7KM240HMHQ0D3<br>480 GB SSD SATA Samsung MZ7KM480HMHQ0D3<br>4.0 TB HDD SATA Seagate   |
| Network | eth0/enp24s0f0, Ethernet, configured rate: 10 Gbps, model: Intel Ethernet Controller X710 for<br>ib0, Omni-Path, configured rate: 100 Gbps, model: Intel Omni-Path HFI Silicon 100 Series [d] |

Table 5.4: Testing Machine Configuration

and it will be only useful to explain certain energytical behaviour so we wont put a lot of focus on this metric.

### 5.4.3 tests preparation

To study the behaviour of the python implementation regarding the energy consumption, we have to focus on the effect of the implementation and mitigate the maximum any side effects such as the organisation of the code or any extra consumption due to the operating system or tier libraries. Therefore, for each test we took the implementation written in python2 as a reference and tried to use it in other implementations as it is. If it is not supported by python3, we transformed the code using the officiel library *2to3*<sup>27</sup>. In the case of the libraries that use *JIT* adding a decorator to the function that we want to optimize was enough, if there are other changes we assume that they alter the original code which is against our purpose.

Each test is implemented in a Docker container for the several reasons

- Isolation: each container has only the test program implemented with a single python runtime to remove any interference between different implementations.
- Deployment: to use the testing machine without extra configurations that may alter the behaviour of the os toward the enrgy consumtum
- Reproducibility: One of the most frequent benchmark crimes [140] in research is the lack of Reproducibility, by using Docker we ensure that each test has an Image that will be accessible in public.

Despite the presence of the official docker images for the most of the runtimes, we prefered to build our own using the same reference image in order to remove any bias due to the Os used in the offical image. We used ArchLinux with the kernel version 4.9.184 as a base image.

---

<sup>27</sup><https://docs.python.org/3.7/library/2to3.html>

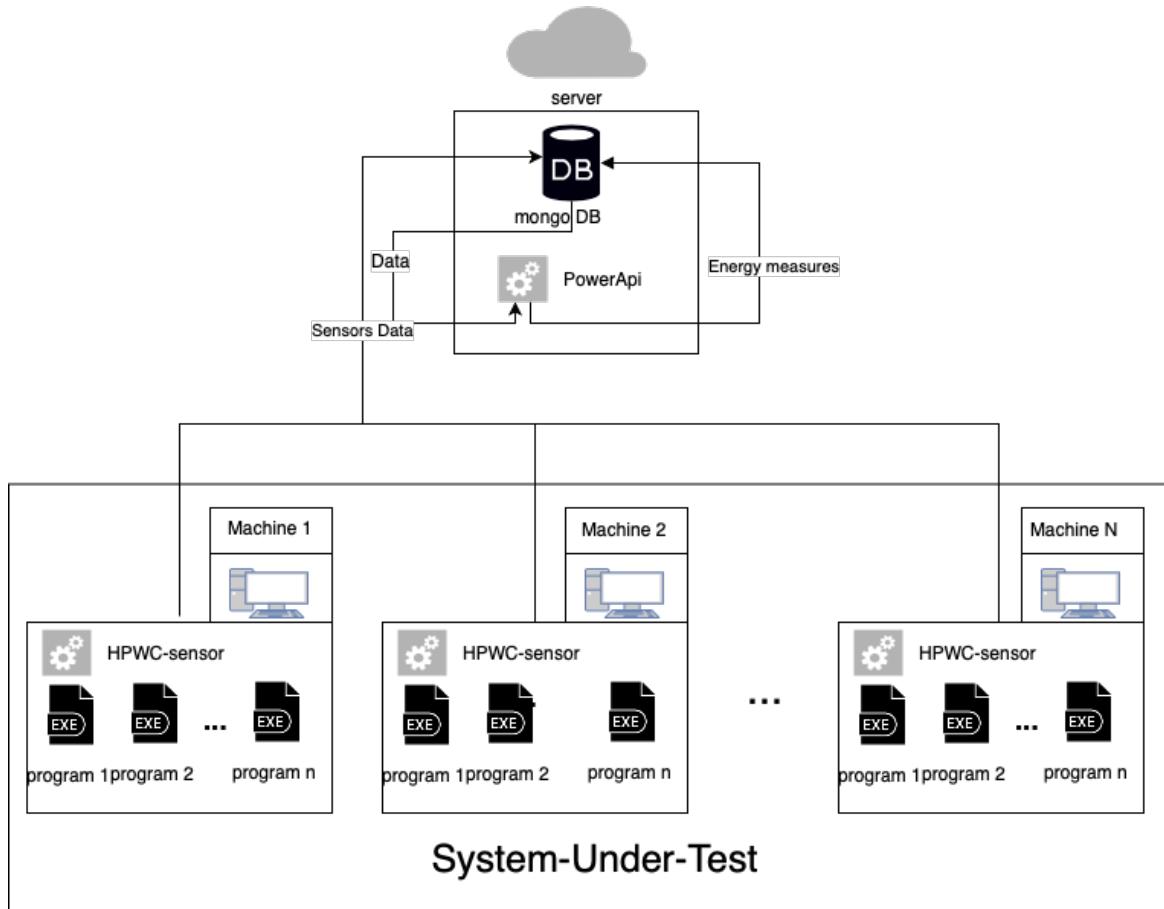


Figure 5.6: powerapi architecture

#### 5.4.4 Extension

As we have done with the previous chapters, we provide a tool that allows to extend the tests with new workloads and new candidates. In the repository<sup>28</sup>, we have a tool that allows to generate new workloads and new candidates. The script `generator.py` allows to create new benchmarks by implementing a python code within different interpreters. Then it generates `launcher-benchmark.sh` that can be used directly to run the experiment. Furthermore all the successful implementations are stored in separate directory and the that couldn't work (mostly because of compatibility issues) stored in a recap file called `benchmarkTest.md`. where `benchmark` is the name of the new workload; To add extra **candidates** one should add a base docker file that contains the new implementation and if there should be extra manipulation that should be added to the workload files ,such as adding new decorator or

<sup>28</sup><https://github.com/chakib-belgaid/python-implementations>

changing some parameters, then they should be added as an extra function in the script generator.py. Finally they should be included in the python candidates.

## 5.5 Results and finding

### web development

first we wanted to test the energy consumption of python using on djagon,one of the most popular web frameworks. therefore we create a simple website where we try to analyse the cost of a single request using different mechanisms to fetch the data from the database. the idea behind this use case is to see wether the choice of the database and the orm ( object relational mapper) impacts the energy consumption and the performances of the website.

we considered using two different databases postgresSQL and SQLite3 that contains the same data, and three different ways to fetch the data.

1. the naive version: which relies only on the ORM to get the data
2. Prefetch : basically we just prefetch the data before we request it
3. optimized : and here we optimize our request on the SQL level without passing by the ORM

As one can see in figure 5.7, different choices of requesting the data have a huge impact on the energy consumption. as the naive version can consume up to 10x more energy than the optimized one. In the other hand the choice of the data base didnt have huge impact on the total energy despite their different behaviour regarding the execution time and the average power. This can be useful to help develeppers make a choice regarding which data base they can use based on the number of the expected requests and the expectation of the performance.

Another interesting observation is the impact of the interpreter, as figure 5.7 highlight. the use of Pypy interpter instead of the default one helped reducing the amount of the energy consumption even when we are dealing with the naive version.

Figure 5.16 shows the behaviour of python programs when we try to introduce the parallelism. As we know python is a single threaded program thx to the GLS ( global lock system ) however due to the increase of the number of cores /threads per cpu it many libraries stared to take advanteage of this feature so most of them they will try to simulate the multithreading by using multiple instances pf the processor

as we can see in the graph the energy consumption is correlate with the number of threads until we arrive to the limit of the cores and then we lose the adventage of the multiprocessing

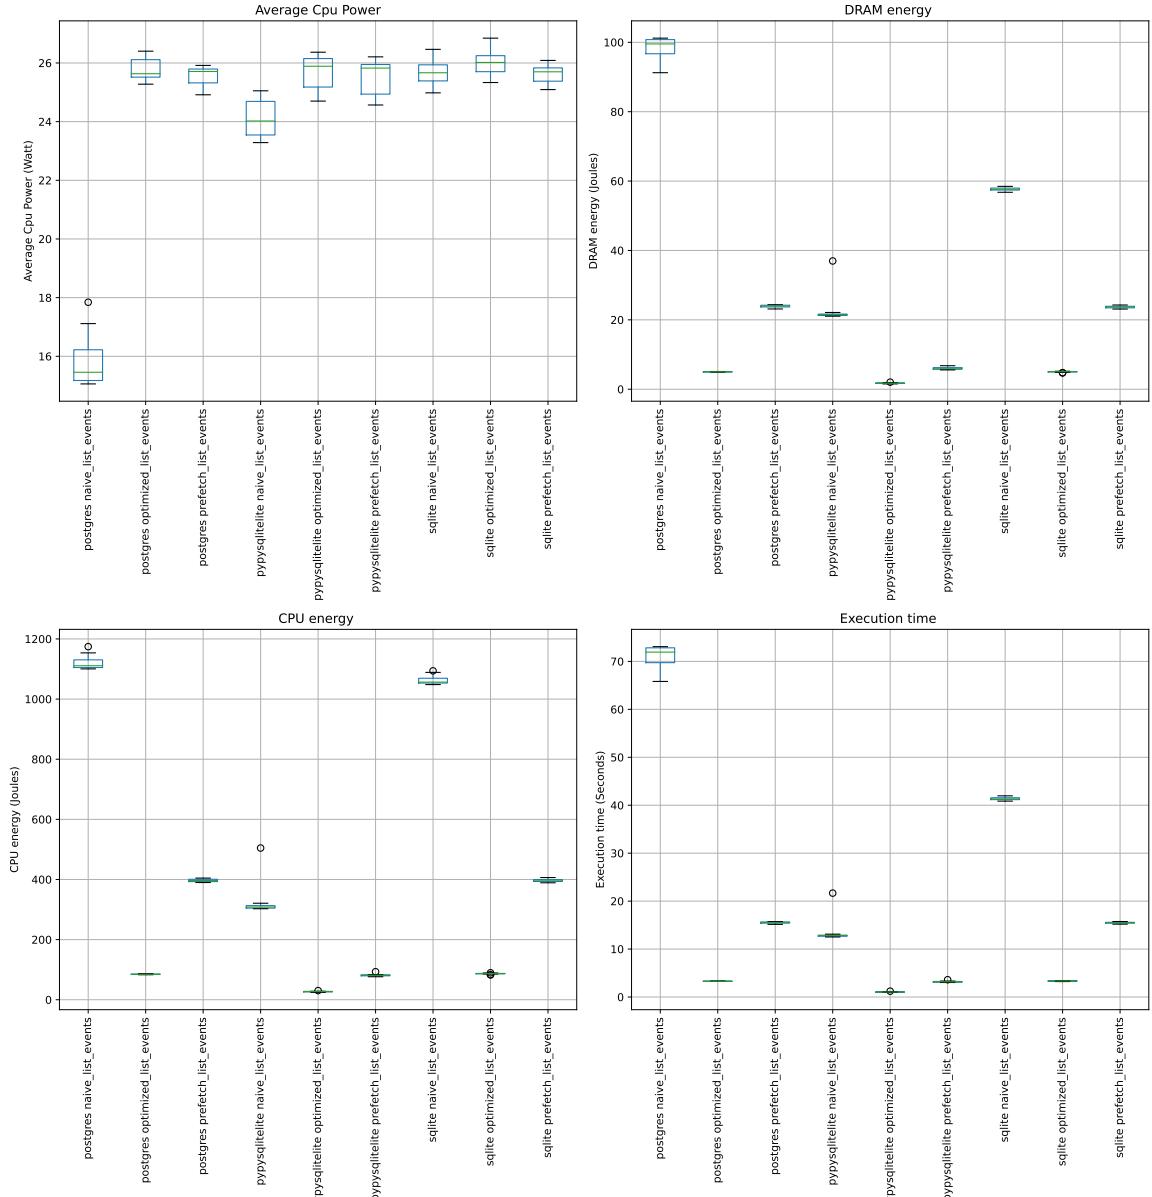


Figure 5.7: energy behaviour based on multiprocessing

, well in that case we pass from parallelism to concurrency. where different sub process have to compete for the CPU Ressources. Another finding is when we hit the number of physical cores. there was an increase of execution time but still reduced energy, the reason behind this is the scheduler of the operating system. basicaly he favorits the hyper threads than the physical core wich will lead to some context switches which cause the slow behaviour, howverver in the other hand the other two physical cores are not consuming energy, neither their hyper threads which explains the gain of the energ consumption in this case. in the

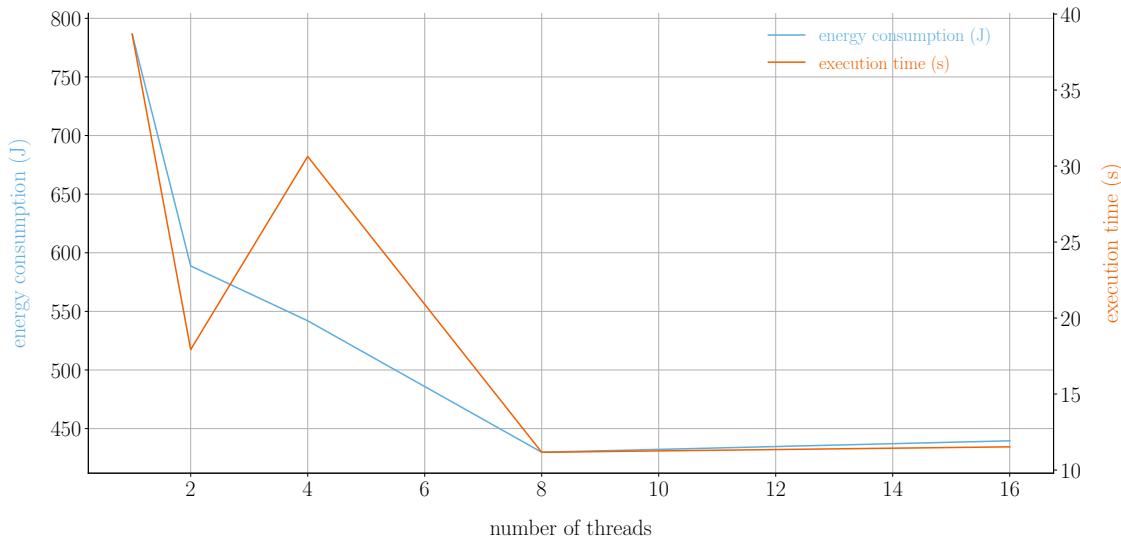


Figure 5.8: energy behaviour based on multiprocessing

Chapter we discuss a deeper this behaviour of the scheduler and in that case we confirm that it is not related to python but it is more generic behaviour

### python and multiprocessing

Figure 5.16 shows the behaviour of python programs when we try to introduce the parallelism. As we know python is a single threaded program thx to the GLS ( global lock system ) however due to the increase of the number of cores /threads per cpu it many libraries started to take advantage of this feature so most of them they will try to simulate the multithreading by using multiple instances pf the processor

as we can see in the graph the energy consumption is correlate with the number of threads until we arrive to the limit of the cores and then we lose the advantage of the multiprocessing , well in that case we pass from parallelism to concurrency. where different sub process have to compete for the CPU Ressources. Another finding is when we hit the number of physical cores. there was an increase of execution time but still reduced energy, the reason behind this is the scheduler of the operating system. basicaly he favorits the hyper threads than the physical core which will lead to some context switches which cause the slow behaviour, however in the other hand the other two physical cores are not consuming energy, neither their hyper threads which explains the gain of the energ consumption in this case. in the Chapter we discuss a deeper this behaviour of the scheduler and in that case we confirm that it is not related to python but it is more generic behaviour

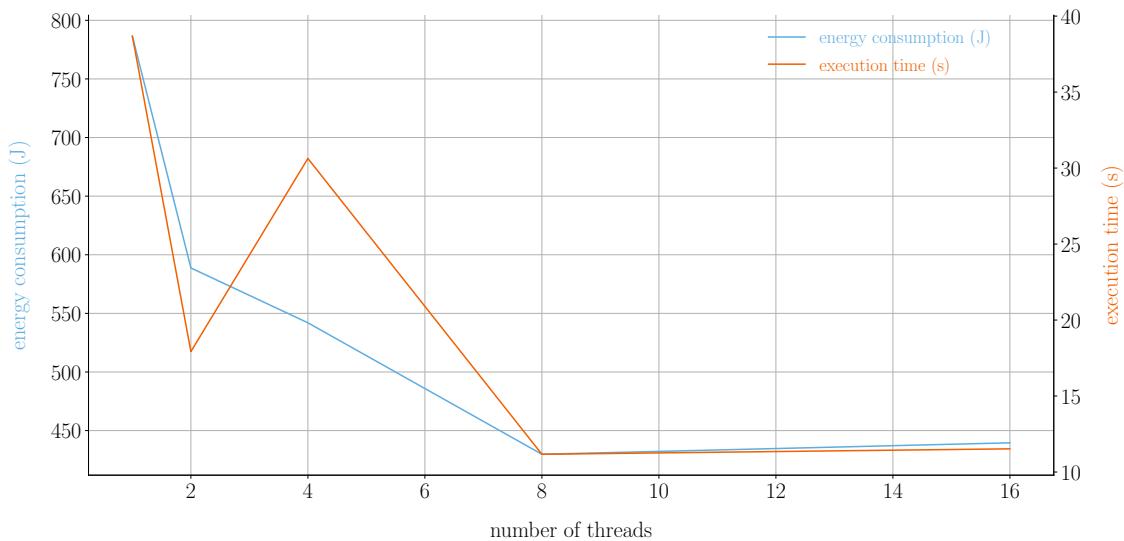


Figure 5.9: energy behaviour based on multiprocessing

### 5.5.1 python insights

The goal of this section is to find some insights where we can optimize the energy consumption without impacting the source code. so we started by extending the work of Hasan et al. and (**author?**) to the python environment.

another field of investigation is the type data and structure controls. that might impact the energy consumption. To do so. We iterate over a list using three methods. first the classical `for ( for i in range (len(n)) )`. however as we can see here unlike other programming languages it requires extra operations such as determining the length of the collection , and then using the iterator range. so we tried the more adapted version `( for element in collection )`. Moreover in most programming languages the for loop is translated to a while loop ( transformation from D type to B type – asm – ), therefore we wanted to compare this with a `( while )` version. After determining the main ways to iterate over a loop we run the algorithms collections of different data types to see whether it will impact of the energy consumption of the code, same thing for the size of the collection.

As we can see in figure 5.10 the type of the data hasn't an impact on the energy consumption.In the other hand the way we iterate over the collection has a huge factor. interestingly, the `for in range` loop was by far the optimal one with following by the regular `for in collection`, and the `while` part was the least one with an overhead of 400% compared to the first option.

the reason behind a such behaviour is mainly related on how python interpreter is made. In order to reduce the latency of the python code. most of the built-in functions and operations are written in C, same thing goes for the function `range`, further more the function `len` has a

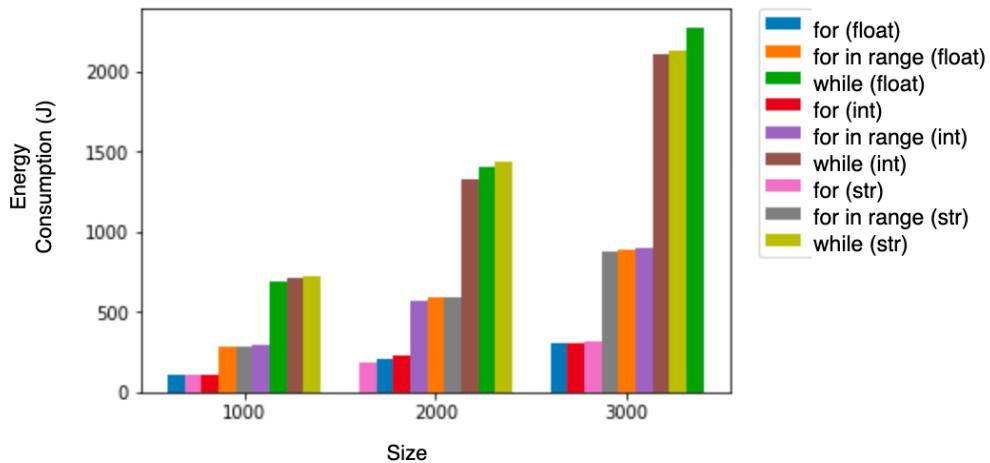


Figure 5.10: energy behaviour of different python loops

complexity of  $O(1)$  because it is based on the function `Py_SIZE` of C which stores the length in a field for the object. so basically for the `for in range` is basically creating a new iterator that has the same length of the first one. and for each iteration we will have to do a second access (`l[i]`) instead of one one access hence the double time. for the `while` is even slower due to the implicit incrementation of the variable which will cause an extra operation during the loop . to confirm the hypothesis. we tried to construct a new list by editing the elements of the previous one. And as predicted , the builtin methods are the best energy saving, while the customize while loop is the heaviest. an interesting finding is. the impact of anonymous functions ( lambda expressions) on the energy consumption. the reason behind this is the fact that python treats those functions as local variables unlike the predefined ones which are global in our case. therefore they are faster and consumes less energy

**conclusion** This study has shown us, that the optimal way to reduce the energy consumption of the python code is to follow the guidelines and use the builtin functions, which is kinda happy news for the developers since they don't have to make extra effort to make their code green

### 5.5.2 Python and machine learning

**conclusion** We discovered that when a model's accuracy improves, so does the energy required for a subsequent accuracy gain. This begs the question of when we should discontinue training. Is a 10% increase in accuracy worth it if we have to spend three times the energy? Even while utilizing a GPU consumes more total power, the training time is significantly reduced. As a result, the utilization of a GPU is required to lower the energy consumption

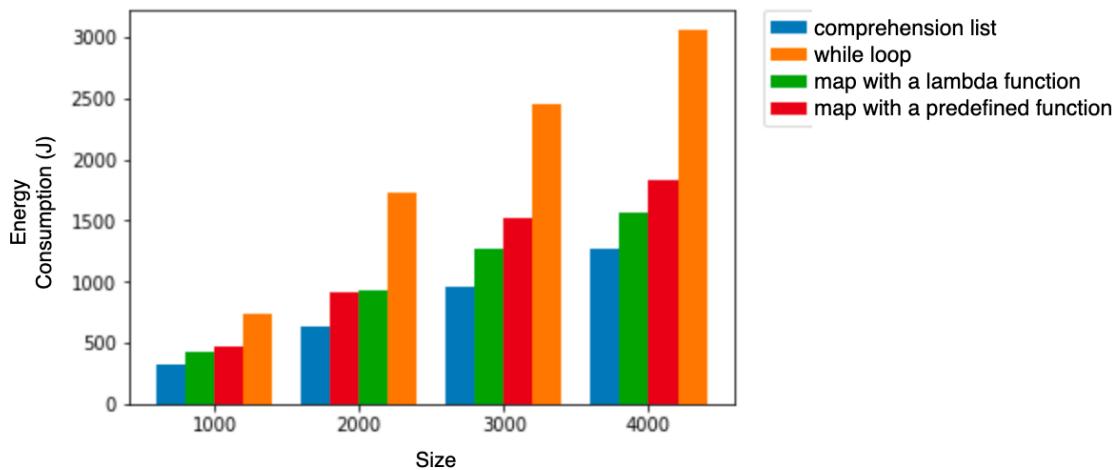


Figure 5.11: energy behaviour of different methodes to change a list

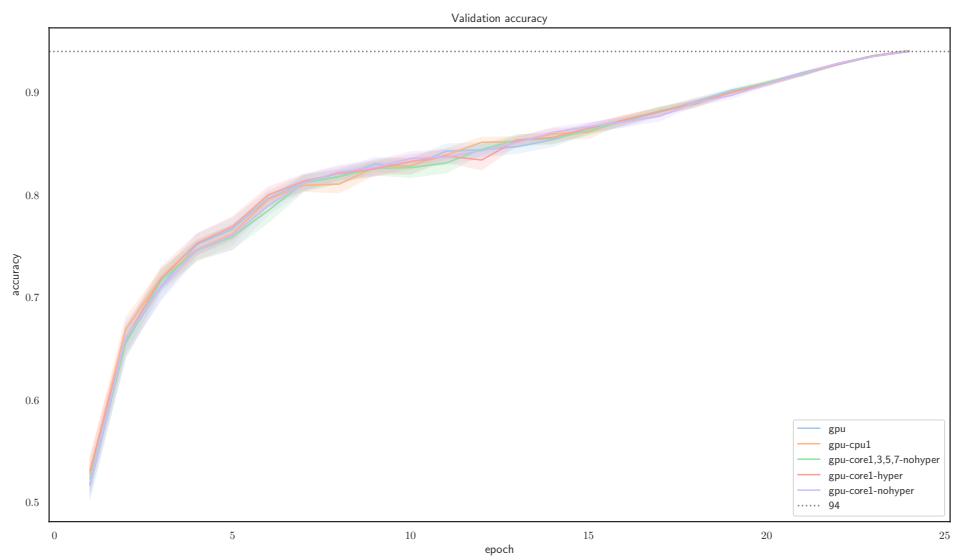


Figure 5.12: accuracy based on epoch

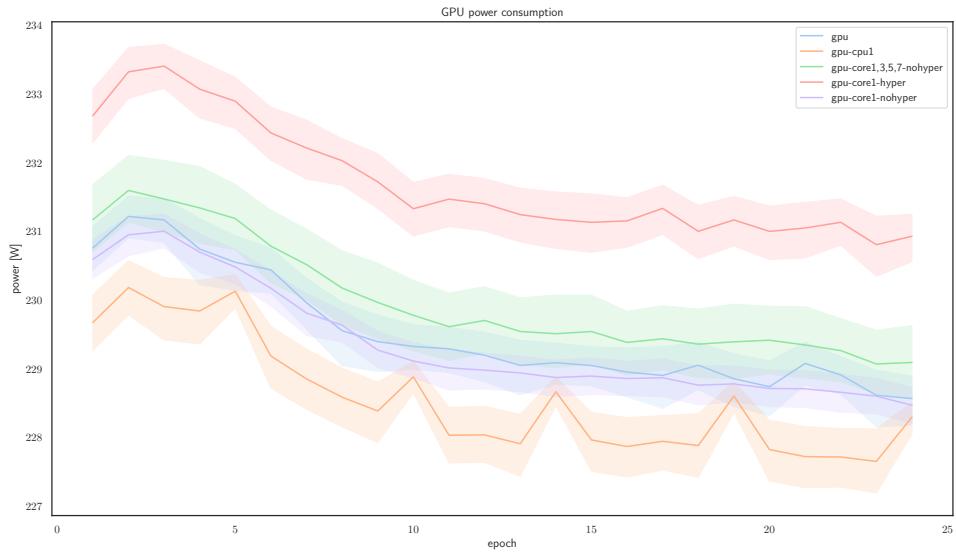


Figure 5.13: evolution of average gpu power based on epoch

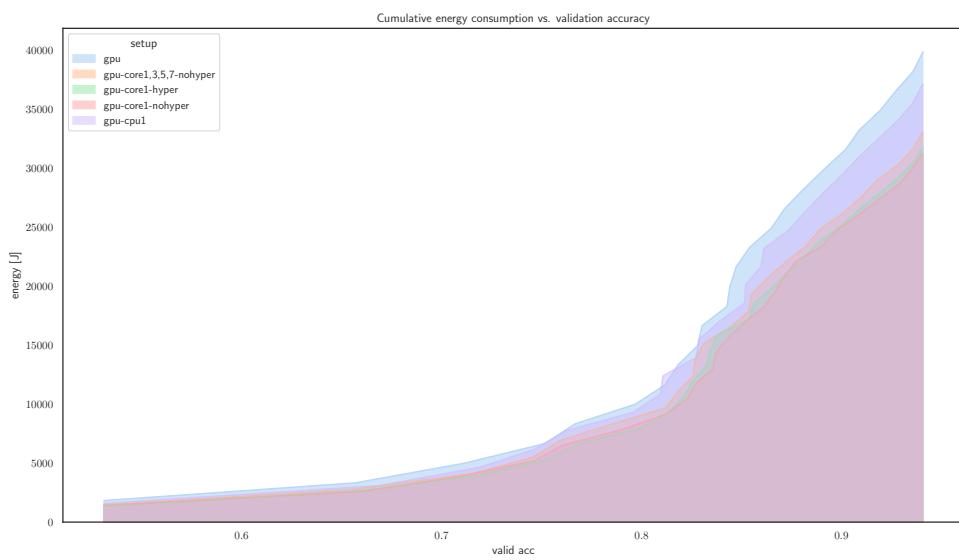


Figure 5.14: cumulative energy of fast10 benchmark within different configurations

Figure 5.15: energy consumption of different implementations using Bit Operation benchmarks (Joule)

| benchmark    | A          | GG         | LL         | Or         | XOR        |
|--------------|------------|------------|------------|------------|------------|
| activepython | 676.980672 | 763.208040 | 651.783048 | 743.016425 | 728.828481 |
| cpython2     | 441.082298 | 435.886950 | 430.846171 | 415.247383 | 419.081447 |
| cpython3     | 595.209019 | 685.085315 | 563.839300 | 657.972734 | 655.560574 |
| cython       | 35.077408  | 182.688395 | 274.177830 | 34.868014  | 34.504778  |
| nuitka       | 33.260991  | 32.980380  | 33.256450  | 33.472770  | 33.030889  |
| numba2       | 9.102939   | 8.411176   | 9.460620   | 9.375920   | 9.755952   |
| numba3       | 9.566646   | 10.144212  | 9.219703   | 9.344613   | 9.665108   |
| pypy2        | 8.456867   | 7.844918   | 8.286278   | 8.138692   | 7.952999   |
| pypy3        | 7.552731   | 8.093884   | 8.108508   | 8.669448   | 8.623737   |
| shedskin     | 8.024198   | 8.070870   | 8.399917   | 8.126236   | 8.277546   |

of the training. Some experiments revealed unusual behavior that was not studied during this internship. These could be examined in future studies and perhaps used to achieve more energy savings. The execution time did not depend on the number of cores employed in several studies. This parameter had a significant impact on training time in others. As a result, the best core configuration will be determined by the script. The next steps in this area could include exploring the reasons for these discrepancies and possibly creating a script that can automatically find the ideal core configuration for a specific script.

### 5.5.3 python runtimes

As we can see in figure 5.18, there is no evolution between cpython2 and cpython3 Intelpython and active python both follows the same behaviour. one can conclude that the work that have been on those interpreters is mainly to improve a specific purpose, Active python claims that their version is focused on security which explains the lack of some performances due to the introduction of more reinforcement .Morver Intel published their version of python as a dedicated for machine learning. Unfortunately the tommti benchmark is a set that focuses on the general purpose programming which does not reflect the performance of the machine learning. Another aspect of a such behaviour might be due to the fact of the processors that were used in the testbed. and it might change in the future if we include the GPU part for the machine learning benchmarks As for nuitka. there were no optimization in the energy consumption despite the fact that is it a compiler. However if we dig through the nuitka mechanisms. they basically embed the python code with an interpreter. Unlike nuitka shedskin exhibit a the best energy consumption pattern when it comes to the arithmetic

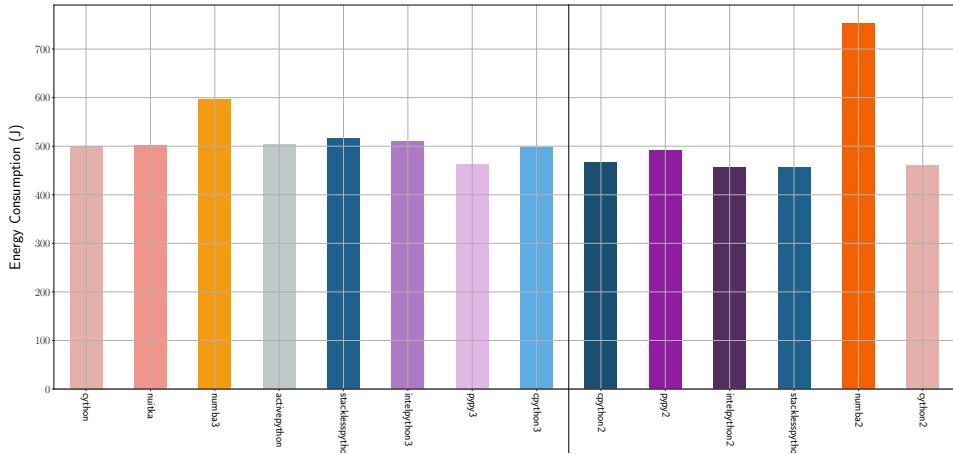


Figure 5.16: energy behaviour based on multiprocessing

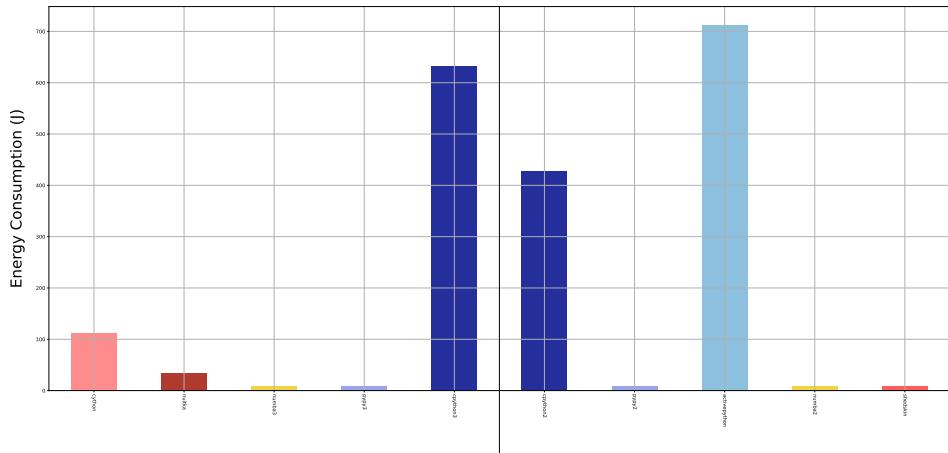


Figure 5.17: Mean consumption of different implementations of bit operations (Joule)



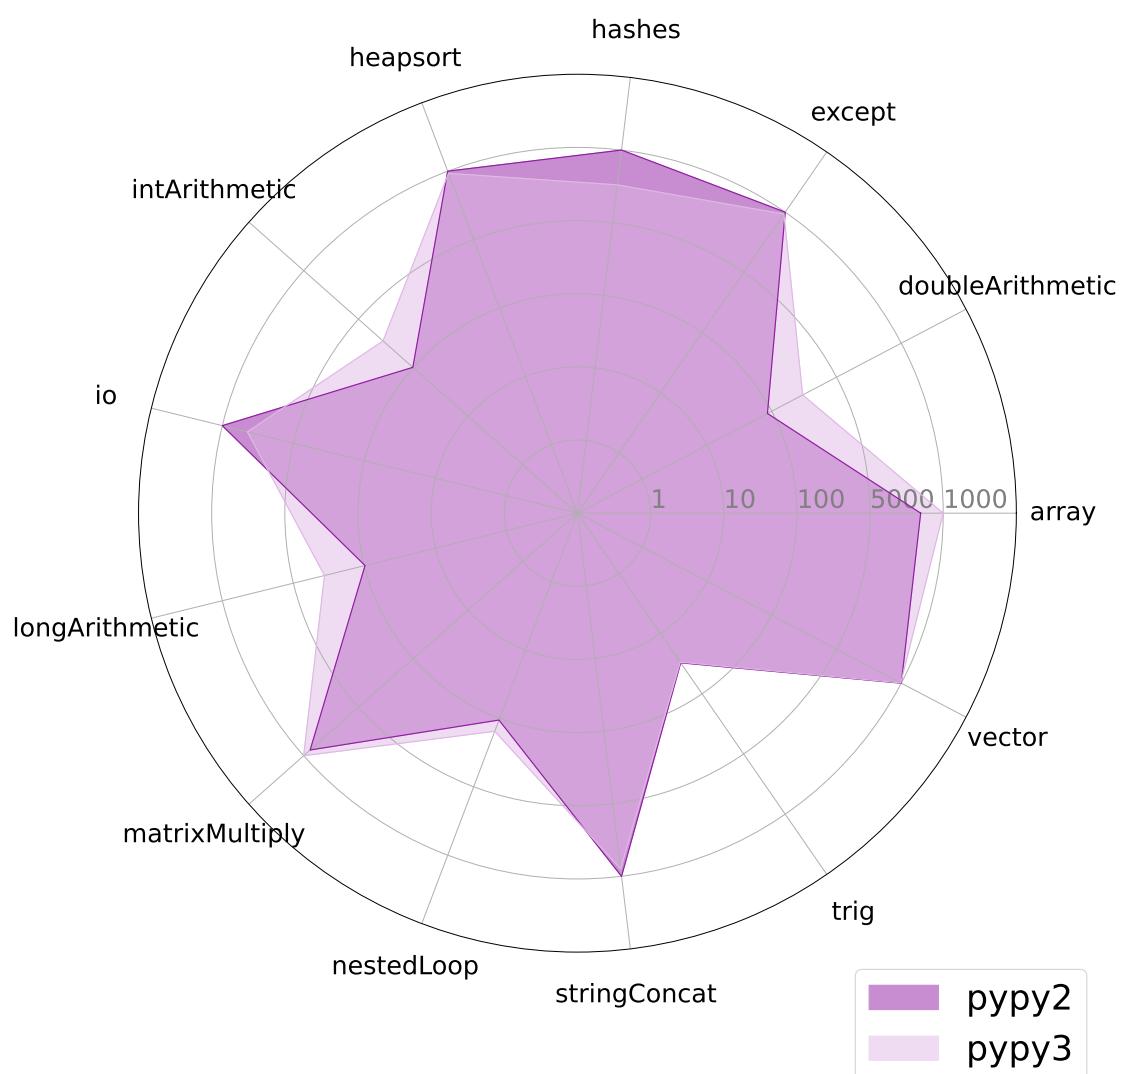


Figure 5.19: green factor of pypy

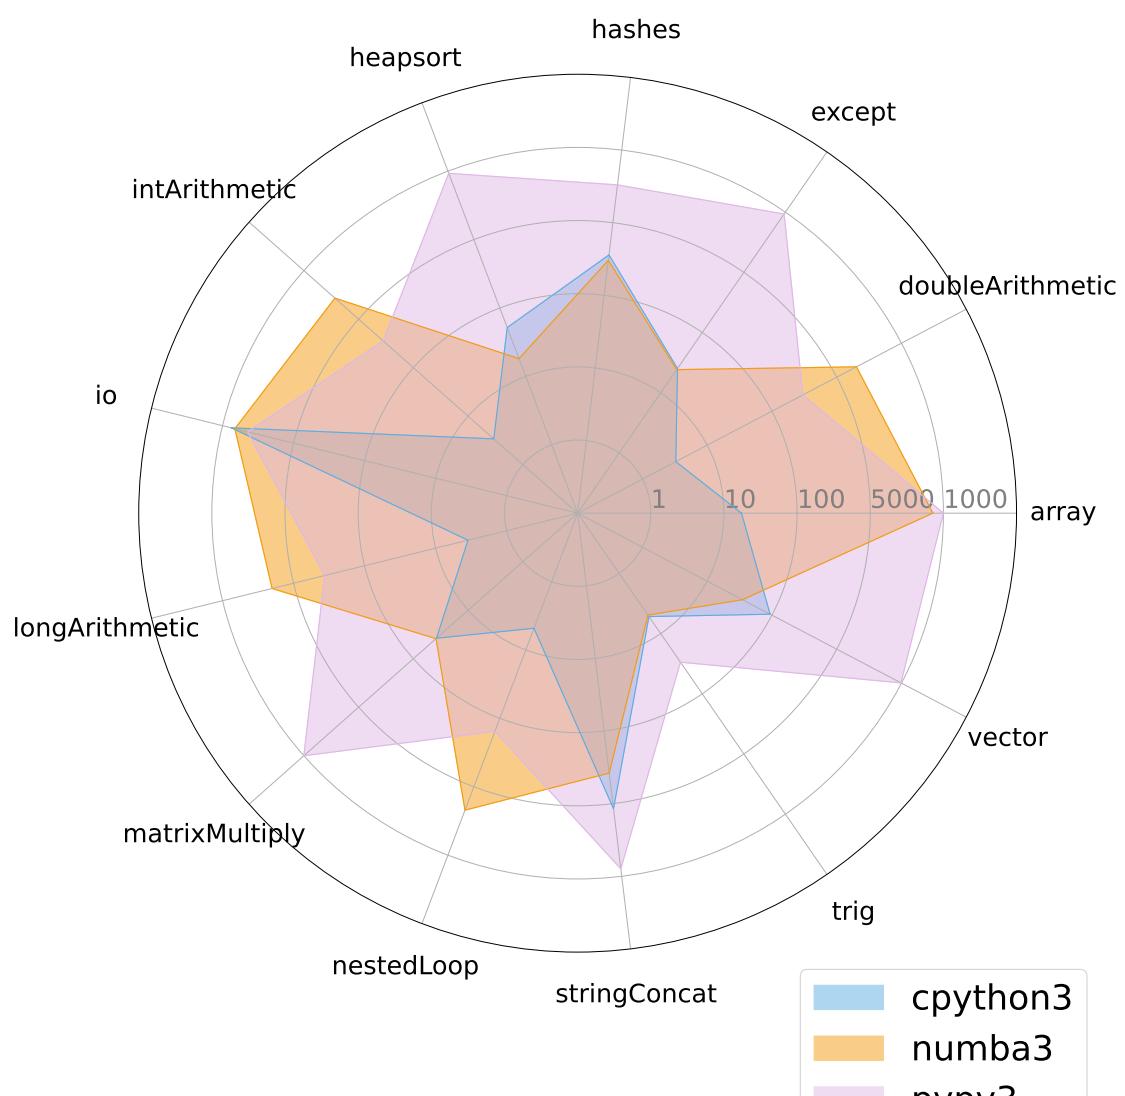


Figure 5.20: comparison of pypy vs python vs numba

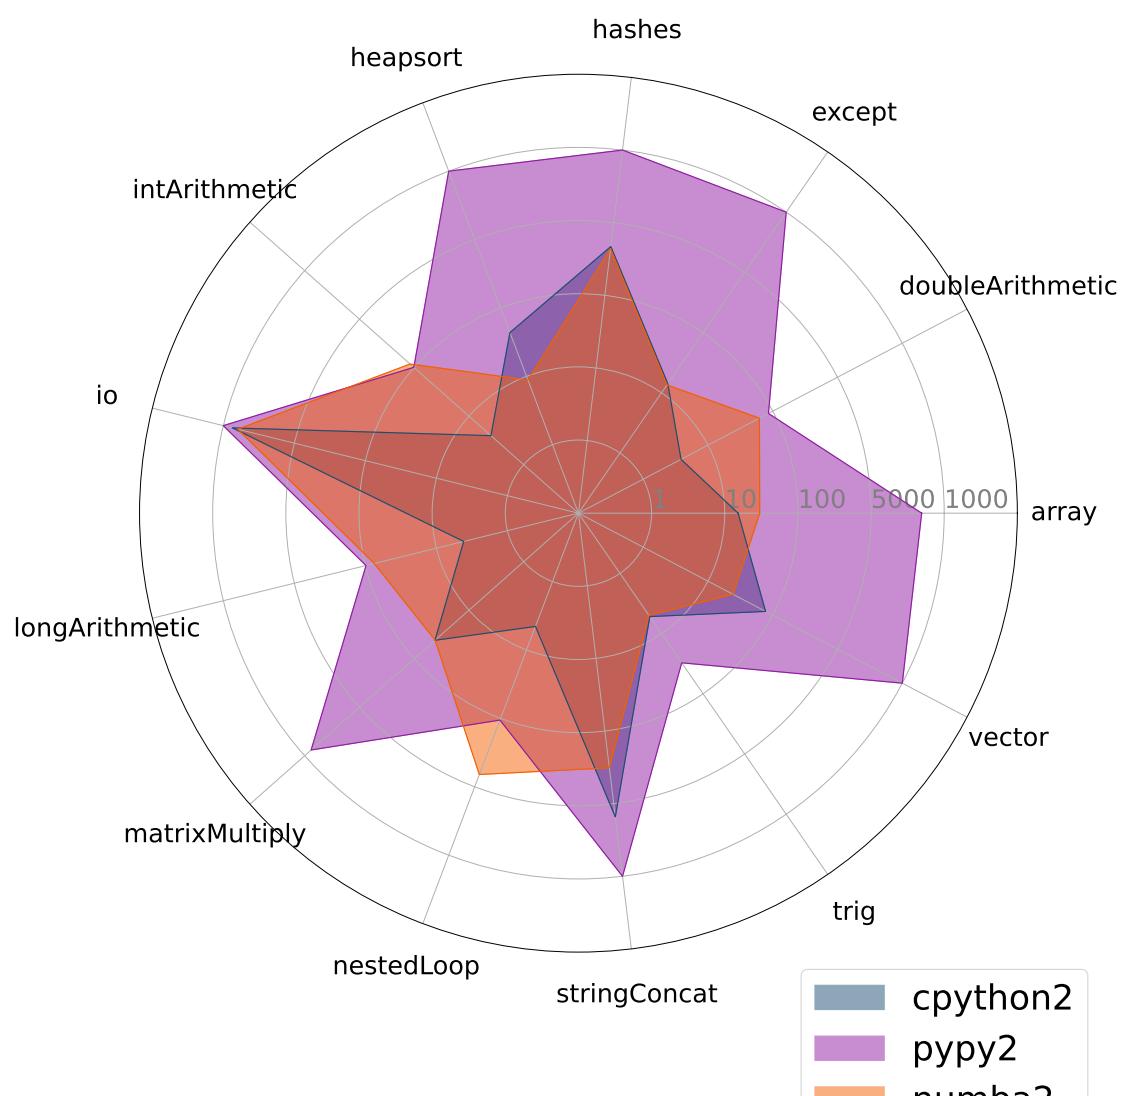


Figure 5.21: comparaison of pypy vs python vs numba

operations. One can conclude it is due to the fact of the native type of the variables, unlike the interpreters where they are treated as object in the beginning.

for the other interpreters pypy is very promising especially when it comes to data manipulation as one can see in the figure ?? pypy is by far the best interpreter when it comes to treating vectors. numba2 introduced the JIT but wasn't as promising as numba3.

for the other vm based interpreters, python and ipy lacked in term of energy optimisation which was kinda expected since they were in their the beginning of the stage and the main purpose of such implementation is to link the bytecode generated by python and ironpython with their respective virtual machines.

Unlike the previous interpreters, graal exhibits a certain promise when it comes to complex algorithms - nested loops - micro python is dedicated to embedded systems so launching it on powerful cpu machines will be misleading.

Most of the interpreters had the same behaviour when it comes to the input outputs, except for python which was kinda of an anomaly probably due to the lack of optimizations.

## 5.6 Threads to validity

## 5.7 tools and contributions

## 5.8 conclusion

One may observe that the choice of Python interpreter has a significant impact on the programs' energy consumption. This investigation is made more intriguing by the absence of a universal solution. The primary downside is the incompatibility of some of these solutions, which causes us to make concessions when we need a generic answer.

# Chapter 6

## The impact of Java virtual machine on Java programs

### JAVA

#### 6.1 Introduction

As reported in the state of the art, Java is one of the most popular programming languages adopted by practitioners. Furthermore, if we take into consideration legacy applications, Java becomes the most used programming language. In addition to its popularity, Java exhibits an interesting behaviour when it comes to energy consumption and performances, basically Java applications can be at the same time one of the most energy efficient or hungry solution. As we have seen in the previous chapter, an inappropriate combination of parameters can drive Java applications from the top language to the bottom just by setting the wrong parameters. Therefore, we wanted to dig deeper into this aspect of Java and study its runtime. This chapter thus focuses on the impact of the runtime of Java applications on the energy consumption.

##### 6.1.1 Goal

In this section, we will investigate the following research questions:

- RQ1:** *What is the impact of existing JVM distributions on the energy consumption of Java-based software services?*
- RQ2:** *What are the relevant JVM settings that can reduce the energy consumption of a given software service?*

To answer those research question we will run an empirical study to highlight the impact of this runtime.

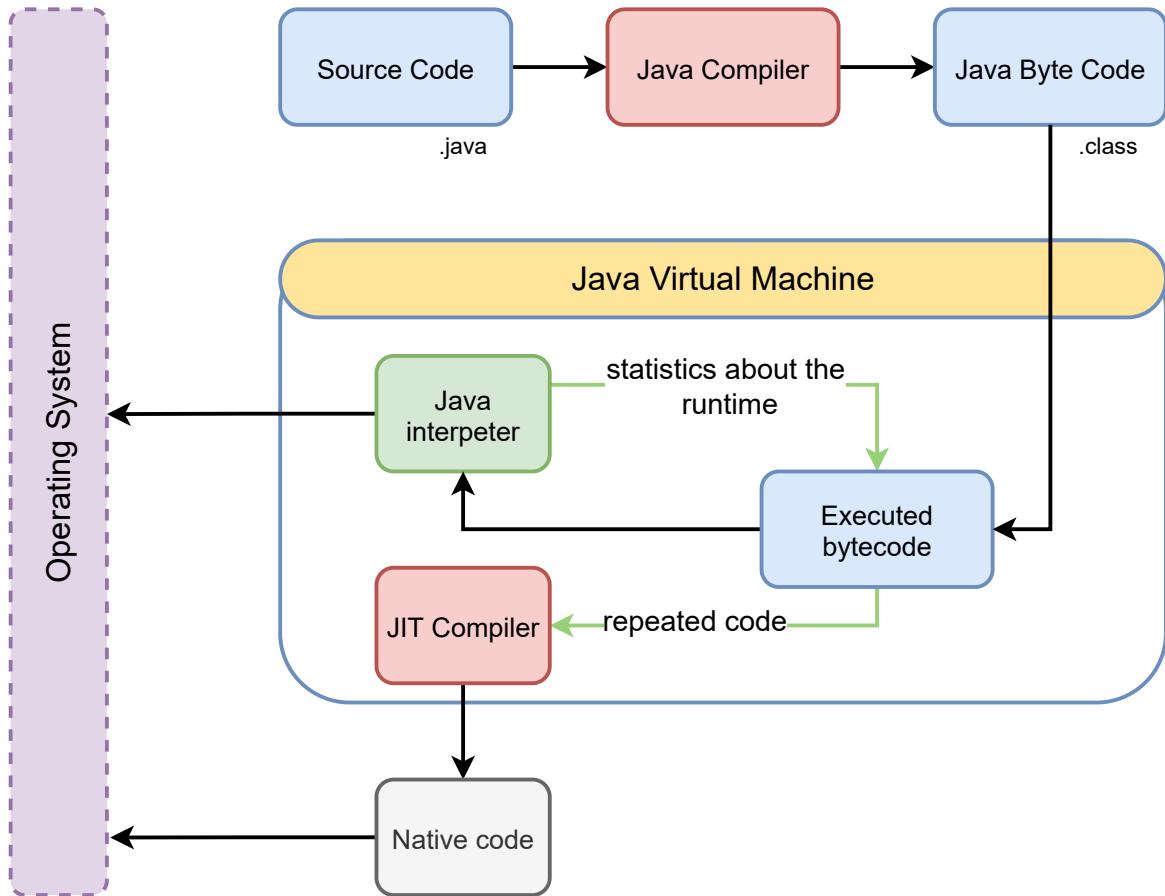


Figure 6.1: JVM architecture

### 6.1.2 definition of the JVM

## 6.2 Experimental Protocol

To investigate the effect that could have the JVM distribution choice and/or parameters on software energy consumption, we conducted a wide set of experiments on a cluster of machines and using several established Java benchmarks and JVM configurations.

### 6.2.1 Measurement Contexts

**Software Settings.** For the sake of reproducibility, each experiment runs within a Docker container based on SDKMAN image and Alpine docker.

**Hardware Settings.** To report on reproducible measurements, we used the cluster Dahu from the G5K platform [11] for most of our experiments. This cluster is composed of 32 identical compute nodes, which are equipped with 2 Intel Xeon Gold 6130 and 192 GB of RAM. Our

Table 6.1: List of selected JVM distributions.

| Distribution | Provider             | Support | Selected versions  |
|--------------|----------------------|---------|--|
| HOTSPOT      | <b>Adopt OpenJDK</b> | ALL     | 8.0.275, 11.0.9, 12.0.2, 13.0.2, 14.0.2, 15.0.1                          |
| HOTSPOT      | <b>Oracle</b>        | ALL     | 8.0.265, 9.0.4, 10.0.2, 11.0.2, 12.0.2, 13.0.2, 14.0.2, 15.0.1, 16.ea.24 |
| ZULU         | <b>Azul Systems</b>  | ALL     | 8.0.272, 9.0.7, 10.0.2, 11.0.9, 12.0.2, 13.0.5, 14.0.2, 15.0.1           |
| SAPMACHINE   | <b>SAP</b>           | ALL     | 11.0.9, 12.0.2, 13.0.2, 14.0.2, 15.0.1                                   |
| LIBRCA       | <b>BellSoft</b>      | ALL     | 8.0.275, 11.0.9, 12.0.2, 13.0.2, 14.0.2, 15.0.1                          |
| CORRETTO     | <b>Amazon</b>        | MJR     | 8.0.275, 11.0.9, 15.0.1  |
| HOTSPOT      | <b>Trava OpenJDK</b> | LTS     | 8.0.232, 11.0.9  |
| DRAGONWELL   | <b>Alibaba</b>       | LTS     | 8.0.272, 11.0.8  |
| OPENJ9       | <b>Eclipse</b>       | ALL     | 8.0.275, 11.0.9, 12.0.2, 13.0.2, 14.0.2, 15.0.1                          |
| GRAALVM      | <b>Oracle</b>        | LTS     | 19.3.4.r8, 19.3.4.r11, 20.2.0.r8, 20.2.0.r11                             |
| MANDREL      | <b>Redhat</b>        | LTS     | 20.2.0.0   |

experimental protocol enforces that the software under test is the only process executed on the node configured with a very minimal Linux Debian 9 (4.9.0 kernel version). The minimal OS configuration ensures that only mandatory services and daemons are kept active to conduct robust experiments and reduce the factors that can affect the energy consumption measurements during our experiments [117].

**Java Virtual Machines Candidates.** We considered a set of 52 JVM distributions taken from 8 different providers/packagers mostly obtained from SDKMAN!,<sup>1</sup> as listed in Table 6.1. Depending on providers, either all the versions, majors, or LTS are made available by SDKMAN!.

### 6.2.2 Workload

We ran our experiments across 12 Java benchmarks we picked from OpenBenchmarking.org.<sup>2</sup> This includes 5 acknowledged benchmarks from the DACAPO benchmark suite v. 9.12 [18], namely Avrora, H2, Lusearch, Sunflow and PMD, that have been widely used in previous studies and proven to be accurate for memory management and computer architecture communities [87, 78]. It consists of open-source and real-world applications with non-trivial memory loads. Then, we also considered 7 additional benchmarks from the RENAISSANCE benchmark suite [130, 131], namely ALS, Dotty, Fj-kmeans, Neo4j, Philosophers, Reaction and Scrabble, which offers a diversified set of benchmarks aimed at testing JIT, GC, profilers, analyzers, and other tools. The benchmarks we picked from both suites exercise a broad range of programming paradigms, including concurrent, parallel, functional, and object-oriented programming. Table 6.2 summarizes the selected benchmarks with a short description.

Figure ?? highlights the scope of each benchmark from the test suit.

<sup>1</sup><https://sdkman.io/>

<sup>2</sup><https://openbenchmarking.org>

Table 6.2: List of selected open-source Java benchmarks taken from DACAPO and RENAISSANCE.

| Benchmark    | Description  | Focus                                      |
|--------------|--|--|
| ALS          | Factorize a matrix using the alternating least square algorithm on spark   | Data-parallel, compute-bound               |
| Avrora       | Simulates and analyses for AVR microcontrollers  | Fine-grained multi-threading, events queue |
| Dotty        | Uses the dotty Scala compiler to compile a Scala code-base   | Data structure, synchronization            |
| Fj-Kmeans    | Runs K-means algorithm using a fork-join framework   | Concurrent data structure, task parallel   |
| H2           | Simulates an SQL database by executing a TPC-C like benchmark written by Apache                                      | Query processing, transactions             |
| Lusearch     | Searches keywords over a corpus of data comprising the works of Shakespeare and the King James bible                 | Externally multi-threaded                  |
| Neo4j        | Runs analytical queries and transactions on the Neo4j database   | Query Processing, Transactions             |
| Philosophers | Solves dining philosophers problem   | Atomic, guarded blocks                     |
| PMD          | Analyzes a list of Java classes for a range of source code problems  | Internally multi-threaded                  |
| Reactors     | Runs a set of message-passing workloads based on the reactors framework  | Message-passing, critical-sections         |
| Scrabble     | Solves a scrabble puzzle using Java streams  | Data-parallel, memory-bound                |
| Sunflow      | Renders a classic Cornell box; a simple scene comprising two teapots and two glass spheres within an illuminated box | Compute-bound                              |

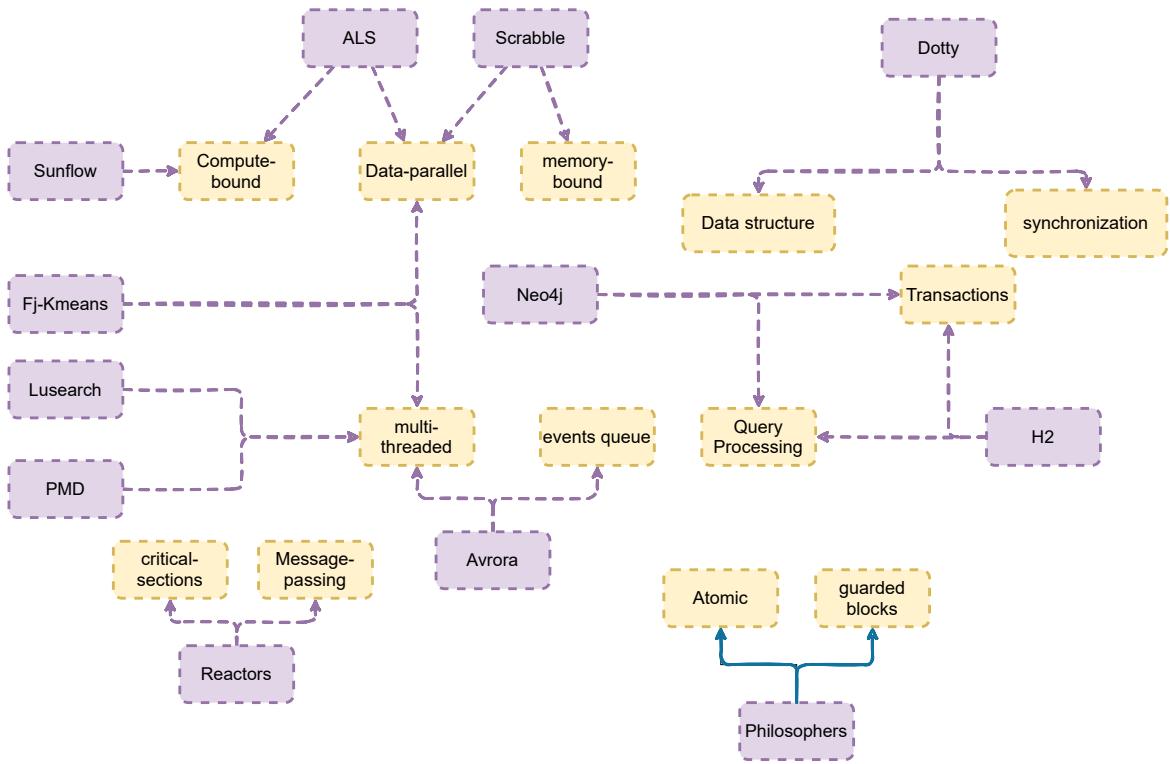


Figure 6.2: Target scope of Dacapo and Renaissance benchmarks

### 6.2.3 Metrics and measurement

Since the goal of this study is the green aspect Java virtual machines, our key metric will be the energy consumption of the job completed by each configuration. In addition to the energy consumption, we collected additional metrics to explain the reasons behind the behaviour of each experiment. Those extra metrics are:

- execution time,
- number of threads.

**Energy Measurements.** We used Intel RAPL as a physical power meter to analyze the energy consumption of the CPU package and the DRAM. RAPL is one of the most accurate tools to report on the global energy consumption of a processor [79, 43]. We note that, due to CPU energy consumption variations issues [117], we used the same node for all our experiments. Moreover, we tried to be very careful, while running our experiments, not to fall in most common benchmarking "crimes" [142]. Every single experiment, therefore, reports on energy metrics obtained from at least 20 executions of 50 iterations per benchmark. All of our experiments are available for use/reproducibility from our anonymous repository.<sup>3</sup>

<sup>3</sup><https://anonymous.4open.science/r/jvm-comparaison-213E/Readme.md>

**Number of threads.** To collect the number of active threads used by the an experiment, we use the command `top` and record at fixed intervals.

### 6.2.4 Extension

We also added an extension to the protocol to allow the user to run the same experiment with different configurations. The package is available in the github repository <sup>4</sup>. To add extra **candidates** for the benchmark applications, we added a new configuration file `jvm.sh` in the root directory of the repository, where we put the name and the version of the jvm to be used. ***TODO : The jvm must be provided by sdkman***<sup>5</sup> For the **workload**,the benchmarks should be provided in the benchmarks directory. As for extra **metrics** One can create a new script file that monitor the experiment and record the metrics. We provide some examples such as `recordpower.sh` to measure the instantanious power and `recordthreads.s` to measure the number of active threads during the experiment.

For faster experements we propose **Jreferral**<sup>6</sup> an open source that provides an opensource to compare the energy consumption of differents jvms for any java application. Later we will discuss this tool in the section 7.2

## 6.3 Experiments & Results

### 6.3.1 Energy Impact of JVM Distributions

**Job-oriented applications.** To answer our first research question, we executed 62,400 experiments by combining the 52 JVM distributions with the 12 Java benchmarks, thus reasoning on 100 energy samples acquired for each of these combinations. Figure 6.3 first depicts the accumulated energy consumption of the 12 Java benchmarks per JVM distribution and major versions (or LTS when unavailable). Concretely, We measure the energy consumption of each of the benchmarks and compute the ratio of energy consumption compared to HOTSPOT-8, which we consider as the baseline in this experiment. Then, we sum the ratios of the 12 benchmarks and depict them as percentages in Figure 6.3.

One can observe that, along with time and versions, the energy efficiency of JVM distributions tends to improve (10% savings), thus demonstrating the benefits of optimizations delivered by the communities. Yet, one can also observe that energy consumption may differ from one distribution to another, thus showing that the choice of a JVM distribution may

---

<sup>4</sup><https://github.com/chakib-belgaid/jvm-comparaison>

<sup>5</sup><https://sdkman.io/>

<sup>6</sup><https://github.com/chakib-belgaid/jreferral>

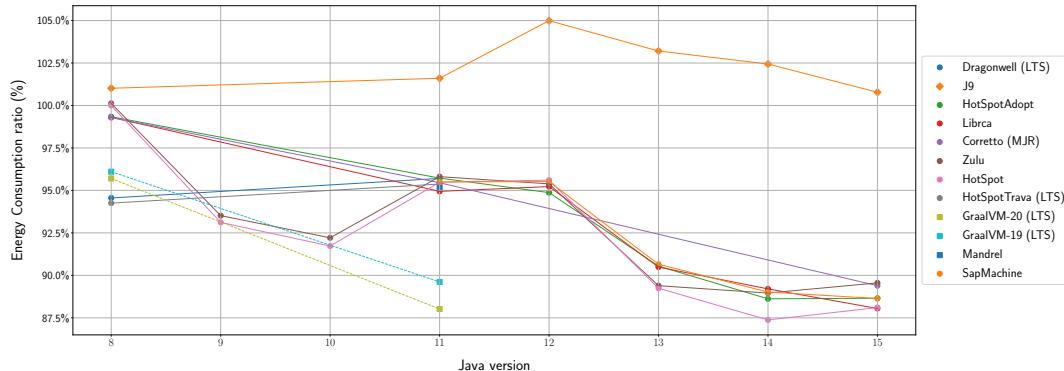


Figure 6.3: Energy consumption evolution of selected JVM distributions along versions.

have a substantial impact on the energy consumption of the deployed software services. For example, one can note that J9 can exhibit up to 15% of energy consumption overhead, while other distributions seem to converge towards a lower energy footprint for the latest version of Java. As GRAALVM adopts a different strategy focused on LTS support, one can observe that its recent releases provide the best energy efficiency for Java 11, but recent releases of other distributions seem to reach similar efficiency for Java 13 and above, which are recent versions not supported by GRAALVM yet.

Interestingly, this convergence of distributions has been observed since Java 11 and coincides with the adoption of DCE VM by HOTSPOT. Ultimately, 3 clusters of JVMs that encompass JVMs with similar energy consumption can be seen through Figure 6.3: J9, the HOTSPOT and its variants, and GRAALVM. Additional detailed figures to illustrate the evolution of energy consumption per benchmark/JVM are made available from the online repository.<sup>7</sup>

Then, Figure ?? depicts the evolution of the energy consumption of the 12 benchmarks, when executed on the HOTSPOT JVM. Figure 6.4 reports on the energy consumption variation of individual benchmarks, using to HOTSPOT-8 as the baseline. Our results show that the JVM version can severely impact the energy consumption of the application. However, unlike Figure 6.3, one can observe that, depending on applications, latest JVM versions can consume less energy (60% less energy for Scrabble) or more energy (25% more energy for the Neo4J). It is worth noticing that the energy consumption of some benchmarks, such as Reactors, exhibit large variations across JVM versions due to experimental features and changes that are not always kept when releasing LTS versions (version 11 here). For example, the introduction

<sup>7</sup><https://anonymous.4open.science/r/jvm-comparaison-213E/Readme.md>

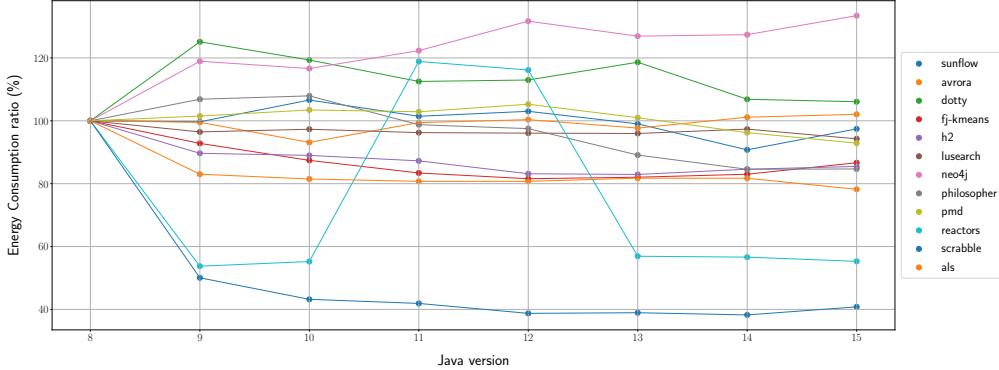


Figure 6.4: Energy consumption of the HotSpot JVM along versions.

of VarHandle to allow low-level access to the memory order modes available in JDK 9 and work along Unsafe Classe that was removed from from JVM 11.<sup>8</sup>

Given that the wide set of distributions and versions seems to highlight 3 classes of energy behaviors, the remainder of this chapter considers the following distributions as relevant samples of JVM to be further evaluated: 20.2.0.r11-grl (GRAALVM), 15.0.1-open (HOTSPOT-15), 15.0.21.j9 (J9). We also decided to keep the 8.0.275-open (HOTSPOT-8) as a baseline JVM for some figures to highlight the evolution of energy consumption over time/versions.

Figure 6.5 further explores the comparison of energy efficiency of the JVM distributions per benchmark. One can observe that, depending on the benchmark’s focus, the energy efficiency of JVM distributions may strongly vary. When considering individual benchmarks, J9 performs the worst for at least 6 out of 12 benchmarks—*i.e.*, worst ratio among the 4 tested distributions. Even though, J9 can still exhibit a significant energy saving for some benchmarks, such as Avrora, where it consumes 38% less energy than HOTSPOT and others.

Interestingly, GRAALVM delivers good results overall, being among the distributions with a low energy consumption for all benchmarks, except for Reactors and Avrora. Yet, some differences still can be observed with HOTSPOT depending on applications. The newer version of HOTSPOT-15 was averagely good and, compared to HOTSPOT-8, it significantly enhances energy consumption for most scenarios. Finally, Neo4J is the only selected benchmark where HOTSPOT-8 is more energy efficient than HOTSPOT-15.

**Service-oriented applications.** In this section, instead of considering bounded execution of benchmarks, we run the same benchmarks as services for 20 minutes, and we compare the average power and total requests processed by each of the 3 JVM distributions. Globally, the

<sup>8</sup><https://blogs.oracle.com/javamagazine/the-unsafe-class-unsafe-at-any-speed>

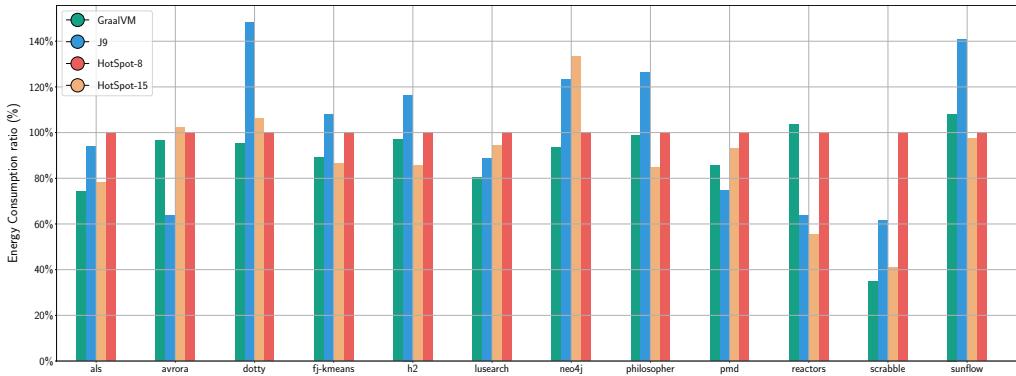


Figure 6.5: Energy consumption comparison across Java benchmarks for HOTSPOT, GRAALVM & J9.

Table 6.3: Power per request for HOTSPOT, GRAALVM & J9.

| Benchmark | JVM     | Power (P) | Requests (R) | $P/R \times 10^{-3}$ |
|-----------|---------|-----------|--------------|----------------------|
| Scrabble  | GRAALVM | 109 W     | 5,336 req    | 20 mW                |
|           | HOTSPOT | 98 W      | 3,595 req    | 27 mW                |
|           | J9      | 92 W      | 2,603 req    | 35 mW                |
| Dotty     | GRAALVM | 45 W      | 510 req      | 88 mW                |
|           | HOTSPOT | 45 W      | 597 req      | 75 mW                |
|           | J9      | 46 W      | 381 req      | 120 mW               |

results showed that the average power when using GRAALVM, HOTSPOT, and OPENJ9 is often equivalent and stable over time. This means that the energy efficiency observed for some JVM distributions with Job-oriented applications is mainly related to shorter execution times, which incidentally results in energy savings. Nonetheless, we can highlight two interesting observations for two benchmarks whose behaviors differ from others. First, the analysis of the Scrabble benchmark experiments showed that, in some scenarios, some JVMs can exhibit different power consumptions. Figure 6.6 depicts the power consumed by the 3 JVM distributions for the Scrabble benchmark. One can clearly see that GRAALVM requires an average power of 109 W, which is 9 W higher than HOTSPOT-15 and 15 W higher than J9. When it comes to the number of requests processed by Scrabbles during that same amount of time, GRAALVM completes 5,336 requests, against 3,595 for HOTSPOT and 2,603 for J9, as shown in Table 6.3. The higher power usage for GRAALVM helped in achieving a high amount of requests, but also the fastest execution of every, request which was 40% faster on GRAALVM. Thus, GRAALVM was more energy efficient, even if it uses more power, which confirms the results observed in Figure 6.5 for this benchmark.

The second interesting situation was observed on the Dotty benchmark. More specifically, during the first 100 seconds of the execution of the Dotty benchmark on all evaluated JVMs.

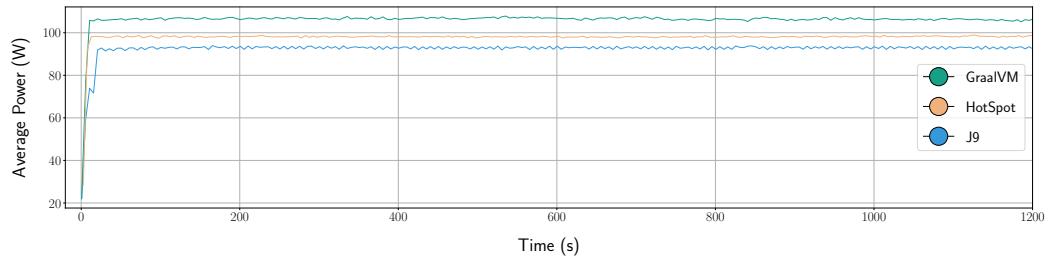


Figure 6.6: Power consumption of Scrabble as a service for HOTSPOT, GRAALVM & J9.

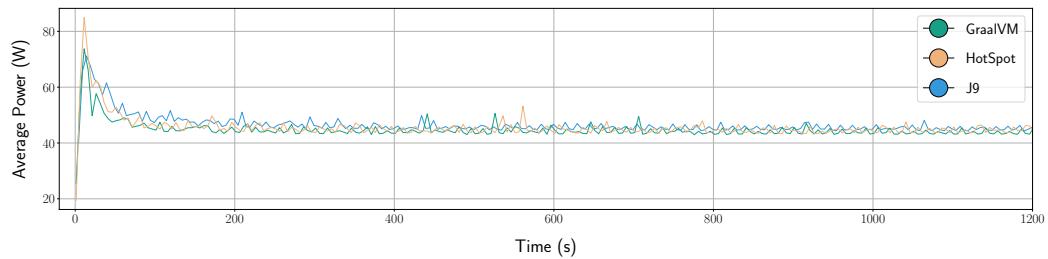


Figure 6.7: Power consumption of Dotty as a service for HOTSPOT, GRAALVM & J9.

At the beginning of the execution, GRAALVM has a slightly lower power consumption, is faster, and consumes 10% less energy. After about 150 seconds, the power differences between the 3 JVMs is barely noticeable. One can, however, notice the effect of the JIT, as HOTSPOT takes the advantage over GRAALVM and becomes more energy efficient. In total, HOTSPOT completes 597 requests against 510 for GRAALVM and 381 for J9, as shown in Table 6.3. HOTSPOT was thus the best choice on the long term, which explains why it is always necessary to consider a warm-up phase and wait for the JIT to be triggered before evaluating the effect of the JVM or the performance of an application. This is exactly what we did in our experiments, and why HOTSPOT was more energy efficient than GRAALVM in Figure 6.5, thus ignoring the warm-up phase would have misleading.

To answer **RQ 1**, we conclude that—while most of the JVM platforms perform similarly—we can cluster JVMs in 3 classes: HOTSPOT, J9, and GRAALVM. The choice of one JVM of these classes can have a major impact on software energy consumption, that strongly depends on the application context. When it comes to the JVM version, latest releases tend to offer the lowest power consumption, but experimental features should be carefully configured, thus further questioning the impact of JVM parameters.

### 6.3.2 Energy Impact of JVM Settings

The purpose of our study is not only to investigate the impact of the JVM platform on the energy consumption, but also the different JVM parameters and configurations that might have a positive or negative effect, with a focus on 3 available settings: multi-threading, JIT, and GC.

#### Multithreading

The purpose behind this phase is to investigate the impact JVM thread management strategies on the energy consumption. This encompasses exploring if the management strategies of application-level parallelism (so called *threads*) results in different energy efficiencies, depending on JVM distributions.

Investigating such an hypothesis requires a selection of highly parallel and CPU-intensive benchmarks, which is one of the main criteria for our benchmark selection. As no tool can accurately monitor the energy consumption at a thread level, we monitor the global power consumption and CPU utilization during the execution using RAPL for the energy, and several Linux tools for the CPU-utilization (htop, cpufreq). Knowing that most of the benchmarks are multi-threaded jobs that use multiple cores, further analysis of thread management is required to understand the results of our previous experiments. We thus selected the benchmarks that highlighted the highest differences along JVM distributions from Figure 6.5, namely Avrora and Reactors. We studied their multi-threaded behavior to optimize their energy efficiency.

Figure 6.8 delivers a closer look to the thread allocation strategies adopted by JVM. First, Figure 6.8a illustrates the active threads count evolution over time (excluding the JVM-related threads, usually 1 or 2 extra threads depending on the execution phase) for Avrora. One can notice through the figure that J9 exploits the CPU more intensively by running much more parallel threads compared to other JVMs (an average of 5.1 threads per second for J9 while the other JVMs do not exceed 1.5 thread per second). Furthermore, the number of context switches is twice bigger for J9, while the number of soft page faults is twice smaller. The efficient J9 thread management explains why running the Avrora benchmark took much less time and consumed less energy, given that no other difference for the JIT or GC configuration was spotted between the JVMs. Another key reasons of the J9's efficiency for the Avrora benchmark is memory allocation, as OpenJ9 adopts a different policy for the heap allocation. It creates a non-collectable *thread local heap* (TLH) within the main heap for each active thread. The benefit of cloning a dedicated TLH is the fast memory access for independent threads: each thread has its own heap and no deadlock can occur.

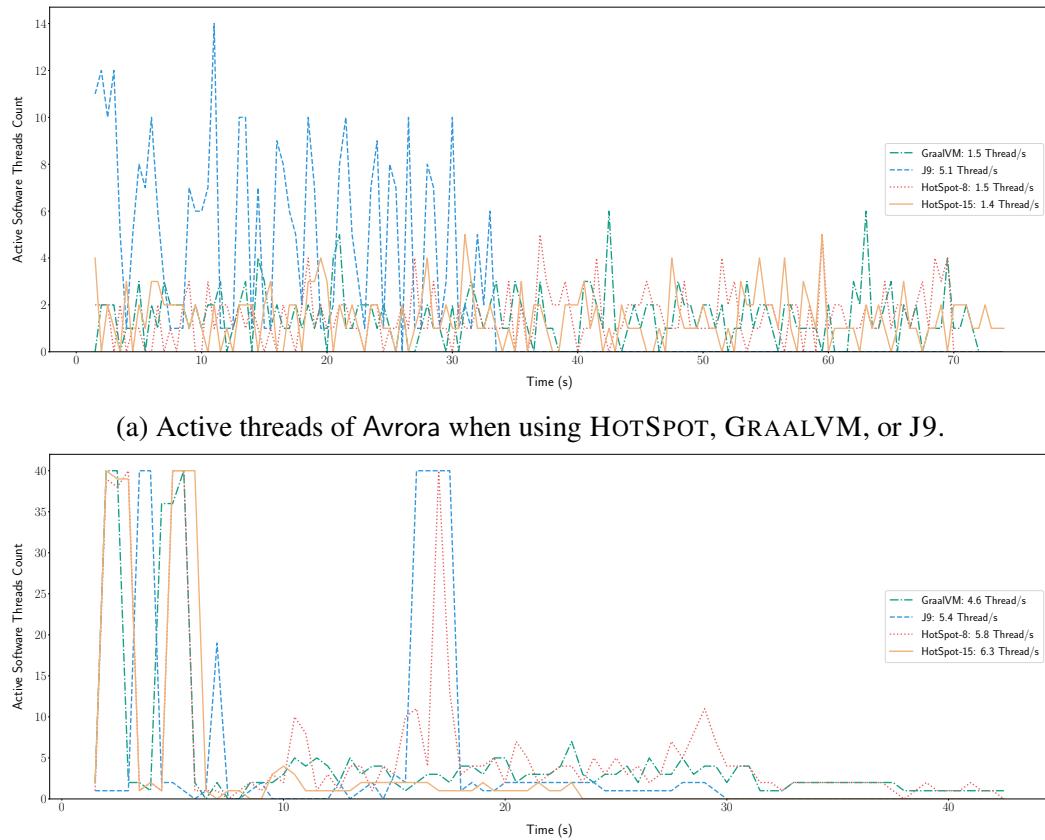


Figure 6.8: Active threads evolution when using HOTSPOT, GRAALVM, or J9.

The second example in Figure 6.8b depicts the active threads evolution over time of the Reactors benchmark. In this case, all the JVMs have a close average of threads per second. Nevertheless, one can still observe that HOTSPOT-15 and J9 keep running faster, which confirms the results of Figure 6.5, where both JVMs consume much less energy compared to GRAALVM and HOTSPOT-8. This difference in energy consumption between benchmarks can be less likely caused by thread management for the Reactors benchmark, as HOTSPOT-8 reports on a higher average of active threads. However, the TLH mechanism was not as efficient as for the Avrora benchmark, as dedicating a heap for each thread can also cause some extra memory usage for data duplication and synchronization, especially if a lot of data is shared between threads.

In conclusion, JVMs thread management can sometimes constitute a key factor that impacts software energy consumption. However, we suggest to check and compare JVMs before deploying a software, especially if the target application is parallel and multi-threaded.

### Just-in-Time Compilation

The purpose of experiments on JIT is to highlight the different strategies that can impact software energy consumption within a JVM and between JVMs. We identified a set of JIT compiler parameters for every JVM platform.

For J9, we considered fixing the intensity of the JIT compiler at multiple levels (cold, warm, hot, veryhot, and scorching).<sup>9</sup> The hotter the JIT, the more code optimization to be triggered. We also varied the minimum count method calls before a JIT compilation occurs (10, 50, 100), and the number of JIT instances threads (from 1 to 7). For HOTSPOT-15, we conducted experiments while disabling the tiered compilation (that generates compiled versions of methods that collect profiling information about themselves), and we also varied the JIT maximum compilation level from 0 to 4, we also tried out HOTSPOT with a basic GRAALVM JIT. We note that the level 0 of JIT compilation only uses the interpreter, with no real JIT compilation. Levels 1, 2, and 3 use the C1 compiler (called client-side) with different amount of extra tuning. The JIT C2 (also called server-side JIT) compiler only kicks-in at level 4.

For GRAALVM, we conducted experiments with and without the JVMCI (a Java-based JVM compiler interface enabling a compiler written in Java to be used by the JVM as a dynamic compiler). We also considered both the community and economy configurations (no enterprise). A JIT+AOT (*Ahead Of Time*) disabling experiment has also been considered for all of the 3 JVM platforms. Table 6.4 reports on the energy consumption of the experiments we conducted for most of the benchmarks and JIT configurations under study.

---

<sup>9</sup>[<https://www.eclipse.org/openj9/docs/jit/>]

Table 6.4: Energy consumption when tuning JIT settings on HOTSPOT, GRAALVM &amp; J9

| JVM     | Mode           | ALS    |                 | Avrora |                 | Dotty    |                 | Fj-kmeans |                 | H2      |                 |
|---------|----------------|--------|-----------------|--------|-----------------|----------|-----------------|-----------|-----------------|---------|-----------------|
| GRAALVM | <i>Default</i> | 2848   | <i>p-values</i> | 3861   | <i>p-values</i> | 2271     | <i>p-values</i> | 948       | <i>p-values</i> | 1959    | <i>p-values</i> |
|         | DisableJVMCI   | 3099   | <b>0.001</b>    | 4012   | <b>0.041</b>    | 2694     | <b>0.001</b>    | 934       | <b>0.011</b>    | 1771    | <b>0.005</b>    |
|         | Economy        | 4503   | <b>0.001</b>    | 3895   | 0.793           | 3466     | <b>0.001</b>    | 1306      | <b>0.002</b>    | 2560    | <b>0.001</b>    |
| J9      | <i>Default</i> | 3792   | <i>p-values</i> | 2122   | <i>p-values</i> | 3515     | <i>p-values</i> | 1271      | <i>p-values</i> | 2426    | <i>p-values</i> |
|         | Thread 1       | 4157   | <b>0.001</b>    | 2121   | 0.875           | 4749     | <b>0.001</b>    | 1297      | 0.097           | 2597    | 0.066           |
|         | Thread 3       | 3849   | 0.018           | 2105   | 0.713           | 3574     | 0.104           | 1259      | 0.371           | 2450    | 0.637           |
|         | Thread 7       | 3843   | 0.041           | 2386   | 0.372           | 3511     | 0.875           | 1259      | 0.25            | 2424    | 0.637           |
|         | Count 0        | 8461   | <b>0.001</b>    | 2425   | <b>0.001</b>    | 4877     | <b>0.001</b>    | 2289      | <b>0.002</b>    | 3212    | <b>0.001</b>    |
|         | Count 1        | 4281   | <b>0.001</b>    | 2150   | 0.431           | 3164     | <b>0.001</b>    | 1841      | <b>0.002</b>    | 2546    | 0.431           |
|         | Count 10       | 3980   | <b>0.001</b>    | 2431   | 0.713           | 3771     | <b>0.001</b>    | 1312      | <b>0.011</b>    | 2779    | <b>0.003</b>    |
|         | Count 100      | 3878   | <b>0.007</b>    | 2141   | 0.713           | 3469     | 0.227           | 1363      | 0.523           | 2513    | 0.128           |
|         | Cold           | 6788   | <b>0.001</b>    | 2134   | 0.637           | 4855     | <b>0.001</b>    | 1636      | <b>0.002</b>    | 2873    | <b>0.001</b>    |
|         | Warm           | 4594   | <b>0.001</b>    | 2112   | 0.713           | 4253     | <b>0.001</b>    | 1244      | 0.055           | 2521    | 0.128           |
|         | Hot            | 7553   | <b>0.001</b>    | 2310   | <b>0.001</b>    | 12749    | <b>0.001</b>    | 1452      | <b>0.002</b>    | 3973    | <b>0.001</b>    |
|         | VeryHot        | 15113  | <b>0.001</b>    | 3300   | <b>0.001</b>    | 18235    | <b>0.001</b>    | 2430      | <b>0.002</b>    | 7205    | <b>0.001</b>    |
|         | Schorching     | 18316  | <b>0.001</b>    | 3541   | <b>0.001</b>    | 21686    | <b>0.001</b>    | 2514      | <b>0.002</b>    | 7855    | <b>0.001</b>    |
| HOTSPOT | <i>Default</i> | 2997   | <i>p-values</i> | 4014   | <i>p-values</i> | 2516     | <i>p-values</i> | 934       | <i>p-values</i> | 1796    | <i>p-values</i> |
|         | Graal          | 2999   | 0.637           | 3971   | 0.318           | 2512     | 0.318           | 929       | 0.609           | 1662    | <b>0.007</b>    |
|         | Lvl 0          | 491443 | /               | 14484  | /               | 84395    | /               | /         | /               | 52344   | /               |
|         | Lvl 1          | /      | /               | 3731   | <b>0.001</b>    | 3302     | <b>0.001</b>    | 1256      | <b>0.002</b>    | 2523    | <b>0.001</b>    |
|         | Lvl 2          | 3079   | <b>0.004</b>    | 4110   | 0.189           | 3723     | <b>0.001</b>    | 22547     | <b>0.002</b>    | 2840    | <b>0.001</b>    |
|         | Lvl 3          | 16375  | <b>0.001</b>    | 7729   | <b>0.001</b>    | 6789     | <b>0.001</b>    | 144914    | <b>0.002</b>    | 4139    | <b>0.001</b>    |
|         | NotTired       | 3254   | <b>0.001</b>    | 3901   | 0.189           | 3110     | <b>0.001</b>    | 912       | <b>0.021</b>    | 1846    | 0.227           |
| JVM     | Mode           | Neo4j  |                 | Pmd    |                 | Reactors |                 | Scrabble  |                 | Sunflow |                 |
| GRAALVM | <i>Default</i> | 3313   | <i>p-values</i> | 297    | <i>p-values</i> | 23452    | <i>p-values</i> | 452       | <i>p-values</i> | 335     | <i>p-values</i> |
|         | DisableJVMCI   | 5086   | <b>0.001</b>    | 353    | <b>0.001</b>    | 25007    | <b>0.007</b>    | 503       | <b>0.002</b>    | 354     | 0.227           |
|         | Economy        | 9525   | <b>0.001</b>    | 270    | <b>0.001</b>    | 30317    | <b>0.001</b>    | 649       | <b>0.002</b>    | 392     | <b>0.002</b>    |
| J9      | <i>Default</i> | 4336   | <i>p-values</i> | 277    | <i>p-values</i> | 12705    | <i>p-values</i> | 734       | <i>p-values</i> | 476     | <i>p-values</i> |
|         | Thread 1       | 4906   | <b>0.001</b>    | 350    | <b>0.001</b>    | 12800    | 0.713           | 948       | <b>0.002</b>    | 626     | <b>0.005</b>    |
|         | Thread 3       | 4477   | <b>0.005</b>    | 294    | <b>0.004</b>    | 12647    | 0.875           | 795       | 0.021           | 457     | 0.27            |
|         | Thread 7       | 4431   | 0.104           | 273    | 0.372           | 12600    | 0.875           | 808       | 0.055           | 463     | 0.372           |
|         | Count 0        | 10565  | <b>0.001</b>    | 744    | <b>0.001</b>    | 18084    | <b>0.001</b>    | 1476      | <b>0.002</b>    | 922     | <b>0.001</b>    |
|         | Count 1        | 7166   | <b>0.001</b>    | 272    | 0.128           | 14715    | <b>0.001</b>    | 1005      | <b>0.002</b>    | 514     | 0.052           |
|         | Count 10       | 4979   | <b>0.001</b>    | 299    | <b>0.001</b>    | 12000    | 0.104           | 860       | <b>0.005</b>    | 1182    | <b>0.001</b>    |
|         | Count 100      | 4547   | <b>0.001</b>    | 262    | 0.031           | 12313    | 0.024           | 768       | 0.16            | 634     | <b>0.004</b>    |
|         | Cold           | 7250   | <b>0.001</b>    | 275    | 0.372           | 20380    | <b>0.001</b>    | 870       | <b>0.005</b>    | 386     | <b>0.001</b>    |
|         | Warm           | 5305   | <b>0.001</b>    | 411    | <b>0.001</b>    | 13726    | <b>0.001</b>    | 913       | <b>0.002</b>    | 336     | <b>0.001</b>    |
|         | Hot            | 8979   | <b>0.001</b>    | 857    | <b>0.001</b>    | 36534    | <b>0.001</b>    | 1180      | <b>0.002</b>    | 506     | 0.128           |
|         | VeryHot        | 19359  | <b>0.001</b>    | 793    | <b>0.001</b>    | 38303    | <b>0.001</b>    | 5420      | <b>0.002</b>    | 1692    | <b>0.001</b>    |
|         | Schorching     | 26409  | <b>0.014</b>    | 808    | <b>0.001</b>    | 43929    | <b>0.001</b>    | 5583      | <b>0.002</b>    | 1778    | <b>0.001</b>    |
| HOTSPOT | <i>Default</i> | 4787   | <i>p-values</i> | 323    | <i>p-values</i> | 11685    | <i>p-values</i> | 530       | <i>p-values</i> | 325     | <i>p-values</i> |
|         | Graal          | 4750   | 0.372           | 327    | 0.189           | 11548    | 0.523           | 537       | 0.701           | 338     | 0.564           |
|         | Lvl 0          | 356287 | /               | 1073   | /               | 148381   | /               | /         | /               | 14559   | /               |
|         | Lvl 1          | 8304   | <b>0.001</b>    | 222    | <b>0.001</b>    | 22410    | <b>0.002</b>    | 735       | <b>0.002</b>    | 277     | <b>0.007</b>    |
|         | Lvl 2          | 19058  | <b>0.001</b>    | 226    | <b>0.001</b>    | 40701    | <b>0.002</b>    | 2291      | <b>0.002</b>    | 4131    | <b>0.001</b>    |
|         | Lvl 3          | 44594  | <b>0.001</b>    | 330    | <b>0.005</b>    | 190124   | <b>0.002</b>    | 9070      | <b>0.002</b>    | 10449   | <b>0.001</b>    |
|         | NotTired       | 3844   | <b>0.001</b>    | 933    | <b>0.001</b>    | 11256    | <b>0.041</b>    | 588       | <b>0.003</b>    | 405     | <b>0.001</b>    |

The *p*-values are computed with the mann-whitney test, with a null hypothesis of the energy consumption being equal to the default configuration. The *p*-values in bold show the values that are significantly different from the default configuration with a 95% confidence, where the values in green highlight the strategies that consumed significantly less energy than default (less energy and significant *p*-value).

For J9, we noticed that adopting the default JIT configuration is always better than specifying a custom JIT intensity. The warm configuration delivers the closest results to the best results observed with the default configuration. Moreover, choosing a low minimum count of method calls seems to have a negative effect on the execution time and the energy consumption. The only parameter that can give better performance than the default configuration in some cases is the number of parallel JIT threads—using 3 and 7 parallel threads—but is not statistically significant.

For GRAALVM, the default community configuration is often the one that consumes the least energy. Disabling the JVMCI can—in some cases—have a benefit (16% of energy consumption reduction for the H2 benchmark), but still gave overall worst results (80% more energy consumption for the Neo4J benchmark). In addition, switching the economy version of the GRAALVM JIT often results in consuming more energy and delaying the execution.

For HOTSPOT, keeping the default configuration of the JIT is also mostly good. In fact, the usage of the C2 JIT is often beneficial (JIT level 4) in most cases, while using the GRAALVM JIT reported similar energy efficiency. Yet, some benchmarks showed that using only the C1 JIT (JIT level 1) is more efficient and even outperforms the usage of the C2 compiler. 10% on Avrora and 30% on Pmd are examples of energy savings observed by using the C1 compiler. However, being limited to the C1 compiler can also cause a huge degradation in energy consumption, such as 32% and 34% of additional energy consumed for the Dotty and FJ-kmeans benchmarks, respectively. Hence, if it is a matter of not using the C2 JIT, the experiments have shown that the level 1 JIT is always the best, compared to levels 2 or 3 that also use the C1 JIT, but with more options, such as code profiling that impacts negatively the performance and the energy efficiency. Level 0 JIT compilation should never be an option to consider. No *p*-value has been computed for Level 0, due to the limited amount of iterations executed with this mode (very high execution time, clearly much more consumed energy).

Globally, we conclude through these experiments that keeping the default JIT configuration was more energy efficient in 80% of our experiments and for the 3 classes of JVMs. This advocates that using the default JIT configuration that can often deliver near-optimal energy efficiency. Although, some other configurations, such as using only the C1 JIT or disabling the JVMCI could be advantageous in some cases.

Table 6.5: The different J9 GC policies

| Policy              | Description  |
|---------------------|--|
| Balanced            | Evens out pause times & reduces the overhead of the costlier operations associated with GC                                   |
| Metronome           | GC occurs in small interruptible steps to avoid stop-the-world pauses  |
| Nogc                | Handles only memory allocation & heap expansion, with no memory reclaim  |
| Gencon (default)    | Minimizes GC pause times without compromising throughput, best for short-lived objects                                       |
| Concurrent Scavenge | Minimizes the time spent in stop-the-world pauses by collecting nursery garbage in parallel with running application threads |
| optthrput           | Optimized for throughput, stopping applications for long pauses while GC takes place   |
| Optavgpause         | Sacrifices performance throughput to reduce pause times compared to optthrput  |

Table 6.6: The different HOTSPOT/GRAALVM GC policies

| Policy         | Description   |
|----------------|---|
| G1GC (default) | Uses concurrent & parallel phases to achieve low-pauses GC and maintain good throughput                                     |
| SerialGC       | Uses a single thread to perform all garbage collection work (no threads communication overhead)                             |
| ParallelGC     | Known as throughput collector: similar to SerialGC, but uses multiple threads to speed up garbage collections for scavenges |
| parallelOldGC  | Use parallel garbage collection for the full collections, enabling it automatically enables the ParallelGC                  |

## Garbage Collection

Changing or tuning the GC strategy has been acknowledged to impact the JVM performances [89]. To investigate if this impact also benefits to energy consumption, we conducted a set of experiments on the selected JVMs. We considered different garbage collector strategies with a limited memory quantity of 2 GB, and recorded the execution time and the energy consumption. The tested GC strategies options mainly vary between J9 and the other 2 JVMs, as detailed in Table 6.5.

For HOTSPOT and GRAALVM, we also considered many GC policies, as described in Table 6.6. Furthermore, other GC settings have also been tested for all JVM platforms, such as the *pause time*, the *number of parallel threads* and *concurrent threads* and *tenure age*.

Table 6.7 summarizes the results of all the tested GC strategies with our selected benchmarks and the *p*-values of the mann-whitney test, with a null hypothesis of the energy consumption being equal to the default configuration with a 95% confidence. The *p*-values

Table 6.7: Energy consumption when tuning GC settings on HOTSPOT, GRAALVM &amp; J9

| JVM     | Mode                | ALS  |                 | Avrora   |                 | Dotty    |                 | H2      |                 | Neo4j |                 |
|---------|---------------------|------|-----------------|----------|-----------------|----------|-----------------|---------|-----------------|-------|-----------------|
| GRAALVM | <i>Default</i>      | 2570 | <i>p-values</i> | 4153     | <i>p-values</i> | 2223     | <i>p-values</i> | 1870    | <i>p-values</i> | 5256  | <i>p-values</i> |
|         | 1Concurrent         | 2567 | 0.403           | 4007     | <b>0.023</b>    | 2220     | 1.000           | 1883    | 0.982           | 5368  | 1.000           |
|         | 1Parallel           | 2668 | <b>0.012</b>    | 3904     | <b>0.008</b>    | 2228     | 0.835           | 2022    | <b>0.000</b>    | 5836  | <b>0.012</b>    |
|         | 5Concurrent         | 2570 | 0.676           | 4117     | 0.161           | 2215     | 0.210           | 1862    | 0.505           | 5259  | 1.000           |
|         | 5Parallel           | 2561 | 0.676           | 3863     | <b>0.012</b>    | 2237     | 1.000           | 1910    | 0.103           | 5223  | 0.403           |
|         | DisableExplicitGC   | 2559 | 0.210           | 3911     | <b>0.003</b>    | 2215     | 1.000           | 1978    | <b>0.018</b>    | 5106  | 0.210           |
|         | ParallelICG         | 2720 | <b>0.012</b>    | 4016     | 0.206           | 2237     | 0.531           | 1945    | <b>0.000</b>    | 13172 | <b>0.037</b>    |
|         | ParallelOldGC       | 2715 | <b>0.012</b>    | 4032     | 0.103           | 2221     | 1.000           | 1925    | <b>0.002</b>    | 13362 | /               |
|         | <i>Default</i>      | 3371 | <i>p-values</i> | 2243     | <i>p-values</i> | 3237     | <i>p-values</i> | 2107    | <i>p-values</i> | 6277  | <i>p-values</i> |
| J9      | Balanced            | 9012 | <b>0.012</b>    | 2232     | 0.597           | 3429     | <b>0.012</b>    | 2247    | <b>0.002</b>    | 8853  | <b>0.012</b>    |
|         | ConcurrentScavenge  | 3487 | <b>0.012</b>    | 2270     | 0.280           | 3388     | <b>0.012</b>    | 2319    | <b>0.001</b>    | 6857  | <b>0.012</b>    |
|         | Metronome           | 2098 | <b>0.012</b>    | 2265     | 0.505           | 3815     | <b>0.012</b>    | 2717    | <b>0.000</b>    | 12103 | <b>0.012</b>    |
|         | Nogc                | 3454 | <b>0.022</b>    | 2239     | 0.872           | 3259     | 0.144           | 2207    | 0.031           | 61781 | <b>0.012</b>    |
|         | Optavgpause         | 3601 | <b>0.012</b>    | 2431     | 0.370           | 3425     | <b>0.012</b>    | 2169    | 0.297           | 7495  | <b>0.012</b>    |
|         | Optthruput          | 3357 | 1.000           | 2432     | 0.241           | 3178     | 0.403           | 2194    | 0.139           | 6324  | 0.835           |
|         | ScvNoAdaptiveTenure | 3494 | <b>0.012</b>    | 2253     | 0.800           | 3248     | 0.835           | 2161    | 0.103           | 8442  | <b>0.012</b>    |
|         | <i>Default</i>      | 2765 | <i>p-values</i> | 4115     | <i>p-values</i> | 2492     | <i>p-values</i> | 1673    | <i>p-values</i> | 8152  | <i>p-values</i> |
|         | 1Concurrent         | 2775 | 0.060           | 4137     | 0.346           | 2493     | 0.676           | 1675    | 0.918           | 8062  | 0.531           |
| HOTSPOT | 1Parallel           | 2863 | <b>0.012</b>    | 4142     | 0.800           | 2526     | <b>0.037</b>    | 1853    | <b>0.001</b>    | 8270  | 0.676           |
|         | 5Concurrent         | 2758 | 0.676           | 4091     | 0.872           | 2485     | 0.296           | 1681    | 0.608           | 8087  | 0.835           |
|         | 5Parallel           | 2767 | 0.144           | 4176     | 0.077           | 2473     | 0.060           | 1654    | 0.720           | 8046  | 0.835           |
|         | DisableExplicitGC   | 2734 | <b>0.012</b>    | 4062     | 0.448           | 2483     | 0.835           | 1702    | 0.248           | 7710  | <b>0.037</b>    |
|         | ParallelICG         | 2653 | <b>0.012</b>    | 4064     | 0.629           | 2356     | <b>0.012</b>    | 1602    | <b>0.008</b>    | 8953  | 0.060           |
|         | ParallelOldGC       | 2764 | 0.531           | 4070     | 0.872           | 2525     | 0.802           | 1675    | 0.959           | 7963  | 0.403           |
|         | SerialGC            | 2593 | <b>0.012</b>    | 4083     | 0.395           | 2378     | <b>0.012</b>    | 1620    | <b>0.046</b>    | 5745  | <b>0.012</b>    |
| JVM     | Mode                | Pmd  |                 | Reactors |                 | Scrabble |                 | Sunflow |                 |       |                 |
| GRAALVM | <i>Default</i>      | 281  | <i>p-values</i> | 2611     | <i>p-values</i> | 410      | <i>p-values</i> | 353     | <i>p-values</i> |       |                 |
|         | 1Concurrent         | 286  | 0.182           | 2664     | 1.000           | 413      | 0.885           | 347     | 0.573           |       |                 |
|         | 1Parallel           | 298  | <b>0.000</b>    | 2869     | 0.144           | 561      | <b>0.030</b>    | 317     | <b>0.000</b>    |       |                 |
|         | 5Concurrent         | 282  | 0.980           | 2611     | 0.531           | 414      | 0.885           | 362     | 0.356           |       |                 |
|         | 5Parallel           | 282  | 0.538           | 2682     | 0.531           | 424      | 0.112           | 353     | 0.758           |       |                 |
|         | DisableExplicitGC   | 281  | 0.758           | 2704     | 0.676           | 400      | 0.312           | 332     | <b>0.036</b>    |       |                 |
|         | ParallelICG         | 282  | 0.878           | 2267     | <b>0.022</b>    | 545      | <b>0.030</b>    | 329     | <b>0.003</b>    |       |                 |
|         | ParallelOldGC       | 282  | 0.918           | 2514     | <b>0.012</b>    | 535      | <b>0.030</b>    | 329     | <b>0.008</b>    |       |                 |
|         | <i>Default</i>      | 232  | <i>p-values</i> | 1644     | <i>p-values</i> | 589      | <i>p-values</i> | 510     | <i>p-values</i> |       |                 |
| J9      | Balanced            | 235  | 0.412           | 1902     | <b>0.020</b>    | 661      | 0.061           | 519     | 0.505           |       |                 |
|         | ConcurrentScavenge  | 233  | 0.878           | 1705     | 0.903           | 639      | 0.194           | 546     | <b>0.018</b>    |       |                 |
|         | Metronome           | 239  | <b>0.022</b>    | 2089     | <b>0.020</b>    | 758      | <b>0.030</b>    | 422     | <b>0.000</b>    |       |                 |
|         | Nogc                | 227  | 0.151           | 1505     | <b>0.066</b>    | 711      | <b>0.030</b>    | 499     | 0.720           |       |                 |
|         | Optavgpause         | 253  | <b>0.000</b>    | 1772     | 0.391           | 1089     | <b>0.030</b>    | 478     | <b>0.046</b>    |       |                 |
|         | Optthruput          | 232  | 0.878           | 1554     | 0.111           | 640      | 0.194           | 429     | <b>0.000</b>    |       |                 |
|         | ScvNoAdaptiveTenure | 228  | 0.137           | 1908     | <b>0.020</b>    | 618      | 0.665           | 528     | 0.218           |       |                 |
|         | <i>Default</i>      | 316  | <i>p-values</i> | 1546     | <i>p-values</i> | 484      | <i>p-values</i> | 347     | <i>p-values</i> |       |                 |
|         | 1Concurrent         | 316  | 0.383           | 1533     | 0.665           | 478      | 0.470           | 334     | <b>0.218</b>    |       |                 |
| HOTSPOT | 1Parallel           | 334  | <b>0.000</b>    | 1747     | <b>0.030</b>    | 592      | <b>0.030</b>    | 320     | <b>0.002</b>    |       |                 |
|         | 5Concurrent         | 314  | 0.330           | 1497     | 0.665           | 469      | <b>0.030</b>    | 336     | 0.259           |       |                 |
|         | 5Parallel           | 316  | 0.573           | 1546     | 0.470           | 489      | 0.470           | 342     | 0.573           |       |                 |
|         | DisableExplicitGC   | 312  | 0.200           | 1545     | 0.470           | 470      | 0.061           | 325     | <b>0.014</b>    |       |                 |
|         | ParallelICG         | 300  | <b>0.000</b>    | 1476     | 0.885           | 579      | <b>0.030</b>    | 336     | 0.081           |       |                 |
|         | ParallelOldGC       | 314  | 0.720           | 1582     | 0.194           | 475      | 0.470           | 333     | 0.151           |       |                 |
|         | SerialGC            | 307  | <b>0.002</b>    | 1672     | 0.061           | 601      | <b>0.030</b>    | 352     | 0.473           |       |                 |

in bold show the values that are significantly different from the default configuration, where the values in green highlight the strategies that consumed significantly less energy than default. For GRAALVM, one can see that the GC default configuration is efficient in most experiments, compared to other strategies. The main noticeable impact is related to the ParallelGC and ParallelOldGC. In fact, the ParallelGC can be 13% more energy efficient in some applications with a significant *p*-value, such as Reactors, compared to default. However, the same GC strategy can cause the software to consume twice times more, as for the Neo4j benchmark, due to the high communications between the GC threads, and the fragmentation of the memory.

For J9, the default Gencon GC causes the software to report an overall good energy efficiency among the tested benchmarks. However, other GC can cause better or worse energy consumption than Gencon depending on workloads. Using the Metronome GC consumes 35% less energy for the ALS benchmark and 17% less energy for the Sunflow benchmark, but it also consumes twice energy for the Neo4j benchmark and 28% more energy for Reactors. The reason is that Metronome occurs in small preemptible steps to reduce the GC cycles composed of many GC quanta. This suits well for real-time applications and can be very beneficial when long GC pauses are not desired, as observed for ALS. However, if the heap space is insufficient after a GC cycle, another cycle will be triggered with the same ID. As Metronome supports class unloading in the standard way, there might be pause time outliers during GC activities, inducing a negative impact on the Neo4j execution time and energy consumption.

The same goes for the Balanced GC that tries to reduce the maximum pause time on the heap by dividing it into individually managed regions. The Balanced strategy is preferred to reduce the pause times that are caused by global GC, but can also be disadvantageous due to the separate management of the heap regions, such as for ALS where it consumed about three times the energy consumption, compared to the default Gencon GC. On the other hand, the Optthruput GC, which stops the application longer and less frequently, gave very good overall results and sometimes even outperformed the Gencon GC by a small margin. Other JVM parameters, such as the ConcurrentScavenge or noAdaptiveTenure did not have a substantial impact during our experiments.

Finally, the results of HOTSPOT shared similarities with GRAALVM. The ParallelGC happened to give better (6% for Dotty) or worst (10% for Neo4j) energy efficiency compared to the default GC. On the other hand, ParallelOldGC and Serial GC gave better results than the default G1 GC. More specifically, the second one consumed 30% and 6% less energy than default GC for the Neo4j and Dotty benchmarks, respectively. The most interesting result for HOTSPOT is the 30% energy reduction obtained with the Serial GC. This last was

also more efficient on ALS (6% less energy), compared to the default G1 GC, due to its single-threaded GC that only uses one CPU core.

Unfortunately, we cannot convey predictive patterns on how to configure the GC to optimize energy efficiency. However, some considerations should be taken into account when choosing the GC, such as the garbage collection time, the throughput, etc. Other settings are less trivial to determine, such as tenure age, memory size, and GC threads count. Experiments should thus be conducted on the software to tune the most convenient GC configuration to achieve a better energy efficiency in production.

Therefore, we noticed during our experiments that, even if using the default GC configuration ensures an overall steady and correct energy consumption, we still found other settings that reduce that energy consumption in 50% of our experiments. Tuning the GC according to the hosted app/benchmark is thus critical to reduce the energy consumption.

To answer **RQ 2**, we conclude that users should be careful while choosing and configuring the garbage collector as substantial energy enhancements can be recorded from a configuration to another. The default GC consumed more energy than other strategies in most of the situations. However, keeping the default JIT parameters often delivers near-optimal energy efficiency. In addition, the JVM platforms can handle differently multi-threaded applications and thus consume a different amount of time/energy. Dedicated performance tuning evaluations should therefore be conducted on such software to identify the most energy-efficient platform and settings.

## 6.4 Threats to Validity

A number of issues may affect the validity of our work. First, we have the use of the Intel RAPL, one of the most accurate available tools to measure the energy consumption of software [79, 43]. However, RAPL only gives the global energy consumption and no fine-grained measures at process or thread levels. We used baremetal hardware with a minimal OS and tuned off all the non-essential services and daemons to limit the overhead that the OS may add to the execution, even if it is not substantial [117].

Another measurement issue is the CPU energy variation within machines [117], thus we executed all the comparable tests on the same node and with the recommended settings to mitigate this threat.

Benchmarks execution time could also constitute on more subtle threat to the validity of our work, especially for some benchmarks that run fast, such as the Pmd benchmark. We thus gave a lot of attention on how long the benchmark is running for the hardware we used,

Table 6.8: J-Referral recommendations.

| Project | Metric       | Energy | JVM          | Execution flags     |
|---------|--------------|--------|--------------|---------------------|
| Zip4J   | Least energy | 2210 J | 16-sapmchn   | default             |
|         | Most energy  | 3680 J | 8.0.292-J9   | default             |
| K-nucl  | Least energy | 1296 J | 21.1.r16-grl | default             |
|         | Most energy  | 4433 J | 15.0.1-J9    | -Xjit:optlevel=cold |

and we tuned the input data workloads to execute benchmarks for at least many (from 10 to hundreds) seconds. Experiments ran at least 30 times to compute the average consumption and the associated standard deviation, therefore reasoning over reasonable dispersion around the average.

How generalizable are our results? We believe that our study conclusions and guideline remain empirical, as we do not intend to generalize any result we obtained for some JVM or benchmark. We provide practitioners with some prerequisites to check before software deployment to reduce the software energy footprint by considering the JVM and its settings.

## 6.5 Tools and contributions

Table 6.8 illustrates an example of the final report of J-Referral. The tool was tested for 2 real Java projects: Zip4J and<sup>10</sup> and K-nucleotide.<sup>11</sup>. Zip4J runs a large file compression, while K-nucleotide extracts a DNA sequence, and updates a hashtable of k-nucleotide keys to count specific values. The short report presented in Table 6.8 shows the ratio of potential energy saving between the most and least energy consuming tested JVM (40% and 70% energy savings for Zip4J and K-nucleotide respectively). Options are available for J-Referral to obtain much more detailed reports including execution time, DRAM usage, split DRAM vs. CPU consumption, etc. The tool is available as *open-source software* (OSS) from our anonymous repository.<sup>12</sup>

## 6.6 Conclusion

The results of our investigations showed that many JVMs share energy efficiencies and can grouped into 3 classes: HOTSPOT, J9, and GRAALVM. The 3 selected JVM classes can however report a different energy efficiency for different software and/or workloads,

<sup>10</sup><https://github.com/srikanth-lingala/zip4j>

<sup>11</sup><https://benchmarksgame-team.pages.debian.net/benchmarksgame/performance/knucleotide.html>

<sup>12</sup><https://github.com/chakib-belgaid/jreferral>

sometimes by a large margin. While we did not observed a unique champion when it comes to energy consumption, GRAALVM reported the best energy efficiency for a majority of benchmarks. Nonetheless, each JVM can achieve the best or the worst depending on the hosted application. One cause can be thread management strategies, as observed with J9 when advantageously running Avrora. Moreover, some JVM settings can cause energy consumption variations. Our experiments showed that the default JIT compiler of the JVM is often near-optimal, in at least 80% of our experiments. The default GC, however, was outperforming alternative strategies in half of our experiments, with some large gains observed when using some alternative GC depending on the application characteristics.

Our main conclusions and guidelines can be thus summarized as: *i*) testing software on the 3 classes of JVM and identifying the one that consumes the least is a good practice, especially for multi-threading purposes, *ii*) while the JVM default JIT give often good energy consumption results, some settings may improve the energy consumption and could be tested, *iii*) the choice of the GC may lead to a large impact on the energy consumption in many situations, thus encouraging a careful tuning of this parameter prior to deployment. To ease the integration of the above guidelines, we propose a tool, named J-Referral, to recommend the most energy-efficient JVM distribution and configuration among more than a hundred considered possibilities. It establishes a full report on the energy consumption of both CPU and DRAM components for each JVM distribution and/or configuration to help the user to choose the one with the least consumption for a Java Software.



# **Chapter 7**

## **Discussion and Conclusion**

### **7.1 Conclusion**

### **7.2 Summary of Contributions**

This section will describe the contributions of this thesis. These can be summarized as follows:

1. **First Idea:** We proposed ...
2. **Second Idea:** We investigated ...
3. **Third Idea:** We addressed ...

### **7.3 Limitations and Challenges**

### **7.4 Future Work**

.... Some potential areas for future efforts could include the following:

1. ...
2. ...
3. ...



# Bibliography

- [noa] PYPL PopularitY of Programming Language index. <https://pypl.github.io/PYPL.html>.
- [2] (2008). *Pearson's Correlation Coefficient*. Springer Netherlands.
- [3] Abuabd, A. and Al-Sharif, Z. A. (2019). Virtualization vs. Containerization: Towards a Multithreaded Performance Evaluation Approach. In *2019 IEEE/ACS 16th International Conference on Computer Systems and Applications (AICCSA)*, pages 1–6.
- [4] Acun, B., Miller, P., and Kale, L. V. (2016a). Variation among processors under turbo boost in hpc systems. In *Proceedings of the 2016 International Conference on Supercomputing*, pages 1–12.
- [5] Acun, B., Miller, P., and Kale, L. V. (2016b). Variation Among Processors Under Turbo Boost in HPC Systems.
- [6] Akeret, J., Gamper, L., Amara, A., and Refregier, A. (2015). HOPE: A Python just-in-time compiler for astrophysical computations. *Astronomy and Computing*, 10:1–8.
- [7] Avgerinou, M., Bertoldi, P., and Castellazzi, L. (2017). Trends in data centre energy consumption under the european code of conduct for data centre energy efficiency. *Energies*, 10(10):1470.
- [Bailey et al.] Bailey, D., Barszcz, E., Barton, J., Browning, D., Carter, R., Dagum, L., Fineberg, S., Frederickson, P., Lasinski, T., Schreiber, R., Simon, H., Venkatakrishnan, V., and Weeratunga, S. The NAS Parallel Benchmarks. page 79.
- [9] Bailey, D. H., Barszcz, E., Barton, J. T., Browning, D. S., Carter, R. L., Dagum, L., Fatoohi, R. A., Frederickson, P. O., Lasinski, T. A., Schreiber, R. S., Simon, H. D., Venkatakrishnan, V., and Weeratunga, S. K. (1991). The nas parallel benchmarks&mdash;summary and preliminary results.
- [10] Balasubramanian, N., Balasubramanian, A., and Venkataramani, A. (2009). Energy consumption in mobile phones: a measurement study and implications for network applications. In *Proceedings of the 9th ACM SIGCOMM Conference on Internet Measurement*, pages 280–293.
- [11] Balouek, D., Carpen Amarie, A., Charrier, G., Desprez, F., Jeannot, E., Jeanvoine, E., Lèbre, A., Margery, D., Niclausse, N., Nussbaum, L., Richard, O., Pérez, C., Quesnel, F., Rohr, C., and Sarzyniec, L. (2013). Adding virtualization capabilities to the Grid'5000 testbed. In *Cloud Computing and Services Science*, volume 367 of *Communications in Computer and Information Science*. Springer.

- [12] Banerjee, A. and Roychoudhury, A. (2016). Automated re-factoring of android apps to enhance energy-efficiency. In *Proceedings of the International Conference on Mobile Software Engineering and Systems*, pages 139–150.
- [13] Baskar, P., Joseph, M. A., Narayanan, N., and Loya, R. B. (2013). Experimental investigation of oxygen enrichment on performance of twin cylinder diesel engine with variation of injection pressure. In *2013 International Conference on Energy Efficient Technologies for Sustainability*, pages 682–687. IEEE.
- [14] Bedard, D., Lim, M. Y., Fowler, R., and Porterfield, A. (2010). Powermon: Fine-grained and integrated power monitoring for commodity computer systems. In *Proceedings of the IEEE SoutheastCon 2010 (SoutheastCon)*, pages 479–484. IEEE.
- [15] Ben Asher, Y. and Rotem, N. (2009). The effect of unrolling and inlining for Python bytecode optimizations. In *Proceedings of SYSTOR 2009: The Israeli Experimental Systems Conference on - SYSTOR '09*, page 1, Haifa, Israel. ACM Press.
- [16] Benmoussa, K., Laaziri, M., Khoulji, S., Larbi, K. M., and Yamami, A. E. (2019). A new model for the selection of web development frameworks: Application to PHP frameworks. *International Journal of Electrical and Computer Engineering (IJECE)*, 9(1):695–703.
- [17] Blackburn, S. M., Diwan, A., Hauswirth, M., Sweeney, P. F., Nelson Amaral, J., Tuma, P., Pankratius, V., Nystrom, N., Moret, P., Kalibera, T., and et al. (2012). Evaluate collaboratory technical report: Can you trust your experimental results?
- [18] Blackburn, S. M., Garner, R., Hoffman, C., Khan, A. M., McKinley, K. S., Bentzur, R., Diwan, A., Feinberg, D., Frampton, D., Guyer, S. Z., Hirzel, M., Hosking, A., Jump, M., Lee, H., Moss, J. E. B., Phansalkar, A., Stefanović, D., VanDrunen, T., von Dincklage, D., and Wiedermann, B. (2006). The DaCapo benchmarks: Java benchmarking development and analysis. In *OOPSLA '06: Proceedings of the 21st annual ACM SIGPLAN conference on Object-Oriented Programming, Systems, Languages, and Applications*, pages 169–190, New York, NY, USA. ACM Press.
- [19] Borkar, S. (2005). Designing Reliable Systems from Unreliable Components: The Challenges of Transistor Variability and Degradation. *IEEE Micro*, 25(6).
- [20] Breitbart, J., Weidendorfer, J., and Trinitis, C. (2015). Case study on co-scheduling for hpc applications. In *2015 44th International Conference on Parallel Processing Workshops*, pages 277–285. IEEE.
- [21] Brown, A. W., Kaiser, K. A., and Allison, D. B. (2018). Issues with data and analyses: Errors, underlying themes, and potential solutions. *Proceedings of the National Academy of Sciences*, 115(11):2563–2570.
- [22] Bujnowski, G. and Smołka, J. (2020). Java and kotlin code performance in selected web frameworks. *Journal of Computer Sciences Institute*, 16:219–226.
- [23] Bukh, P. N. D. (1992). The art of computer systems performance analysis, techniques for experimental design, measurement, simulation and modeling.

- [24] Burtscher, M., Zecena, I., and Zong, Z. (2014). Measuring gpu power with the k20 built-in sensor. In *Proceedings of Workshop on General Purpose Processing Using GPUs*, pages 28–36.
- [Caldeira et al.] Caldeira, A. B., Grabowski, B., Haug, V., Kahle, M.-E., Laidlaw, A., Maciel, C. D., Sanchez, M., and Sung, S. Y. Ibm power system s822.
- [26] Caldeira, A. B., Grabowski, B., Haug, V., Kahle, M.-E., Maciel, C. D., and Sanchez, M. (2014). Ibm power systems s814 and s824 technical overview and introduction. *IBM Redbook REDP-5097-00*.
- [27] Calero, C., Mancebo Pavón, J., and García, F. (2021). Does maintainability relate to the energy consumption of software?
- [28] Cardenas, L. G., Gil, J. A., Domenech, J., Sahuquillo, J., and Pont, A. (2005). Performance comparison of a Web cache simulation framework. In *19th International Conference on Advanced Information Networking and Applications (AINA '05) Volume 1 (AINA Papers)*, volume 2, pages 281–284 vol.2.
- [29] Chamas, C. L., Cordeiro, D., and Eler, M. M. (2017). Comparing rest, soap, socket and grpc in computation offloading of mobile applications: An energy cost analysis. In *2017 IEEE 9th Latin-American Conference on Communications (LATINCOM)*, pages 1–6. IEEE.
- [30] Chasapis, D., Casas, M., Moretó, M., Schulz, M., Ayguadé, E., Labarta, J., and Valero, M. (2016a). Runtime-guided mitigation of manufacturing variability in power-constrained multi-socket numa nodes. In *Proceedings of the 2016 International Conference on Supercomputing*, pages 1–12.
- [31] Chasapis, D., Schulz, M., Casas, M., Ayguadé, E., Valero, M., Moretó, M., and Labarta, J. (2016b). Runtime-Guided Mitigation of Manufacturing Variability in Power-Constrained Multi-Socket NUMA Nodes.
- [32] Chiba, T., Yoshimura, T., Horie, M., and Horii, H. (2018). Towards selecting best combination of sql-on-hadoop systems and jvms. In *2018 IEEE 11th International Conference on Cloud Computing (CLOUD)*, pages 245–252. IEEE.
- [33] Coles, H., Qin, Y., and Price, P. (2014a). Comparing Server Energy Use and Efficiency Using Small Sample Sizes. Technical Report LBNL-6831E, 1163229.
- [34] Coles, H. C., Qin, Y., and Price, P. N. (2014b). Comparing server energy use and efficiency using small sample sizes. Technical report, Lawrence Berkeley National Lab.(LBNL), Berkeley, CA (United States).
- [35] Coley, G. (2012). Beaglebone rev a6 system reference manual. *Obtenido*, 4(23):2012.
- [36] Colmant, M., Rouvoy, R., Kurpicz, M., Sobe, A., Felber, P., and Seinturier, L. (2018a). The next 700 cpu power models. *Journal of Systems and Software*, 144:382–396.
- [37] Colmant, M., Rouvoy, R., Kurpicz, M., Sobe, A., Felber, P., and Seinturier, L. (2018b). The next 700 CPU power models. *Journal of Systems and Software*, 144.

- [38] Corral, L., Georgiev, A. B., Sillitti, A., and Succi, G. (2014). Method reallocation to reduce energy consumption: an implementation in android os. In *Proceedings of the 29th Annual ACM Symposium on Applied Computing*, pages 1213–1218.
- [39] Couto, M., Pereira, R., Ribeiro, F., Rua, R., and Saraiva, J. (2017). Towards a green ranking for programming languages. In *Proceedings of the 21st Brazilian Symposium on Programming Languages*, pages 1–8.
- [40] Crist, J. (2016). Dask Numba: Simple libraries for optimizing scientific python code. In *2016 IEEE International Conference on Big Data (Big Data)*, pages 2342–2343.
- [41] Das, R. and Saikia, D. L. P. (2016). Comparison of Procedural PHP with Codeigniter and Laravel Framework. [/paper/A-new-model-for-the-selection-of-web-development-to-Benmoussa-Laaziri/6eb6977a37b2d38e232472b43897ab6047bd751c](https://paperkit.net/paper/A-new-model-for-the-selection-of-web-development-to-Benmoussa-Laaziri/6eb6977a37b2d38e232472b43897ab6047bd751c).
- [42] de Matos, F. F. S., Rego, P. A., and Trinta, F. A. M. (2021). An empirical study about the adoption of multi-language technique in computation offloading in a mobile cloud computing scenario. In *CLOSER*, pages 207–214.
- [43] Desrochers, S., Paradis, C., and Weaver, V. M. (2016). A validation of dram rapl power measurements. In *Proceedings of the Second International Symposium on Memory Systems*, MEMSYS ’16, page 455–470, New York, NY, USA. Association for Computing Machinery.
- [44] Destefanis, G., Ortu, M., Porru, S., Swift, S., and Marchesi, M. (2016). A Statistical Comparison of Java and Python Software Metric Properties. In *Proceedings of the 7th International Workshop on Emerging Trends in Software Metrics*, WETSoM ’16, pages 22–28, New York, NY, USA. ACM.
- [45] Diouri, M. E. M., Glück, O., Lefevre, L., and Mignot, J.-C. (2013). Your cluster is not power homogeneous: Take care when designing green schedulers! In *2013 International Green Computing Conference Proceedings*, pages 1–10. IEEE.
- [46] Echtler, F. and Häußler, M. (2018). Open source, open science, and the replication crisis in hci. association for computing machinery, new york, ny, usa, 1–8.
- [47] Eddie Antonio Santos, Carson McLean, Christophr Solinas, and Abram Hindle (2017). How does docker affect energy consumption? Evaluating workloads in and out of Docker containers. *The journal of systems & Software*.
- [48] Efron, B. (2000). The bootstrap and modern statistics. *Journal of the American Statistical Association*, 95(452).
- [49] El Mehdi Diouri, M., Gluck, O., Lefevre, L., and Mignot, J.-C. (2013). Your cluster is not power homogeneous: Take care when designing green schedulers!
- [50] Fahad, M., Shahid, A., Manumachu, R. R., and Lastovetsky, A. (2019). A comparative study of methods for measurement of energy of computing. *Energies*, 12(11):2204.
- [51] Fernandes, B., Pinto, G., and Castor, F. (2017). Assisting non-specialist developers to build energy-efficient software. In *2017 IEEE/ACM 39th International Conference on Software Engineering Companion (ICSE-C)*, pages 158–160. IEEE.

- [52] Fieni, G., Rouvoy, R., and Seinturier, L. (2020). Smartwatts: Self-calibrating software-defined power meter for containers. In *2020 20th IEEE/ACM International Symposium on Cluster, Cloud and Internet Computing (CCGRID)*, pages 479–488. IEEE.
- [53] Fieni, G., Rouvoy, R., and Seinturier, L. (2021). Selfwatts: On-the-fly selection of performance events to optimize software-defined power meters. In *2021 IEEE/ACM 21st International Symposium on Cluster, Cloud and Internet Computing (CCGrid)*, pages 324–333. IEEE.
- [54] Gajewski, M. and Zabierowski, W. (2019). Analysis and Comparison of the Spring Framework and Play Framework Performance, Used to Create Web Applications in Java. In *2019 IEEE XVth International Conference on the Perspective Technologies and Methods in MEMS Design (MEMSTECH)*, pages 170–173.
- [55] Ge, R., Feng, X., Song, S., Chang, H.-C., Li, D., and Cameron, K. W. (2009). Powerpack: Energy profiling and analysis of high-performance systems and applications. *IEEE Transactions on Parallel and Distributed Systems*, 21(5):658–671.
- [56] Goodman, S. N., Fanelli, D., and Ioannidis, J. P. (2016). What does research reproducibility mean? *Science translational medicine*, 8(341):341ps12–341ps12.
- [57] Grambow, M., Meusel, L., Wittern, E., and Bermbach, D. (2020). Benchmarking microservice performance: A pattern-based approach. In *Proceedings of the 35th Annual ACM Symposium on Applied Computing*, pages 232–241, Brno Czech Republic. ACM.
- [58] Guimarães, M., Saraiva, J., and Belo, O. (2016). Some heuristic approaches for reducing energy consumption on database systems. *DBKDA 2016*, page 59.
- [59] Hackenberg, D., Ilsche, T., Schöne, R., Molka, D., Schmidt, M., and Nagel, W. E. (2013). Power measurement techniques on standard compute nodes: A quantitative comparison. In *2013 IEEE International Symposium on Performance Analysis of Systems and Software (ISPASS)*, pages 194–204. IEEE.
- [60] Hackenberg, D., Ilsche, T., Schuchart, J., Schöne, R., Nagel, W. E., Simon, M., and Georgiou, Y. (2014). Hdeem: high definition energy efficiency monitoring. In *2014 Energy Efficient Supercomputing Workshop*, pages 1–10. IEEE.
- [61] Hackenberg, D., Schöne, R., Ilsche, T., Molka, D., Schuchart, J., and Geyer, R. (2015). An energy efficiency feature survey of the intel haswell processor. In *2015 IEEE international parallel and distributed processing symposium workshop*, pages 896–904. IEEE.
- [62] Hammouda, A., Siegel, A. R., and Siegel, S. F. (2015). Noise-Tolerant Explicit Stencil Computations for Nonuniform Process Execution Rates. *ACM Transactions on Parallel Computing*, 2(1):1–33.
- [63] Hankins, T. L. (1986). A debate over experiment: Leviathan and the air-pump. hobbes, boyle, and the experimental life. steven shapin and simon schaffer. including a translation of hobbes's dialogus physicus de natura aeris by simon schaffer. princeton university press, princeton, nj, 1985. xiv, 442 pp., illus. 60. *Science*, 232(4753):1040–1042.

- [64] Hasan, S., King, Z., Hafiz, M., Sayagh, M., Adams, B., and Hindle, A. (2016a). Energy profiles of java collections classes. In *Proceedings of the 38th International Conference on Software Engineering*, pages 225–236.
- [65] Hasan, S., King, Z., Hafiz, M., Sayagh, M., Adams, B., and Hindle, A. (2016b). Energy Profiles of Java Collections Classes. In *2016 IEEE/ACM 38th International Conference on Software Engineering (ICSE)*, pages 225–236.
- [66] He, S., Manns, G., Saunders, J., Wang, W., Pollock, L., and Soffa, M. L. (2019). A statistics-based performance testing methodology for cloud applications. In *Proceedings of the 2019 27th ACM Joint Meeting on European Software Engineering Conference and Symposium on the Foundations of Software Engineering - ESEC/FSE 2019*, pages 188–199, Tallinn, Estonia. ACM Press.
- [67] Heinrich, F., Carpen-Amarie, A., Degomme, A., Hunold, S., Legrand, A., Orgerie, A.-C., and Quinson, M. (2017a). Predicting the performance and the power consumption of mpi applications with simgrid.
- [68] Heinrich, F., Carpen-Amarie, A., Degomme, A., Hunold, S., Legrand, A., Orgerie, A.-C., and Quinson, M. (2017b). Predicting the Performance and the Power Consumption of MPI Applications With SimGrid.
- [69] Hindle, A., Wilson, A., Rasmussen, K., Barlow, E. J., Campbell, J. C., and Romansky, S. (2014). Greenminer: A hardware based mining software repositories software energy consumption framework. In *Proceedings of the 11th working conference on mining software repositories*, pages 12–21.
- [70] Hirst, J. M., Miller, J. R., Kaplan, B. A., and Reed, D. D. (2013). Watts up? pro ac power meter for automated energy recording.
- [71] Ilsche, T., Hackenberg, D., Graul, S., Schone, R., and Schuchart, J. (2015). Power measurements for compute nodes: Improving sampling rates, granularity and accuracy. In *2015 Sixth International Green and Sustainable Computing Conference (IGSC)*, pages 1–8, Las Vegas, NV, USA. IEEE.
- [72] Inadomi, Y., Patki, T., Inoue, K., Aoyagi, M., Rountree, B., Schulz, M., Lowenthal, D., Wada, Y., Fukazawa, K., Ueda, M., et al. (2015a). Analyzing and mitigating the impact of manufacturing variability in power-constrained supercomputing. In *SC’15: Proceedings of the International Conference for High Performance Computing, Networking, Storage and Analysis*, pages 1–12. IEEE.
- [73] Inadomi, Y., Ueda, M., Kondo, M., Miyoshi, I., Patki, T., Inoue, K., Aoyagi, M., Rountree, B., Schulz, M., Lowenthal, D., Wada, Y., and Fukazawa, K. (2015b). Analyzing and mitigating the impact of manufacturing variability in power-constrained supercomputing.
- [74] Islam, S., Noureddine, A., and Bashroush, R. (2016). Measuring energy footprint of software features. In *2016 IEEE 24th International Conference on Program Comprehension (ICPC)*, pages 1–4. IEEE.
- [75] Jagroep, E., Procaccianti, G., van der Werf, J. M., Brinkkemper, S., Blom, L., and van Vliet, R. (2017). Energy efficiency on the product roadmap: an empirical study across releases of a software product. *Journal of Software: Evolution and process*, 29(2):e1852.

- [76] Jagroep, E., van der Werf, J. M. E., Jansen, S., Ferreira, M., and Visser, J. (2015). Profiling energy profilers. In *Proceedings of the 30th annual ACM symposium on applied computing*, pages 2198–2203.
- [77] Joakim v Kisroski, Hansfreid Block, John Beckett, Cloyce Spradling, Klaus-Dieter Lange, and Samuel Kounev (2016). Variations in CPU Power Consumption.
- [78] Kalibera, T., Mole, M., Jones, R. E., and Vitek, J. (2012). A black-box approach to understanding concurrency in dacapo. In Leavens, G. T. and Dwyer, M. B., editors, *Proceedings of the 27th Annual ACM SIGPLAN Conference on Object-Oriented Programming, Systems, Languages, and Applications, OOPSLA 2012, part of SPLASH 2012, Tucson, AZ, USA, October 21-25, 2012*, pages 335–354. ACM.
- [79] Khan, K. N., Hirki, M., Niemi, T., Nurminen, J. K., and Ou, Z. (2018). Rapl in action: Experiences in using rapl for power measurements. *ACM Trans. Model. Perform. Eval. Comput. Syst.*, 3(2).
- [80] Kocher, P., Horn, J., Fogh, A., Genkin, D., Gruss, D., Haas, W., Hamburg, M., Lipp, M., Mangard, S., Prescher, T., Schwarz, M., and Yarom, Y. (2019). Spectre attacks: Exploiting speculative execution.
- [81] Koomey, J. et al. (2011). Growth in data center electricity use 2005 to 2010. *A report by Analytical Press, completed at the request of The New York Times*, 9(2011):161.
- [82] Kothari, N. and Bhattacharya, A. (2009). Joulemeter: Virtual machine power measurement and management. *MSR Tech Report*.
- [83] Kurpicz, M., Orgerie, A.-C., and Sobe, A. (2016). How much does a vm cost? energy-proportional accounting in vm-based environments. In *2016 24th Euromicro International Conference on Parallel, Distributed, and Network-Based Processing (PDP)*, pages 651–658. IEEE.
- [84] Lafond, S. and Lilius, J. (2006). An energy consumption model for an embedded java virtual machine. In *International Conference on Architecture of Computing Systems*, pages 311–325. Springer.
- [85] Laros, J. H., Pokorny, P., and DeBonis, D. (2013). Powerinsight-a commodity power measurement capability. In *2013 International Green Computing Conference Proceedings*, pages 1–6. IEEE.
- [86] LeBeane, M., Ryoo, J. H., Panda, R., and John, L. K. (2015). Watt watcher: fine-grained power estimation for emerging workloads. In *2015 27th International Symposium on Computer Architecture and High Performance Computing (SBAC-PAD)*, pages 106–113. IEEE.
- [87] Lengauer, P., Bitto, V., Mössenböck, H., and Weninger, M. (2017). A comprehensive java benchmark study on memory and garbage collection behavior of dacapo, dacapo scala, and specjvm2008. In Binder, W., Cortellessa, V., Koziolek, A., Smirni, E., and Poess, M., editors, *Proceedings of the 8th ACM/SPEC on International Conference on Performance Engineering, ICPE 2017, L’Aquila, Italy, April 22-26, 2017*, pages 3–14. ACM.

- [88] Li, Y. and Schwiebert, L. (2016). Boosting Python Performance on Intel Processors: A Case Study of Optimizing Music Recognition. In *2016 6th Workshop on Python for High-Performance and Scientific Computing (PyHPC)*, pages 52–58.
- [89] Libič, P., Bulej, L., Horky, V., and Tůma, P. (2014). On the limits of modeling generational garbage collector performance. In *Proceedings of the 5th ACM/SPEC International Conference on Performance Engineering*, ICPE ’14, page 15–26, New York, NY, USA. Association for Computing Machinery.
- [90] Lilja, D. J. (2005). *Measuring computer performance: a practitioner’s guide*. Cambridge university press.
- [91] Lipp, M., Schwarz, M., Gruss, D., Prescher, T., Haas, W., Fogh, A., Horn, J., Mangard, S., Kocher, P., Genkin, D., Yarom, Y., and Hamburg, M. (2018). Meltdown: Reading kernel memory from user space.
- [92] Liu, K., Pinto, G., and Liu, Y. D. (2015). Data-oriented characterization of application-level energy optimization. In *International Conference on Fundamental Approaches to Software Engineering*, pages 316–331. Springer.
- [93] Longo, M., Rodriguez, A. V., Mateos Diaz, C. M., and Zunino Suarez, A. O. (2019). Reducing energy usage in resource-intensive java-based scientific applications via micro-benchmark based code refactorings.
- [94] Lovicott, D. (2009). Thermal design of the dell™ poweredge™ t610™, r610™, and r710™ servers. *Round Rock, Texas*.
- [95] Ma, H., Simon, D., Siarry, P., Yang, Z., and Fei, M. (2017). Biogeography-based optimization: a 10-year review. *IEEE Transactions on Emerging Topics in Computational Intelligence*, 1(5):391–407.
- [96] Manotas, I., Pollock, L., and Clause, J. (2014). Seeds: A software engineer’s energy-optimization decision support framework. In *Proceedings of the 36th International Conference on Software Engineering*, pages 503–514.
- [97] Manotas, I., Sahin, C., Clause, J., Pollock, L., and Winbladh, K. (2013a). Investigating the impacts of web servers on web application energy usage. In *2013 2nd International Workshop on Green and Sustainable Software (GREENS)*, pages 16–23. IEEE.
- [98] Manotas, I., Sahin, C., Clause, J., Pollock, L., and Winbladh, K. (2013b). Investigating the impacts of web servers on web application energy usage. In *2013 2nd International Workshop on Green and Sustainable Software (GREENS)*, pages 16–23.
- [99] Marathe, A., Zhang, Y., Blanks, G., Kumbhare, N., Abdulla, G., and Rountree, B. (2017a). An empirical survey of performance and energy efficiency variation on intel processors. In *Proceedings of the 5th International Workshop on Energy Efficient Supercomputing*, pages 1–8.
- [100] Marathe, A., Zhang, Y., Blanks, G., Kumbhare, N., Abdulla, G., and Rountree, B. (2017b). An empirical survey of performance and energy efficiency variation on Intel processors.

- [101] Margery, D., Morel, E., Nussbaum, L., Richard, O., and Rohr, C. (2014). Resources Description, Selection, Reservation and Verification on a Large-scale Testbed.
- [102] McCreary, H.-Y., Broyles, M. A., Floyd, M. S., Geissler, A. J., Hartman, S. P., Rawson, F. L., Rosedahl, T. J., Rubio, J. C., and Ware, M. S. (2007). Energyscale for ibm power6 microprocessor-based systems. *IBM Journal of Research and Development*, 51(6):775–786.
- [103] Mirowski, P., Mathewson, K., Branch, B., Winters, T., Verhoeven, B., and Elfving, J. (2020). Rosetta code: Improv in any language. In *Proceedings of the 11th International Conference on Computational Creativity*, pages 115–122. Association for Computational Creativity.
- [104] Mishra, S. and Srivastava, S. (2021). Web development frameworks and its performance analysis—a review. *Smart Computing*, pages 337–343.
- [105] Mishra, S. K., Puthal, D., Sahoo, B., Jayaraman, P. P., Jun, S., Zomaya, A. Y., and Ranjan, R. (2018). Energy-efficient vm-placement in cloud data center. *Sustainable computing: informatics and systems*, 20:48–55.
- [106] Modzelewski, K. (2020). Pyston v2: 20% faster Python.
- [107] Mukherjee, T., Banerjee, A., Varsamopoulos, G., Gupta, S. K., and Rungta, S. (2009). Spatio-temporal thermal-aware job scheduling to minimize energy consumption in virtualized heterogeneous data centers. *Computer Networks*, 53(17):2888–2904.
- [108] Murri, R. (2013). Performance of Python runtimes on a non-numeric scientific code. page 6.
- [109] Mytkowicz, T., Diwan, A., Hauswirth, M., and Sweeney, P. F. (2009). Producing wrong data without doing anything obviously wrong! *ACM Sigplan Notices*, 44(3):265–276.
- [110] Nanz, S. and Furia, C. A. (2015). A comparative study of programming languages in rosetta code. In *2015 IEEE/ACM 37th IEEE International Conference on Software Engineering*, volume 1, pages 778–788. IEEE.
- [111] Noureddine, A. (2022). Powerjoular and joularjx: Multi-platform software power monitoring tools. In *18th International Conference on Intelligent Environments*.
- [112] Noureddine, A., Bourdon, A., Rouvoy, R., and Seinturier, L. (2012). A preliminary study of the impact of software engineering on GreenIT. In *2012 First International Workshop on Green and Sustainable Software (GREENS)*, pages 21–27.
- [113] Noureddine, A., Islam, S., and Bashroush, R. (2016). Jolinar: analysing the energy footprint of software applications. In *Proceedings of the 25th International Symposium on Software Testing and Analysis*, pages 445–448.
- [114] Noureddine, A., Rouvoy, R., and Seinturier, L. (2015). Monitoring energy hotspots in software. *Automated Software Engineering*, 22(3):291–332.
- [115] Oi, H. (2011). Power-performance analysis of jvm implementations. In *ICIMU 2011: Proceedings of the 5th international Conference on Information Technology & Multimedia*, pages 1–7. IEEE.

- [Oliveira et al.] Oliveira, W., Oliveira, R., Castor, F., Fernandes, B., and Pinto, G. Recommending Energy-Efficient Java Collections. page 11. Chapter 2: Collections- Introducing the main study field  
- categorizing them with the characteristics of each category .
- [117] Ournani, Z., Belgaid, M. C., Rouvoy, R., Rust, P., Penhoat, J., and Seinturier, L. (2020). Taming energy consumption variations in systems benchmarking. In *Proceedings of the ACM/SPEC International Conference on Performance Engineering*, ICPE '20, page 36–47, New York, NY, USA. Association for Computing Machinery.
- [Pang et al.] Pang, A., Anslow, C., and Noble, J. What Programming Languages Do Developers Use? a Theory of Static vs Dynamic Language Choice. page 9.
- [Pankiv] Pankiv, A. Concurrent benchmark system for web-frameworks on Python. page 26.
- [120] Pankiv, A. (2019). *Concurrent benchmark system for web-frameworks on Python*. PhD thesis, Ukrainian Catholic University.
- [121] Patil, P. and Parmigiani, G. (2018). Training replicable predictors in multiple studies. *Proceedings of the National Academy of Sciences*, 115(11):2578–2583.
- [122] Peng, R. D. (2011). Reproducible research in computational science. *Science*, 334(6060):1226–1227.
- [123] Pereira, R., Carcao, T., Couto, M., Cunha, J., Fernandes, J. P., and Saraiva, J. (2017a). Helping Programmers Improve the Energy Efficiency of Source Code. In *2017 IEEE/ACM 39th International Conference on Software Engineering Companion (ICSE-C)*, pages 238–240, Buenos Aires, Argentina. IEEE. ## main idea  
This paper presents a technique to spot the energy leaks inside a program using a spectrum technique called SPELL (Spectrum-based Energy Leak Localization)  
## How it works  
We have a matrix (n\*m) where n is the number of the tests and m is the number of components (like classes, methods, packages, etc.) after this we calculate the oracle (a vector that says which component is responsible for what)  
## Contributions  
This paper helps developers to spot the red areas in their code and optimize the energy consumption. As an example it helped to reduce the energy consumption of a java application 50% faster and with 18% more efficiency.
- [124] Pereira, R., Carçao, T., Couto, M., Cunha, J., Fernandes, J. P., and Saraiva, J. (2017b). Helping programmers improve the energy efficiency of source code. In *2017 IEEE/ACM 39th International Conference on Software Engineering Companion (ICSE-C)*, pages 238–240. IEEE.
- [125] Pereira, R., Couto, M., Ribeiro, F., Rua, R., Cunha, J., Fernandes, J. P., and Saraiva, J. (2017c). Energy efficiency across programming languages: how do energy, time, and memory relate? In *Proceedings of the 10th ACM SIGPLAN International Conference on Software Language Engineering*, pages 256–267.

- [126] Pereira, R., Couto, M., Ribeiro, F., Rua, R., Cunha, J., Fernandes, J. P., and Saraiva, J. (2017d). Energy Efficiency Across Programming Languages: How Do Energy, Time, and Memory Relate? In *Proceedings of the 10th ACM SIGPLAN International Conference on Software Language Engineering*, SLE 2017, pages 256–267, New York, NY, USA. ACM. this paper discuss the energy consumption through memory usage however we aim to see the relation between CPU usage and energy consumption rather than memory usage.
- [127] Philippot, O., Anglade, A., and Leboucq, T. (2014). Characterization of the energy consumption of websites: Impact of website implementation on resource consumption. In *ICT for Sustainability 2014 (ICT4S-14)*, pages 171–178. Atlantis Press.
- [128] Pinto, G. and Castor, F. (2017). Energy Efficiency: A New Concern for Application Software Developers. *Commun. ACM*, 60(12):68–75. things to extend : use micro benchmarks , and say that each one is used to measure a specific thing (memory intensive , cpu intensive , io intensive ..etc ).
- [129] Pinto, G., Liu, K., Castor, F., and Liu, Y. D. (2016). A comprehensive study on the energy efficiency of java’s thread-safe collections. In *2016 IEEE International Conference on Software Maintenance and Evolution (ICSME)*, pages 20–31. IEEE.
- [130] Prokopec, A., Rosà, A., Leopoldseder, D., Duboscq, G., Tůma, P., Studener, M., Bulej, L., Zheng, Y., Villazón, A., Simon, D., Würthinger, T., and Binder, W. (2019a). Renaissance: Benchmarking suite for parallel applications on the jvm. In *Proceedings of the 40th ACM SIGPLAN Conference on Programming Language Design and Implementation*, PLDI 2019, page 31–47, New York, NY, USA. Association for Computing Machinery.
- [131] Prokopec, A., Rosà, A., Leopoldseder, D., Duboscq, G., Tuma, P., Studener, M., Bulej, L., Zheng, Y., Villazón, A., Simon, D., Würthinger, T., and Binder, W. (2019b). Renaissance: benchmarking suite for parallel applications on the JVM. In *PLDI*, pages 31–47. ACM.
- [132] Redondo, J. M. and Ortín, F. (2015). A Comprehensive Evaluation of Common Python Implementations. *IEEE Software*, 32(4):76–84. benchmarks link <http://www.reflection.uniovi.es/python>.
- [133] Ribic, H. and Liu, Y. D. (2016). Aequitas: Coordinated energy management across parallel applications. In *Proceedings of the 2016 International Conference on Supercomputing*, pages 1–12.
- [134] Rodriguez, A. (2017). Reducing energy consumption of resource-intensive scientific mobile applications via code refactoring. In *2017 IEEE/ACM 39th International Conference on Software Engineering Companion (ICSE-C)*, pages 475–476. IEEE.
- [135] Santos, E. A., McLean, C., Solinas, C., and Hindle, A. (2018). How does docker affect energy consumption? evaluating workloads in and out of docker containers. *Journal of Systems and Software*, 146:14–25.
- [136] Simakov, N. A., Innus, M. D., Jones, M. D., White, J. P., Gallo, S. M., DeLeon, R. L., and FOPTurlani, T. R. (2018). Effect of meltdown and spectre patches on the performance of HPC applications. *CoRR*, abs/1801.04329.

- [137] Stodden, V., Seiler, J., and Ma, Z. (2018). An empirical analysis of journal policy effectiveness for computational reproducibility. *Proceedings of the National Academy of Sciences*, 115(11):2584–2589.
- [138] Strubell, E., Ganesh, A., and McCallum, A. (2019). Energy and policy considerations for deep learning in nlp. *arXiv preprint arXiv:1906.02243*.
- [139] Tschanz, J., Kao, J., Narendra, S., Nair, R., Antoniadis, D., Chandrakasan, A., and De, V. (2002). Adaptive body bias for reducing impacts of die-to-die and within-die parameter variations on microprocessor frequency and leakage. *IEEE Journal of Solid-State Circuits*, 37(11).
- [140] van der Kouwe, E., Andriesse, D., Bos, H., Giuffrida, C., and Heiser, G. (2018). Benchmarking Crimes: An Emerging Threat in Systems Security. *CoRR*, abs/1801.02381.
- [141] van der Kouwe, E., Andriesse, D., Bos, H., Giuffrida, C., and Heiser, G. (2018). Benchmarking Crimes: An Emerging Threat in Systems Security. *arXiv:1801.02381 [cs]*.
- [142] van der Kouwe, E., Andriesse, D., Bos, H., Giuffrida, C., and Heiser, G. (2018). Benchmarking Crimes: An Emerging Threat in Systems Security. *CoRR*, abs/1801.02381.
- [143] van Kessel, J., Taal, A., and Grossos, P. (2016). Power efficiency of hypervisor-based virtualization versus container-based virtualization. *University of Amsterdam*.
- [144] Vassamopoulos, G., Banerjee, A., and Gupta, S. K. S. (2009). Energy Efficiency of Thermal-Aware Job Scheduling Algorithms under Various Cooling Models. In *Contemporary Computing*, volume 40. Springer.
- [145] Vasan, A., Sivasubramaniam, A., Shimpi, V., Sivabalan, T., and Subbiah, R. (2010). Worth their watts? - an empirical study of datacenter servers.
- [146] von Kistowski, J., Block, H., Beckett, J., Spradling, C., Lange, K.-D., and Kounev, S. (2016). Variations in cpu power consumption. In *Proceedings of the 7th ACM/SPEC on International Conference on Performance Engineering*, pages 147–158.
- [147] Wang, X., Zhao, H., and Zhu, J. (1993). Grpc: A communication cooperation mechanism in distributed systems. *ACM SIGOPS Operating Systems Review*, 27(3):75–86.
- [148] Wang, Y., Nörterhäuser, D., Le Masson, S., and Menaud, J.-M. (2018a). Potential effects on server power metering and modeling. *Wireless Networks*, pages 1–8.
- [149] Wang, Y., Nörterhäuser, D., Le Masson, S., and Menaud, J.-M. (2018b). Potential effects on server power metering and modeling. *Wireless Networks*.
- [Wang et al.] Wang, Y., Nörterhäuser, D., Masson, S. L., and Menaud, J.-M. Experimental Characterization of Variation in Power Consumption for Processors of Different generations. page 10.
- [151] Yet, A. W. F. (2016). Cross-language compiler benchmarking.