

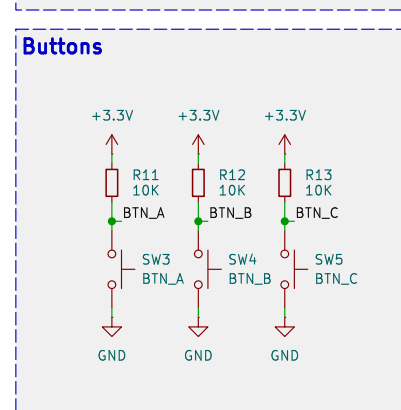

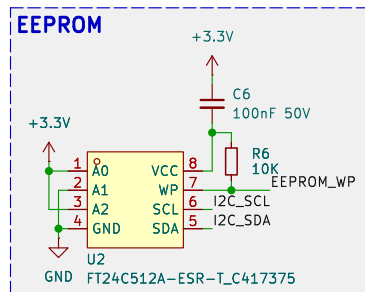
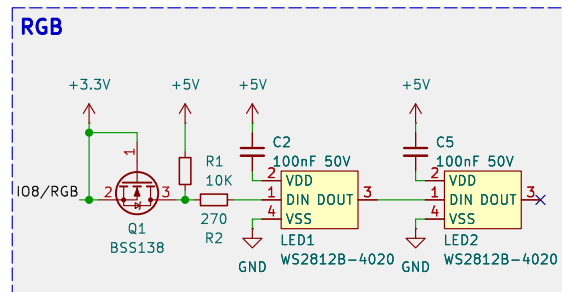
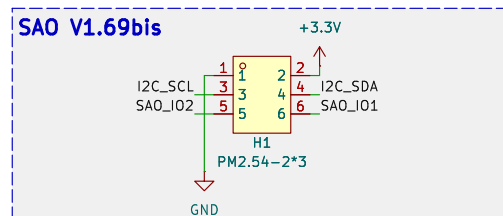
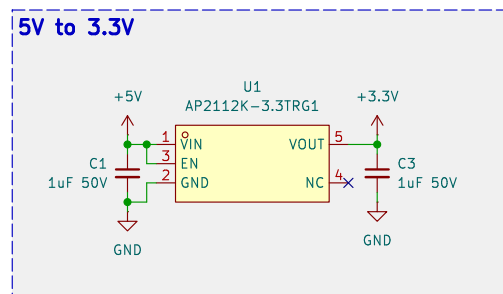
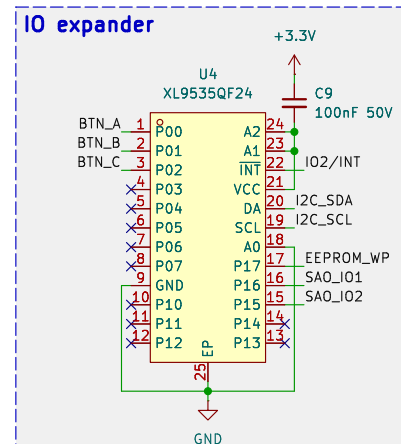


GPIO2 Must be HIGH during reset in all cases (internal default float, we do pull up with R9)
 GPIO8 Must be HIGH during reset in all cases (internal default float, we do pull up with R10)
 GPIO9 HIGH – SPI Boot / LOW – UART Download (internal default pull up)


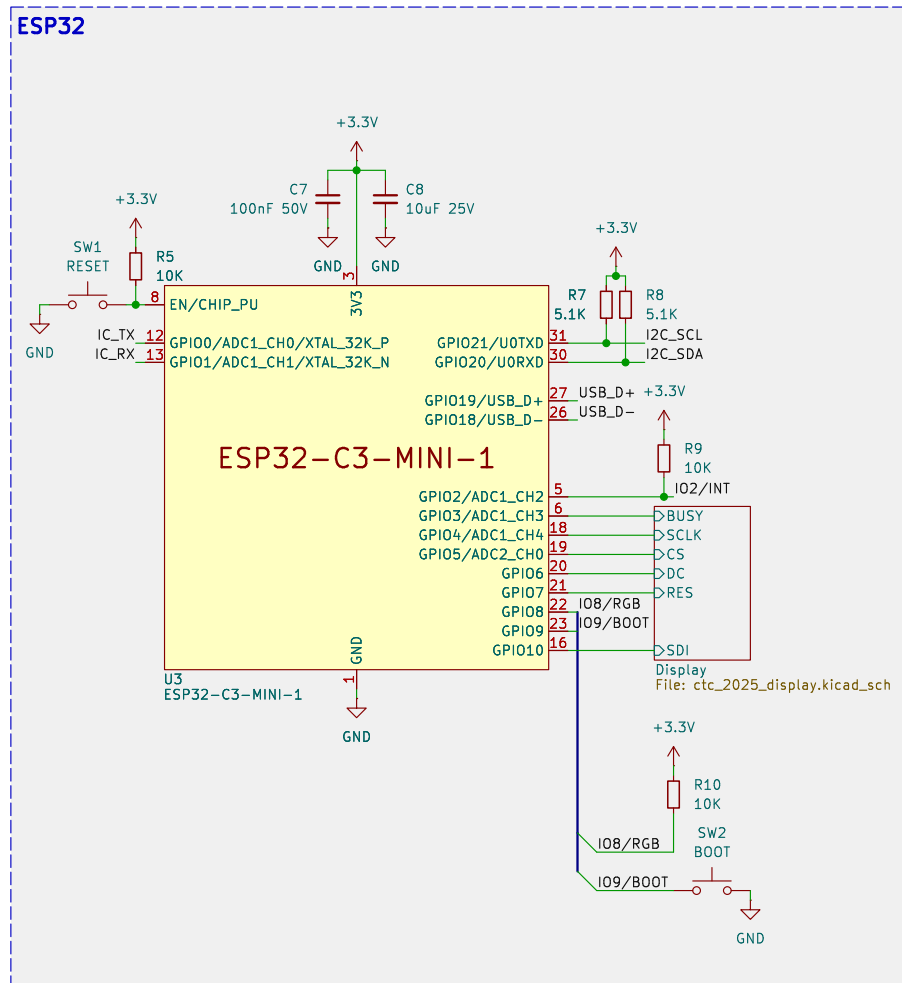


Sheet: /		File: ctc_2025.kicad_sch	
Title:			
Size: A4	Date:		Rev:
KiCad E.D.A. 8.0.7			Id: 1/2

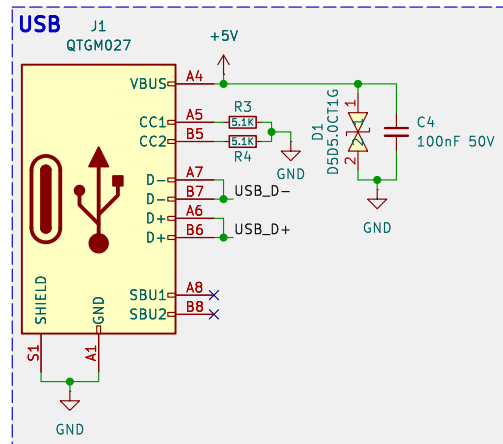

X1
Screen

FPC1
AFC24-S24FIA-00

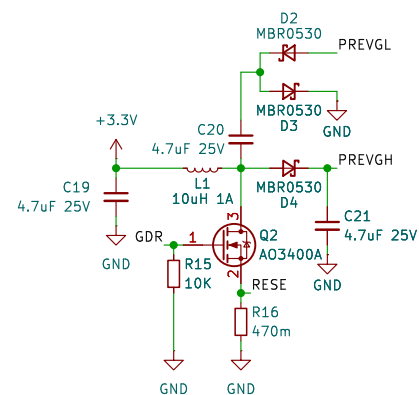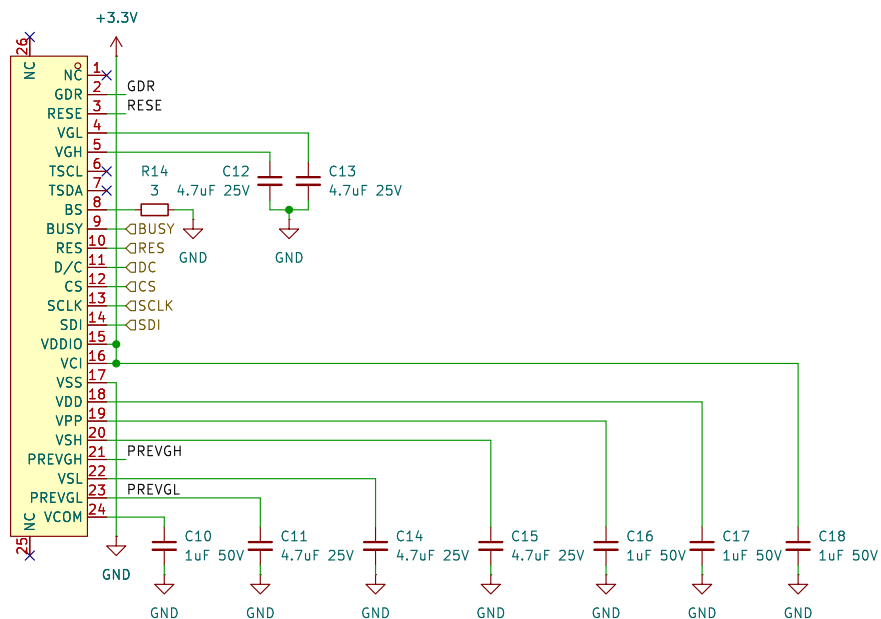

Sheet: /Display/
File: ctc_2025_display.kicad_sch

Title:

Size: A4

Date:

Rev:

KiCad E.D.A. 8.0.7

Id: 2/2