
Specification

Lithium Polymer Battery Pack LP301013 23mAh 3.7V with Protection Circuit Module (PCM)
This data sheet describes the requirements and properties of lithium polymer rechargeable battery pack manufactured by LiPol Battery Co., Ltd - China

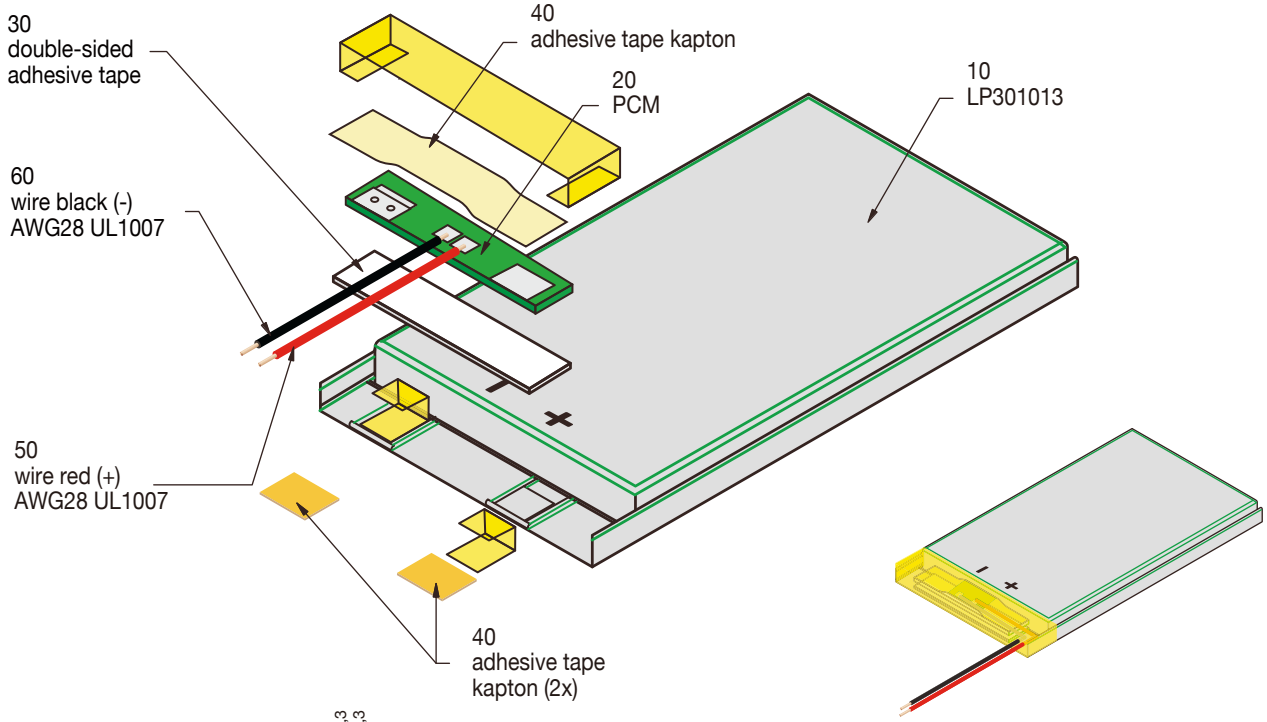

Mechanical Chracteristics

Cell	► LP301013
PCM	► Yes
NTC	► No
Configuration	► 1S1P
Weight	► appr. 0.46g

Electrical Specification

Rated Capacity	► 23mAh min, 28mAh typ.
Nominal Voltage	► 3.7V
Wat-Hour Rating	► 0.0851Wh
Max. Operating Voltage Range	► 2.75V to 4.20V
Max. Charge Voltage	► 4.2V ±50mV
Max. Charge Current	► 11.5mA
Max. Continuous Discharge Current	► 23mA
Discharge Cut Off	► 2.75V
Internal Impedance	► <200mΩ
Expected Cycle Life @ (0.5C/0.5C) @ 23±5°C	► 500 cycles ≥ 80%

Cell Protection


Overcharge Detection	► 4.275 ±50mV (0.7 to 1.3sec. delay, release 4.275V ±50mV)
Overdischarge Detection	► 2.75V ±50mV (14 to 26msec. delay, resume 2.50V ±50mV)
Overcurrent Detection	► 2A to 4.5A (8 to 16msec. delay)

Ambient Conditions


Charge Temp. Range	► 0 to +45°C
Discharge Temp. Range	► -20 to +60°C
Storage Temp. Range	► 1 year at -20 to +30°C >70% ► 3 moths at -20 to +45°C >70% ► 1 month at -20 to +60°C >70%
Humidity	► 65 ±20%RH

Environmental and Safety

Please follow LiPol Handling and Safety Precautions for Lithium Polymer Battery. This battery meets the requirements of Battery Directives, and the battery parts are IEC 62133 & RoHS-Compliant. For more satety precautions and performance standards, please go to www.lipolbattery.com/support.html

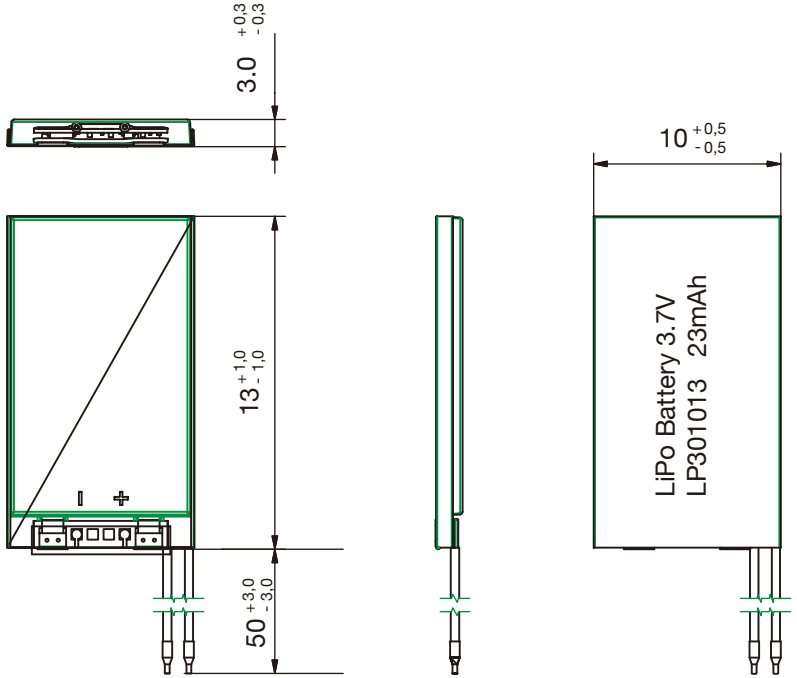

Circuit Diagram



Mae in mm All dimensions in mm	Freimatoleranzen Generaltolerances			Date	Name
			Erst. / Orig	28.10.2019	Xie Qingfang
Als Betriebsgeheimnis anvertraut, alle Rechte vorbehalten	up to 6	` 0,1	Gepr./Check	28.10.2019	Guo Daxia
	over 6 up to 30	` 0,2	Benennung/ Designation	LP301013	
Proprietary data, company confidential, all rights reserved.	over 30 up to 100	` 0,3	Zchng. / Dwg. Nr.	FD_1013_70	Index 3
	over 100	` 0,5	Origin:		

LiPol Battery

support@lipolbattery.com www.LiPolBattery.com