

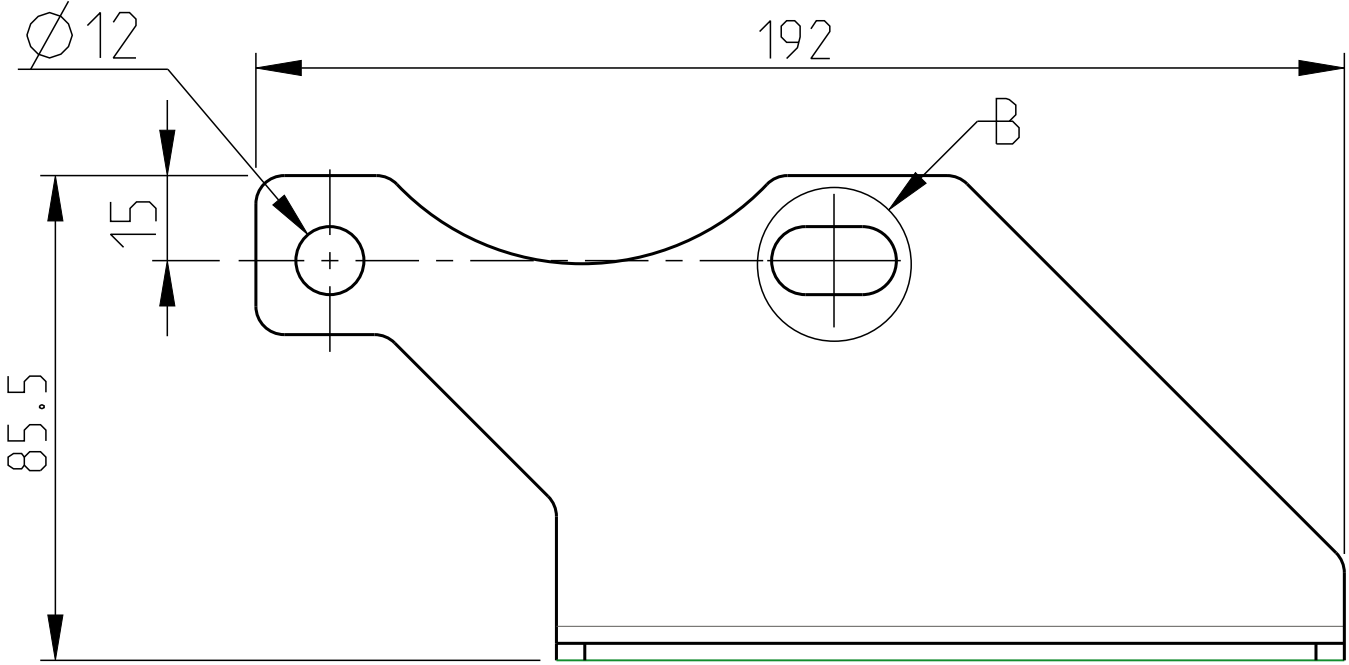
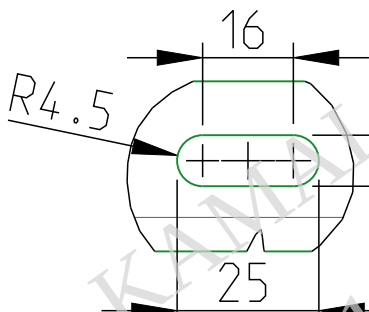
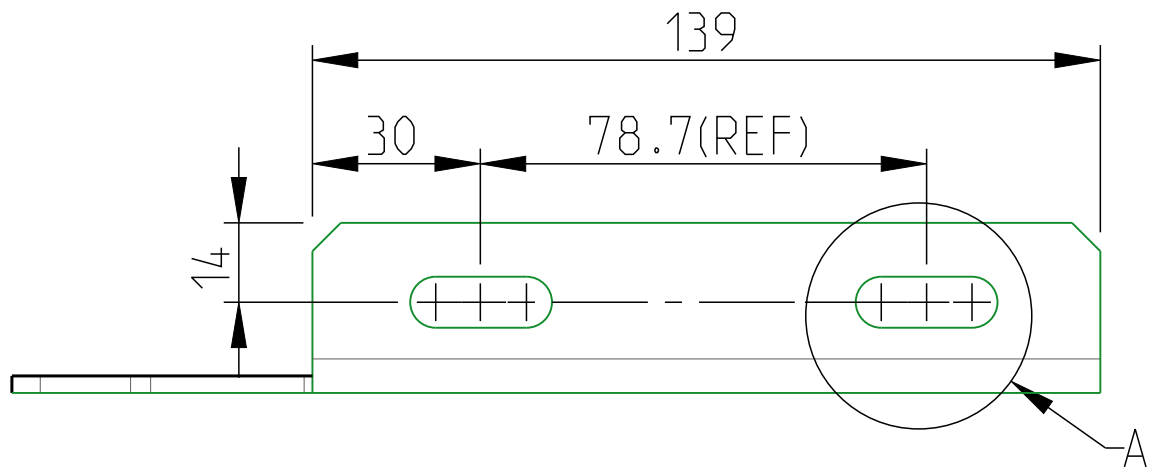
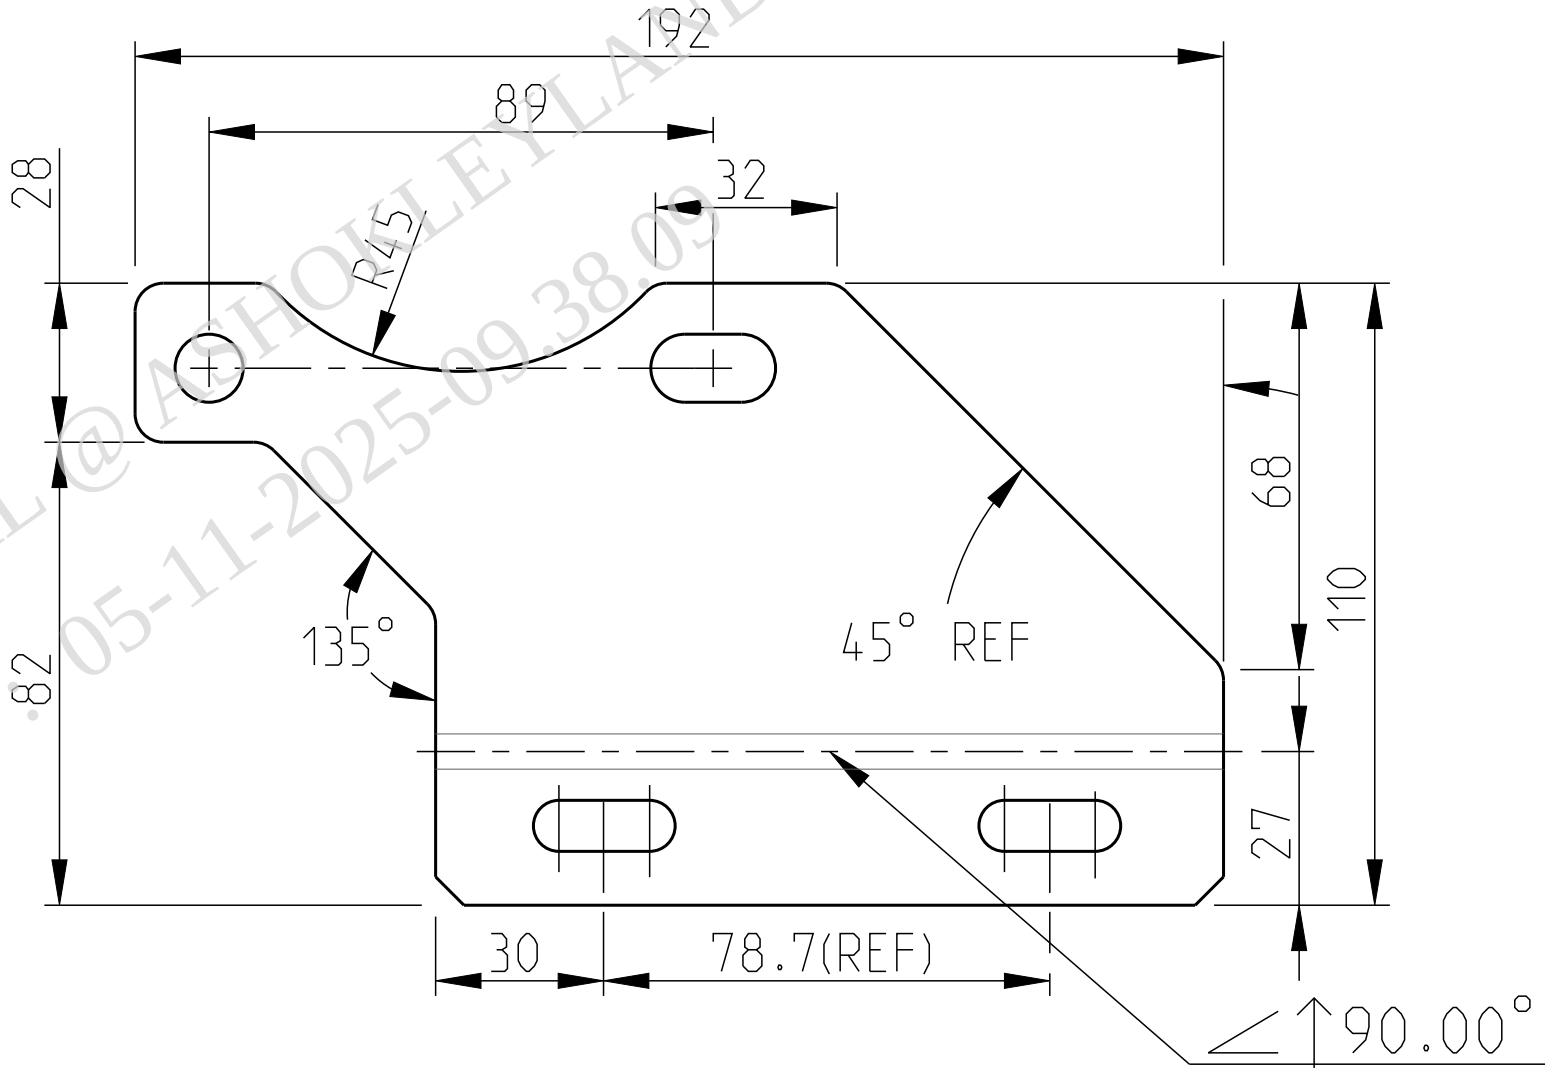


DETAILED VIEW B

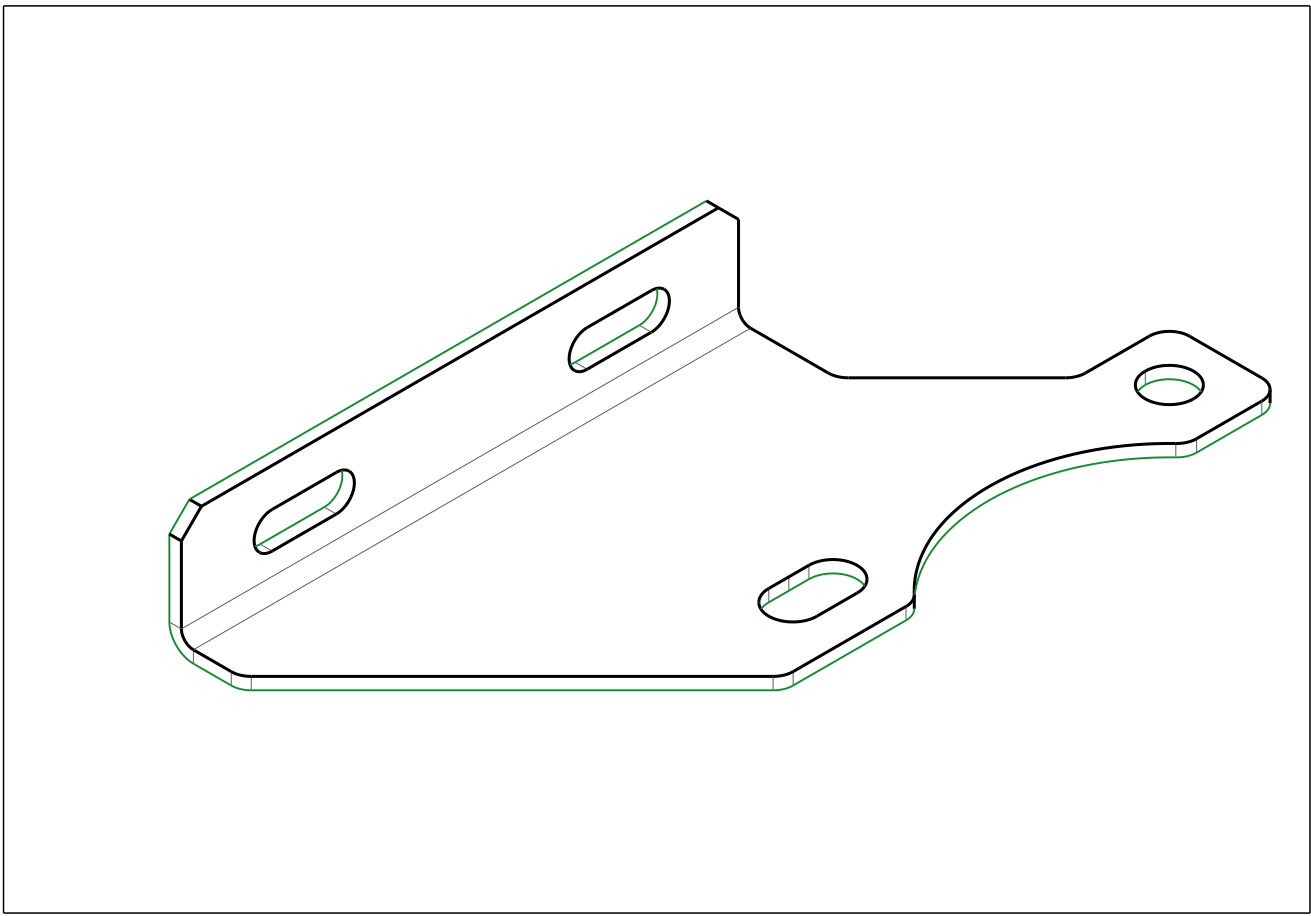

DETAIL VIEW A (2X)

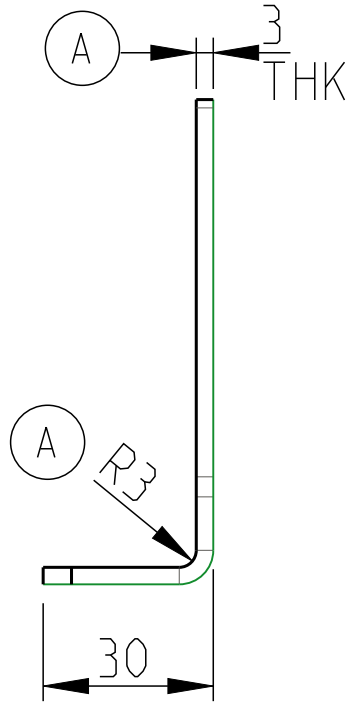

FLAT PATTERN

NOTES:-

- 1) TO BE POWDER COATED.
- 2) COATING THICKNESS TO BE 60 MICRONS MINIMUM. (A)
- 3) COLOUR BLACK
- 4) TO BE SUBJECTED TO PRE TRETMENT AT POWDER COATING PART TO WITH STAND 300 HRS MINIMUM SALT SPARAY LIFE
- 5) NO BLISTERING IS ALLOWED
- 6) AL PART NO. AND SOURCE CODE TO BE PROVIDED. MIN.LETTER 6 mm
- 7) SURFACE PROTECTION CLASS D AS PER THE ALS.268.03

UNLESS OTHERWISE SPECIFIED

TOLERANCES	REFER IS:2102 ; MEDIUM FOR MACHINING AND COARSE FOR FABRICATION		
SURFACE PROTECTION	FABRICATED COMPONENTS TO BE DEGREASED, DESCALED, APPLY ZINC PHOSPHATE, APPLY EPOXY PRIMER AND APPLY ENAMEL TO MEET 300 HRS OF SALT SPRAY LIFE WHEN TESTED AS PER ASTM B117 (UNDER PELLICULAR CORROSION <= 2 mm. NO BLISTERING IS ALLOWED.) MACHINED SURFACE TO BE APPLIED WITH RUST PREVENTIVE OIL TO IS: 1154		
SURFACE FINISH AS PER IS: 3073 (CLA VALUE)	METRIC SCREW THREADS SHALL CONFORM TO THE LIMITS AND TOLERANCES SPECIFIED IN THE CURRENT IS:4218 CLASS 6g EXTERNAL OR 5H INTERNAL.	SHARP EDGES TO BE REMOVED DIMENSIONS ARE IN mm DO NOT SCALE DRAWING	

⊕ IMPORTANT CHARACTERISTIC ()	⊗ 100% INSPECTION CHARACTERISTIC ()
⊙ CRITICAL CHARACTERISTIC ()	⊕ SAFETY CHARACTERISTIC ()

SPECIAL INSTRUCTIONS/NOTE:

THIS DRAWING SHEET CONTAINS _ KEY CHARACTERISTICS

BILL OF MATERIALS

APPEARANCE ITEM	ER-DIN	DATE
☒ YES ☐ NO	CA-0120535	28.09.24
FINISHED WEIGHT (APPROX)	REF PART NO:	---
kg	S/A PART NO:	---
SCALE	SUPERSEDES	---
3:4	SPEC NO:	----

ALTERATIONS

-DIM 3.0 THK WAS 2.5 THK
-DIM R3.0 WAS R2.5
-NOTE UPDATED

ER - DIN DATE	GRADE	SUFFIX
CA-00143632 29.10.25	1	A

PLM VAULT		
REVISION : A	DATE : 28/10/2025	STATUS : RELEASE
STAGE : III	ER-DIN NO : CA-00143632	DATE : 5/11/2025
ALTERED BY : palanivelu.p	CHECKED BY : palanivelu.p	
MED APPROVAL : sunilraj.s	APPROVED BY : midhun.vs	
DIGITALLY SIGNED . PHYSICAL SIGNATURE NOT REQUIRED		

DRAWN / DATE	CHECKED / DATE	MED APPROVAL / DATE	APPROVED / DATE	STDS APP. / DATE
KMP / 28.09.24	PPV / 28.09.24	/	MVS / 28.09.24	XXXX / XXXX

MATERIAL
IS 2062 E250 GRADE 'A'
HEAT TREATMENT
--

REMARKS		
CPCB4+ NG GENSET APPLICATION		
DESCRIPTION		
BRACKET CAC IN PIPE SUPPORT		
PART NO.	F5C04213	A
SHEET NO.	1 OF 1	A2