

ZAtop Gearless elevator machine

SM190



Description

- Permanent magnet synchronous motor with NdFeB magnets
- With ≤ 320 mm installation width for the narrowest shaft dimensions
- High efficiency
- Noise emissions: < 50 dB(A)
- Axle load: up to 2,400 kg
- Traction sheave: 200 mm or 240 mm
- Separately controllable brake circuits, type-tested as safety device against uncontrolled and unintended car movement
- Temperature monitoring by PTC thermistor

Scope of delivery

- Gearless elevator machine
- Type-tested brake system
- Traction sheave with 40° , 45° or 50° V-groove, alternatively round groove for plastic coated ropes
- Absolute encoder type Heidenhain ECN1313 EnDat
- 10 m motor cable
- Rope guard according to EN 81

Options

- Pre-parametrised frequency inverter ZAdyn


Machine frame	Page 68
Deflection pulleys	Page 80
Adapter plates	Page 79
ZAlift	Page 87

Technical data

Motor type	Nominal torque Nm	Max. axle load kg	Nominal speed min ⁻¹	Rated output power kW
SM190.15	250	1850	168 / 192	4.4 / 5.0
SM190.23	380	2400		6.7 / 7.6

Dimensions mm

SM190.15, SM190.23

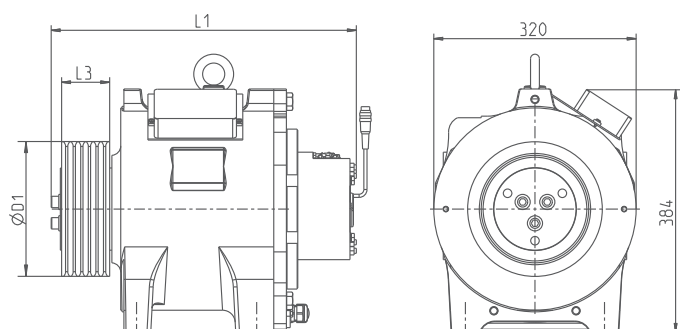

Motor type	L1 mm	D1 mm	L3 mm	Weight kg
SM190.15	483	200	76	160
		240	88	166
SM190.23	514	200	106	195
		240	124	204

Range of possible elevator configurations for SM190

Important technical data for the drawn configuration examples are listed in the table below.
The following diagram shows the range of elevator configurations which can be achieved with the ZAtop SM190 elevator machine.
Other elevator configurations, also outside this range, are possible. Flexibility is our business!
Our calculation software ZAlift is available free of charge to you for fast and convenient calculation of your elevator project.

Example configurations

Suspension	No	Max. payload	Speed	Motor type	Traction sheave	Rope	Motor power	Rated current
		kg	m/s		mm	Number x Ø mm	kW	A
1:1	I	300	1.6	SM190.15	200	6 x 6.5	3.3	10.6
	II	450	1.6	SM190.23	240	7 x 6.5	4.8	17.5
	III	630	1.6	SM190.23	200	7 x 6.5	6.3	19.1
2:1	I	300	1.0	SM190.15	200	4 x 6.5	2.2	6.3
	II	450	1.0	SM190.15	200	5 x 6.5	3.2	9.2
	III	630	1.0	SM190.15	240	6 x 6.5	4.4	13.5
	IV	675	1.0	SM190.15	200	7 x 6.5	4.8	13.6
	V	1050	1.0	SM190.23	200	9 x 6.5	7.2	19.9
	VI	1125	1.0	SM190.23	200	7 x 6.5	7.0	19.5
	VII	1200	1.0	SM190.23	200	7 x 6.5	7.6	21.1

