





Lithium Battery

For Energy Storage and UPS



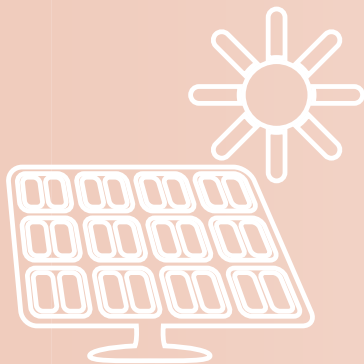

Lithium Batteries

- Equipped with communication function, protection function for overcharge, over discharge and over temperature, and battery equalization technology.
- The system uses environmental-friendly lithium iron phosphate batteries and is equipped with high performance BMS to manage the battery cells efficiently.
- Application: Photovoltaic power generation, communication base station, UPS

48V50Ah Lithium Battery

Model	R-LFP48V50Ah
Battery Type	Power Lithium (Lithium Iron Phosphate)
Customizable	Yes
Nominal Voltage	48 (V)
Nominal Capacity	50Ah (0.2C discharge)
Dimension	482*400*89(mm)
Charge Time (Recommended)	5h
Max. Voltage	54.75V $\pm$ 1.0V
Min. Voltage	37.5V $\pm$ 1.0V
Max. Discharge Current	50A
Max. Charge Current	50A
Security Certification	TüV / CE / UN38.3 / TLC
Communication Port	RS232, RS485
Cycle Life	$\geq$ 4500(0.2C charge/ 0.2C discharge)
Weight(KG)	27Kg



48V100Ah Lithium Battery

Model	R-LFP48V100Ah
Battery Type	Power Lithium (Lithium Iron Phosphate)
Customizable	Yes
Nominal Voltage	48 (V)
Nominal Capacity	100Ah (0.2C discharge)
Dimension	482*400*177(mm)
Charge Time (Recommended)	5h
Max. Voltage	54.75V $\pm$ 1.0V
Min. Voltage	37.5V $\pm$ 1.0V
Max. Discharge Current	100A
Max. Charge Current	100A
Security Certification	TüV / CE / UN38.3 / TLC
Communication Port	RS232, RS485
Cycle Life	$\geq$ 4500(0.2C charge/ 0.2C discharge)
Weight(KG)	41Kg



12V6Ah Lithium Battery

Model	R-LFP12V6Ah
Battery Type	Power Lithium (Lithium Iron Phosphate)
Customizable	Yes
Nominal Voltage	12.8 (V)
Nominal Capacity	6Ah (0.2C discharge)
Dimension	151*65*95(mm)
Charge Time (Recommended)	5h
Max. Voltage	14.6V $\pm$ 1.0V
Min. Voltage	10V $\pm$ 1.0V
Max. Discharge Current	6A
Max. Charge Current	6A
Security Certification	TüV / CE / UN38.3 / TLC
Communication Port	\
Cycle Life	$\geq$ 4500(0.2C charge/ 0.2C discharge)
Weight(KG)	1.2Kg



12V9Ah Lithium Battery

Model	R-LFP12V9Ah
Battery Type	Power Lithium (Lithium Iron Phosphate)
Customizable	Yes
Nominal Voltage	12.8 (V)
Nominal Capacity	9Ah (0.2C discharge)
Dimension	151*65*95(mm)
Charge Time (Recommended)	5h
Max. Voltage	14.6V $\pm$ 1.0V
Min. Voltage	10V $\pm$ 1.0V
Max. Discharge Current	9A
Max. Charge Current	9A
Security Certification	TüV / CE / UN38.3 / TLC
Communication Port	\
Cycle Life	$\geq$ 4500(0.2C charge/ 0.2C discharge)
Weight(KG)	1.5Kg



12V12Ah Lithium Battery

Model	R-LFP12V12Ah
Battery Type	Power Lithium (Lithium Iron Phosphate)
Customizable	Yes
Nominal Voltage	12.8 (V)
Nominal Capacity	12Ah (0.2C discharge)
Dimension	151*99*92(mm)
Charge Time (Recommended)	5h
Max. Voltage	14.6V $\pm$ 1.0V
Min. Voltage	10V $\pm$ 1.0V
Max. Discharge Current	12A
Max. Charge Current	12A
Security Certification	TüV / CE / UN38.3 / TLC
Communication Port	\
Cycle Life	$\geq$ 4500(0.2C charge/ 0.2C discharge)
Weight(KG)	1.5Kg



12V18Ah Lithium Battery

Model	R-LFP12V18Ah
Battery Type	Power Lithium (Lithium Iron Phosphate)
Customizable	Yes
Nominal Voltage	12.8 (V)
Nominal Capacity	18Ah (0.2C discharge)
Dimension	183*77*156(mm)
Charge Time (Recommended)	5h
Max. Voltage	14.6V $\pm$ 1.0V
Min. Voltage	10V $\pm$ 1.0V
Max. Discharge Current	18A
Max. Charge Current	18A
Security Certification	TüV / CE / UN38.3 / TLC
Communication Port	\
Cycle Life	$\geq$ 4500(0.2C charge/ 0.2C discharge)
Weight(KG)	2.3Kg



12V20Ah Lithium Battery

Model	R-LFP12V20Ah
Battery Type	Power Lithium (Lithium Iron Phosphate)
Customizable	Yes
Nominal Voltage	12.8 (V)
Nominal Capacity	20Ah (0.2C discharge)
Dimension	183*77*156(mm)
Charge Time (Recommended)	5h
Max. Voltage	14.6V $\pm$ 1.0V
Min. Voltage	10V $\pm$ 1.0V
Max. Discharge Current	20A
Max. Charge Current	20A
Security Certification	TüV / CE / UN38.3 / TLC
Communication Port	\
Cycle Life	$\geq$ 4500(0.2C charge/ 0.2C discharge)
Weight(KG)	2.3Kg



12V22Ah Lithium Battery

Model	R-LFP12V22Ah
Battery Type	Power Lithium (Lithium Iron Phosphate)
Customizable	Yes
Nominal Voltage	12.8 (V)
Nominal Capacity	22Ah (0.2C discharge)
Dimension	181*77*156(mm)
Charge Time (Recommended)	5h
Max. Voltage	14.6V $\pm$ 1.0V
Min. Voltage	10V $\pm$ 1.0V
Max. Discharge Current	22A
Max. Charge Current	22A
Security Certification	TüV / CE / UN38.3 / TLC
Communication Port	\
Cycle Life	$\geq$ 4500(0.2C charge/ 0.2C discharge)
Weight(KG)	3.1Kg



12V24Ah Lithium Battery

Model	R-LFP12V24Ah
Battery Type	Power Lithium (Lithium Iron Phosphate)
Customizable	Yes
Nominal Voltage	12.8 (V)
Nominal Capacity	24Ah (0.2C discharge)
Dimension	181*76*170(mm)
Charge Time (Recommended)	5h
Max. Voltage	14.6V $\pm$ 1.0V
Min. Voltage	10V $\pm$ 1.0V
Max. Discharge Current	24A
Max. Charge Current	24A
Security Certification	TüV / CE / UN38.3 / TLC
Communication Port	\
Cycle Life	$\geq$ 4500(0.2C charge/ 0.2C discharge)
Weight(KG)	3.9Kg



12V33Ah Lithium Battery

Model	R-LFP12V33Ah
Battery Type	Power Lithium (Lithium Iron Phosphate)
Customizable	Yes
Nominal Voltage	12.8 (V)
Nominal Capacity	33Ah (0.2C discharge)
Dimension	194*132*173(mm)
Charge Time (Recommended)	5h
Max. Voltage	14.6V $\pm$ 1.0V
Min. Voltage	10V $\pm$ 1.0V
Max. Discharge Current	33A
Max. Charge Current	33A
Security Certification	TüV / CE / UN38.3 / TLC
Communication Port	\
Cycle Life	$\geq$ 4500(0.2C charge/ 0.2C discharge)
Weight(KG)	3.5Kg



12V35Ah Lithium Battery

Model	R-LFP12V35Ah
Battery Type	Power Lithium (Lithium Iron Phosphate)
Customizable	Yes
Nominal Voltage	12.8 (V)
Nominal Capacity	35Ah (0.2C discharge)
Dimension	194*132*172(mm)
Charge Time (Recommended)	5h
Max. Voltage	14.6V $\pm$ 1.0V
Min. Voltage	10V $\pm$ 1.0V
Max. Discharge Current	35A
Max. Charge Current	35A
Security Certification	TüV / CE / UN38.3 / TLC
Communication Port	\
Cycle Life	$\geq$ 4500(0.2C charge/ 0.2C discharge)
Weight(KG)	4.1Kg



12V40Ah Lithium Battery

Model	R-LFP12V40Ah
Battery Type	Power Lithium (Lithium Iron Phosphate)
Customizable	Yes
Nominal Voltage	12.8 (V)
Nominal Capacity	40Ah (0.2C discharge)
Dimension	197*161*169(mm)
Charge Time (Recommended)	5h
Max. Voltage	14.6V $\pm$ 1.0V
Min. Voltage	10V $\pm$ 1.0V
Max. Discharge Current	40A
Max. Charge Current	40A
Security Certification	TüV / CE / UN38.3 / TLC
Communication Port	\
Cycle Life	$\geq$ 4500(0.2C charge/ 0.2C discharge)
Weight(KG)	4.9Kg



12V50Ah Lithium Battery

Model	R-LFP12V50Ah
Battery Type	Power Lithium (Lithium Iron Phosphate)
Customizable	Yes
Nominal Voltage	12.8 (V)
Nominal Capacity	50Ah (0.2C discharge)
Dimension	230*127*191(mm)
Charge Time (Recommended)	5h
Max. Voltage	14.6V $\pm$ 1.0V
Min. Voltage	10V $\pm$ 1.0V
Max. Discharge Current	50A
Max. Charge Current	50A
Security Certification	TüV / CE / UN38.3 / TLC
Communication Port	\
Cycle Life	$\geq$ 4500(0.2C charge/ 0.2C discharge)
Weight(KG)	5.5Kg



12V55Ah Lithium Battery

Model	R-LFP12V55Ah
Battery Type	Power Lithium (Lithium Iron Phosphate)
Customizable	Yes
Nominal Voltage	12.8 (V)
Nominal Capacity	55Ah (0.2C discharge)
Dimension	230*127*191(mm)
Charge Time (Recommended)	5h
Max. Voltage	14.6V $\pm$ 1.0V
Min. Voltage	10V $\pm$ 1.0V
Max. Discharge Current	55A
Max. Charge Current	55A
Security Certification	TüV / CE / UN38.3 / TLC
Communication Port	\
Cycle Life	$\geq$ 4500(0.2C charge/ 0.2C discharge)
Weight(KG)	6Kg



12V75Ah Lithium Battery

Model	R-LFP12V75Ah
Battery Type	Power Lithium (Lithium Iron Phosphate)
Customizable	Yes
Nominal Voltage	12.8 (V)
Nominal Capacity	75Ah (0.2C discharge)
Dimension	256*165*210(mm)
Charge Time (Recommended)	5h
Max. Voltage	14.6V $\pm$ 1.0V
Min. Voltage	10V $\pm$ 1.0V
Max. Discharge Current	75A
Max. Charge Current	75A
Security Certification	TüV / CE / UN38.3 / TLC
Communication Port	\
Cycle Life	$\geq$ 4500(0.2C charge/ 0.2C discharge)
Weight(KG)	8.8Kg



12V90Ah Lithium Battery

Model	R-LFP12V90Ah
Battery Type	Power Lithium (Lithium Iron Phosphate)
Customizable	Yes
Nominal Voltage	12.8 (V)
Nominal Capacity	90Ah (0.2C discharge)
Dimension	305*169*210(mm)
Charge Time (Recommended)	5h
Max. Voltage	14.6V $\pm$ 1.0V
Min. Voltage	10V $\pm$ 1.0V
Max. Discharge Current	90A
Max. Charge Current	90A
Security Certification	TüV / CE / UN38.3 / TLC
Communication Port	\
Cycle Life	$\geq$ 4500(0.2C charge/ 0.2C discharge)
Weight(KG)	10.5Kg



12V100Ah Lithium Battery

Model	R-LFP12V100Ah
Battery Type	Power Lithium (Lithium Iron Phosphate)
Customizable	Yes
Nominal Voltage	12.8 (V)
Nominal Capacity	100Ah (0.2C discharge)
Dimension	330*173*216(mm)
Charge Time (Recommended)	5h
Max. Voltage	14.6V $\pm$ 1.0V
Min. Voltage	10V $\pm$ 1.0V
Max. Discharge Current	100A
Max. Charge Current	100A
Security Certification	TüV / CE / UN38.3 / TLC
Communication Port	\
Cycle Life	$\geq$ 4500(0.2C charge/ 0.2C discharge)
Weight(KG)	10.5Kg



12V120Ah Lithium Battery

Model	R-LFP12V120Ah
Battery Type	Power Lithium (Lithium Iron Phosphate)
Customizable	Yes
Nominal Voltage	12.8 (V)
Nominal Capacity	120Ah (0.2C discharge)
Dimension	406*173*236(mm)
Charge Time (Recommended)	5h
Max. Voltage	14.6V $\pm$ 1.0V
Min. Voltage	10V $\pm$ 1.0V
Max. Discharge Current	120A
Max. Charge Current	120A
Security Certification	TüV / CE / UN38.3 / TLC
Communication Port	\
Cycle Life	$\geq$ 4500(0.2C charge/ 0.2C discharge)
Weight(KG)	14.2Kg



12V150Ah Lithium Battery

Model	R-LFP12V150Ah
Battery Type	Power Lithium (Lithium Iron Phosphate)
Customizable	Yes
Nominal Voltage	12.8 (V)
Nominal Capacity	150Ah (0.2C discharge)
Dimension	483*170*240(mm)
Charge Time (Recommended)	5h
Max. Voltage	14.6V $\pm$ 1.0V
Min. Voltage	10V $\pm$ 1.0V
Max. Discharge Current	150A
Max. Charge Current	150A
Security Certification	TüV / CE / UN38.3 / TLC
Communication Port	\
Cycle Life	$\geq$ 4500(0.2C charge/ 0.2C discharge)
Weight(KG)	17.8Kg



12V200Ah Lithium Battery

Model	R-LFP12V200Ah
Battery Type	Power Lithium (Lithium Iron Phosphate)
Customizable	Yes
Nominal Voltage	12.8 (V)
Nominal Capacity	200Ah (0.2C discharge)
Dimension	521*238*219(mm)
Charge Time (Recommended)	5h
Max. Voltage	14.6V $\pm$ 1.0V
Min. Voltage	10V $\pm$ 1.0V
Max. Discharge Current	200A
Max. Charge Current	200A
Security Certification	TüV / CE / UN38.3 / TLC
Communication Port	\
Cycle Life	$\geq$ 4500(0.2C charge/ 0.2C discharge)
Weight(KG)	19Kg



12V300Ah Lithium Battery

Model	R-LFP12V300Ah
Battery Type	Power Lithium (Lithium Iron Phosphate)
Customizable	Yes
Nominal Voltage	12.8 (V)
Nominal Capacity	300Ah (0.2C discharge)
Dimension	521*268*225(mm)
Charge Time (Recommended)	5h
Max. Voltage	14.6V $\pm$ 1.0V
Min. Voltage	10V $\pm$ 1.0V
Max. Discharge Current	300A
Max. Charge Current	300A
Security Certification	TüV / CE / UN38.3 / TLC
Communication Port	\
Cycle Life	$\geq$ 4500(0.2C charge/ 0.2C discharge)
Weight(KG)	27Kg



24V50Ah Lithium Battery

Model	R-LFP24V50Ah
Battery Type	Power Lithium (Lithium Iron Phosphate)
Customizable	Yes
Nominal Voltage	12.8 (V)
Nominal Capacity	50Ah (0.2C discharge)
Dimension	328*172*220(mm)
Charge Time (Recommended)	5h
Max. Voltage	14.6V $\pm$ 1.0V
Min. Voltage	10V $\pm$ 1.0V
Max. Discharge Current	50A
Max. Charge Current	50A
Security Certification	TüV / CE / UN38.3 / TLC
Communication Port	\
Cycle Life	$\geq$ 4500(0.2C charge/ 0.2C discharge)
Weight(KG)	13.2Kg




24V100Ah Lithium Battery

Model	R-LFP24V100Ah
Battery Type	Power Lithium (Lithium Iron Phosphate)
Customizable	Yes
Nominal Voltage	12.8 (V)
Nominal Capacity	100Ah (0.2C discharge)
Dimension	483*170*241(mm)
Charge Time (Recommended)	5h
Max. Voltage	14.6V $\pm$ 1.0V
Min. Voltage	10V $\pm$ 1.0V
Max. Discharge Current	100A
Max. Charge Current	200A
Security Certification	TüV / CE / UN38.3 / TLC
Communication Port	\
Cycle Life	$\geq$ 4500(0.2C charge/ 0.2C discharge)
Weight(KG)	19Kg



Lithium Battery (Cells Introduction)

Soft-packed Lithium Iron Phosphate Battery		
Model:PF50		Appearance
Nominal Capacity	50Ah@0.2C	
Nominal Voltage	3.2V	
Standard Charge	0.2 C to 3.65V CC/CV,0.02C	
Standard Discharge	0.2 C to 2.5V	
Min. Capacity	50Ah@0.2C	
Internal Resistance	<1.5(1KHZ AC) / mΩ	
Energy Density	150Wh/kg	
Cycle Life	>3000(0.2 charge/ 0.2 discharge, final capacity is 80% of initial capacity)	
Security Certification	CE、TÜV、TLC、UL、ROHS	

Soft-packed Lithium Iron Phosphate Battery		
Model:PF100		Appearance
Nominal Capacity	100Ah@0.2C	
Nominal Voltage	3.2V	
Standard Charge	0.2 C to 3.65V CC/CV,0.02C	
Standard Discharge	0.2 C to 2.5V	
Min. Capacity	100Ah@0.2C	
Internal Resistance	<0.8(1KHz AC) / mΩ	
Energy Density	150Wh/kg	
Cycle Life	>3000(0.2 charge/ 0.2 discharge, final capacity is 80% of initial capacity)	
Security Certification	CE、TÜV、TLC、UL、ROHS	

Soft-packed Lithium Iron Phosphate Battery		
Model:PF32650		Appearance
Nominal Capacity	6Ah@0.2C	
Nominal Voltage	3.2V	
Standard Charge	0.2 C to 3.65V CC/CV,0.02C	
Standard Discharge	0.2 C to 2.5V	
Min. Capacity	6Ah@0.2C	
Internal Resistance	<9(1KHZ AC) / mΩ	
Energy Density	150Wh/kg	
Cycle Life	>3000(0.2 charge/ 0.2 discharge, final capacity is 80% of initial capacity)	
Security Certification	CE、TÜV、TLC、UL、ROHS	

BMS-Intelligent Monitoring System

For battery group and single series cells, it provides hardware and software protection functions such as over-voltage, under-voltage, charge-discharge over-current, high-low temperature and short circuit, etc. The system terminal receives SOC and SOH information through RS485-1 and RS485-2 interfaces. It can calculate the present battery capacity by real-time monitoring voltage and current; makes relevant control and protection actions by monitoring various protection states; and has intelligent cell equalization function to improve the battery pack's effective use time and cycle life.




Applications


Solar batteries, energy storage power stations, UPS batteries, solar street lamps, etc.




3.2V50Ah Discharge Curves at Different Rates

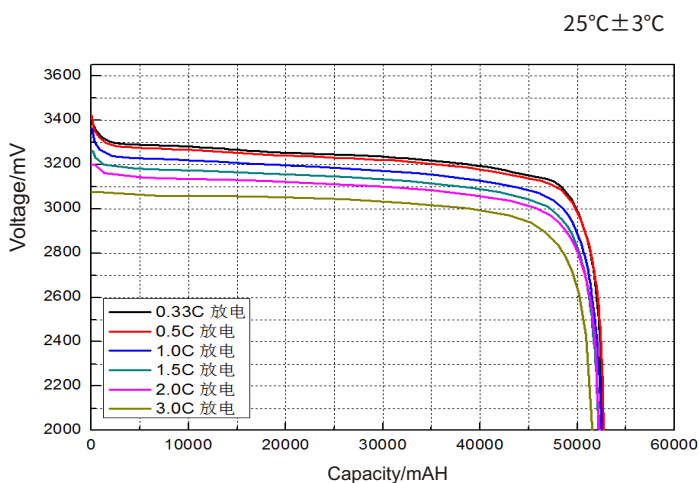


3.2V50Ah Discharge Curves at Different Temperatures

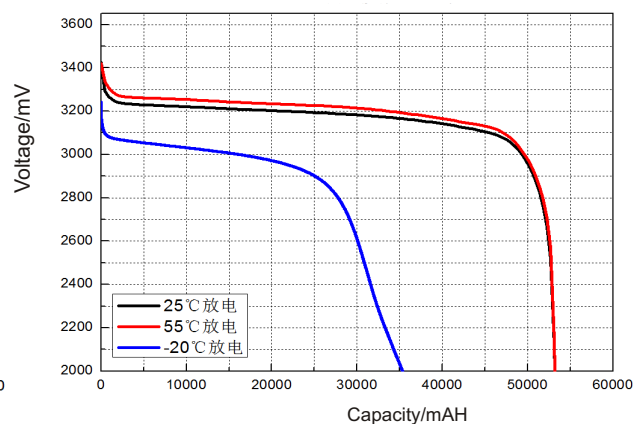

3.2V100Ah Discharge Curves at Different Rates

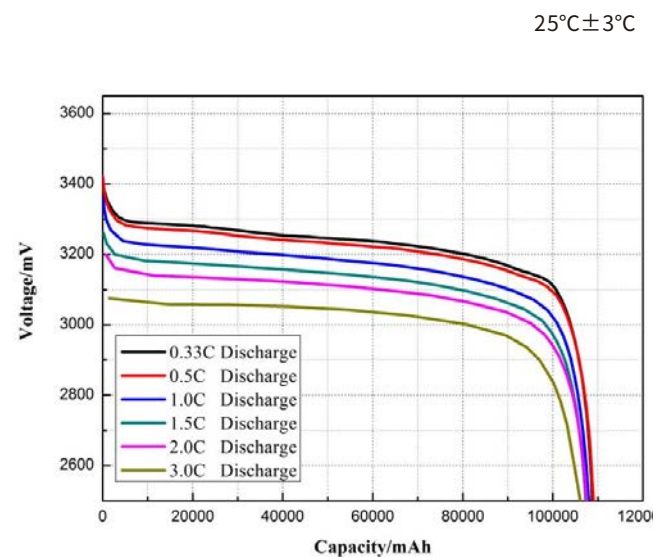


3.2V100Ah Discharge Curves at Different Temperatures

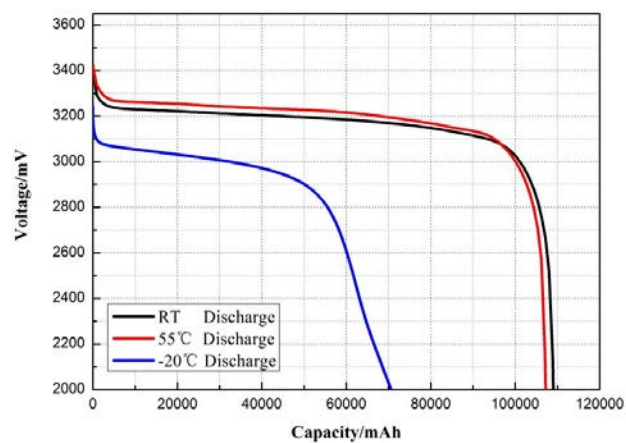


3.2V50Ah Cycle Life Diagram

0.2C Charge/Discharge (@25±3°C)

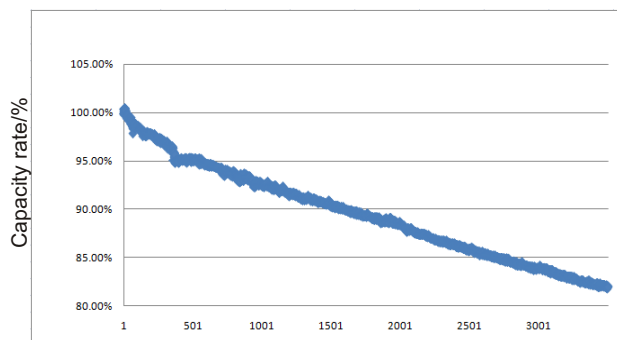

3.2V100Ah Cycle Life Diagram

0.2C Charge/Discharge (@25±3°C)

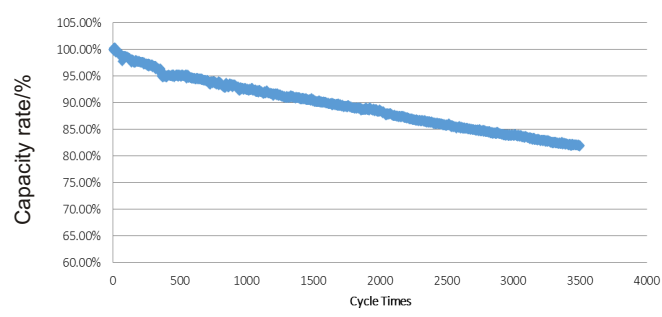



RITAR INTERNATIONAL GROUP LIMITED

Headquarters Add: 10th Floor, Tower C, 1st Building, Software Industry Base,
No.81, Xuefu Road, Nanshan District, Shenzhen, Guangdong, China 518057

Tel: +86-755-33981668/83475380

E-mail: sales@ritarpower.com

Fax: +86-755-83475180

www.ritarpower.com

2019-Version-0

The bottom of the page features a decorative graphic made of several overlapping, semi-transparent, curved shapes in shades of light orange and beige, creating a modern, abstract design.