
AUTHORISED DISTRIBUTOR

Divyanshi Digital Services Private Limited

Authorised Distributor for Solar Products of Livguard Energy Technologies Pvt. Ltd.

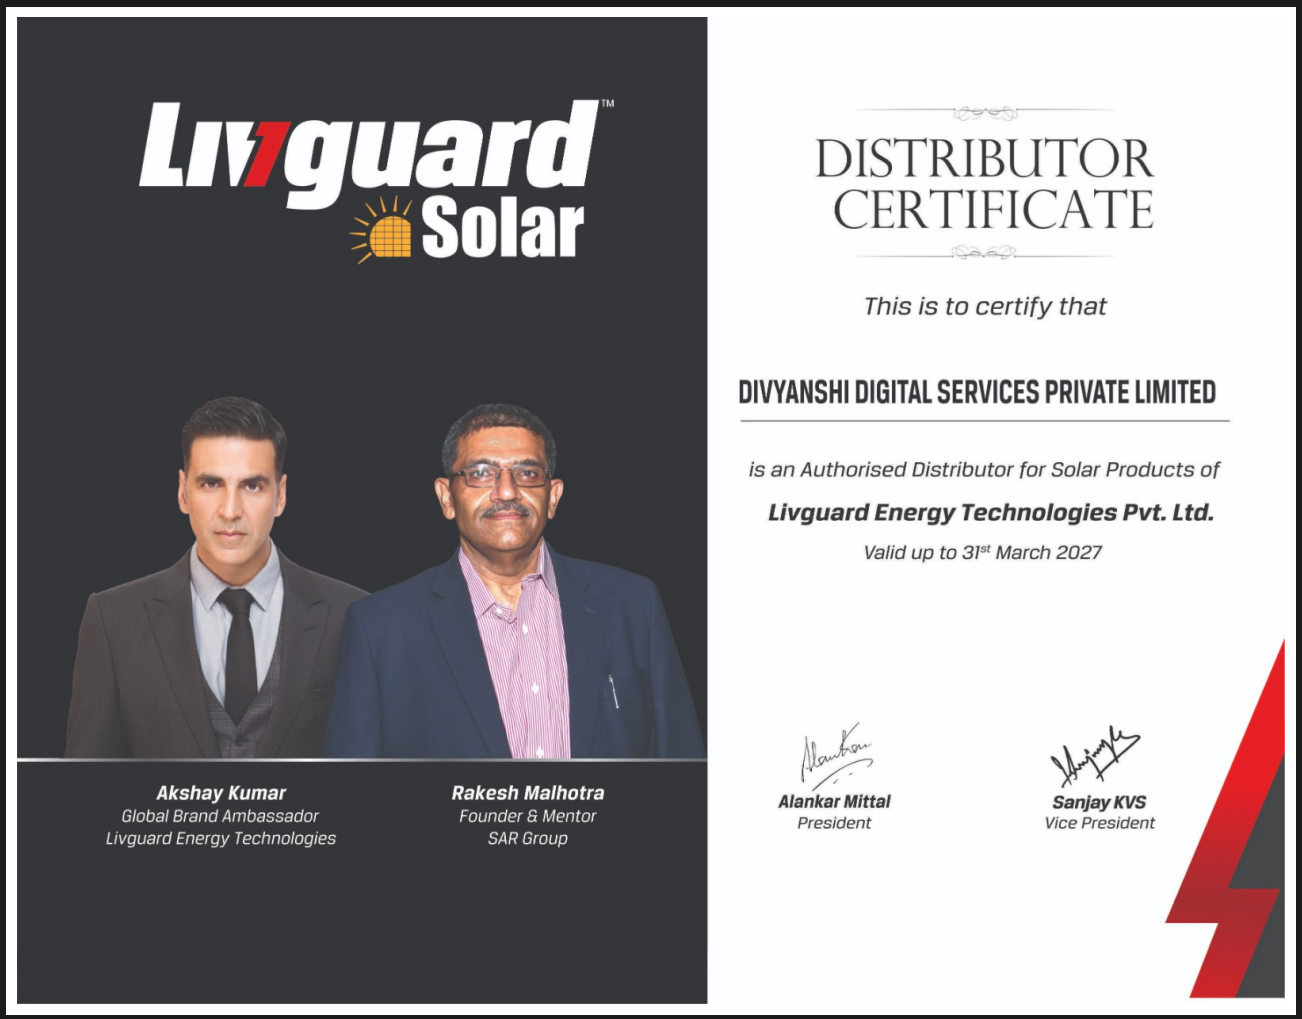

Certificate Valid up to 31st March 2027

Livguard Solar Panels

N-Type TopCon Bifacial | Glass-to-Glass | 12 Yr Product + 30 Yr Performance Warranty

Industry-leading N-Type TopCon bifacial panels with dual-glass construction for maximum durability and energy harvest.

Up to 23.2% Efficiency
N-Type TopCon half-cut cells for superior performance in all conditions

Bifacial Glass-to-Glass
2mm AR coated front + 2mm rear glass, up to 25% bifacial gain

30 Year Warranty
Linear: 1% yr-1 degradation then 0.45%/yr from year 2 to 30

LGTPV580WBNTOPDCR — 580 Wp

Parameter	Specification
Peak Power (STC)	580 Wp
Voc / Vmpp	52.85V / 44.79V
Isc / Impp	13.71A / 12.95A
Module Efficiency	22.45%
Cell Type	144 Half-Cut N-Type TopCon Bifacial
Construction	Glass-to-Glass (2mm + 2mm)
Dimensions	2278 x 1133 x 30 mm
Weight	32.5 +/- 0.5 kg
Max System Voltage	1500V DC
Bifacial Gain @10%	638 Wp (24.70% eff.)
Bifacial Gain @25%	725 Wp (28.07% eff.)
Mechanical Load	Snow 5400 Pa / Wind 2400 Pa
Product Warranty	12 Years
Performance Warranty	30 Years Linear

LGTPV600WBNTOPDCR — 600 Wp

Parameter	Specification
Peak Power (STC)	600 Wp
Voc / Vmpp	53.0V / 43.97V
Isc / Impp	14.63A / 13.68A
Module Efficiency	23.2%
Cell Type	144 Half-Cut N-Type 16BB TopCon
Construction	Glass-to-Glass (2mm + 2mm)
Dimensions	2278 x 1134 x 30 mm
Weight	33.4 +/- 5% kg
Bifacial Gain @5%	630 Wp (24.39% eff.)
Bifacial Gain @25%	750 Wp (29.03% eff.)
NOCT	41 deg C +/- 3 deg C
Temp Coeff. Pmax	-0.29%/ deg C
Product Warranty	12 Years
Performance Warranty	30 Years Linear

IP65 Hybrid Solar Inverters

48V Battery System | Single Phase (3K-5K) & Three Phase (5K-20K) | 5 Years Warranty

IP65-rated for indoor/outdoor use. Lead-acid & lithium compatible with intelligent BMS integration.

IP65 Weatherproof Rating

Dust-tight, water-jet protected enclosure for outdoor mounting

Scalable Parallel Operation

Up to 16 units (1PH) / 10 units (3PH) on-grid & off-grid

Time-of-Use Scheduling

6 programmable charge/discharge periods for savings

DG + Grid + Solar Input

Charge from diesel generator, grid, or solar — full flexibility

Single Phase (3K-1PH / 5K-1PH)

Parameter	3K-1PH	5K-1PH
Rated AC Power	3000W	5000W
Max PV Input Power	4800W	8000W
Max PV Voltage	500V	500V
MPPT Range	150-425V	150-425V
MPPT Trackers/Strings	1/1	2/1+1
Battery Voltage	40-60V	40-60V
Max Charge/Discharge	70A	120A
Max Efficiency	97.60%	97.60%
Parallel Support	Up to 16 units	Up to 16 units
IP Rating	IP65	IP65
Weight	17 kg	17 kg
Warranty	5 Years	5 Years

Three Phase (5K / 10K / 20K)

Parameter	5K-3PH	10K-3PH	20K-3PH
Rated AC Power	5000W	10000W	20000W
Max PV Input	7500W	15000W	32000W
Max PV Voltage	800V	800V	800V
MPPT Trackers	2/1+1	2/1+1	2/2+2
Max Charge Current	120A	210A	350A
Max Efficiency	97.60%	97.60%	97.60%
Parallel Units	Up to 10	Up to 10	Up to 10
Weight	35.2 kg	35.2 kg	51.9 kg
Warranty	5 Years	5 Years	5 Years

3.6KW/24V Hybrid Inverter

High Frequency | Transformerless | BIS Certified | Grid Export

Smart on-grid + off-grid combo: reduce bills, store backup, and export surplus solar to grid.

98% Efficiency
Advanced transformerless design for maximum power conversion

Battery Flexible
Lead-acid & lithium with auto detection and BMS

Grid Export
Sell surplus solar power back to the grid

Smart BMS
Intelligent battery management for lithium protection

Wi-Fi Monitor
Optional remote monitoring from anywhere

Pure Sine Wave
Clean output for sensitive electronics

Model: LGTDU36K24VHFGIH

Parameter	Specification
Rated Power (Battery)	3600W
Rated Power (PV)	4500W
Battery Voltage	24V DC
Input Voltage Range	90-280 VAC (APL) / 170-280 VAC (UPS)
Output Voltage	220/230/240 VAC +/- 5%
Output Waveform	Pure Sine Wave
Peak Power	7200 VA
Transfer Time	10ms (UPS) / 20ms (APL)
Max PV Input Power	5000W
MPPT Range	60-500 VDC
Max PV Voltage	500 VDC
Max PV Current	18A
Max PV Charging	120A
Max AC Charging	100A
Grid Feed Voltage	195-253 VA
Power Factor	> 0.99
Conversion Efficiency	98%
Communication	RS232, BMS Card, Wi-Fi (opt)
Operating Temp	-10 deg C to 50 deg C
Parallel	Not Available
Certification	BIS Certified (IS/IEC)

*** Parallel connection not available in this model**

Solar Lead Acid Batteries

C10 Deep Cycle | SuperTUFF 3D Grid | BIS Certified | 60 Months Warranty

Industry-first SuperTUFF 3D Grid with double-sided pasting. 2000 life cycles at 80% depth of discharge.

SuperTUFF 3D Grid

Industry-first design with double-sided pasting for longer life

2000 Life Cycles

At 80% DoD — built for demanding solar deep-cycle use

Ultra Low Maintenance

8-10 months topping interval for hassle-free operation

Futuristic Design

Premium build with robust high-quality materials for durability

LS20060TT — 200 Ah Solar Battery

Parameter	Specification
Model	LS20060TT
Capacity (C10)	200 Ah
Voltage	12V
Type	Tubular Lead Acid — Deep Cycle
Grid Technology	SuperTUFF 3D Grid
Life Cycles	2000 cycles @ 80% DoD
Warranty	60 Months Full Replacement
Weight	63.4 kg
Maintenance	Ultra Low (8-10 month topping)
Certification	BIS Certified

LS15060TT — 150 Ah Solar Battery

Parameter	Specification
Model	LS15060TT
Capacity (C10)	150 Ah
Voltage	12V
Type	Tubular Lead Acid — Deep Cycle
Grid Technology	SuperTUFF 3D Grid
Life Cycles	2000 cycles @ 80% DoD
Warranty	60 Months Full Replacement
Maintenance	Ultra Low (8-10 month topping)
Certification	BIS Certified

Lithium-X Power Backup

1250VA Inverter + 100Ah Lithium + Smart BMS | All-in-One | 8 Years Warranty

Revolutionary all-in-one: inverter, lithium battery, and smart BMS in a compact wall-mount unit.
12x more cycles than lead acid. Battery life up to 10 years. Zero maintenance.

12X Charging Cycles
Battery life up to 10 years vs traditional lead acid systems

3X Faster Charging
0-100% charge in just 3 hours — always ready for backup

Zero Maintenance
No water top-ups or acid checks — completely maintenance-free

Smart BMS Built-in
Over-current, over-voltage, thermal shutdown, fault detection

LivMonitor 360 App
Track backup time, power cut prediction, load %, charge status

Wall Mount Design
Compact 439 x 173 x 493 mm with elegant modern aesthetics

Max Load: 1050W — Powers Your Entire Household

5x20W LEDs | 1x250W Fridge | 1x125W TV+STB | 3x70W Laptops | 4x75W Fans | 1x60W Purifier

LITHIUM-X 1500 — Specifications

Parameter	Specification
Model	LITHIUM-X 1500
Rating	1250 VA
Battery	12.8V / 100Ah Lithium (LFP)
Depth of Discharge	95%
Grid Input (Normal)	170V - 265V
Grid Input (UPS)	100V - 280V
Grid Output	220V +/- 8%
Charging Current	28A
Charge Time (0-100%)	3 Hours
Transfer (UPS Mode)	< 10 ms
Transfer (Normal)	< 30 ms
THD	< 3%
Protections	Overload, Low Battery, Short Circuit, Over-Temp
Display	LCD (Voltages, Currents, Status)
Modes	UPS / Eco Mode
Wi-Fi	Yes — LivMonitor 360
Dimensions	439 x 173 x 493 mm
Weight	28 kg
Mounting	Wall Mount
Warranty	8 Years*