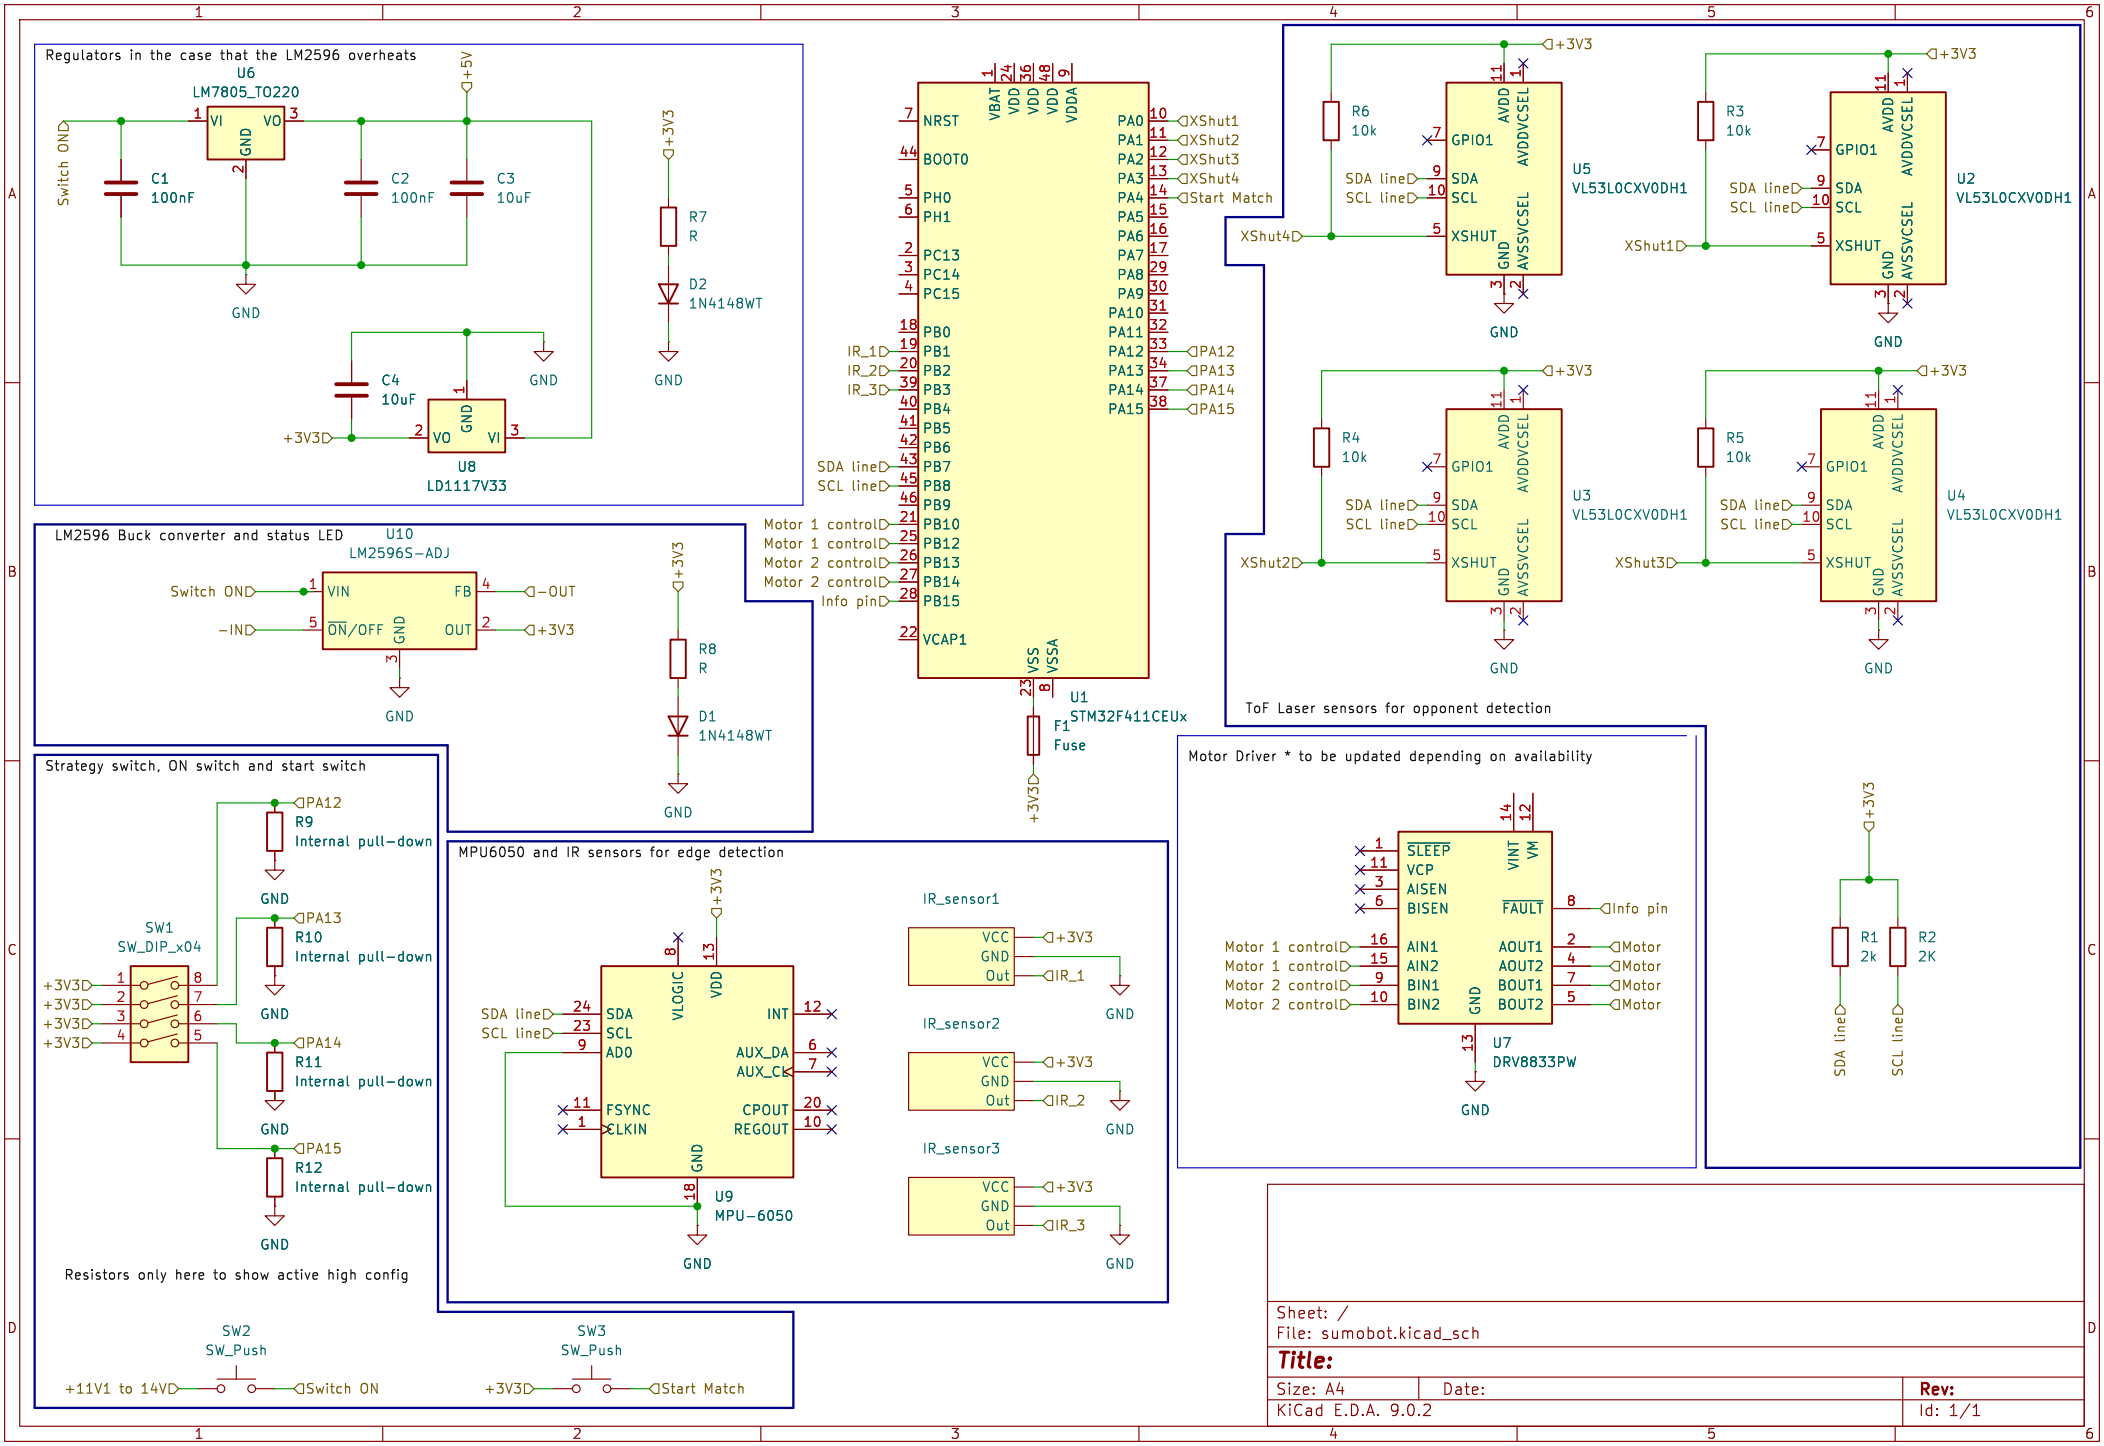

Regulators in the case that the LM2596 overheats
U6
LM7805_TO220
Switch OND
C1
100nF
C2
100nF
C3
10uF
C4
10uF
U8
LD1117V33
R7
R
D2
1N4148WT
LM2596 Buck converter and status LED
U10
LM2596S-ADJ
Switch OND
R8
R
D1
1N4148WT
Strategy switch, ON switch and start switch
SW1
SW_DIP_x04
R9
Internal pull-down
R10
Internal pull-down
R11
Internal pull-down
R12
Internal pull-down
Resistors only here to show active high config
SW2
SW_Push
+11V1 to 14V
Switch ON
SW3
SW_Push
+3V3
Start Match
U1
STM32F411CEUx
F1
Fuse
MPU6050 and IR sensors for edge detection
U9
MPU-6050
IR_sensor1
IR_sensor2
IR_sensor3
ToF Laser sensors for opponent detection
U5
VL53L0CXV0DH1
U2
VL53L0CXV0DH1
U3
VL53L0CXV0DH1
U4
VL53L0CXV0DH1
Motor Driver * to be updated depending on availability
U7
DRV8833PW
R1
2k
R2
2K
Sheet: /
File: sumobot.kicad_sch
Title:
Size: A4
Date:
Rev:
KiCad E.D.A. 9.0.2
Id: 1/1