

(12) **United States Patent**
Chang et al.

(10) **Patent No.:** **US 11,697,993 B1**
(45) **Date of Patent:** **Jul. 11, 2023**

(54) **ROTARY ENGINE**

(71) Applicants: **Shih-Ho Chang**, Changhua (TW);
Han-Chih Chang, Shanghua (TW);
Hsin-Yu Chang, Changhua (TW)

(72) Inventors: **Shih-Ho Chang**, Changhua (TW);
Han-Chih Chang, Changhua (TW)

(73) Assignees: **Shih-Ho Chang**, Changhua (TW);
Han-Chih Chang, Changhua (TW);
Hsin-Yu Chang, Changhua (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **18/089,992**

(22) Filed: **Dec. 28, 2022**

(51) **Int. Cl.**
F01B 13/06 (2006.01)
F02B 57/08 (2006.01)
F02B 75/22 (2006.01)

(52) **U.S. Cl.**
CPC **F01B 13/068** (2013.01); **F02B 57/08** (2013.01)

(58) **Field of Classification Search**
CPC F01B 13/068; F02B 57/08; F02B 75/22;
F02B 75/222; F04B 27/053; F04B 27/04;
F04B 27/0404; F04B 27/06; F04B 27/065
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS


2,018,306 A * 10/1935 Hunt F02B 57/08
123/226
5,954,017 A * 9/1999 Federowicz F01B 13/068
123/44 R
2017/0254320 A1 * 9/2017 Schulze F04B 27/0409
* cited by examiner

Primary Examiner — Deming Wan
(74) *Attorney, Agent, or Firm* — Muncy, Geissler, Olds & Lowe, P C.

(57) **ABSTRACT**

A rotary engine is provided, including: a stator assembly, including an intake stator including an annular intake groove and an exhaust stator including an annular exhaust groove which define a track therebetween; a rotor, rotatably disposed between the intake and exhaust stators, including cylinders each being covered by one of the cylinder head and cylinder heads each including an intake port and an exhaust port, the intake and exhaust ports being connected to the annular intake and exhaust grooves, respectively; a shaft, inserted axially in the stator assembly and the rotor; valve mechanisms, posited on the cylinder heads respectively and each including an intake valve and an exhaust valve; pistons, received in the cylinders respectively and each including a piston rod which is movable along the track; and spark plugs, posited on the cylinder heads and exposed to interiors of the cylinders, respectively.

16 Claims, 15 Drawing Sheets

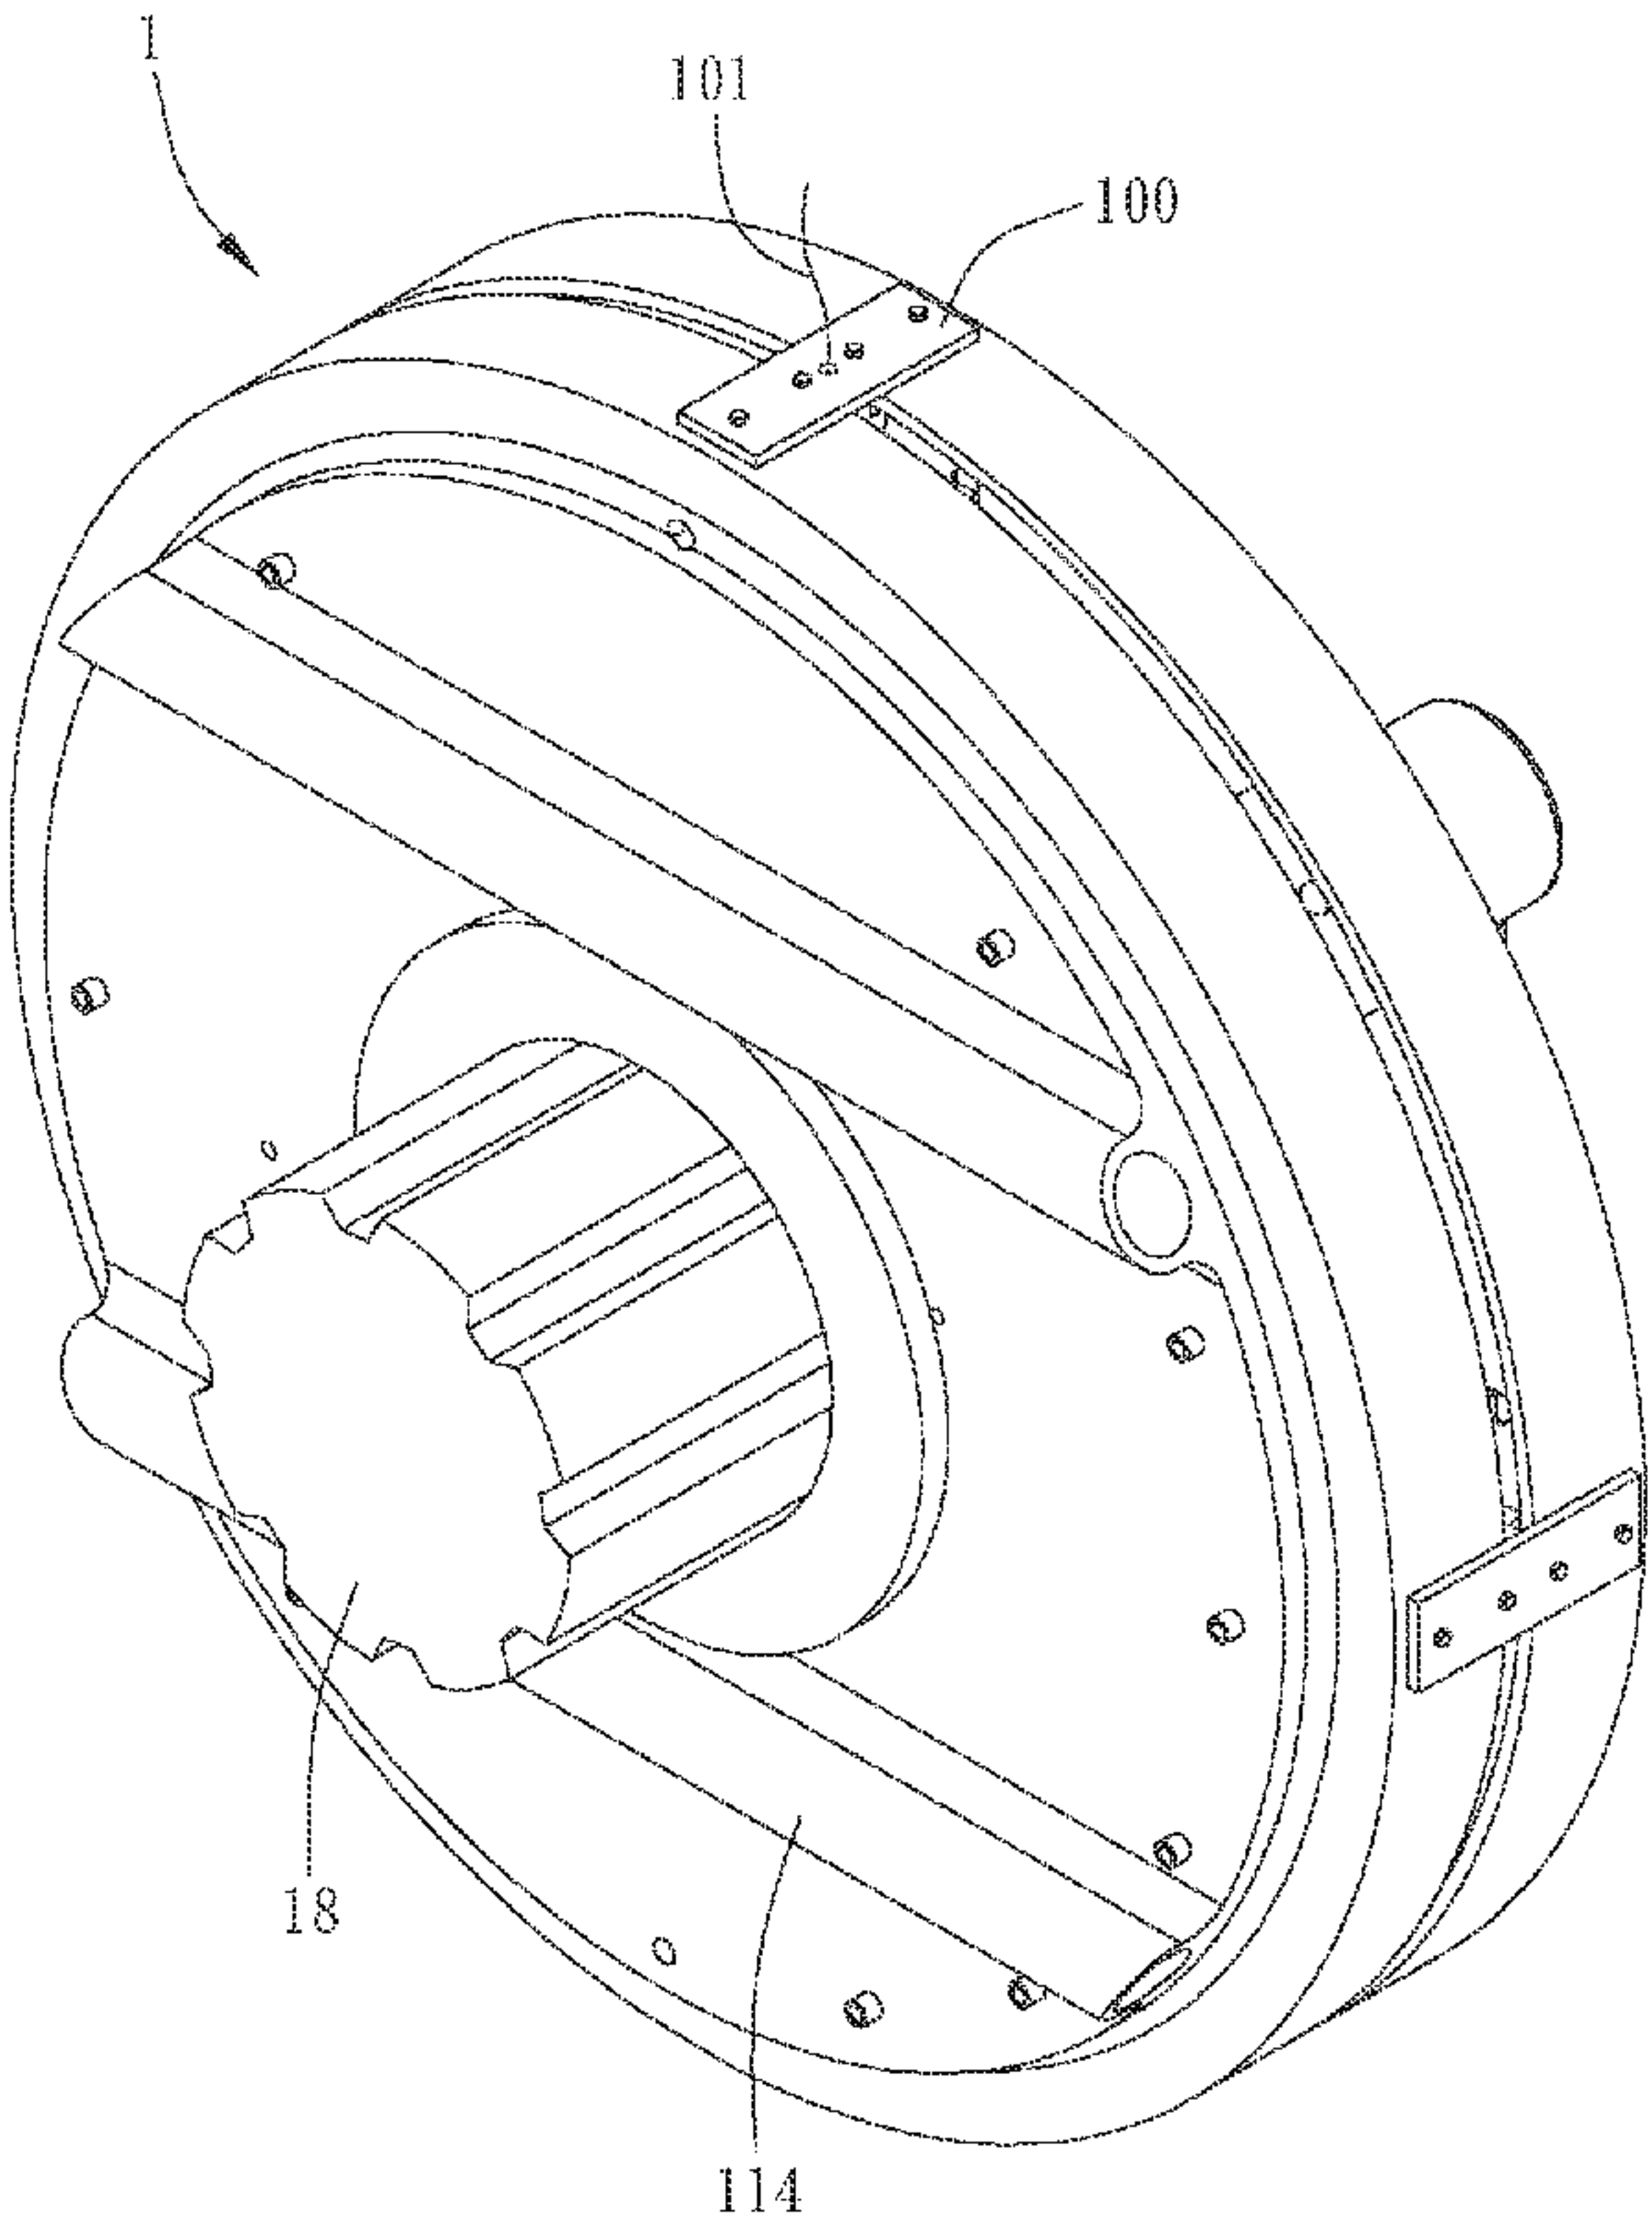

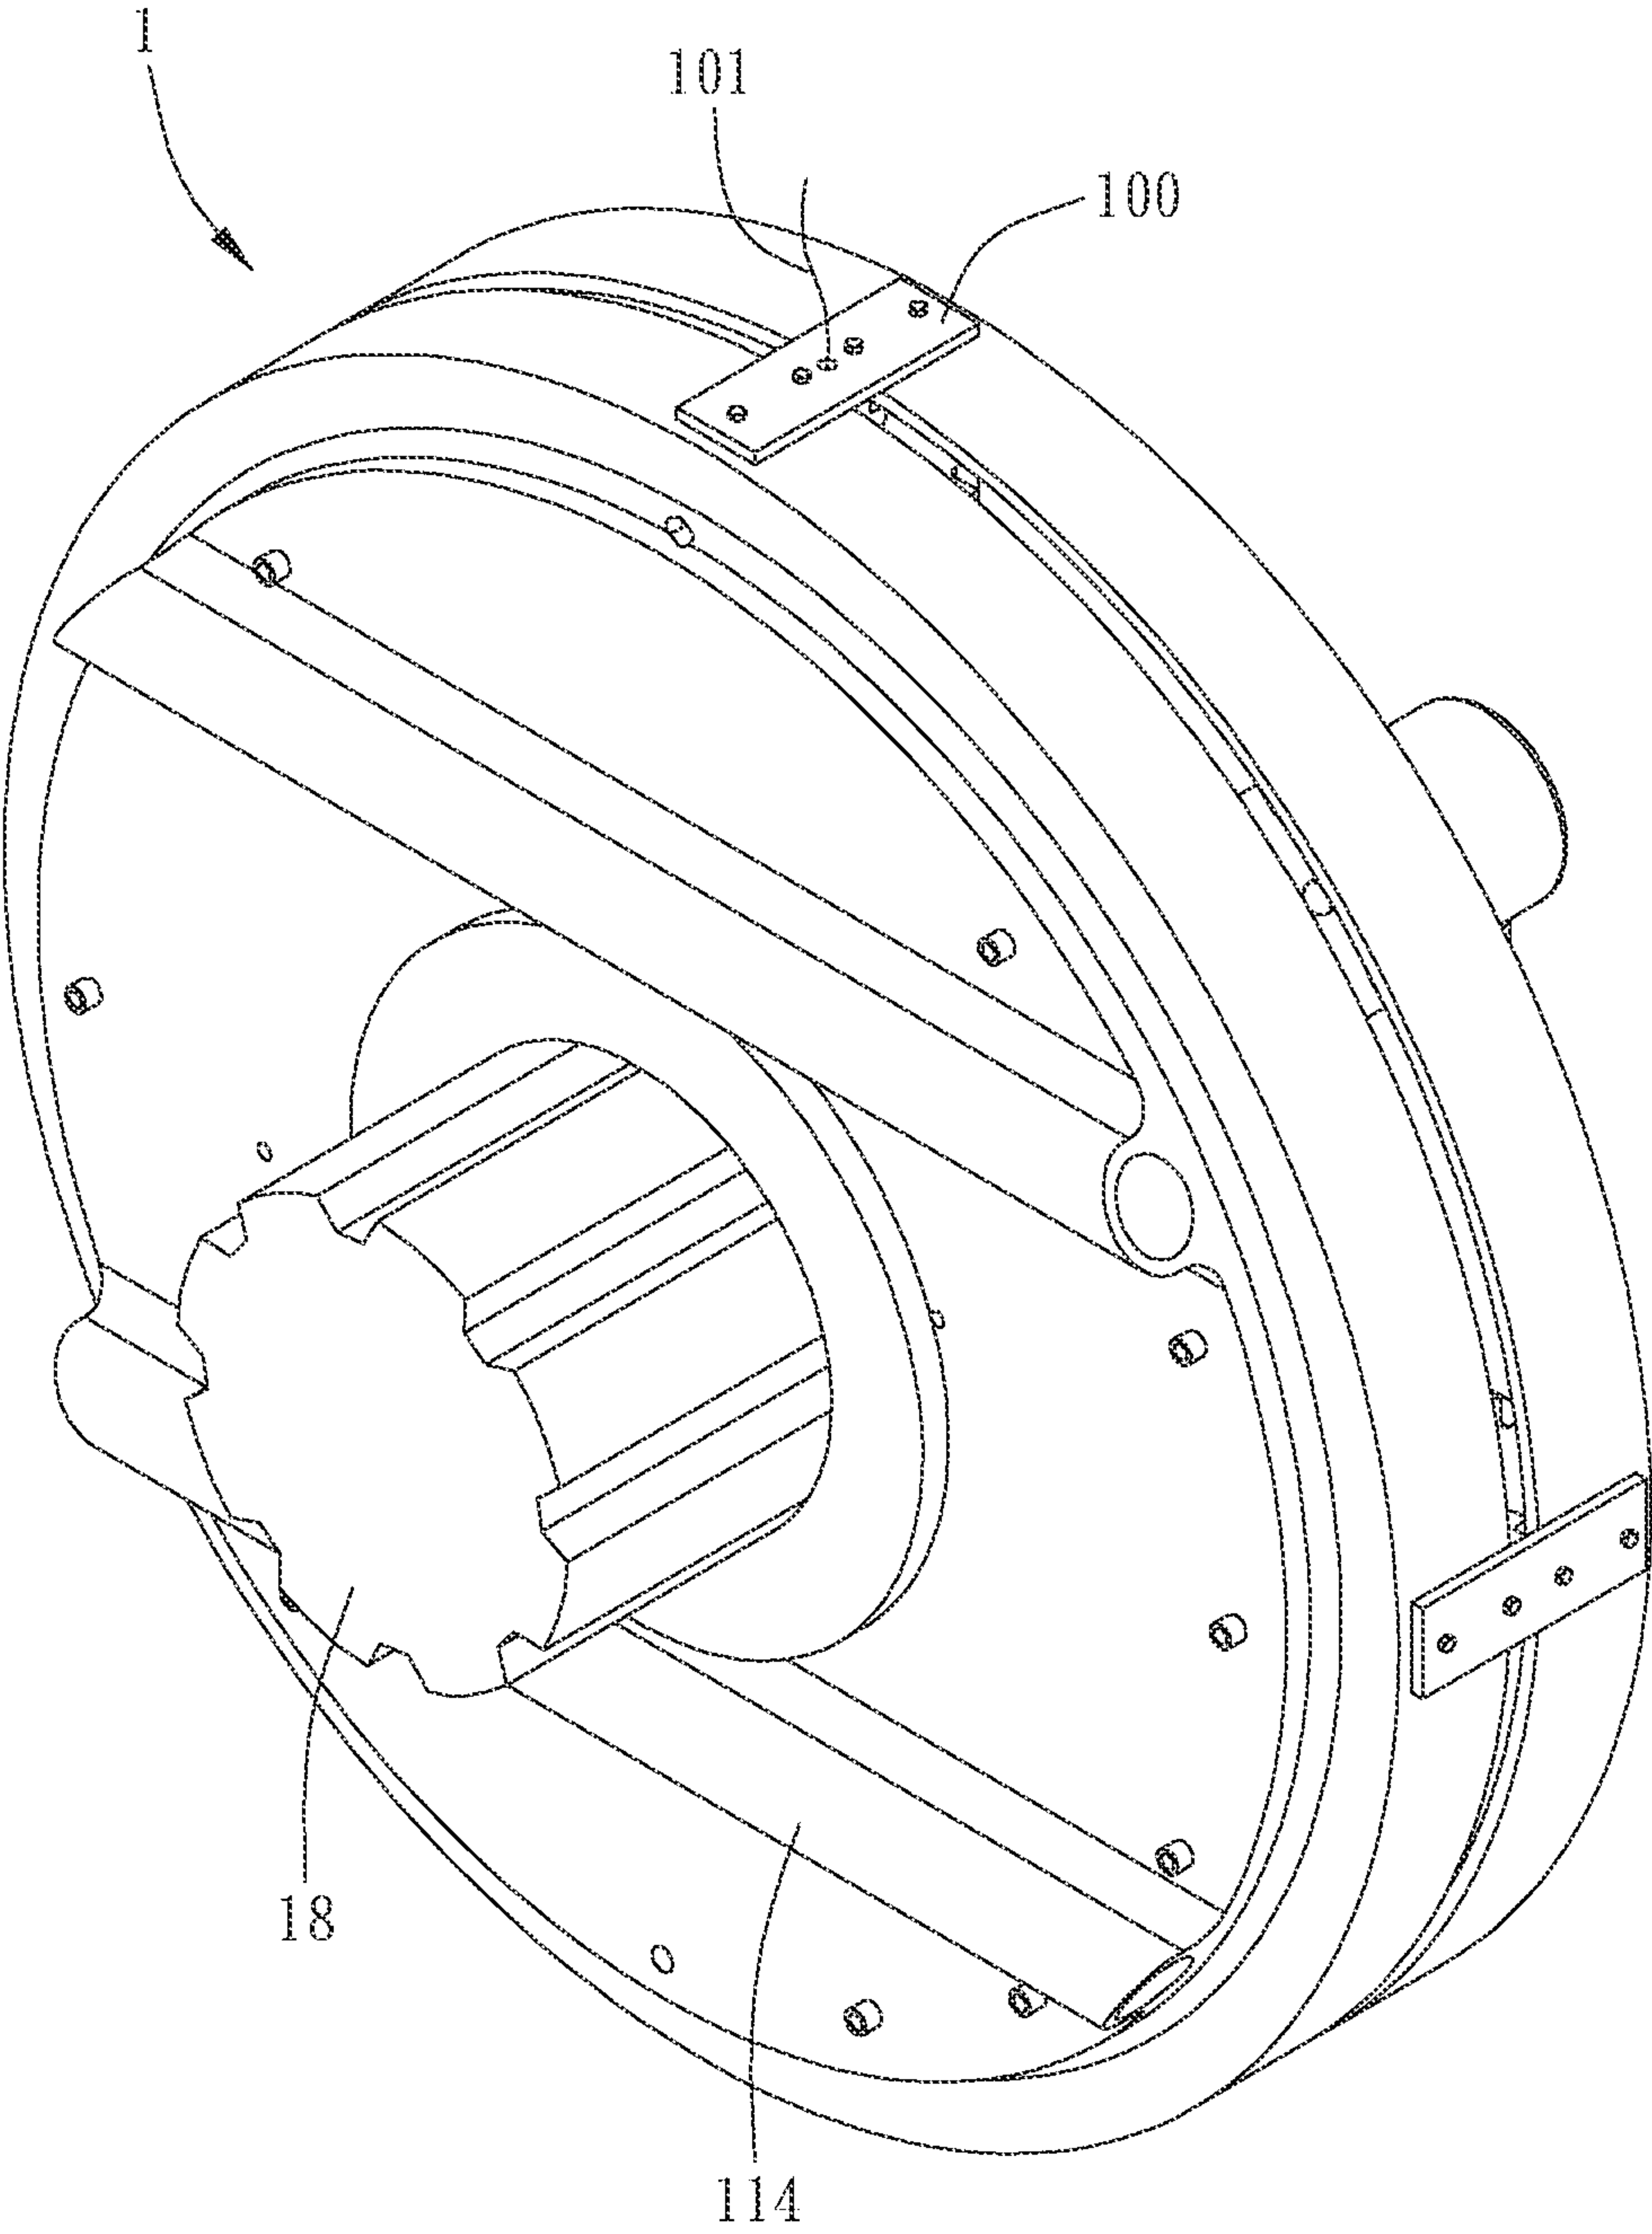


FIG. 1

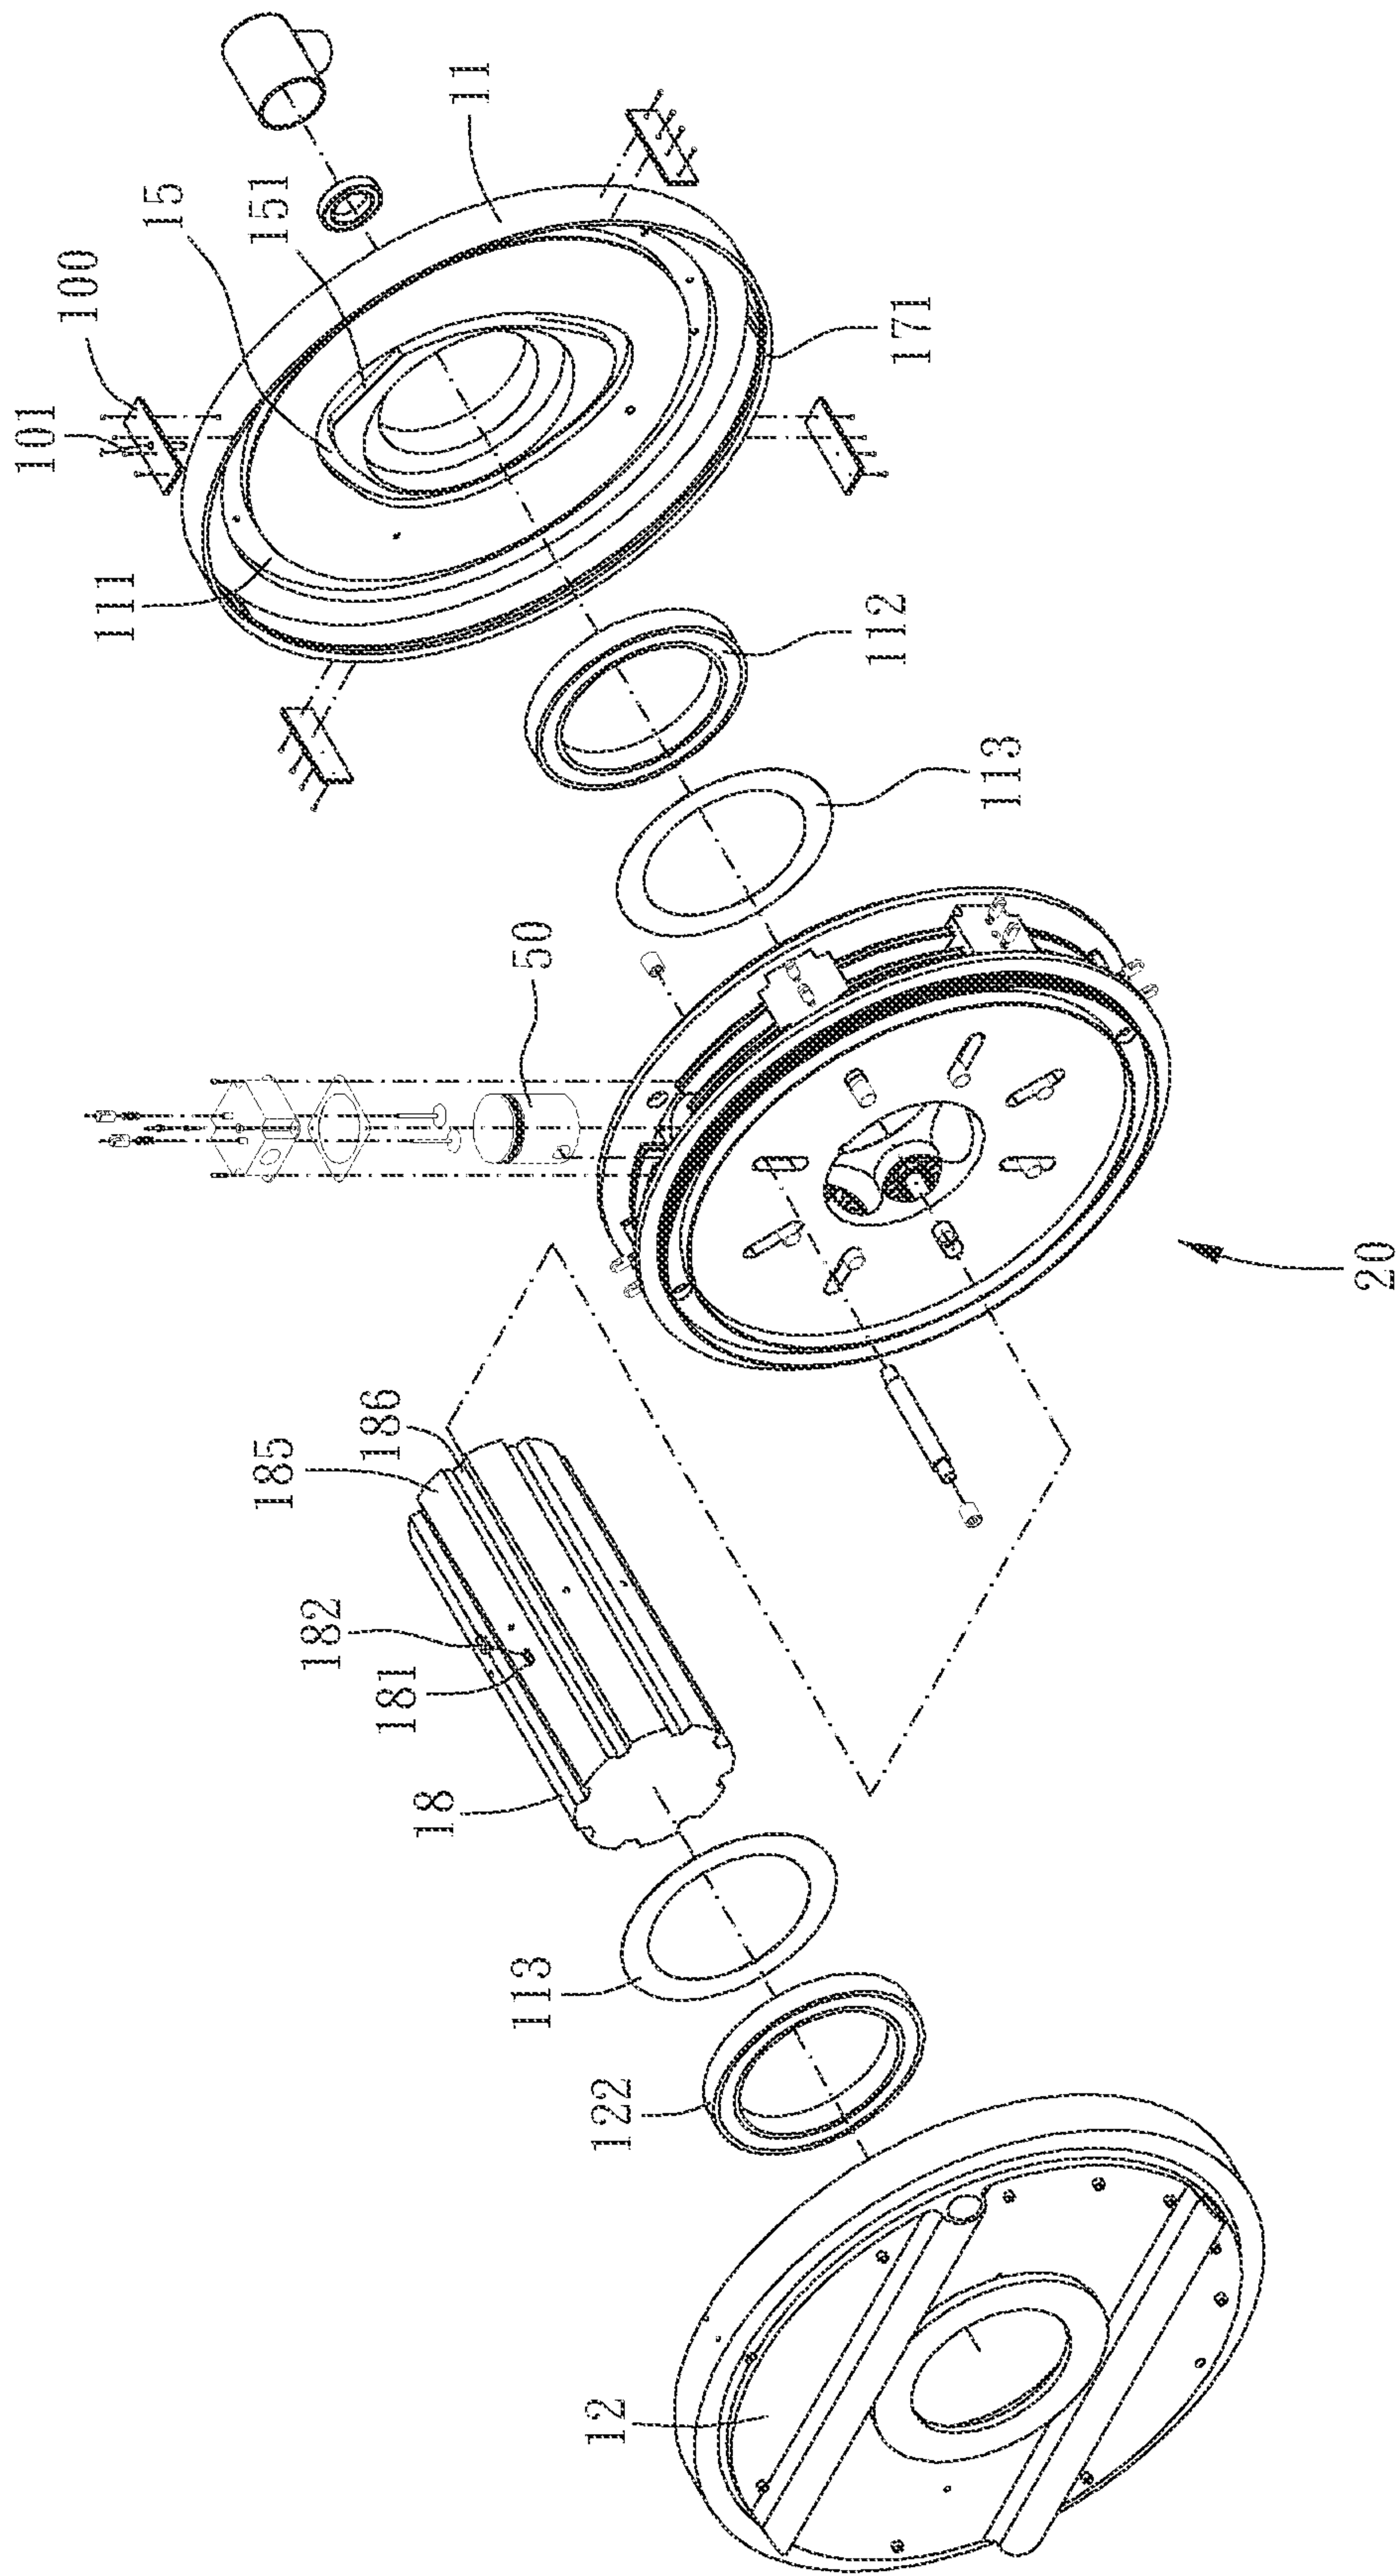


FIG. 2

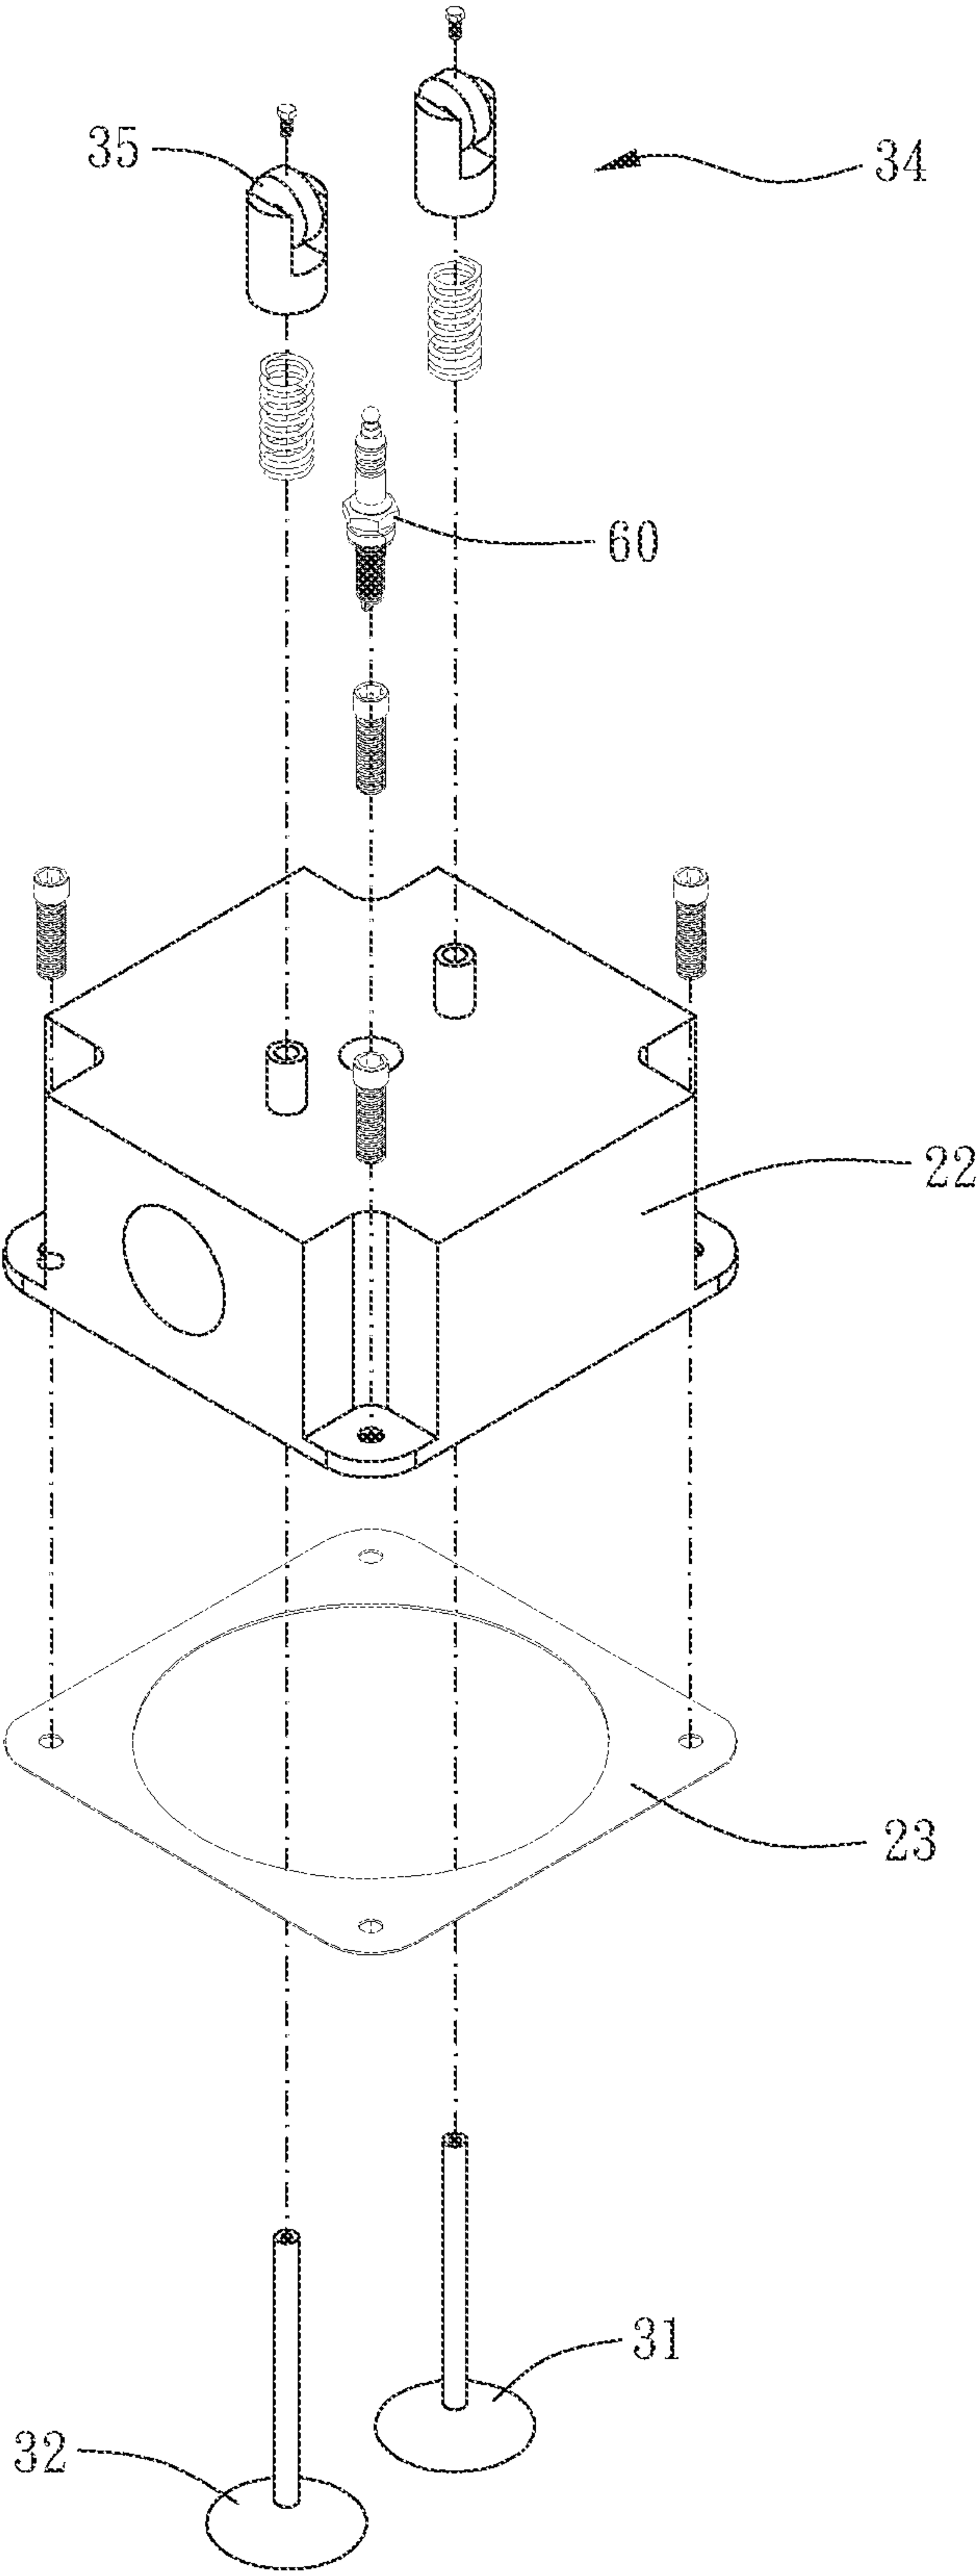


FIG. 3

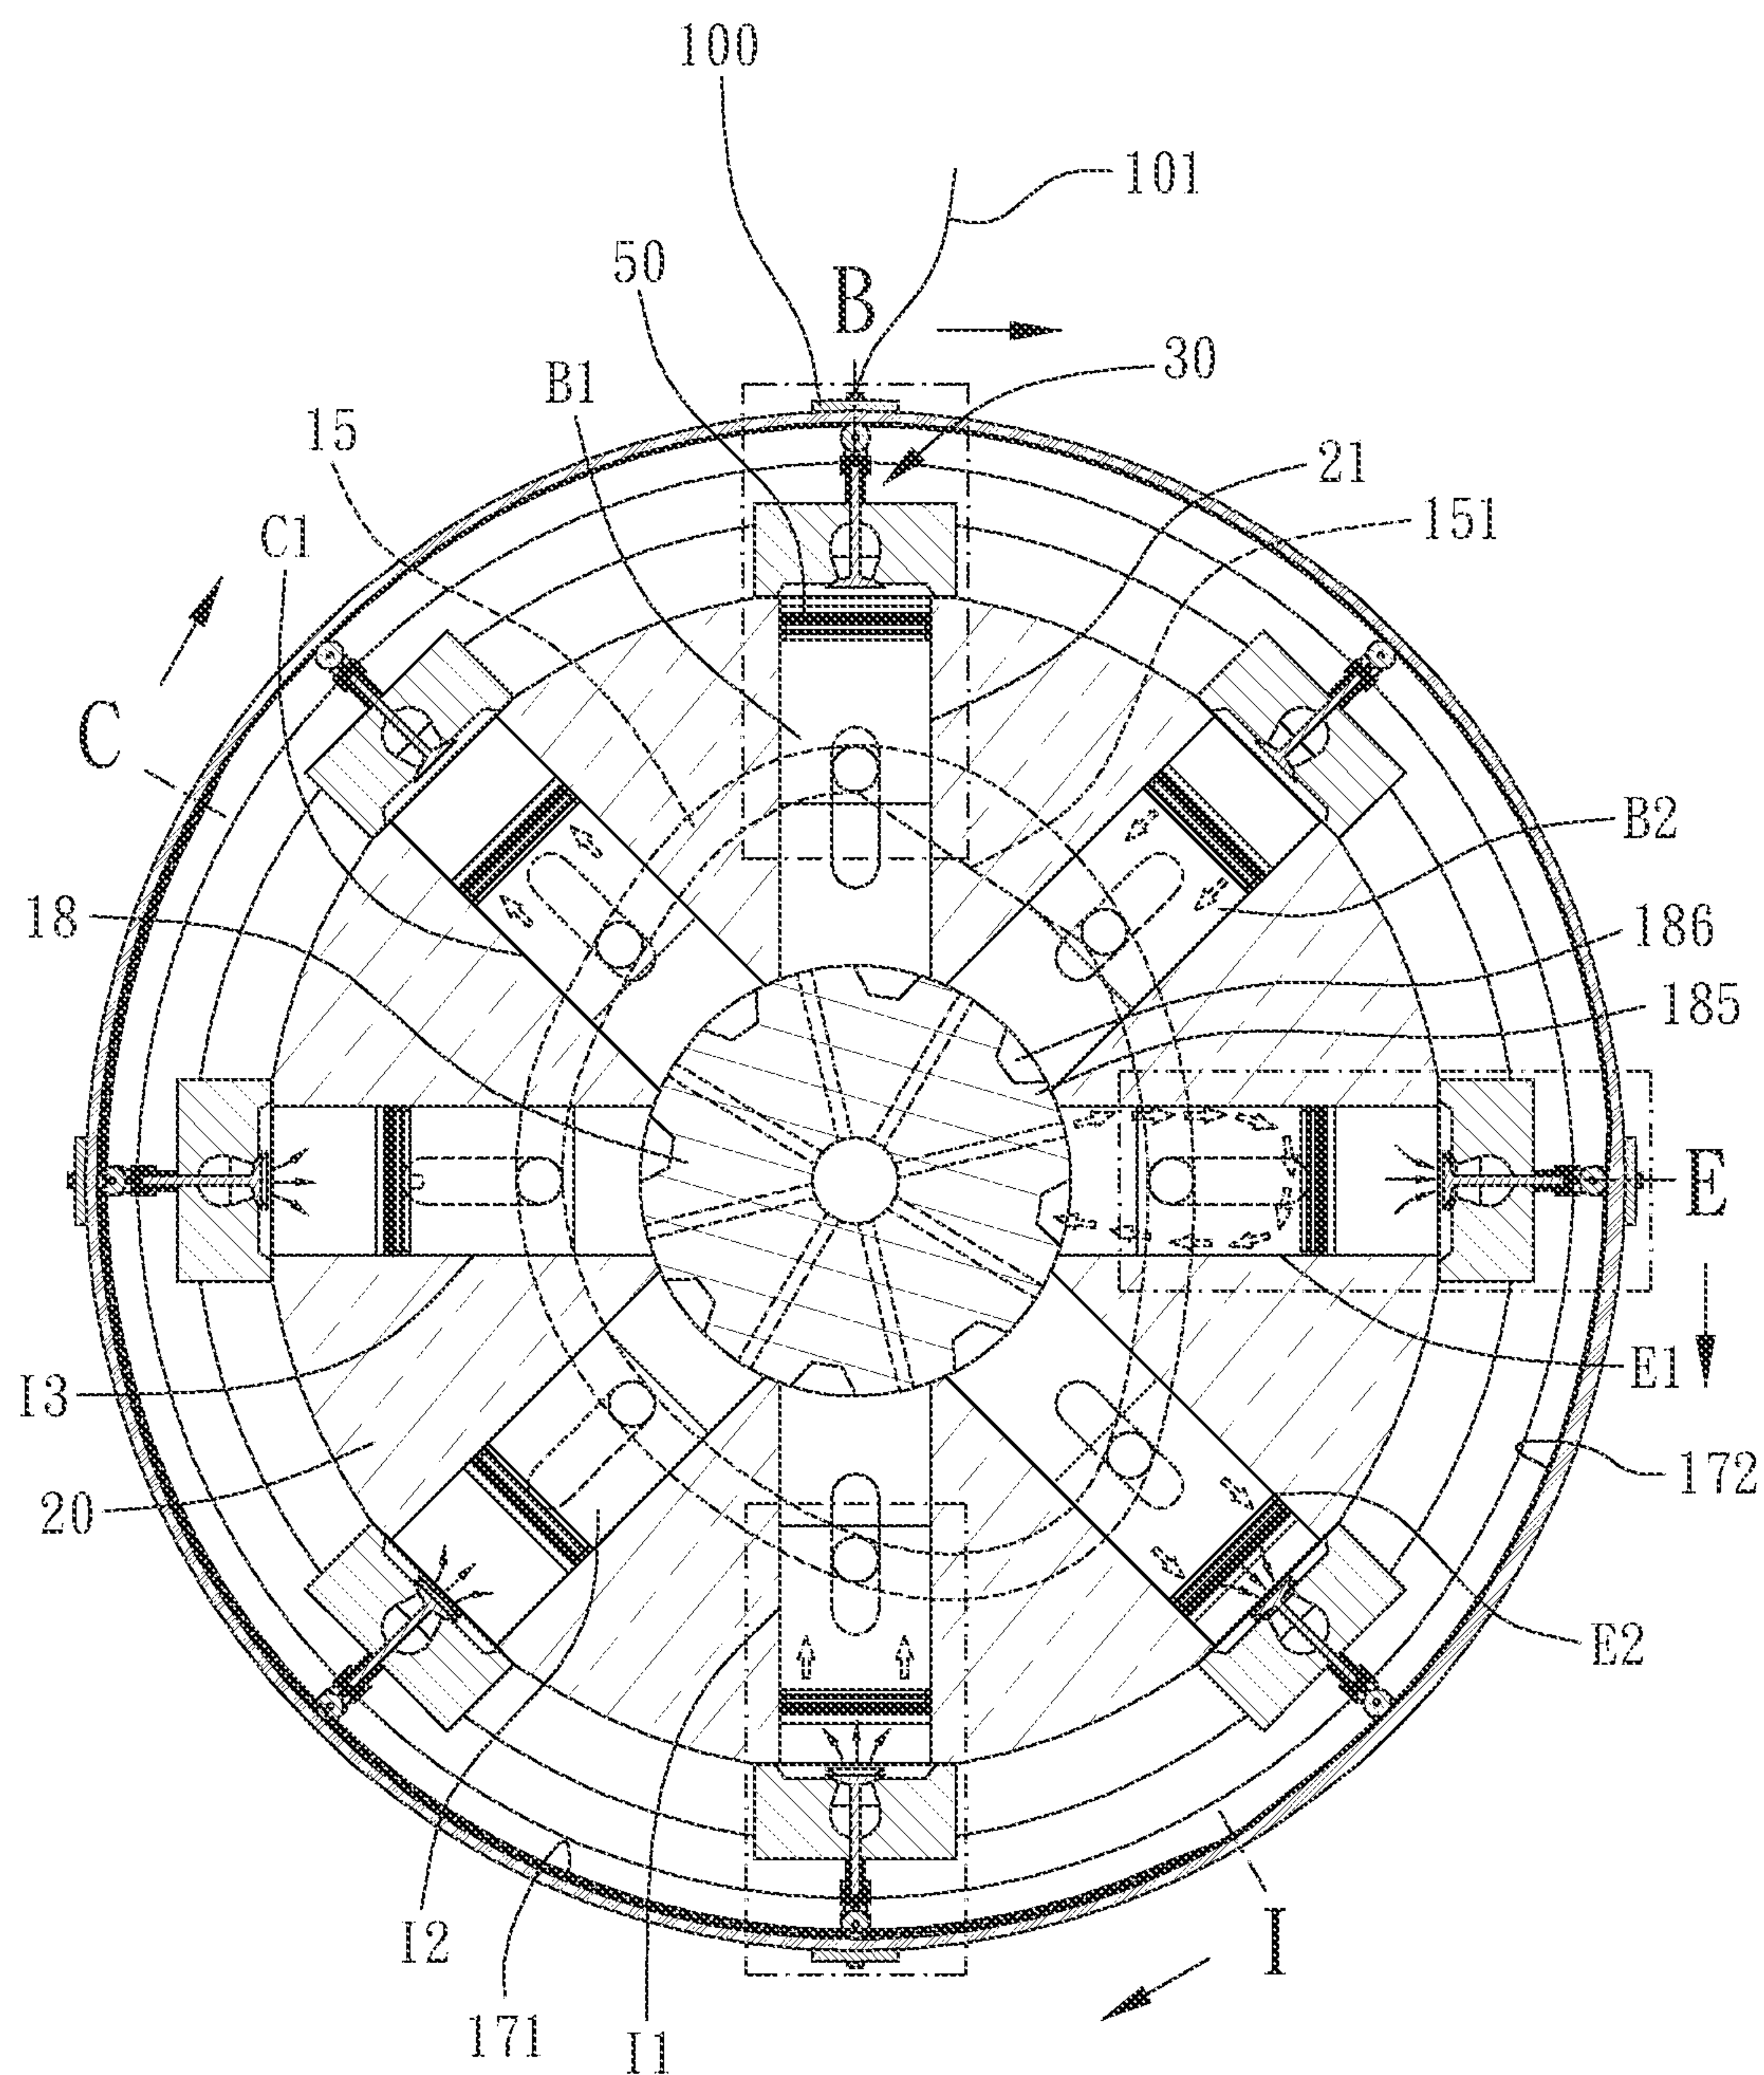


FIG. 4

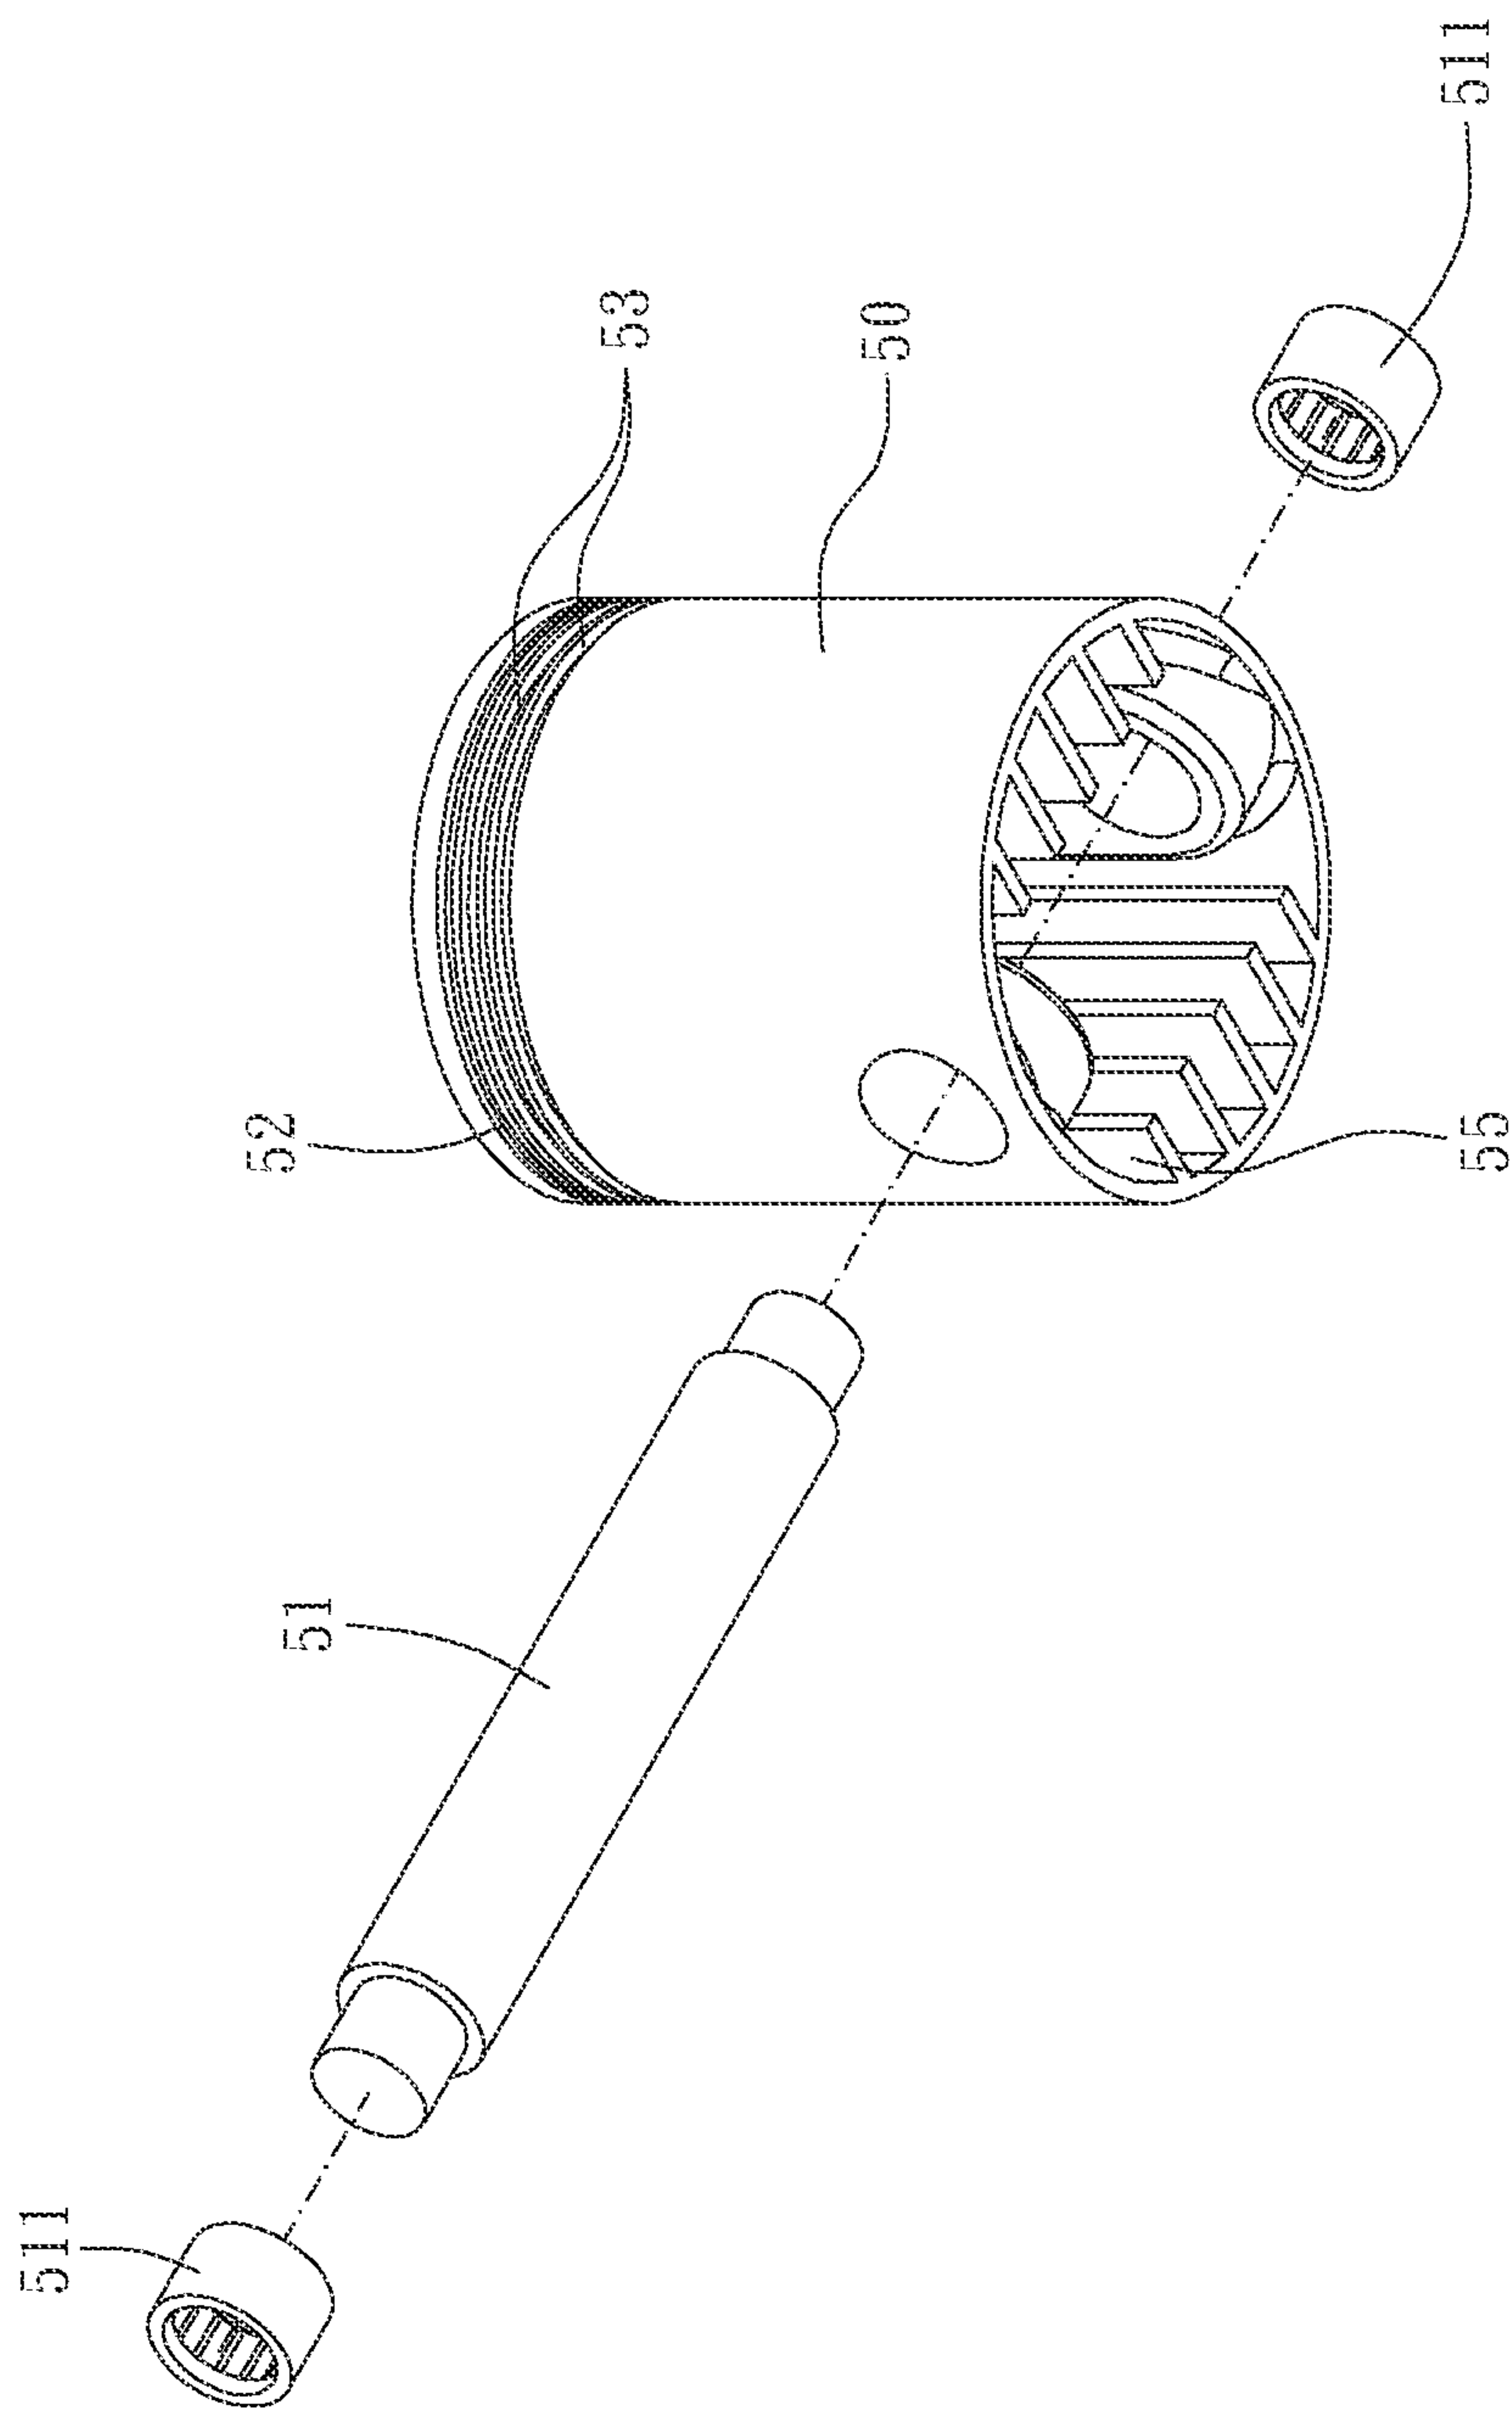


FIG. 5

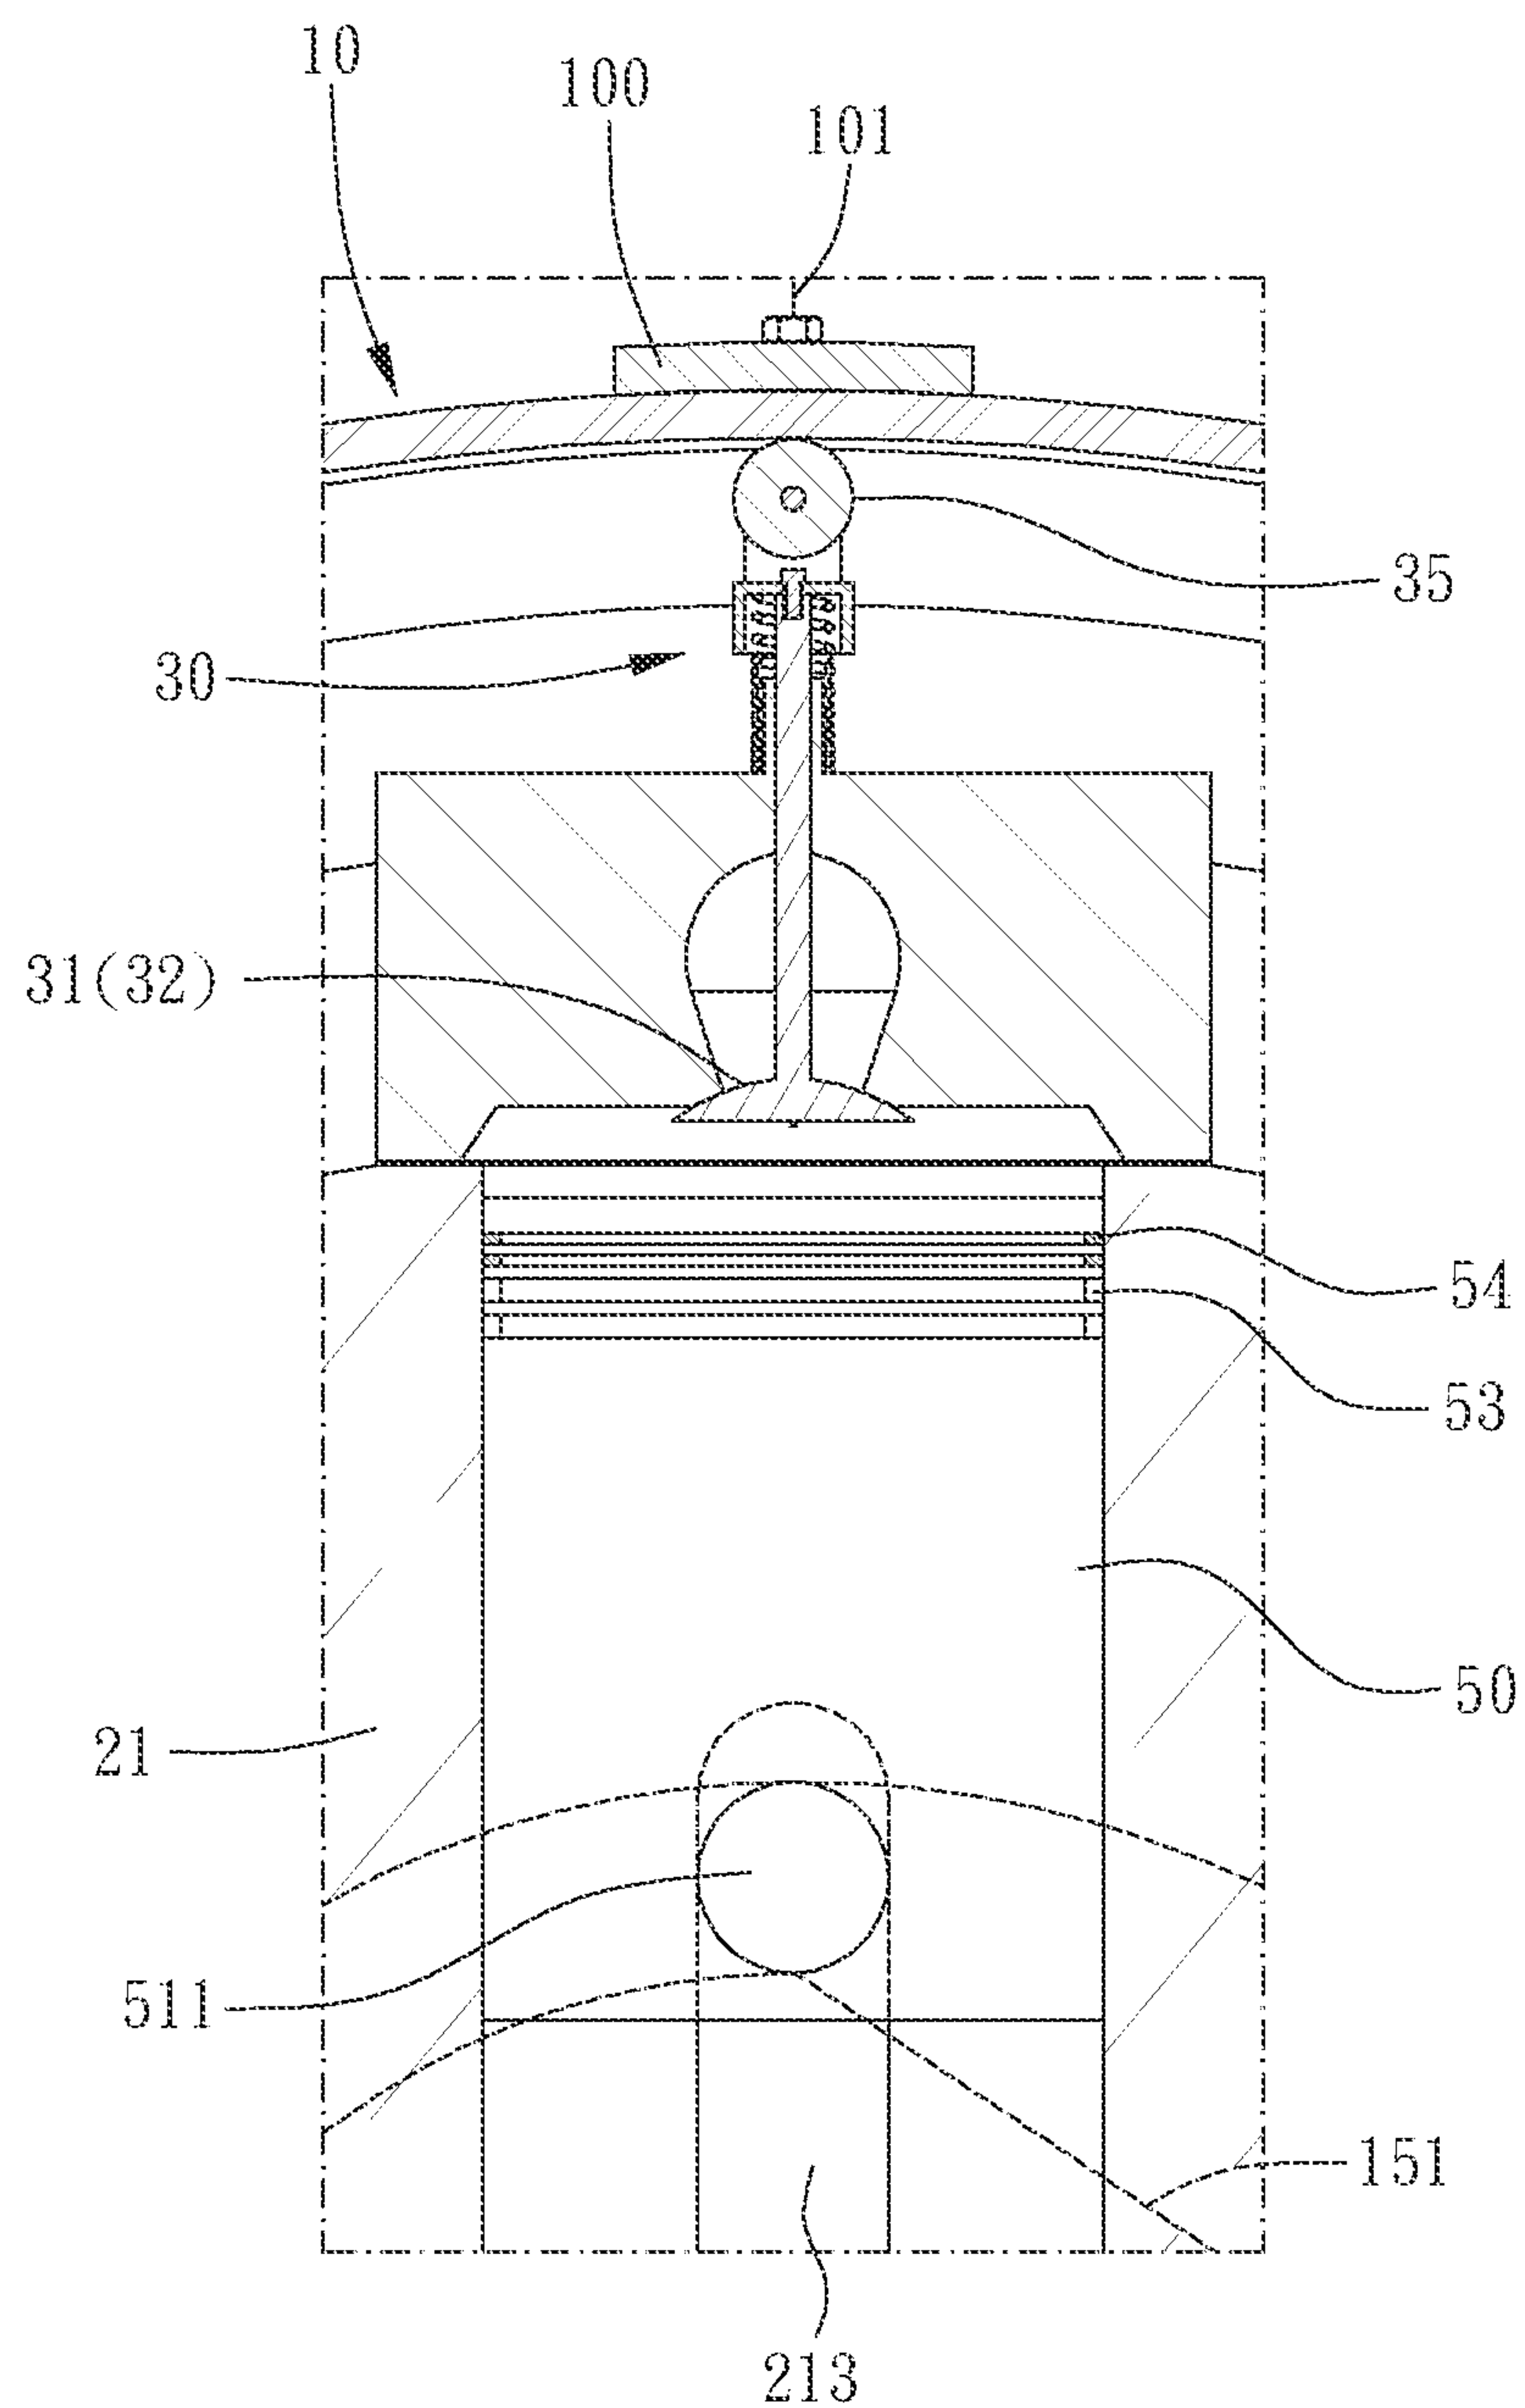


FIG. 6

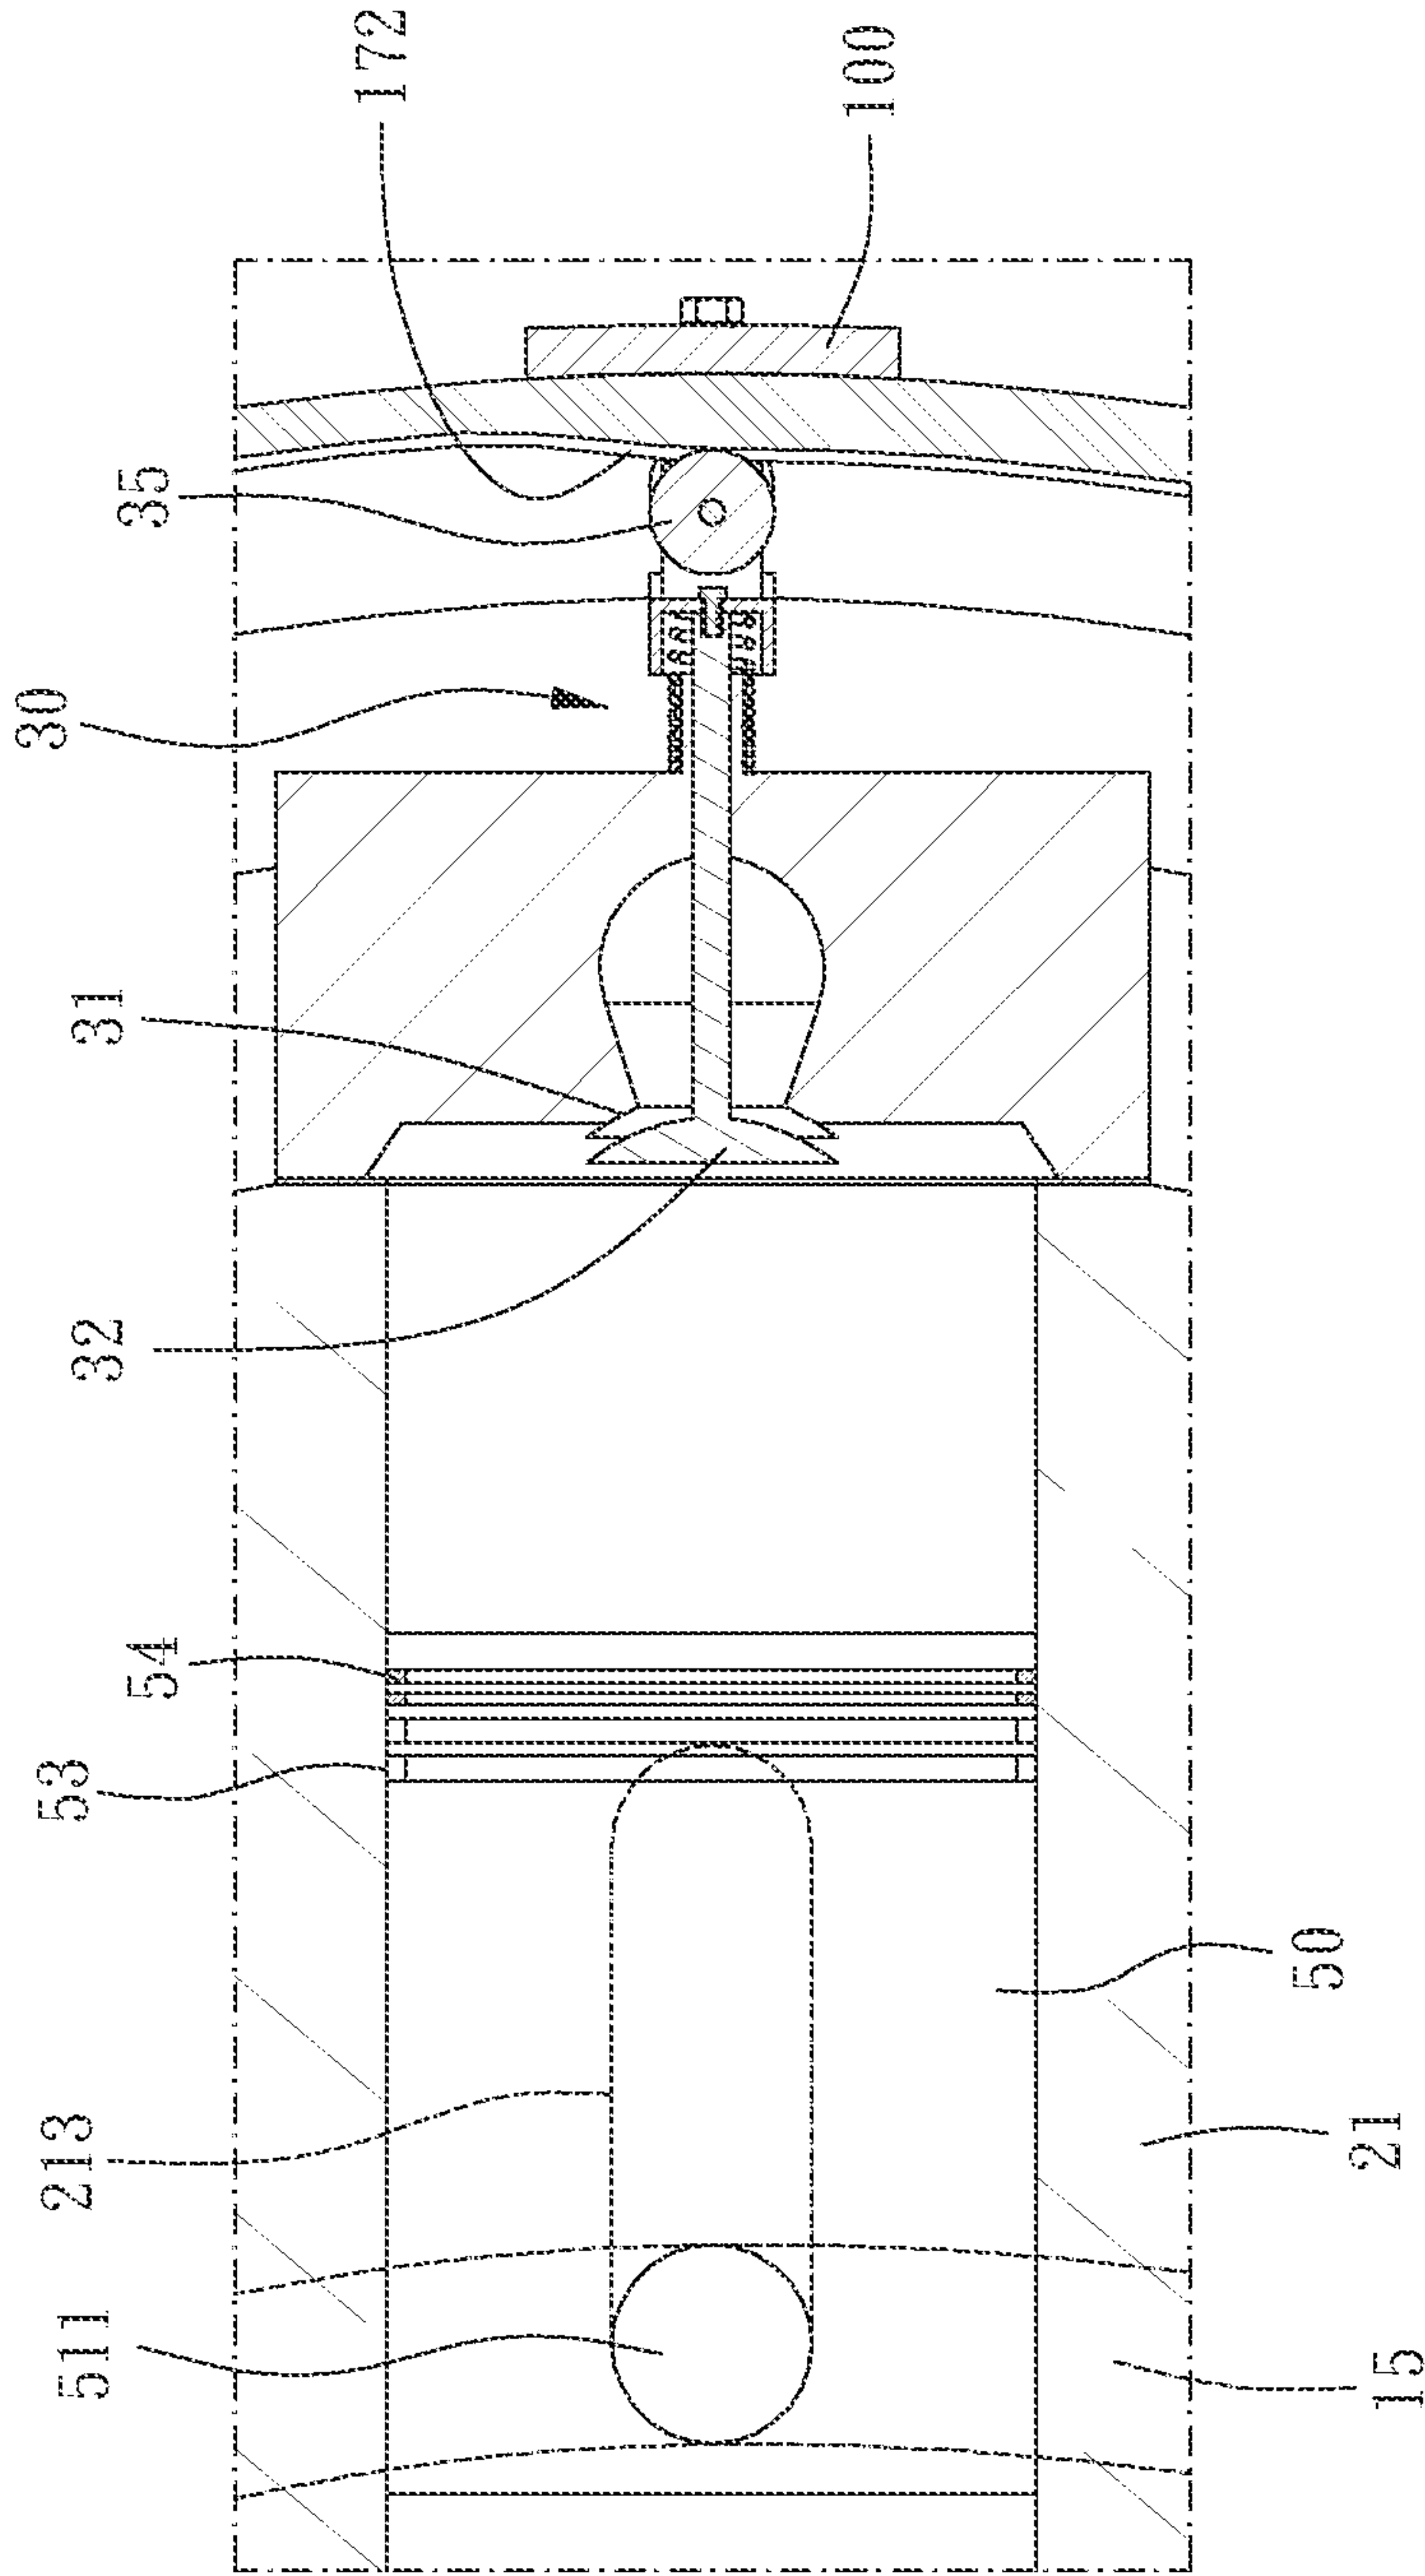


FIG. 7

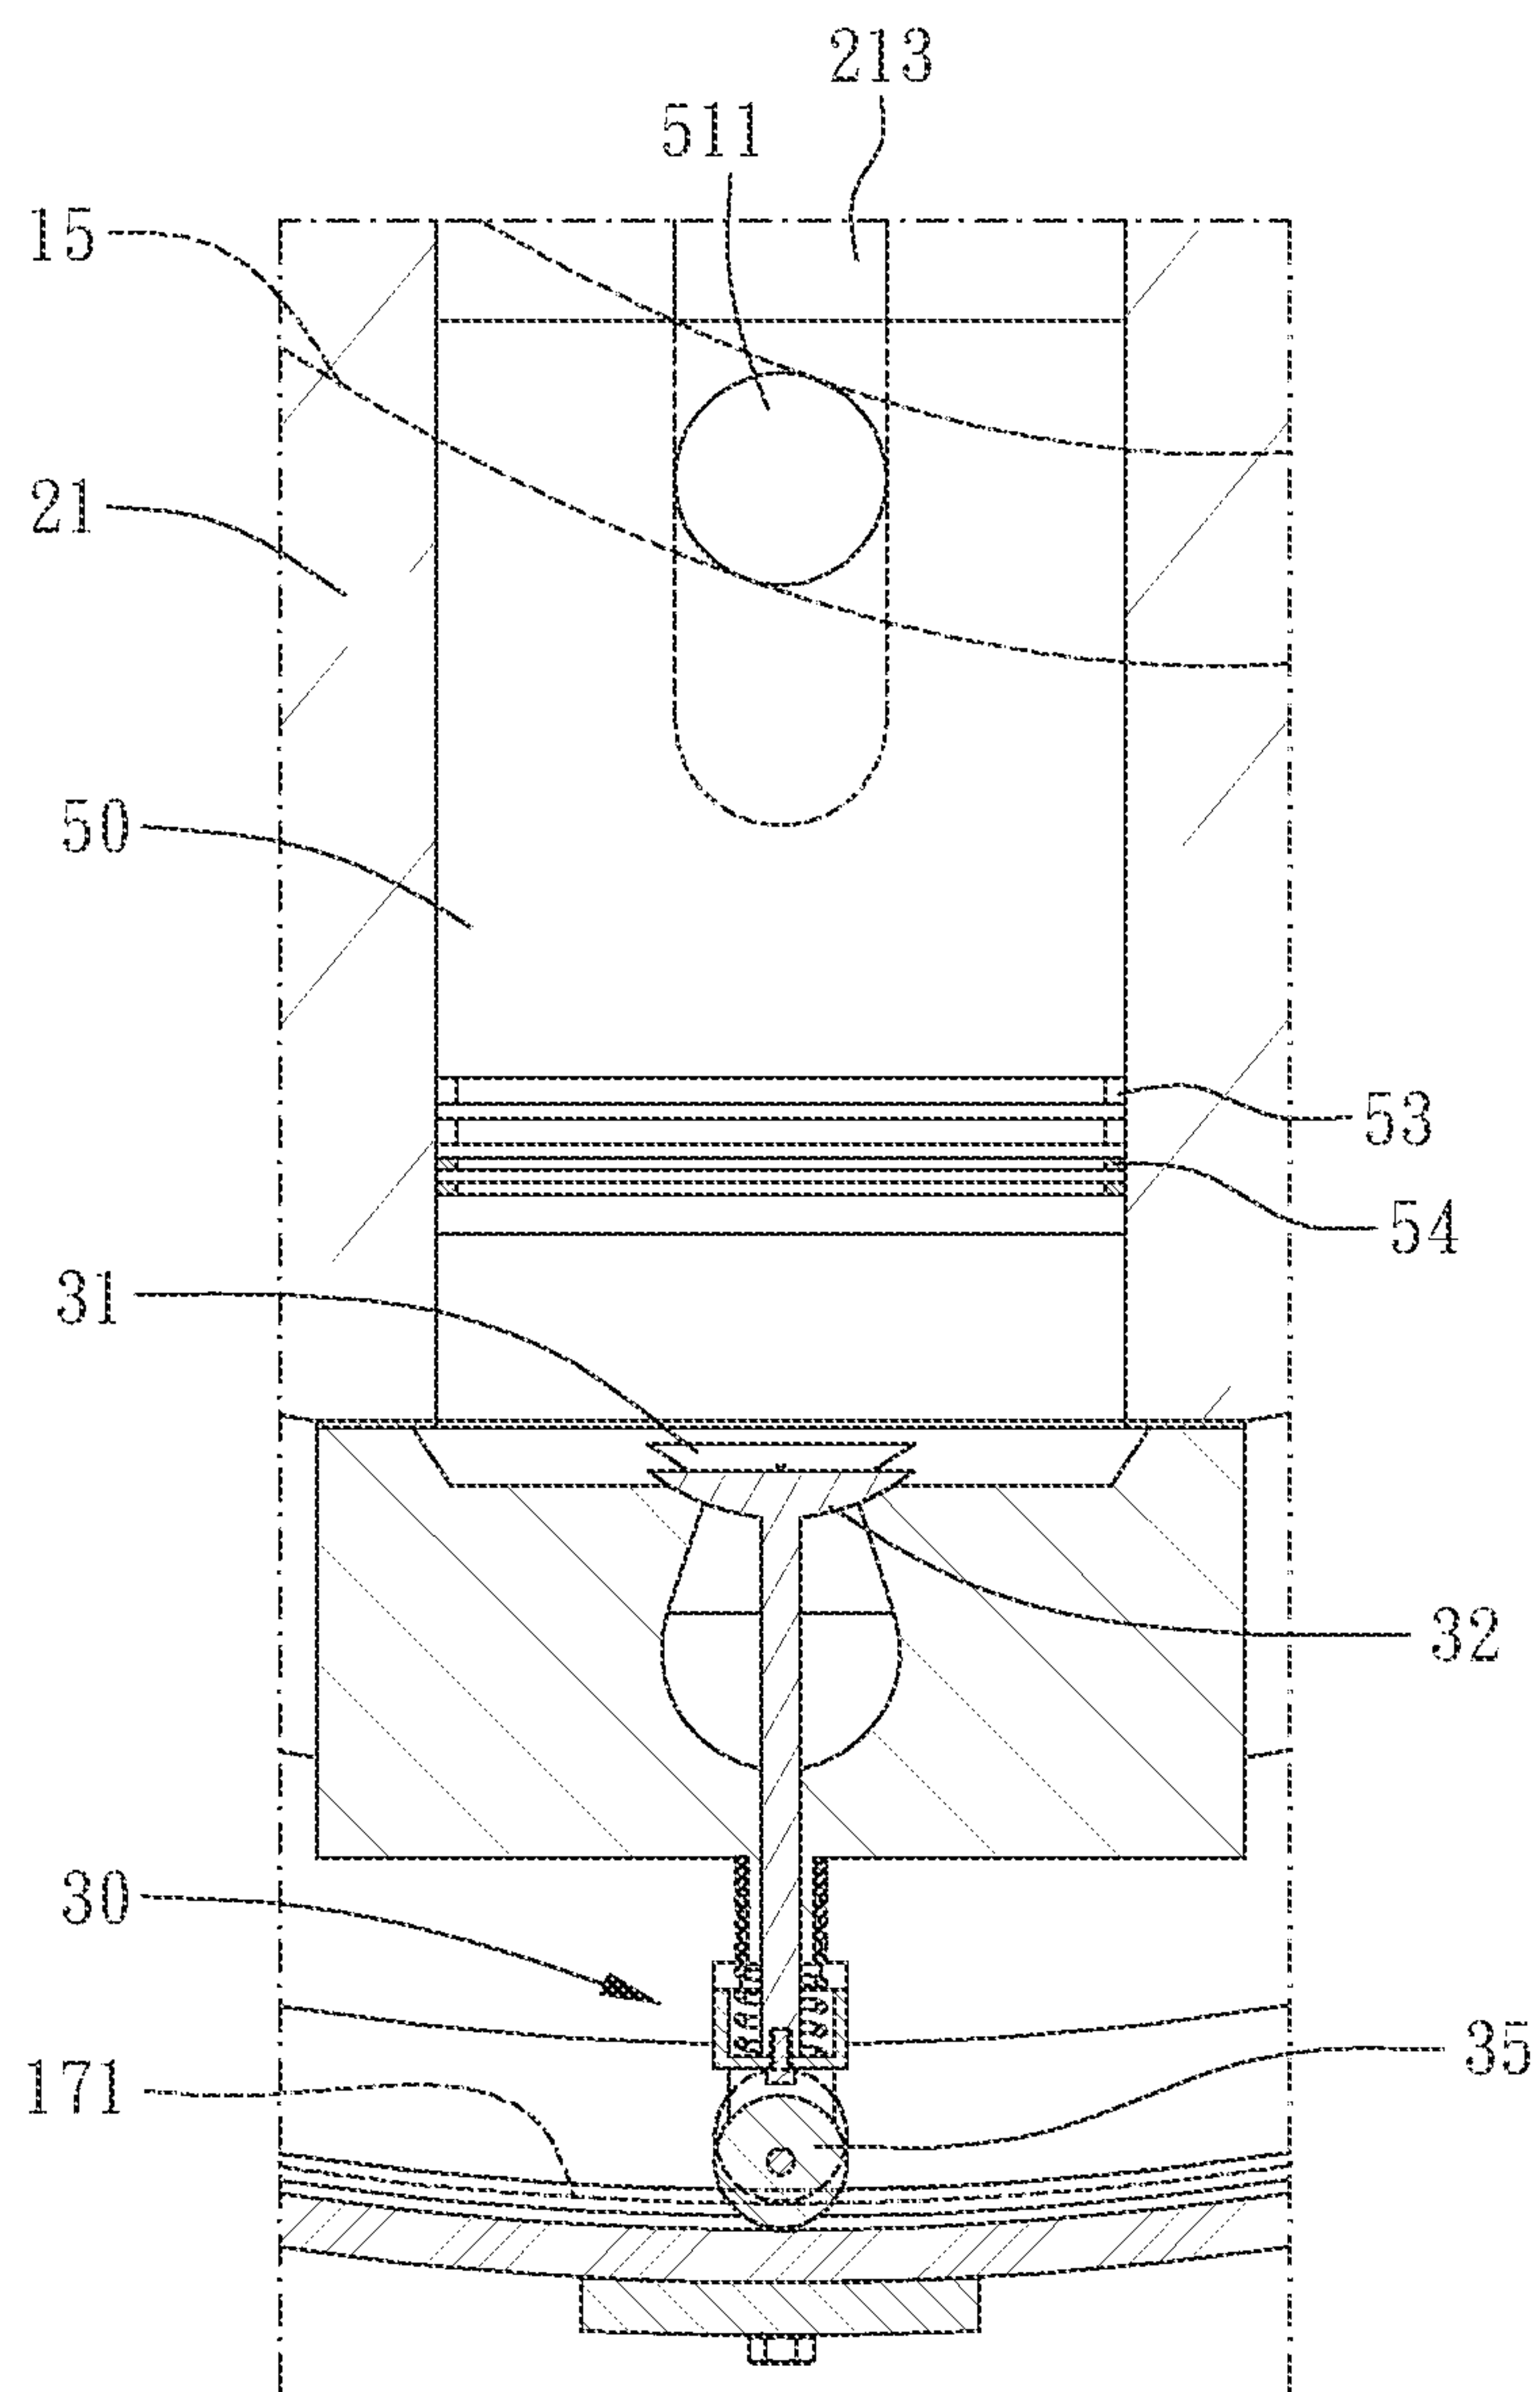


FIG. 8

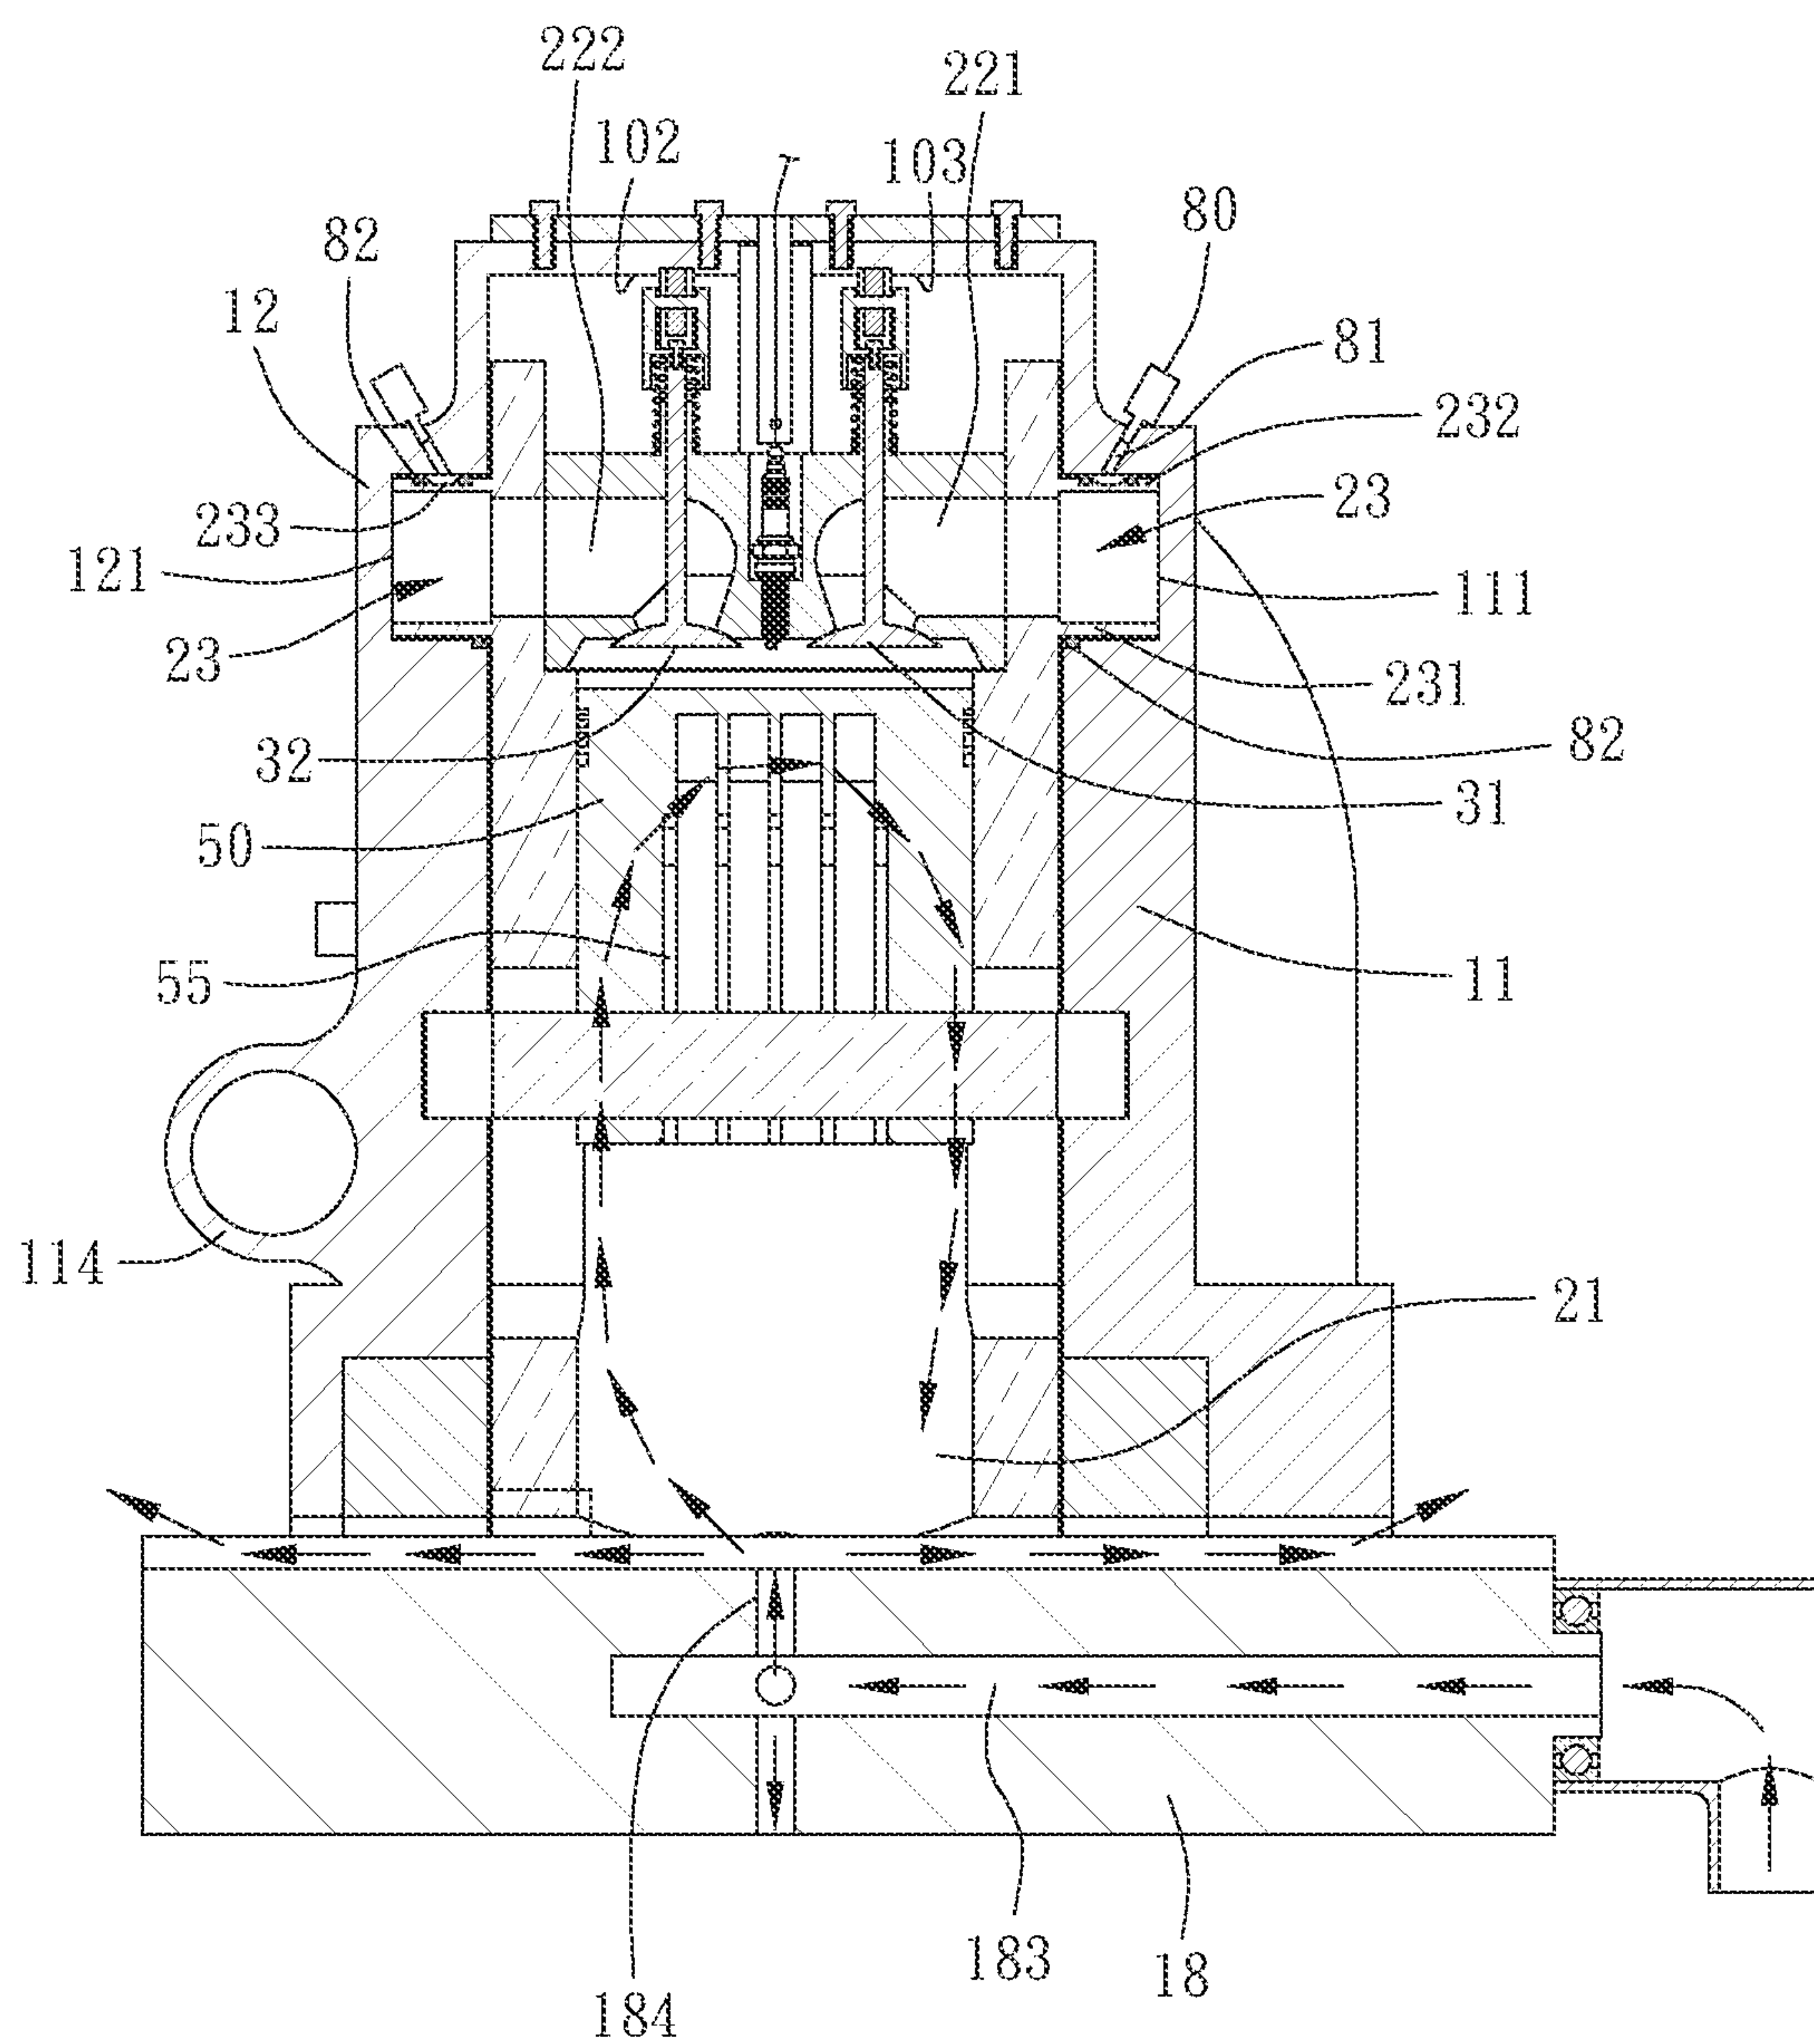


FIG. 9

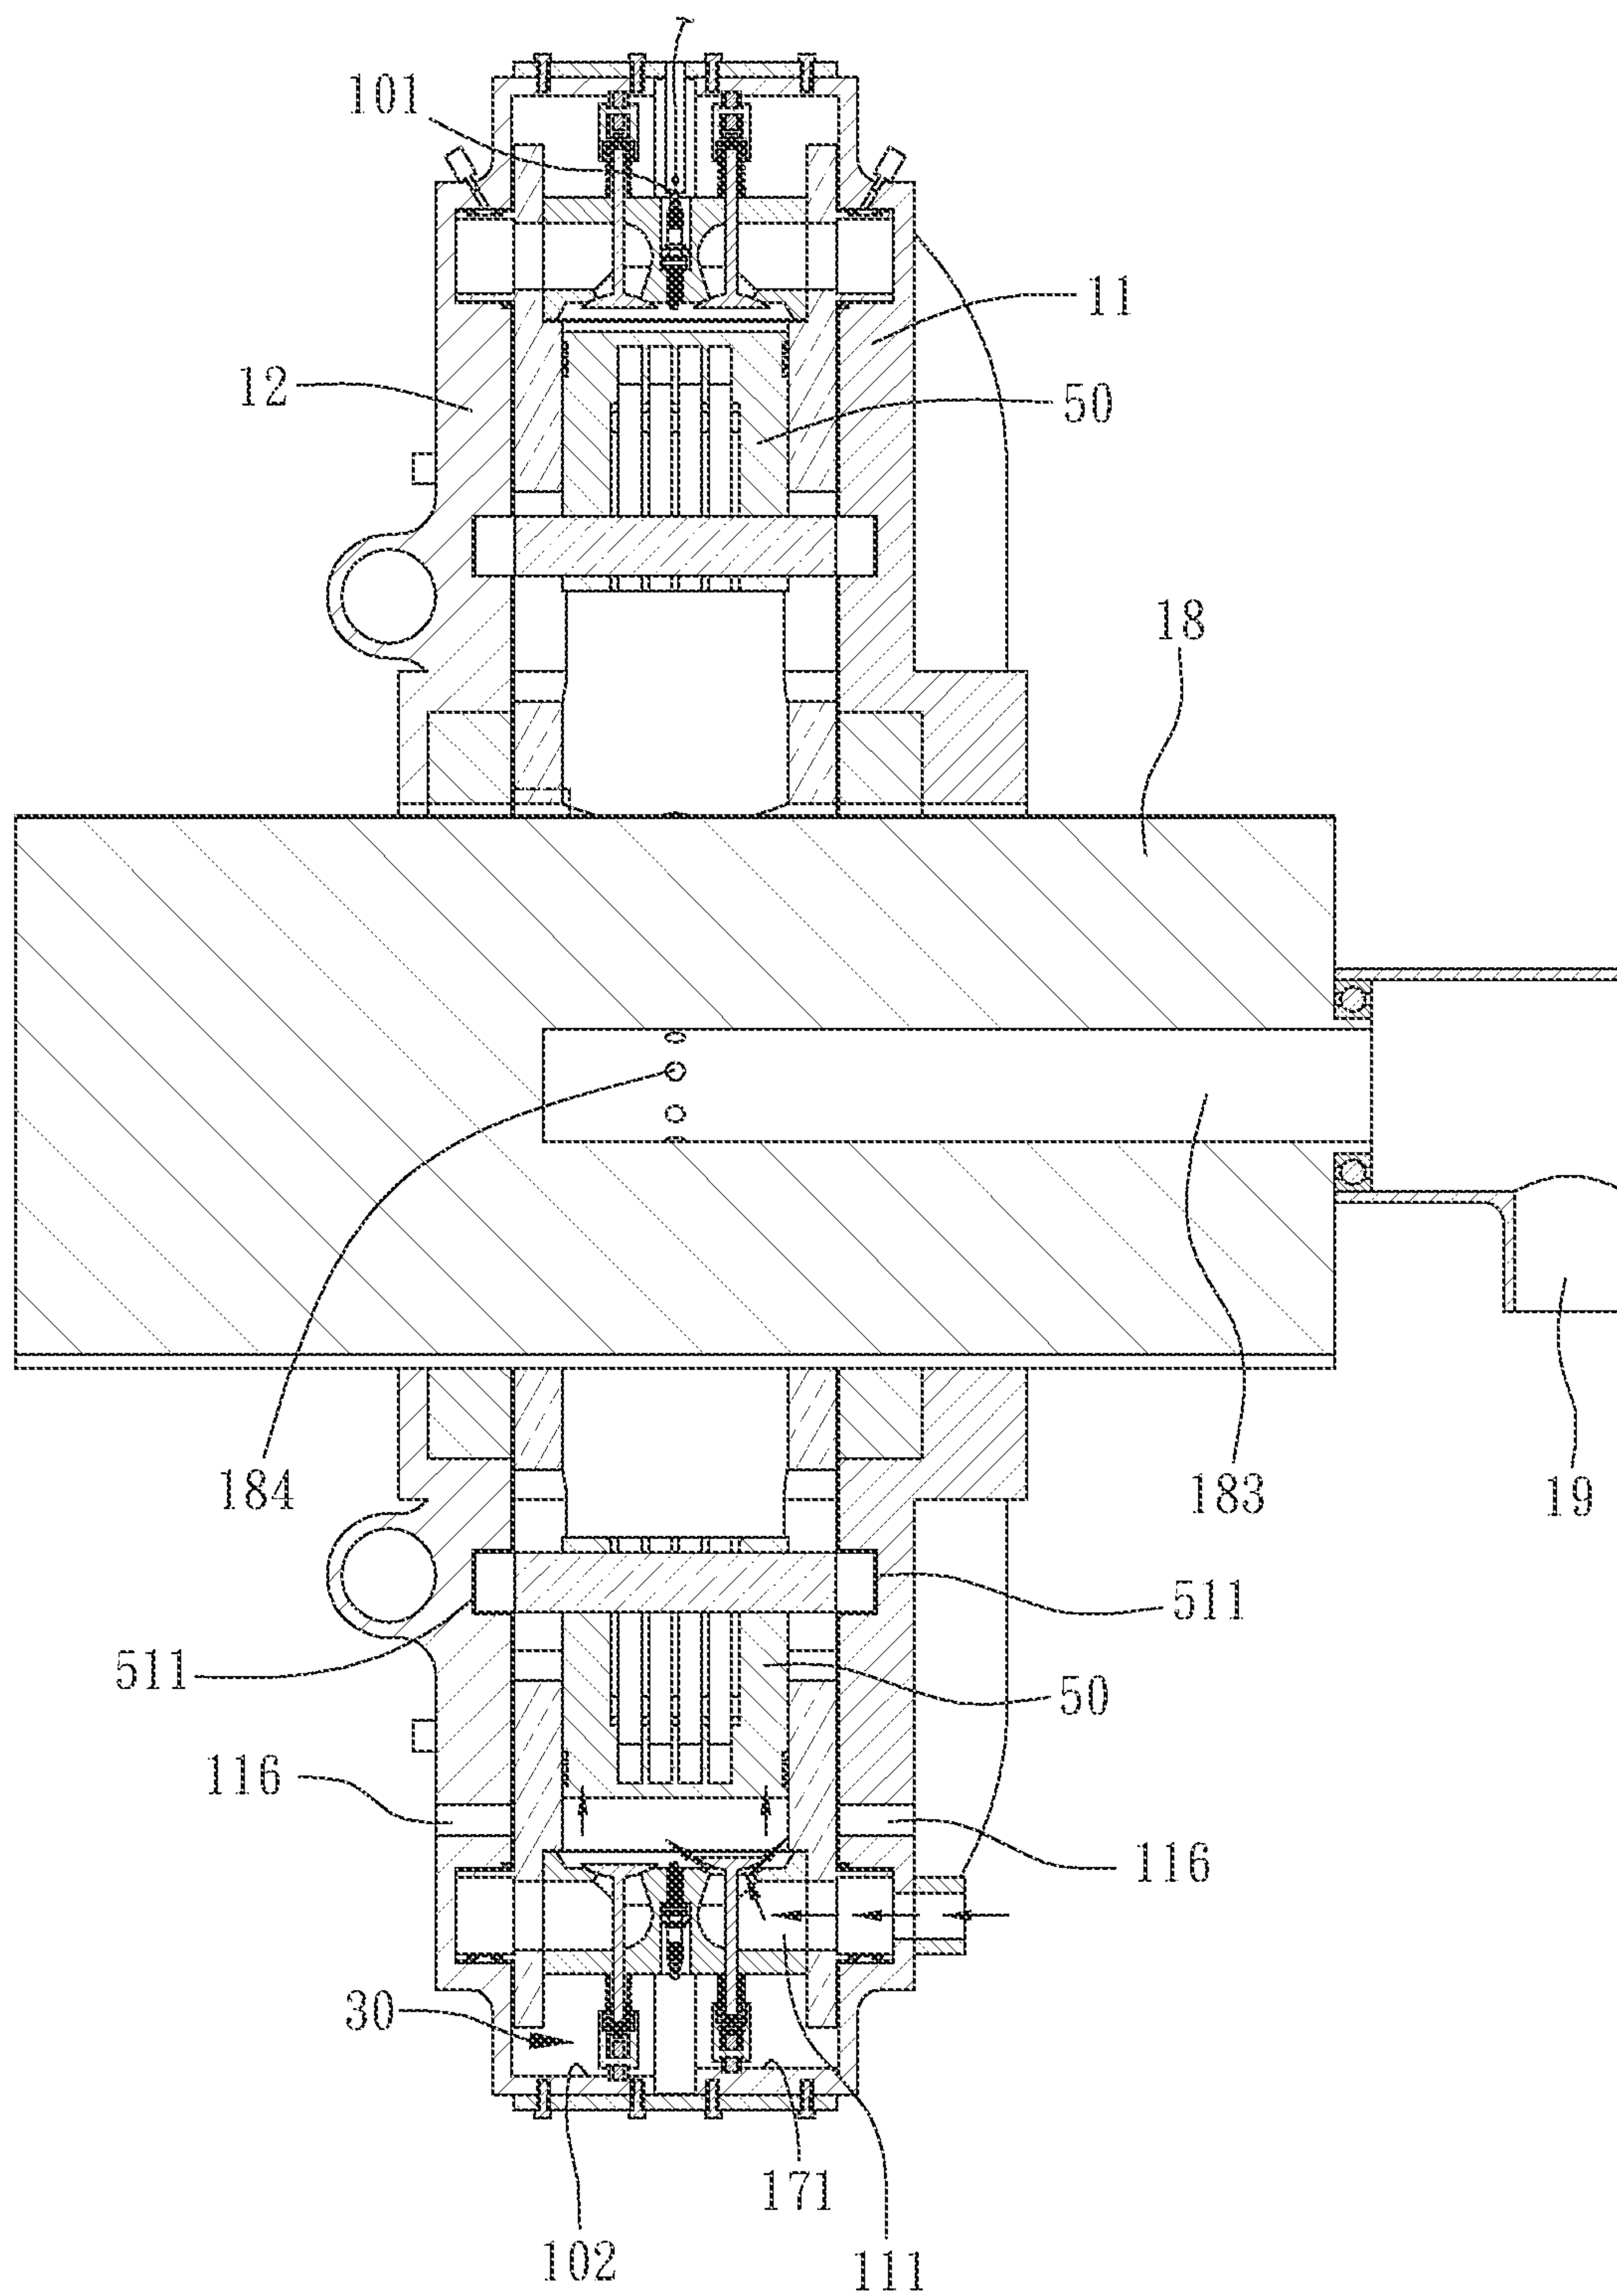


FIG. 10

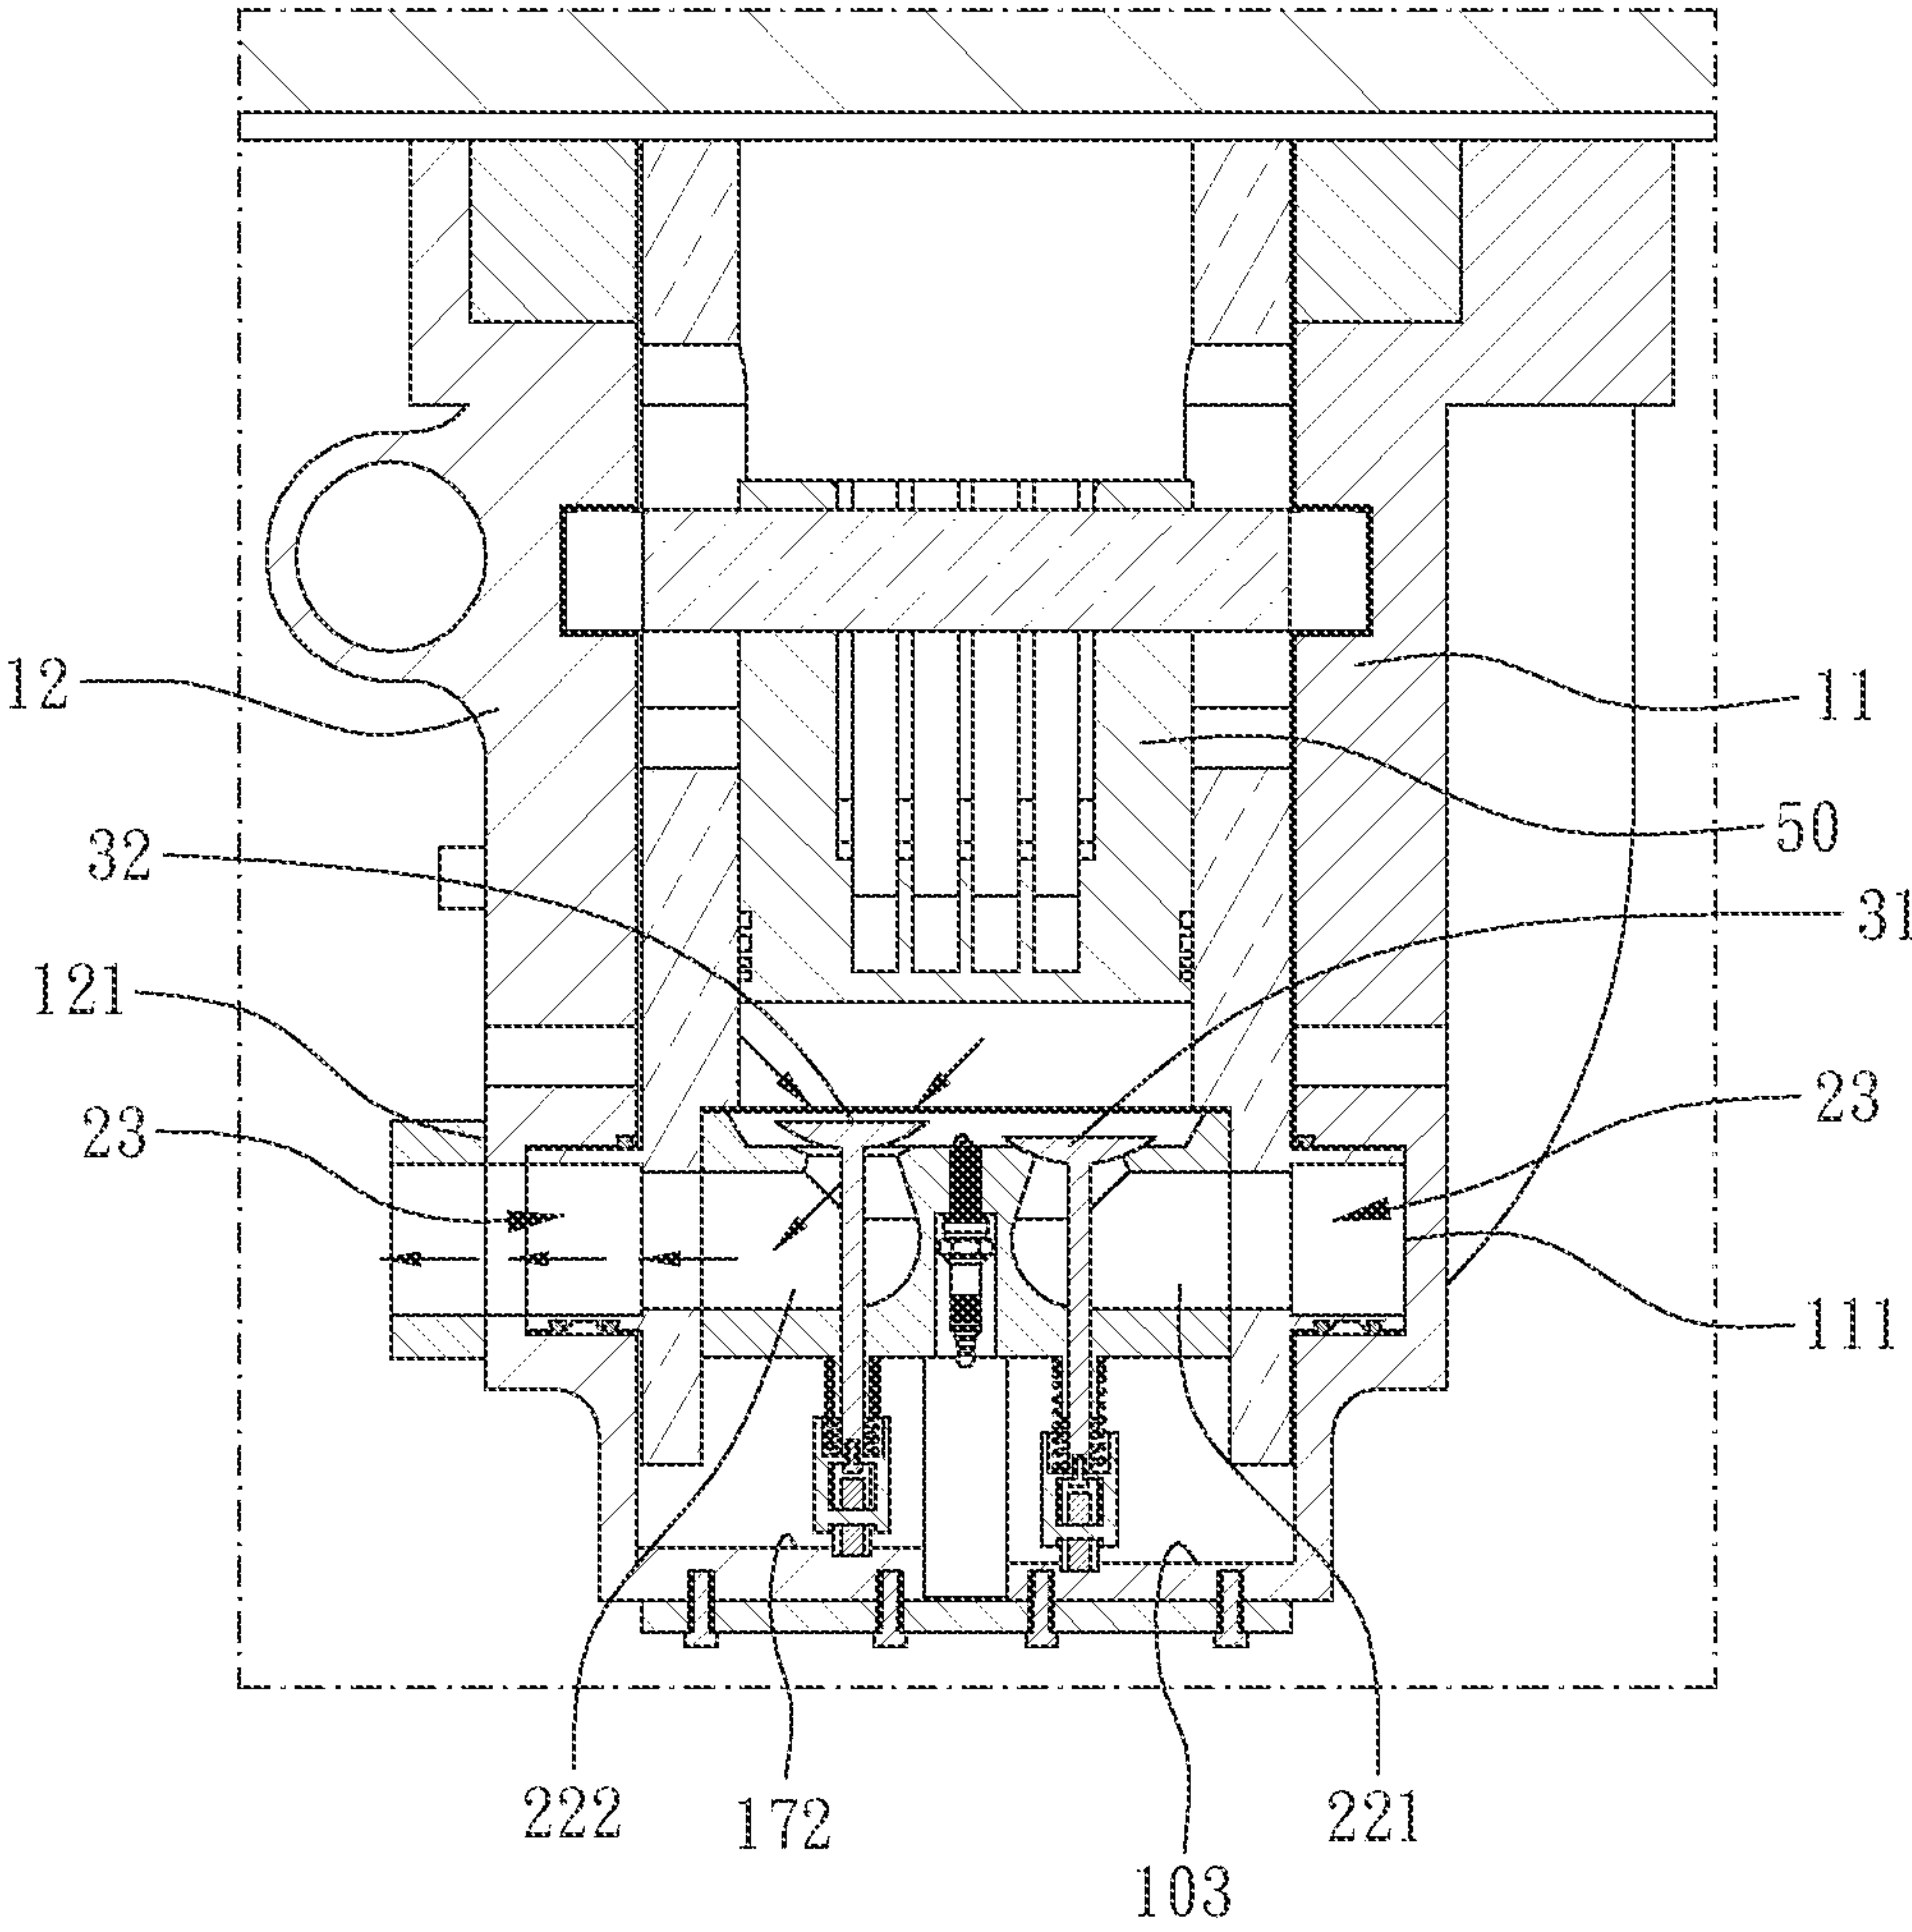


FIG. 11

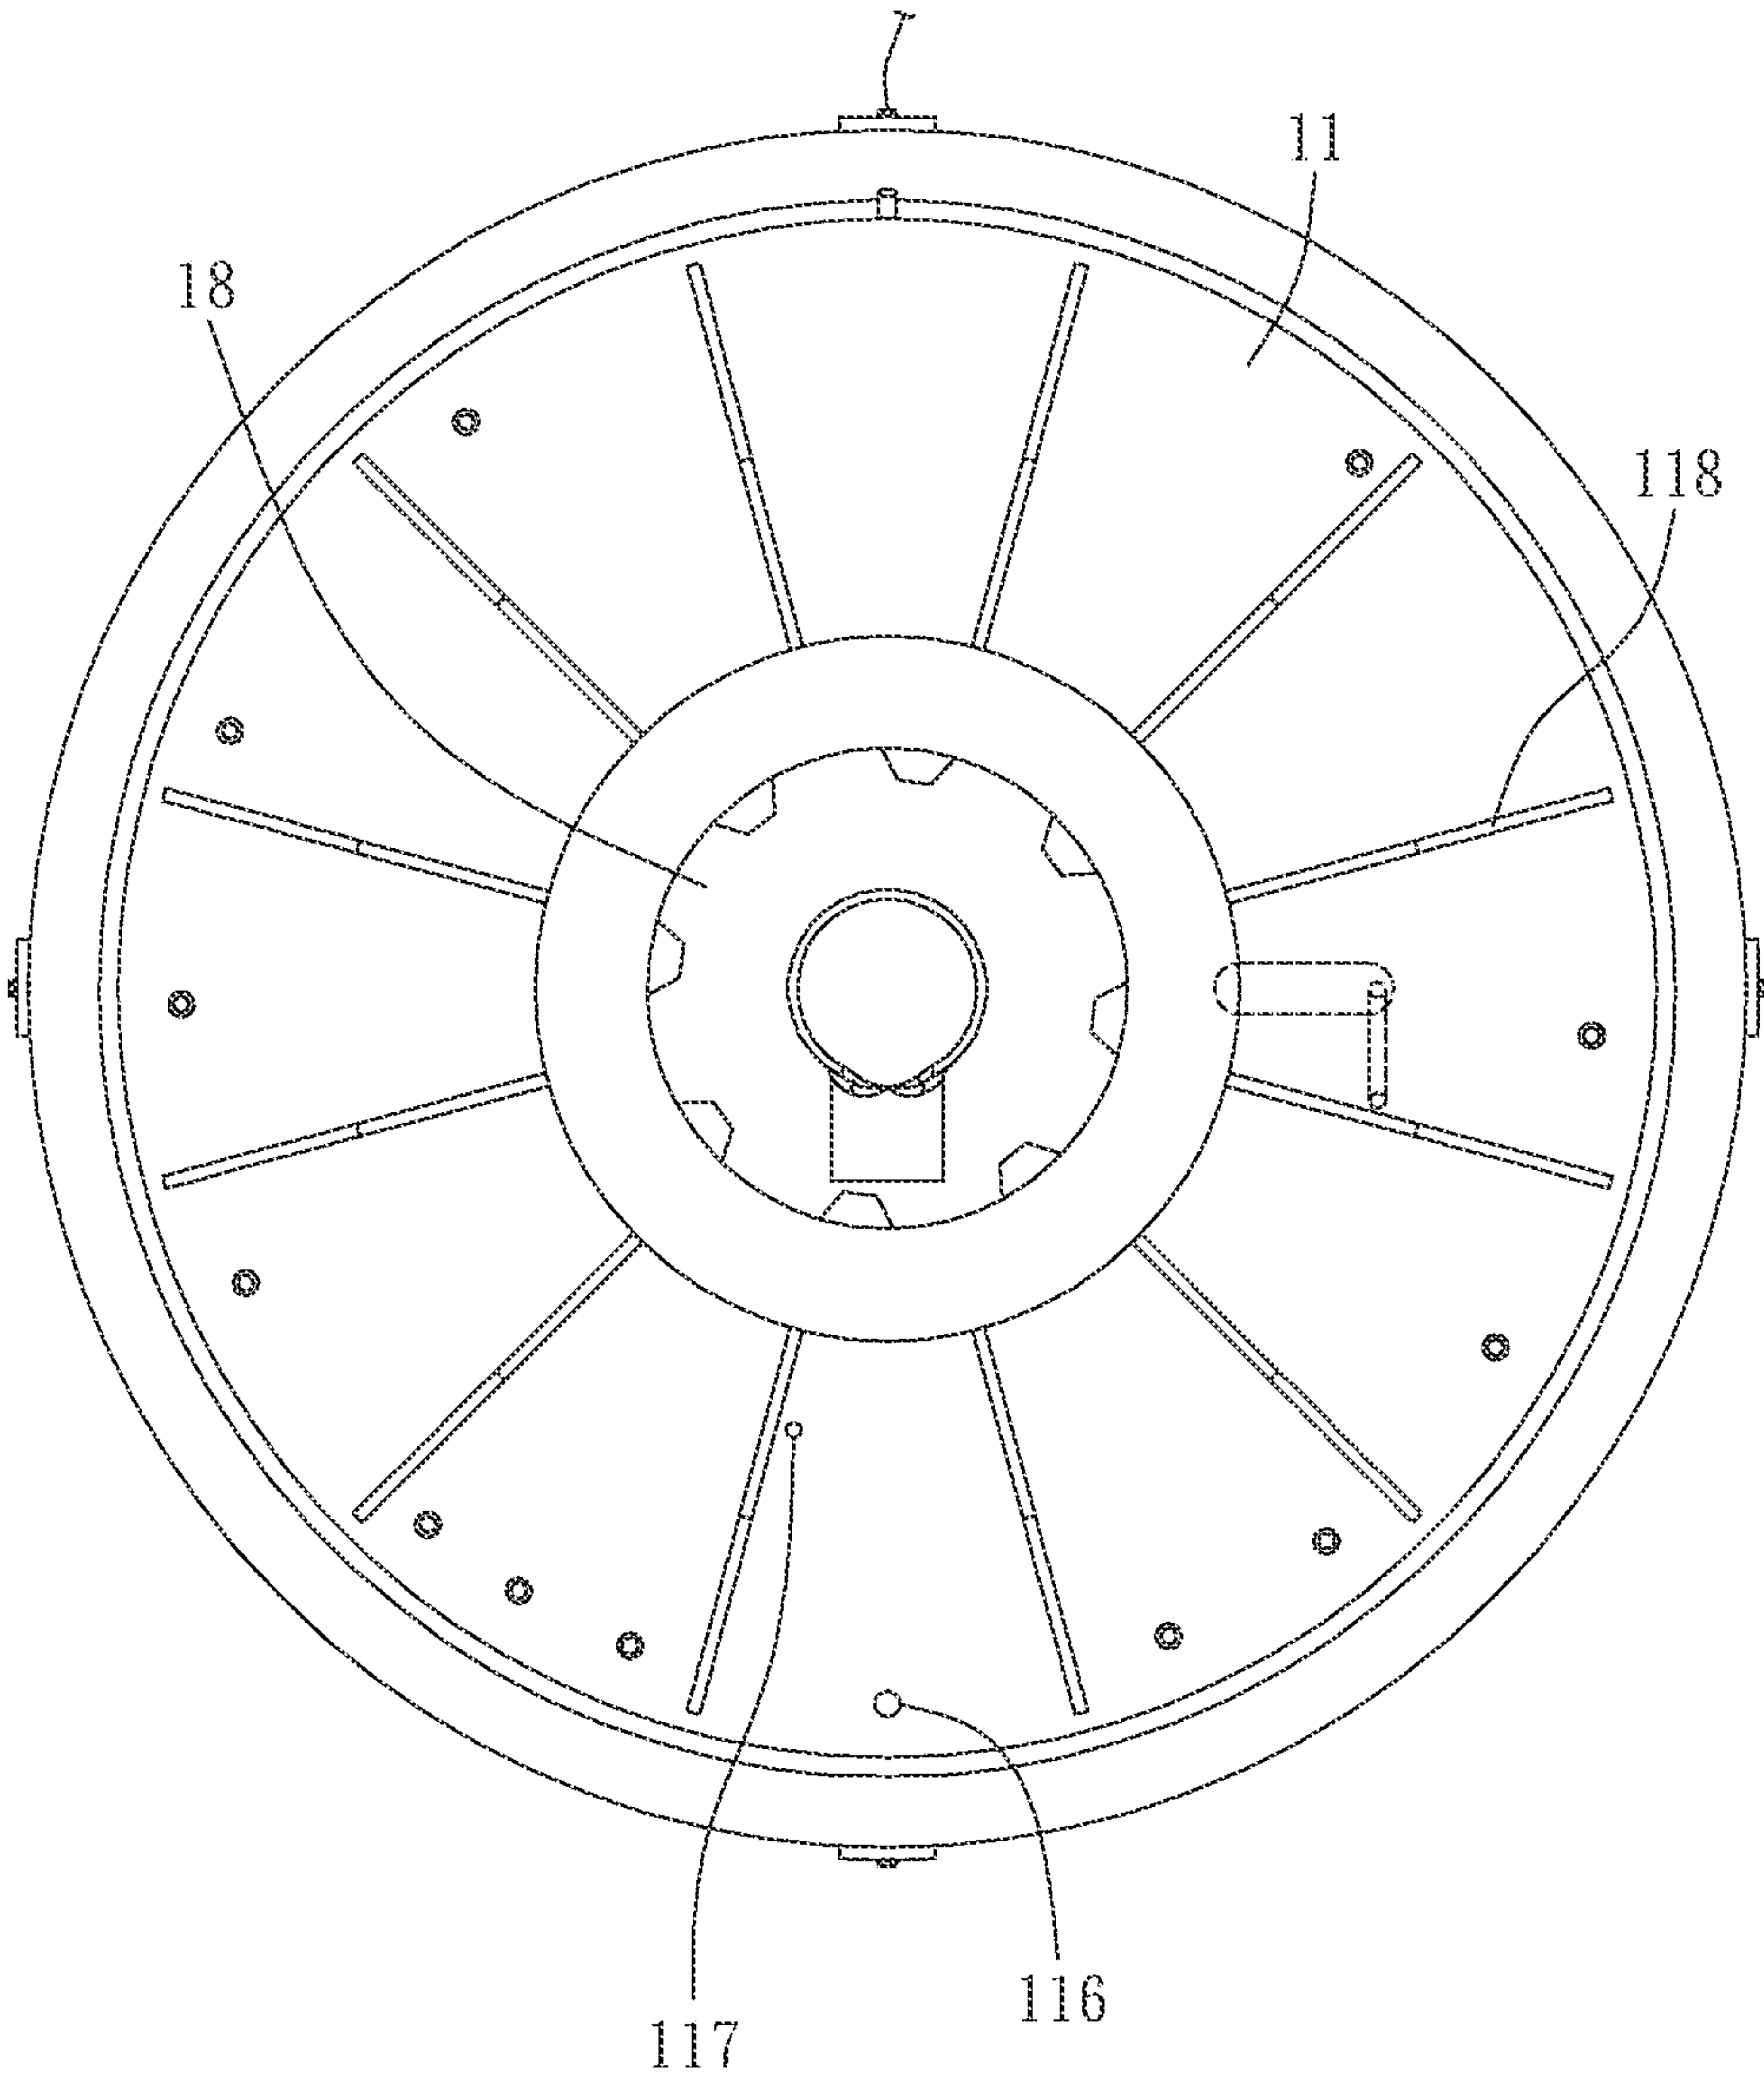


FIG. 12

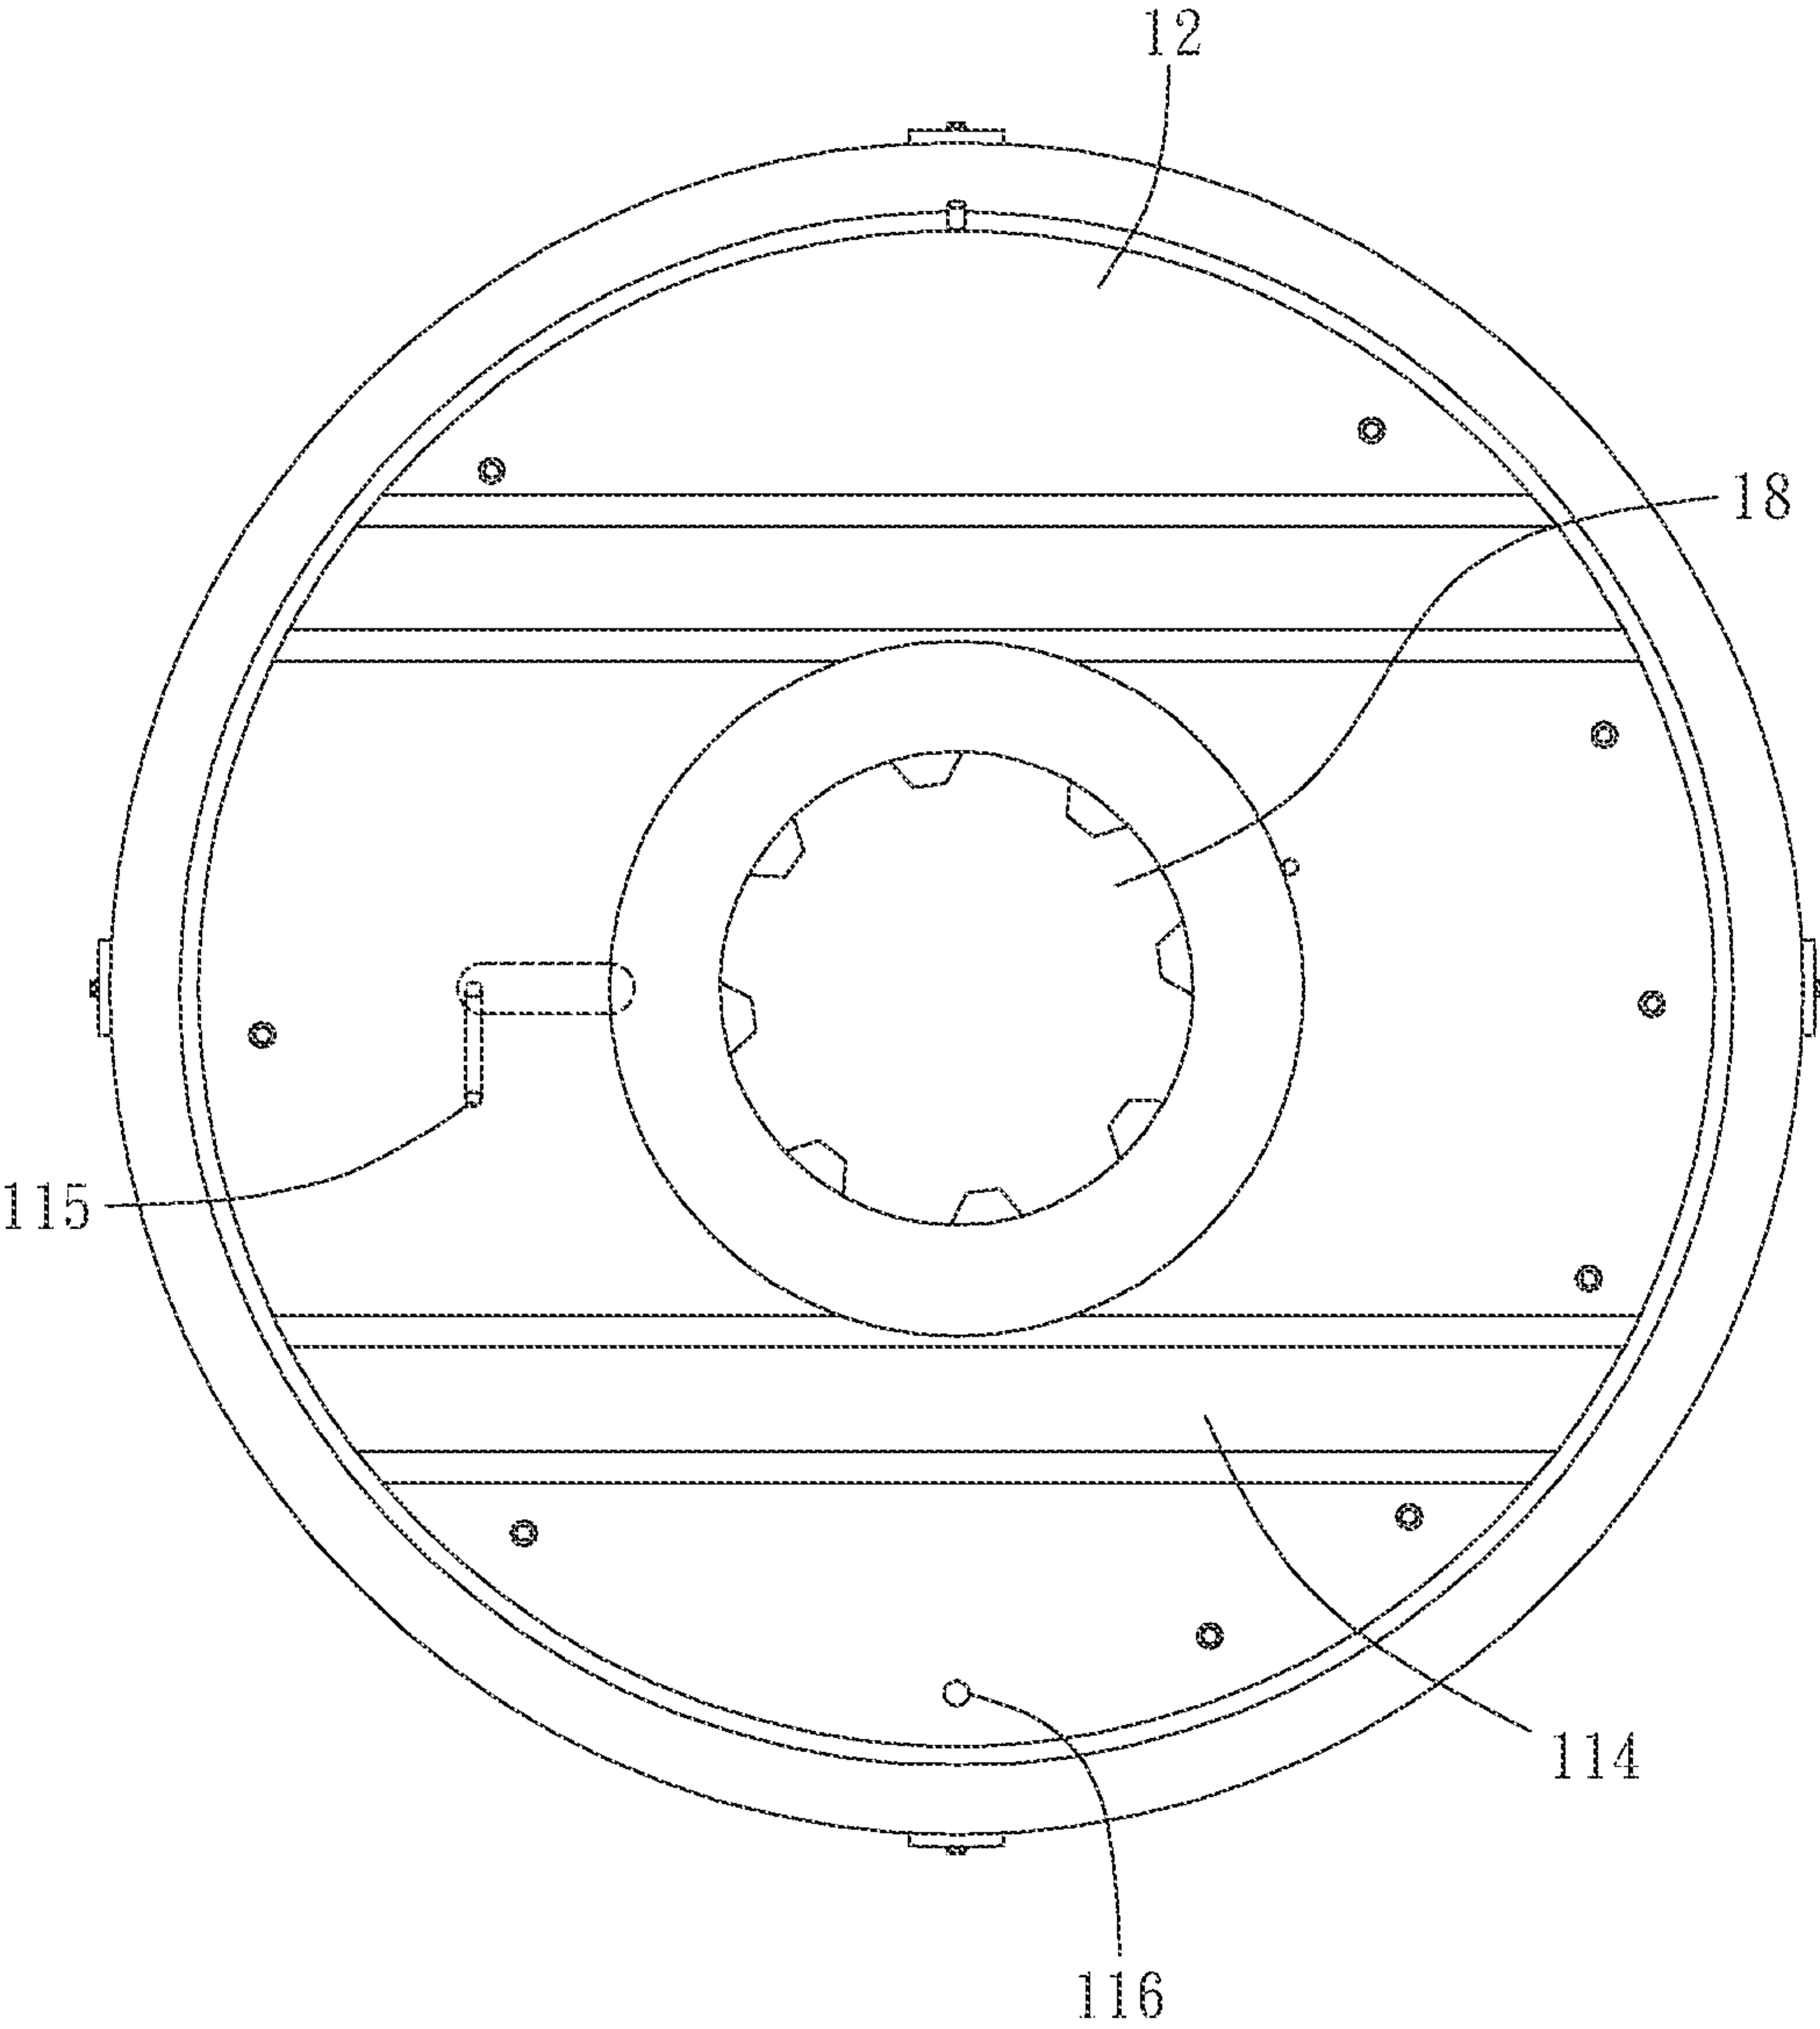


FIG. 13

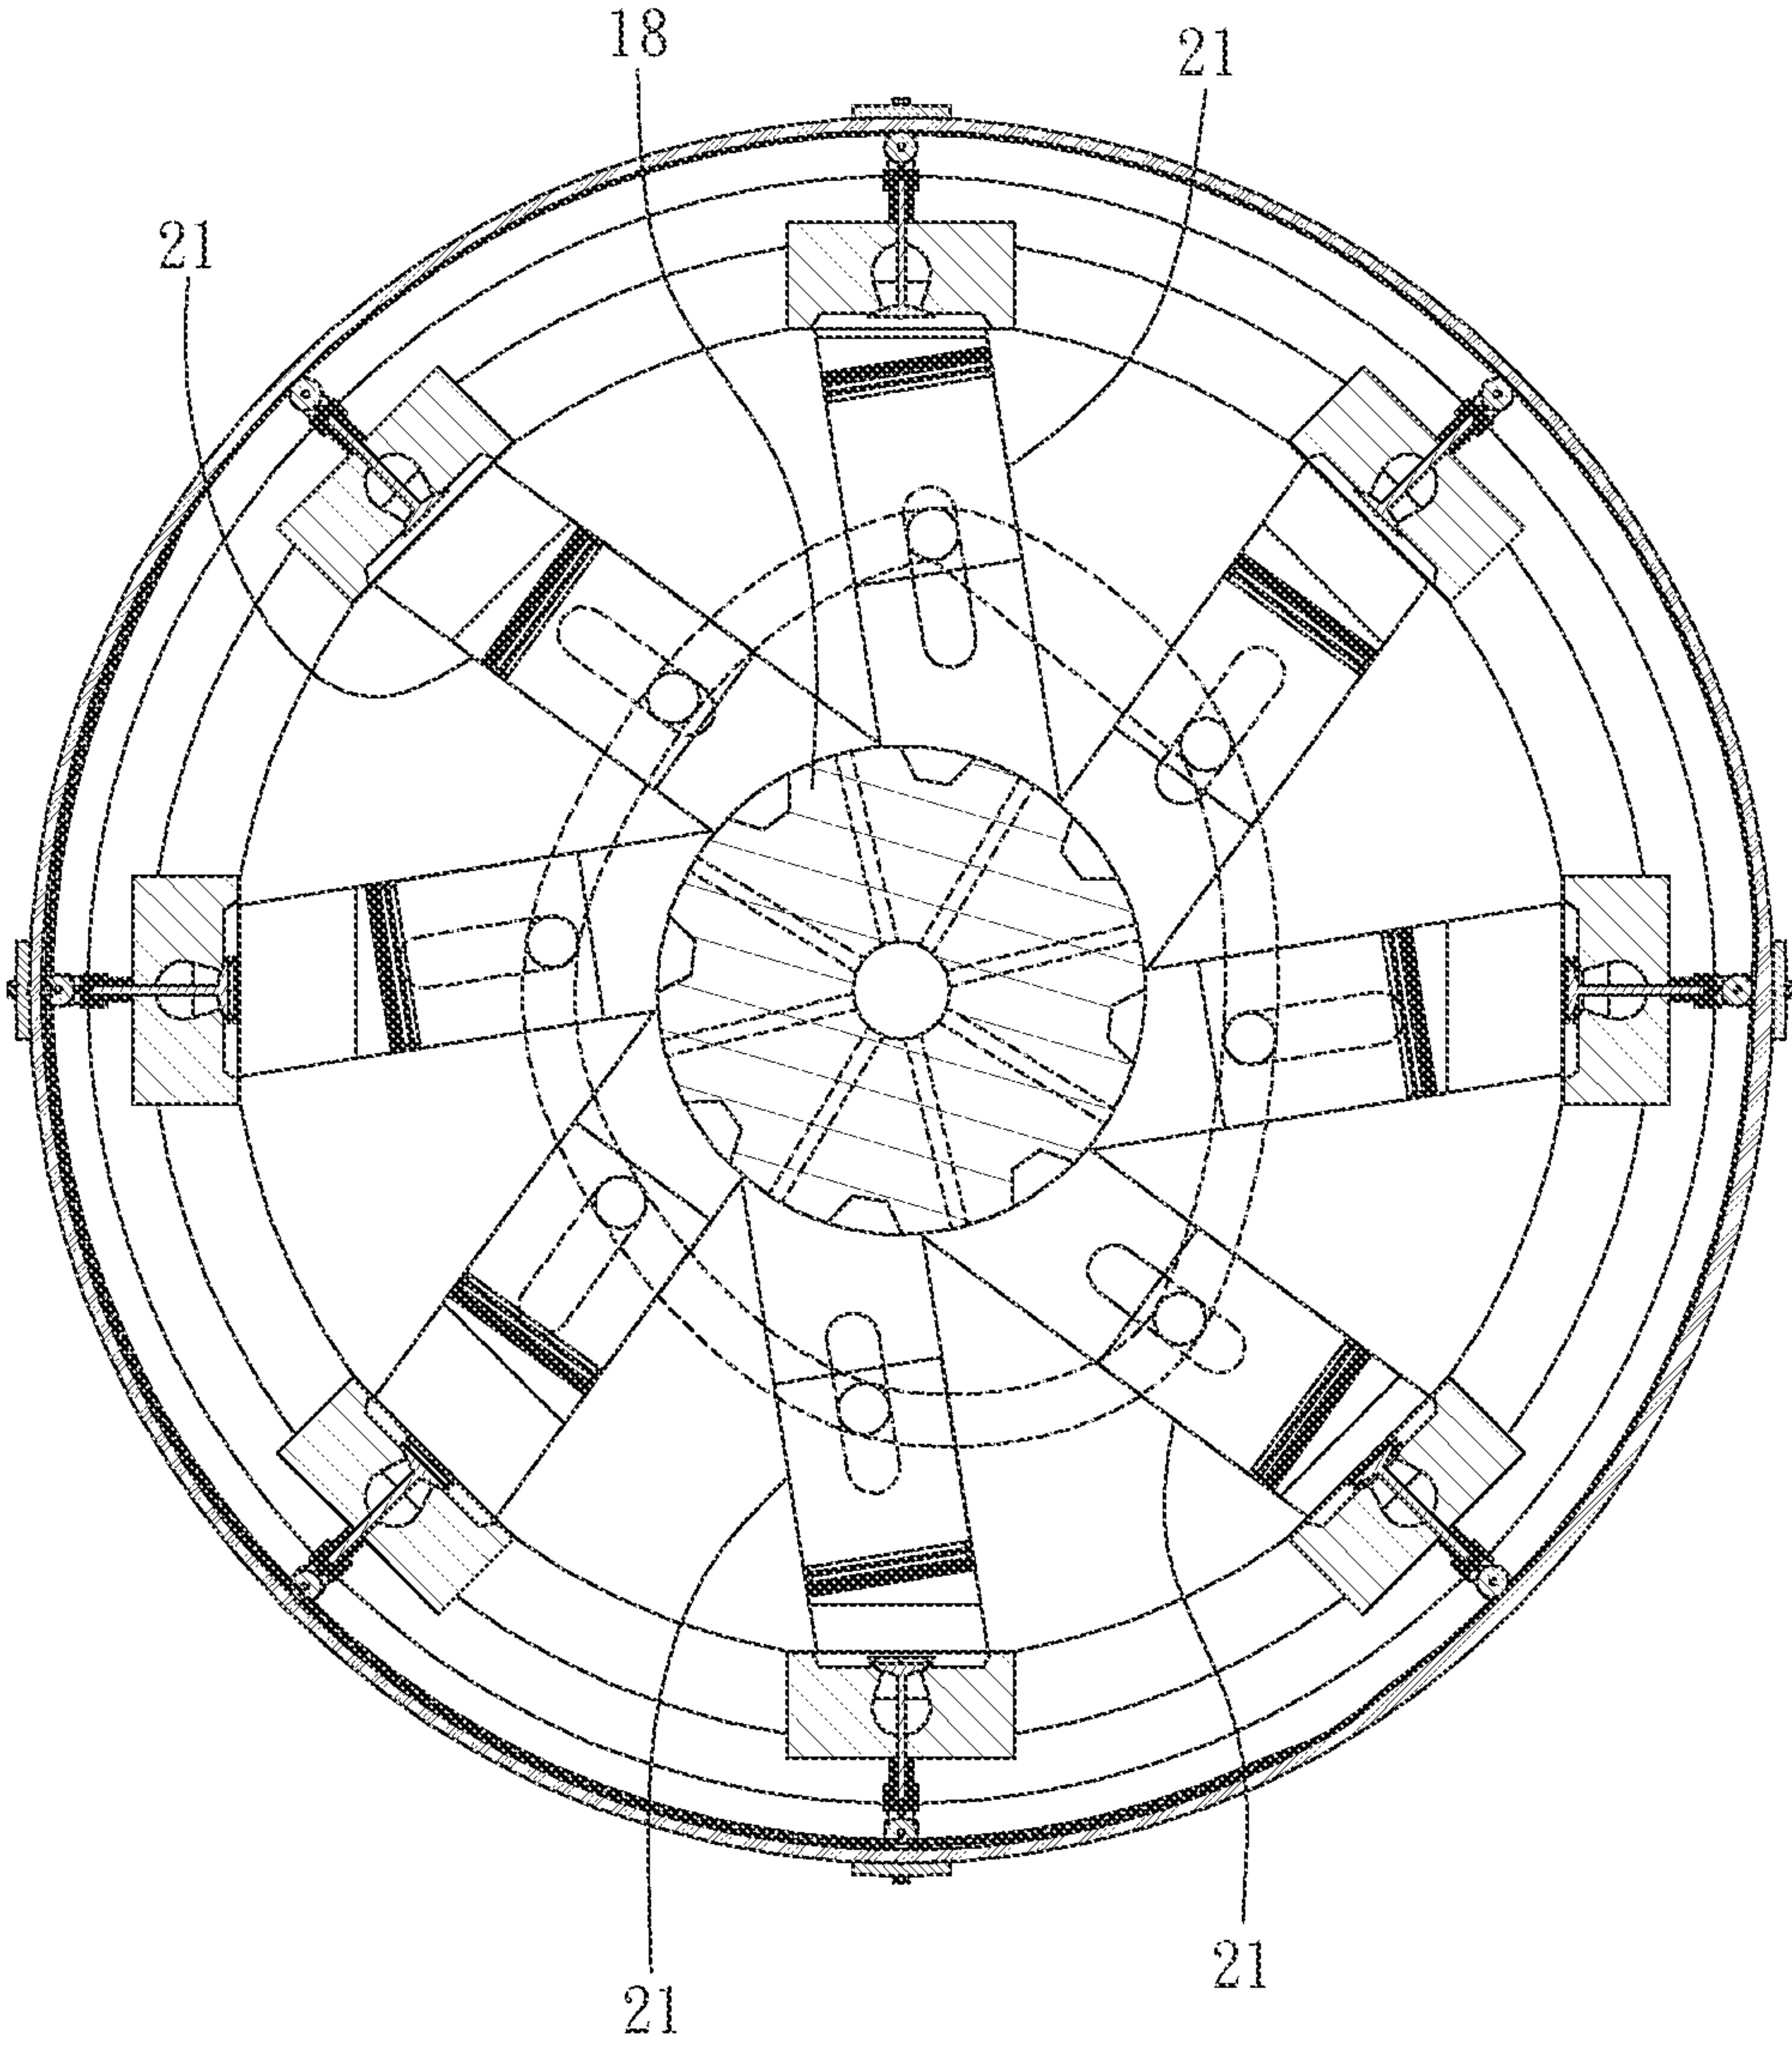


FIG. 14

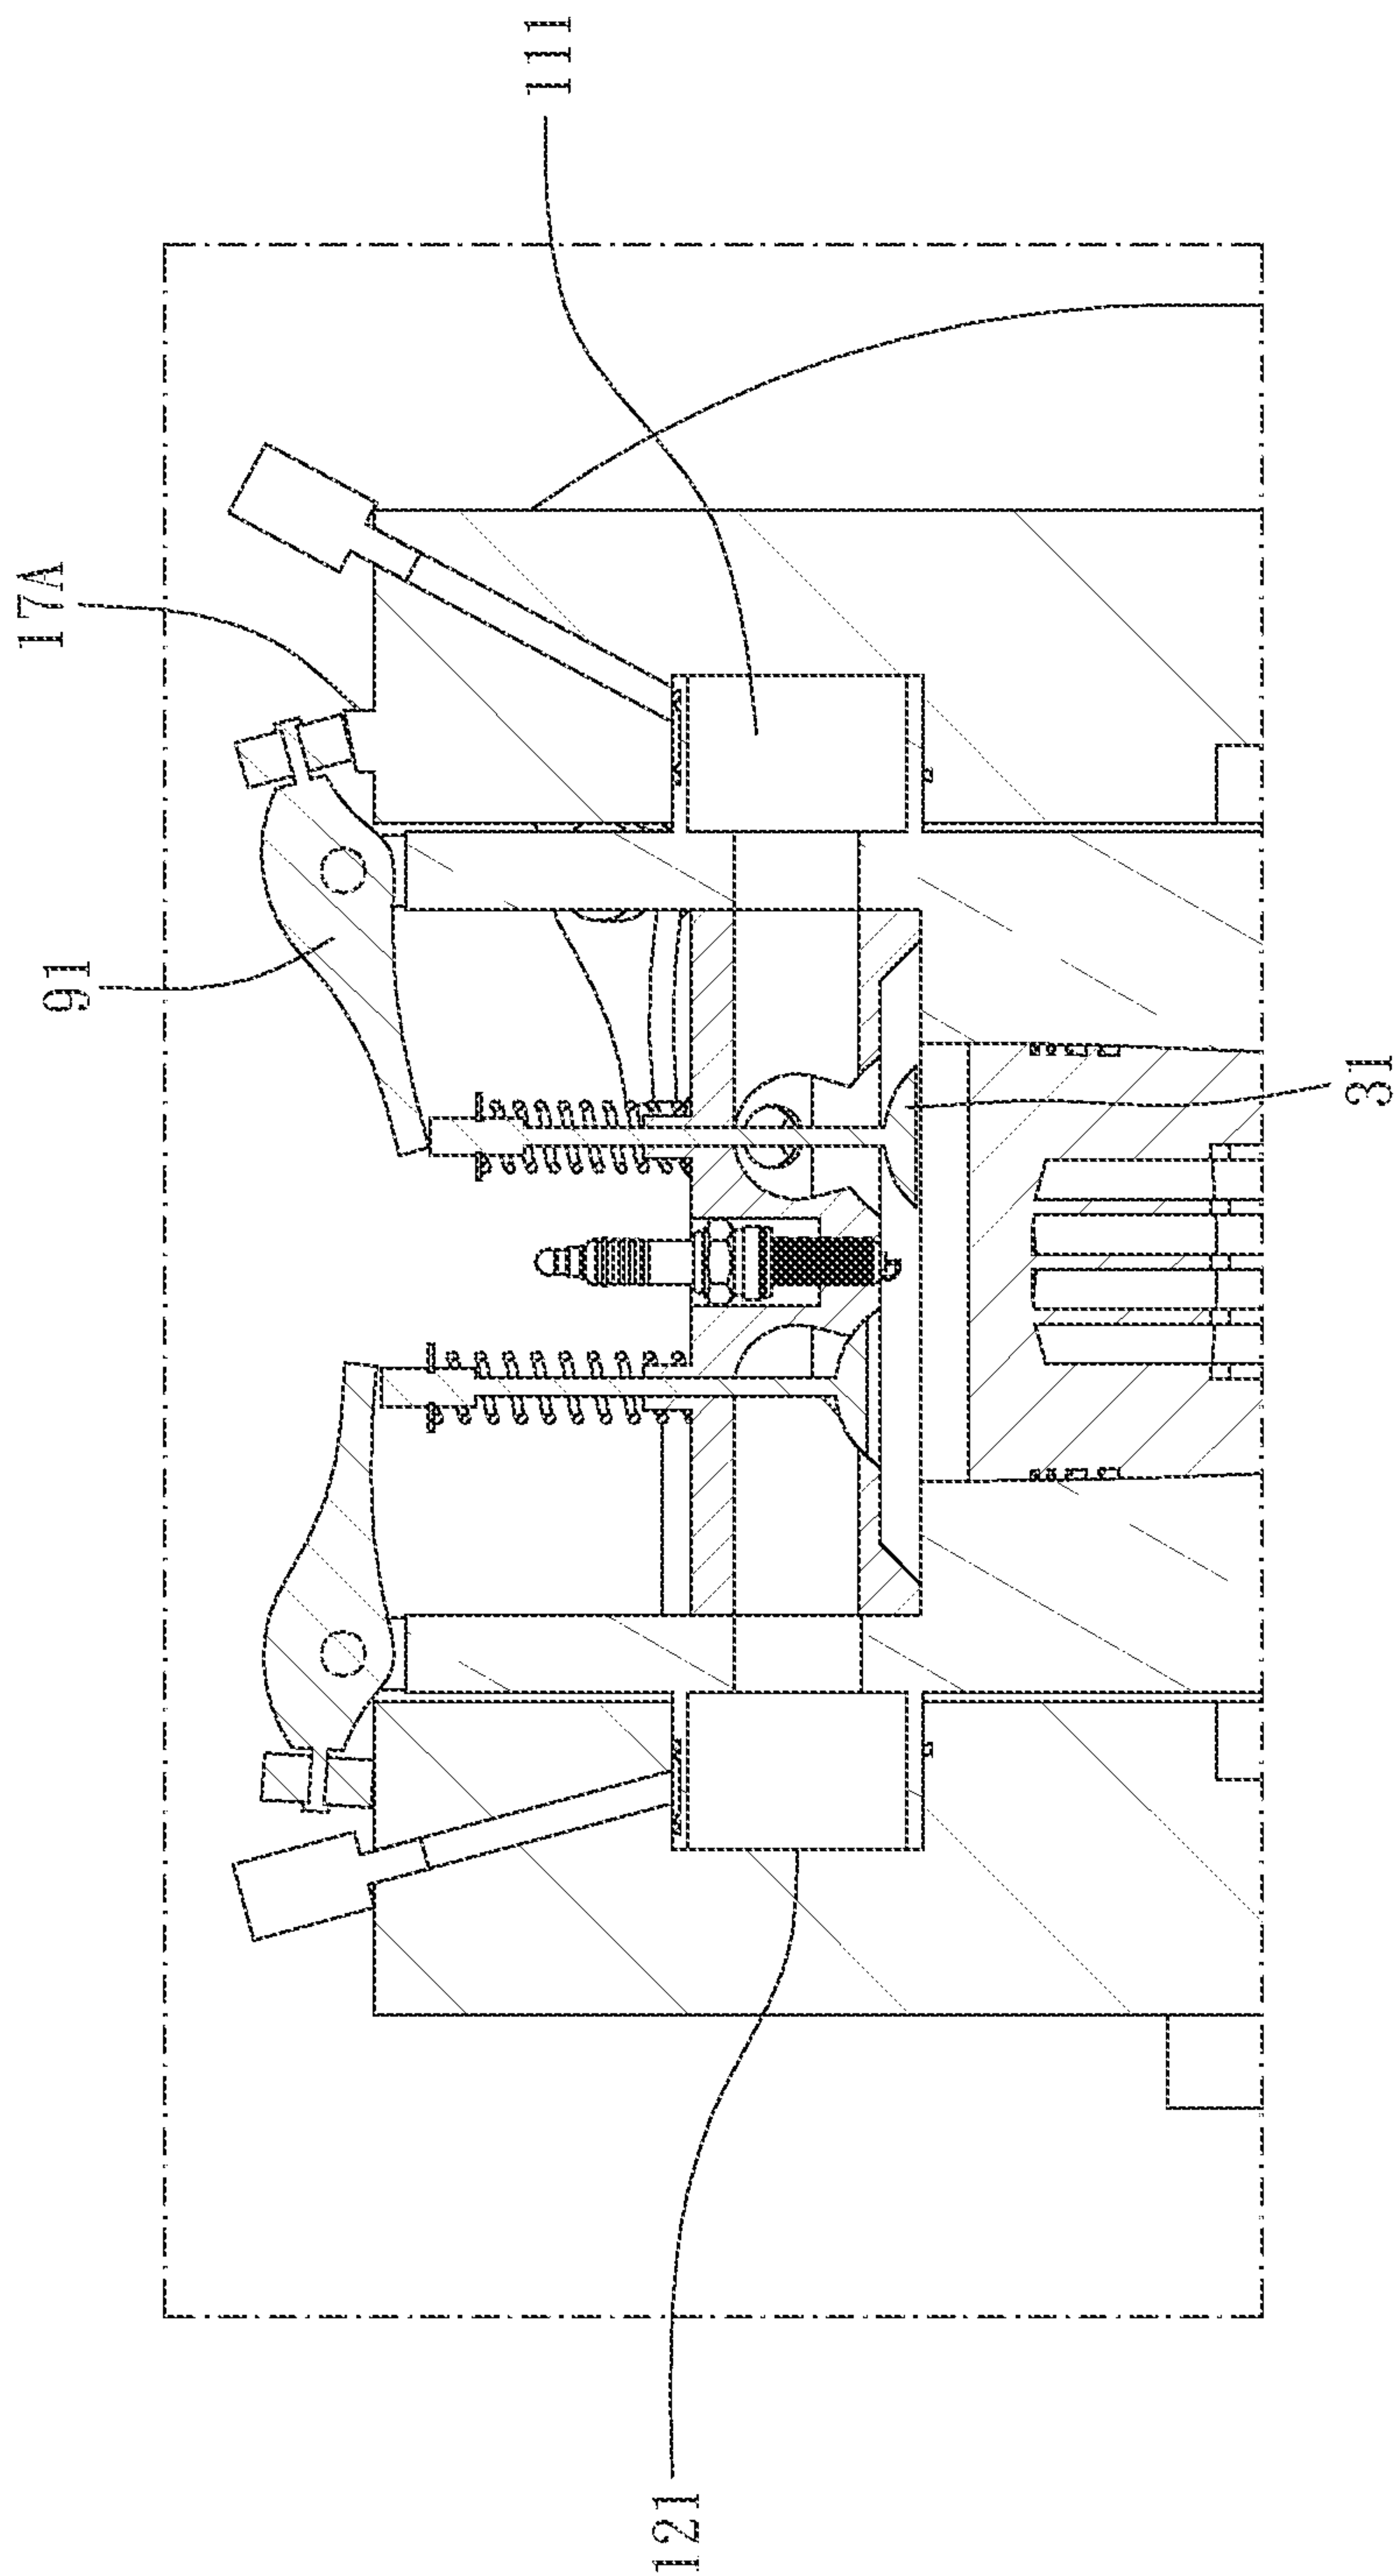


FIG. 15

1

ROTARY ENGINE

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a rotary engine.

Description of the Prior Art

Nowadays, the engine plays an important role in the power demands of vehicles or other fields. Generally, the conventional engine performs intake, compression, power and exhaust strokes through the cooperation of the cylinder, piston, crankshaft, valve, to achieve a complete power cycle.

However, the manufacture and assembly of the structure and components of the conventional engine are very complicated and difficult. For example, the crankshaft needs to be designed as a curved shaft according to the number of pistons. Therefore, the piston moves up and down eccentrically, and thus there is great friction between the piston and the cylinder. As a result, the cylinder and piston are easy to wear and damage, and the crankshaft is easy to break. Moreover, at a power starting point when the power stroke starts, the piston rod and the crankshaft of the conventional engine are aligned with each other, so the power generated by the explosion is not efficiently transmitted so that the power cannot be fully output. In addition, the number of cylinders of the conventional engine is also greatly limited, so it cannot provide a large power output. In the present invention, a large shaft larger than the crankshaft of the conventional engine can be used in a rotary engine so that the rotary engine runs more smoothly and outputs greater power and so that an air supply hole can be formed in the large shaft, which allows the cooling air outside the rotary engine to enter the cylinder to cool the rotary engine effectively and quickly.

The present invention is, therefore, arisen to obviate or at least mitigate the above-mentioned disadvantages.

SUMMARY OF THE INVENTION

The main object of the present invention is to provide a rotary engine which can carry out multiple power strokes during one rotation and provide greater power output.

To achieve the above and other objects, a rotary engine is provided, including: a stator assembly, including an intake stator and an exhaust stator, the intake stator and the exhaust stator each including an annular guiding groove, the annular guiding groove of the intake stator and the annular guiding groove of the exhaust stator axially corresponding to each other and defining a track, the intake stator further including an annular intake groove, the exhaust stator further including an annular exhaust groove; a rotor, rotatably disposed between the intake stator and the exhaust stator, including a plurality of cylinders and a plurality of cylinder heads, each of the plurality of cylinders being covered by one of the plurality of cylinder heads, each of the plurality of cylinder heads including an intake port and an exhaust port, the intake port being connected to the annular intake groove, the exhaust port being connected to the annular exhaust groove; a shaft, inserted axially in the stator assembly and the rotor; a plurality of valve mechanisms, posited on the plurality of cylinder heads respectively and each including an intake valve configured to selectively close the intake port and an exhaust valve configured to selectively close the exhaust port; a plurality of pistons, received in the plurality of

2

cylinders respectively and each including a piston rod which projects radially beyond one of the plurality of cylinders and is movable along the track, an intake starting point, a compression starting point, a power starting point and an exhaust starting point of each of the plurality of pistons being defined sequentially relatively based on the track; and a plurality of spark plugs, posited on the plurality of cylinder heads and exposed to interiors of the plurality of cylinders, respectively.

The present invention will become more obvious from the following description when taken in connection with the accompanying drawings, which show, for purpose of illustrations only, the preferred embodiment(s) in accordance with the present invention.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a stereogram of a preferable embodiment of the present invention;

FIG. 2 is a breakdown drawing of a preferable embodiment of the present invention;

FIG. 3 is a partial breakdown drawing of a preferable embodiment of the present invention;

FIG. 4 is a drawing showing operation of a rotary engine of a preferable embodiment of the present invention;

FIG. 5 is a drawing showing a piston of a preferable embodiment of the present invention;

FIGS. 6-8 are schematic diagrams of FIG. 4;

FIG. 9 is a partial cross-sectional view of a preferable embodiment of the present invention;

FIG. 10 is a cross-sectional view taken radially according to a preferable embodiment of the present invention;

FIG. 11 is a schematic diagram of FIG. 10;

FIG. 12 is a first side view of a preferable embodiment of the present invention;

FIG. 13 is a second side view of a preferable embodiment of the present invention;

FIG. 14 is a cross-sectional view taken radially according to another preferable embodiment of the present invention; and

FIG. 15 is a partial cross-sectional view of the another preferable embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Please refer to FIGS. 1 to 14 for a preferable embodiment of the present invention. A rotary engine 1 of the present invention includes a stator assembly 10, a rotor 20, a plurality of valve mechanisms 30, a plurality of pistons 50 and a plurality of spark plugs 60.

The stator assembly 10 includes an intake stator 11 and an exhaust stator 12. The intake stator 11 and the exhaust stator 12 each include an annular guiding groove 13, and the annular guiding groove 13 of the intake stator 11 and the annular guiding groove 13 of the exhaust stator 12 axially correspond to each other and define a track 15. The intake stator 11 further includes an annular intake groove 111, and the exhaust stator 12 further includes an annular exhaust groove 121. The rotor 20 is rotatably disposed between the intake stator 11 and the exhaust stator 12, and the rotor 20 includes a plurality of cylinders 21 and a plurality of cylinder heads 22. Each of the plurality of cylinders 21 is covered by one of the plurality of cylinder heads 22, and a cylinder gasket 23 is disposed between the cylinder head 22 and cylinder 21. Each of the plurality of cylinder heads 22 includes an intake port 221 and an exhaust port 222, the

3

intake port **221** is connected to the annular intake groove **111**, and the exhaust port **222** is connected to the annular exhaust groove **121**. The plurality of valve mechanisms **30** are posited on the plurality of cylinder heads **22** respectively and each include an intake valve **31** configured to selectively close the intake port **221** and an exhaust valve **32** configured to selectively close the exhaust port **222**. The plurality of pistons **50** are received in the plurality of cylinders **21** respectively and each include a piston rod **51** which projects radially beyond one of the plurality of cylinders **21** and is movable along the track **15**. An intake starting point I, a compression starting point C, a power starting point B and an exhaust starting point E of each of the plurality of pistons **50** are sequentially defined relatively based on the track **15** (FIG. 4). The plurality of spark plugs **60** are posited on the plurality of cylinder heads **22** and exposed to interiors of the plurality of cylinders **21**, respectively, for ignition at the power starting point B. The stator assembly **10** is fixedly connected to a fixation frame **100**, and the fixation frame **100** includes a terminal **101**. When each of the plurality of spark plugs **60** moves with the cylinder head **22** to correspondingly contact the terminal, it ignites. Whereby, there are multiple power strokes during one rotation of the rotor **20**, which can provide greater power output.

Preferably, the track **15** includes an inclined section **151** in a location on its inner side corresponding to the power starting point B. The inclined section **151** allows the bearing **511** of the piston rod **51** to slide downward along the inclined section **151** smoothly at the power starting point B so that the explosion power can be maximally converted to the piston **50** to generate huge torque without decreasing the power conversion efficiency.

The rotor **20** further includes two annular chambers **23** (FIG. 9), and each of the two annular chambers **23** is defined by an inner annular wall **231** and an outer annular wall **232** inserted in the annular intake groove **111** and the annular exhaust groove **121**, respectively. The outer annular wall **232** includes an annular reservoir **233** on an outer side thereof, the stator assembly **10** further includes a plurality of oiling holes **81** connected to at least one oil pot **80**, and each of the plurality of oiling holes **81** is connected to the annular reservoir **233**. Two seals **82** are engaged within the outer annular wall at two sides of the annular reservoir **233** and abutted against an inner surface of the annular guiding groove **13**, so that the oil can be retained in the annular reservoir **233** and the two seals **82** help air sealing. The consumption of oil between the two seals **82** is little so that the oil pot **80** is sufficient to supply the oil required and to ensure formation of the sealing chamber. There are oiling holes **115** between the rotor **20** and the intake stator **11** and between the rotor **20** and the exhaust stator **12**, which allows the oil to lubricate the piston **50** and the two seals **82** and enhances cooling of the rotary engine.

Specification, a shaft **18** is inserted axially in the stator assembly **10** and the rotor **20**, and the shaft **18** and the rotor **20** include a key slot **181**, respectively. A key **182** is keyed in the key slots of the shaft **18** and the rotor **20** so that the rotor **20** rotates in lock steps with the shaft **18**.

In an alternative embodiment (FIG. 14), the cylinders **21** are eccentrically arranged relative to the shaft **18**.

A first bearing **112** is sleeved with and between the intake stator **11** and the shaft **18**, and a second bearing **122** is sleeved with and between the exhaust stator **12** and the shaft **18**. The shaft **18** includes an axial hole **183** (FIG. 9) and a plurality of radial holes **184** extending radially from the axial hole **183** and opened on an outer circumferential surface of the shaft **18**, and each of the plurality of cylinders

4

21 is connected to at least one of the plurality of radial holes **184**. The total area of cross-sections of the plurality of radial holes **184** is less than the cross-section of the axial hole **183** so that the airflow in each of the plurality of radial holes **184** is of high pressure and low flow velocity and so that the airflow ejects in high flow velocity from the radial holes **184**, which effectively cools the piston and the cylinder. The axial hole **183** is configured to be connected to an air supply device such as a blower, for forcing the air to enter the cylinder **21**, and thus the heat dissipation efficiency is high. Preferably, the shaft **18** is provided with a large size, which is beneficial to the stability of the engine, helps the heat transfer and cooling of the engine, is conducive to the large power output, and is beneficial to form the axial hole **183** (big air hole) and the plurality of radial holes **184** (small air hole) blowing the air to the piston **50**. An air supply device **19** is provided at an end of the shaft **18**, and the air supply device forces the cooling fluid to the plurality of radial holes **184** through the axial hole **183**, to achieve better heat dissipation efficiency. The present invention is very suitable for the design and manufacture of a multi-cylinder engine which needs the most a large shaft to stabilize the engine and transmit power, and the rotary engine **1** just fits requirement of the large shaft. Specifically, the shaft **18** further includes a plurality of ribs **185** extending axially on the outer circumferential surface, neighboring two of the plurality of ribs **185**, the stator assembly **10** and the rotor **20** define a groove **186**, and each of the plurality of radial holes **184** is opened on one of the plurality of ribs **185**. The groove **186** is connected to an outside of the rotary engine **1**, which is beneficial for heat dissipation.

Preferably, two steel sheets **113** are interposed between the intake stator **11** and the rotor **20** and between the exhaust stator **12** and the rotor **20**, respectively. The two steel sheets **113** are radially protruding beyond the first bearing **112** and the second bearing **122**, respectively. The two steel sheets **113** are configured to keep the gaps and to block the oil from flowing to the shaft **18**. Centrifugal force prevents the oil in the cylinder **21** from flowing to the shaft **18**. Only when the engine stops, the oil is able to flow to the shaft **18**; however, as the engine starts again, the oil will be thrown outward. The two steel sheets **113** each can act as a barrier to prevent oil from easily entering the groove **186** of the shaft **18** and flowing out from the groove **186**. In addition, with the spacer function of the two steel sheets **113**, it avoids large-area friction between the rotor **20** and the intake stator **11** and between the rotor **20** and the exhaust stator **12**, and avoids loss of kinetic energy.

Preferably, the stator assembly **10** further includes at least one cooling pipe **114** configured for receiving cooling medium, and the at least one cooling pipe **114** may be integrally formed as a part of at least one of the intake stator **11** and the exhaust stator **12**. Preferably, the cooling pipe **114** is provided on the exhaust stator **12** and can be connected to the pipe receiving cooling medium, which can achieve an excellent heat dissipation effect.

In this embodiment, each of the plurality of cylinders **21** extends along a diametric direction of the rotor **20**, which favors rotational balance, each of the plurality of cylinders **21** includes two guiding slots **213** which are disposed therethrough and diametrically correspond to each other and are configured to guide the piston rod **51**. Two ends of each of the plurality of piston rods **51** are each sleeved with a bearing **511** received within the track **15**, wherein the bearing **511** reduces friction considerably and allows the piston **50** to operate smoothly and efficiently.

5

An upper portion of each of the plurality of pistons **50** includes at least two ring receiving grooves **52** and at least one oil reservoiring groove **53** lower than the at least two ring receiving grooves **52**, and at least two piston rings **54** are engaged within the at least two ring receiving grooves **52**, respectively. The at least two piston rings **54** establish a good sealing between the piston **50** and the cylinder **21**. Preferably, a (inner or outer) lower portion of each of the plurality of pistons **50** includes a plurality of piston heat dissipation fins **55**, enhancing heat dissipation. The stator assembly **10** further includes a cylinder oiling hole **115** and a drain hole **116** (lower than the cylinder oiling hole, about six o'clock position in FIG. **14**) connected to the track **15**. The oil is poured into the at least one oil reservoiring groove **53** via the cylinder oiling hole **115**, and thus there is sufficient quantity of oil for lubricating the piston **50** in the next high-load stroke (compression stroke and explosion stroke). When the rotor **20** rotates and the cylinder oiling hole **115** and the oil reservoiring groove **53** of the piston **50** correspond to and are connected to each other, the oil contacts the piston **50**, and the oil can enter the cylinder **21** because of the action of centrifugal force; when the oil entering the piston **50** is scraped back by the two piston rings **54**, some oil can enter the gap between the rotor **20** and the intake stator **11** and the gap between the rotor **20** and the exhaust stator **12** via the guiding slots **213** of the cylinder, and the oil moves between an inner seal of the rotor **20** and the drain hole **116** because of the action of centrifugal force, and the oil can be drained from the drain hole **116**, wherein the drain hole **116** is preferably located in a lower position, for example, almost next to the inner edge of the annular intake groove **111**. The oil entering the at least one oil reservoiring groove **53** moves with the piston **50** and lubricates the cylinder **21**. Repeatedly, the oil can lubricate the cylinder **21** and dissipate the heat from the piston **50** and the cylinder **21** to the outside of the system. In addition, a plurality of stator heat dissipation fins **118** may be provided on an axially-facing outer surface of the intake stator **11** to increase heat dissipation. The stator assembly **10** further includes a track oiling hole **117** (in this embodiment, about six o'clock position in FIG. **12**) connected to the track **15**. A small amount of oil brought by the plurality of cylinders **21** enters the track **15** at a point about six o'clock position. Since the oil in the cylinder oiling hole **115** applied at the point about nine o'clock position **9** might not enter the track **15**, it needs to pour some oil into the track **15**.

In this embodiment (FIGS. **3** and **6-11**), each of the plurality of valve mechanisms **30** further includes a valve stem assembly **34** which is resiliently posited on the cylinder head **22** and includes a roller **35** abutted against the stator assembly **10**. When the roller **35** moves with the rotor **20** and is urged by a raise posited on an outer circumferential surface of the stator assembly **10**, the valve mechanism **30** is driven to open. Preferably, the roller **35** is partially received within an annular guiding groove posited on an inner circumferential surface of the stator assembly **10**, which provides precise and stable guidance to the roller **35**. The roller **35** is preferably a wheel made of high-strength rubber, which prevents and buffers the roller **35** from impacting hard against an intake raise **171** on the intake stator **11** or against an exhaust raise **172** on the exhaust stator **12** when the roller **35** is running at high speed.

Please refer to FIG. **4**, it shows the operation of rotary engine of the present invention. Combustion gas (mixture of air and fuel) is supplied, from the outside of the rotary engine **1**, into the annular intake groove **111**; the intake stroke (from I to C) is about 150 degrees; a first cylinder **11**,

6

a second cylinder **12** and a third cylinder **13** are within the intake stroke; there is none of exhaust raise **172** provided on an exhaust inner surface **102** of the exhaust stator **12**, and the exhaust valve **32** is therefore in a closed state; when the intake valve **31** can be urged to open by the intake raise **171** posited on an intake inner surface **103** of the intake stator **11**, and at the same time, the piston **50** moves along the track **15** from a top dead center to a bottom dead center so that the cylinder **21** carries out a 150-degree intake stroke (the intake raise **171** extends for 150 degrees) for entering sufficient combustion gas; when the intake stroke ends, the intake raise **171** on the intake inner surface **103** of the intake stator **11** does not correspond to the intake valve **31**, the intake valve **31** is closed, and at the same time, the piston **50** moves along the track **15** from the bottom dead center to the top dead center to carry out the compression stroke (from C to B) for 60 degrees, wherein a fourth cylinder **C1** in FIG. **4** is carrying out the compression stroke; when the compression stroke ends (B), then the spark plug **60** ignites to induce explosion to generate power, the power stroke (B to E) is carried out for about 90 degrees, wherein a fifth cylinder **B1** and a sixth cylinder **B2** in FIG. **4** are carrying out the power stroke, the piston **50** in the cylinder **21** moves along the inclined section **151** toward the bottom dead center, and since the piston **50** moves along the inclined section **151** of the track **15**, it does not result in loss of the power generated so that the engine can generate a huge torque; when the power stroke ends (E), then the exhaust stroke (from E to I) is carried out for about 60 degrees (the exhaust raise **172** also extends for about 60 degrees), wherein a seventh cylinder **E1** in FIG. **4** is carrying out the exhaust stroke, and at the same time, the exhaust raise **172** on the exhaust inner surface **102** of the exhaust stator **12** corresponds to the exhaust valve **32**, the exhaust valve **32** is opened, the piston **50** moves along the track **15** toward the top dead center, exhaust gas in the cylinder **21** is discharged via the exhaust port **222** (FIG. **11**); a eighth cylinder **E2** in FIG. **4** is carrying out the last part of the exhaust stroke. The above are the basic intake, compression, power and exhaust strokes of an engine, wherein through the cooperation of the opening and closing of the plurality of valve mechanisms **30** at the appropriate timing, the individual actuation timings of all strokes can be controlled separately and precisely.

In another embodiment (FIG. **15**), the two stators each include a raise **17A** on the outer circumference thereof, for controlling the drag lever **91**. When an end of the drag lever **91** is lifted by the raise **17A**, the spring will be compressed, thereby controlling the opening and closing of the valve mechanism.

Although particular embodiments of the invention have been described in detail for purposes of illustration, various modifications and enhancements may be made without departing from the spirit and scope of the invention. Accordingly, the invention is not to be limited except as by the appended claims.

What is claimed is:

1. A rotary engine, including:

a stator assembly, including an intake stator and an exhaust stator, the intake stator and the exhaust stator each including an annular guiding groove, the annular guiding groove of the intake stator and the annular guiding groove of the exhaust stator axially corresponding to each other and defining a track, the intake stator further including an annular intake groove, the exhaust stator further including an annular exhaust groove;

7

a rotor, rotatably disposed between the intake stator and the exhaust stator, including a plurality of cylinders and a plurality of cylinder heads, each of the plurality of cylinders being covered by one of the plurality of cylinder heads, each of the plurality of cylinder heads including an intake port and an exhaust port, the intake port being connected to the annular intake groove, the exhaust port being connected to the annular exhaust groove;

a shaft, inserted axially in the stator assembly and the rotor;

a plurality of valve mechanisms, posited on the plurality of cylinder heads respectively and each including an intake valve configured to selectively close the intake port and an exhaust valve configured to selectively close the exhaust port;

a plurality of pistons, received in the plurality of cylinders respectively and each including a piston rod which projects radially beyond one of the plurality of cylinders and is movable along the track, an intake starting point, a compression starting point, a power starting point and an exhaust starting point of each of the plurality of pistons being sequentially defined relatively based on the track; and

a plurality of spark plugs, posited on the plurality of cylinder heads and exposed to interiors of the plurality of cylinders, respectively.

2. The rotary engine of claim 1, wherein each of the plurality of cylinders extends along a diametric direction of the rotor.

3. The rotary engine of claim 1, wherein two ends of each of the plurality of piston rods are each sleeved with a bearing received within the track.

4. The rotary engine of claim 1, wherein each of the plurality of cylinders includes two guiding slots which are disposed therethrough and diametrically correspond to each other and are configured to guide the piston rod.

5. The rotary engine of claim 4, wherein an upper portion of each of the plurality of pistons includes at least two ring receiving grooves and at least one oil reservoiring groove lower than the at least two ring receiving grooves, at least two piston rings are engaged within the at least two ring receiving grooves respectively, the stator assembly further includes a cylinder oiling hole, and the cylinder oiling hole is connected to one of the two guiding slots and corresponds to the at least one oil reservoiring groove.

6. The rotary engine of claim 1, wherein a lower portion of each of the plurality of pistons includes a plurality of piston heat dissipation fins.

7. The rotary engine of claim 4, wherein the stator assembly further includes a track oiling hole connected to the track.

8. The rotary engine of claim 1, wherein the stator assembly further includes a drain hole connected to the track.

8

9. The rotary engine of claim 1, wherein the rotor further includes two annular chambers, each of the two annular chambers is defined by an inner annular wall and an outer annular wall inserted in the annular intake groove and the annular exhaust groove, respectively, the outer annular wall includes an annular reservoir on an outer side thereof, and two seals are engaged within the outer annular wall at two sides of the annular reservoir and abutted against an inner surface of the annular guiding groove.

10. The rotary engine of claim 9, wherein the stator assembly further includes a plurality of oiling holes connected to at least one oil pot, and each of the plurality of oiling holes is connected to the annular reservoir.

11. The rotary engine of claim 1, wherein the shaft includes an axial hole extending axially and a plurality of radial holes extending radially from the axial hole and opened on an outer circumferential surface of the shaft, and each of the plurality of cylinders is connected to at least one of the plurality of radial holes.

12. The rotary engine of claim 11, wherein the shaft further includes a plurality of ribs extending axially on the outer circumferential surface, neighboring two of the plurality of ribs, the stator assembly and the rotor define a groove, and each of the plurality of radial holes is opened one of the plurality of ribs.

13. The rotary engine of claim 12, wherein a first bearing is sleeved with and between the intake stator and the shaft, and a second bearing is sleeved with and between the exhaust stator and the shaft; two steel sheets are interposed between the intake stator and the rotor and between the exhaust stator and the rotor, respectively, and the two steel sheets are radially protrusive beyond the first bearing and the second bearing, respectively.

14. The rotary engine of claim 1, wherein the stator assembly further includes at least one cooling pipe configured for receiving cooling medium.

15. The rotary engine of claim 1, wherein each of the plurality of valve mechanisms further includes a valve stem assembly which is resiliently posited on the cylinder head and includes a roller abutted against the stator assembly, and when the roller moves with the rotor and is urged by a raise of the stator assembly, the valve mechanism is driven to open.

16. The rotary engine of claim 1, wherein each of the plurality of valve mechanisms further includes a valve stem assembly which is resiliently posited on the cylinder head and a drag lever which is pivotally connected to the rotor, the drag lever includes a roller abutted against an outer circumferential surface of the stator assembly, and when the roller moves with the rotor and is urged by a raise on the outer circumferential surface of the stator assembly, the drag lever drives the valve stem assembly to open.

* * * * *