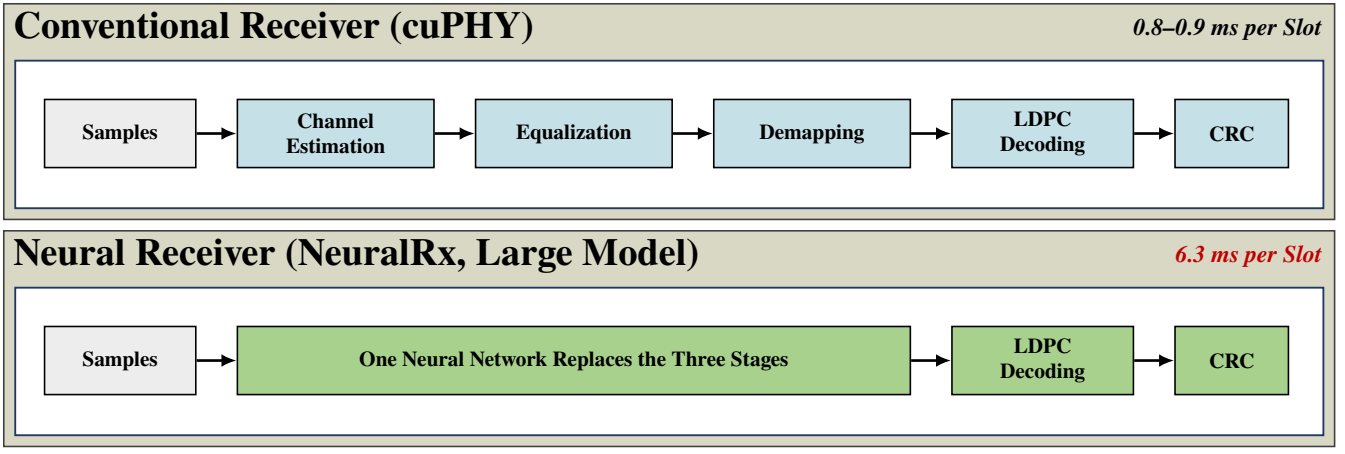


The uplink period is 2.5 ms: the large model takes 2.5 periods, and it decodes 15–67% of the TBs that the conventional receiver failed.