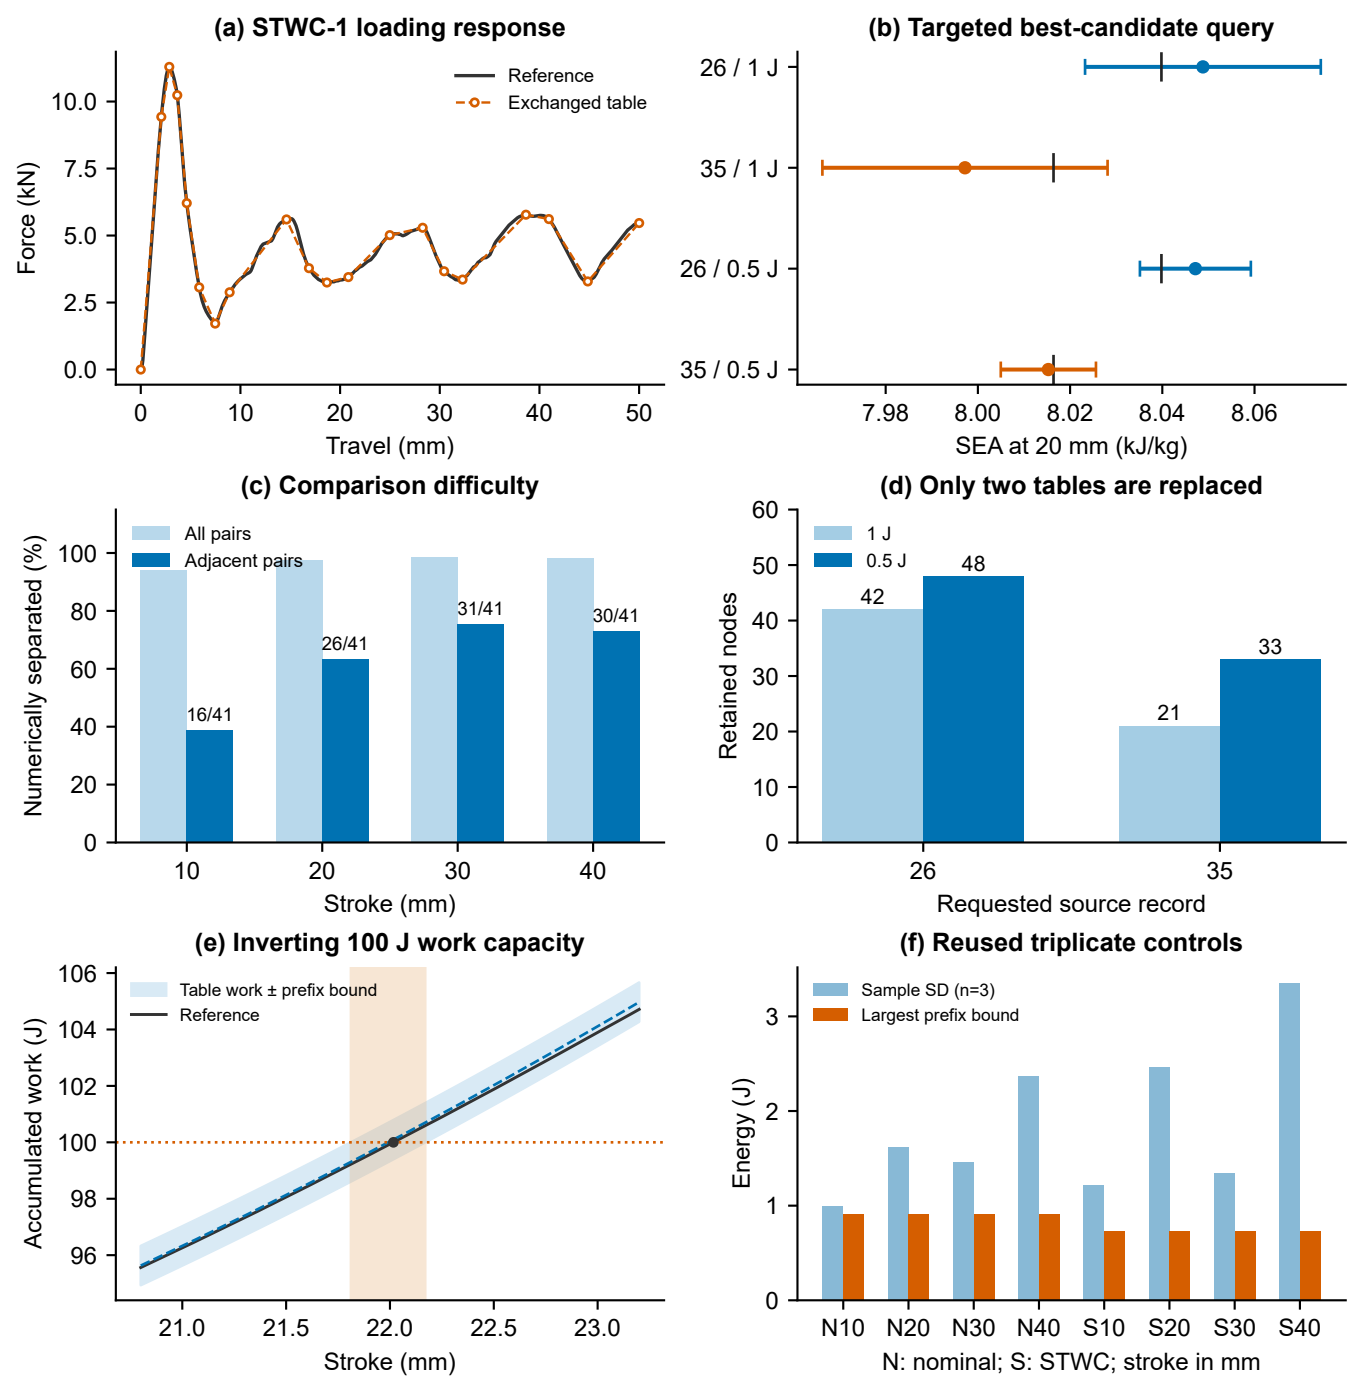

(a) STWC-1 loading response
Reference
Exchanged table
Force (kN)
Travel (mm)
(b) Targeted best-candidate query
26 / 1 J
35 / 1 J
26 / 0.5 J
35 / 0.5 J
SEA at 20 mm (kJ/kg)
(c) Comparison difficulty
All pairs
Adjacent pairs
16/41
26/41
31/41
30/41
Numerically separated (%)
Stroke (mm)
(d) Only two tables are replaced
1 J
0.5 J
42
48
21
33
Retained nodes
Requested source record
(e) Inverting 100 J work capacity
Table work ± prefix bound
Reference
Accumulated work (J)
Stroke (mm)
(f) Reused triplicate controls
Sample SD (n=3)
Largest prefix bound
Energy (J)
N10
N20
N30
N40
S10
S20
S30
S40
N: nominal; S: STWC; stroke in mm