

# RSLogix Micro Project Report



Processor Information

---

Processor Type: Bul.1763      MicroLogix 1100 Series B

Processor Name: UNTITLED

Total Memory Used: 214 Instruction Words Used - 77 Data Table Words Used

Total Memory Left: 6442 Instruction Words Left

Program Files: 6

Data Files: 9

Program ID: af94

## I/O Configuration

|   |          |                          |
|---|----------|--------------------------|
| 0 | Bul.1763 | MicroLogix 1100 Series B |
| 1 |          |                          |
| 2 |          |                          |
| 3 |          |                          |
| 4 |          |                          |

## Channel Configuration

## CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex

CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Edit Resource/Owner Timeout: 60  
CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Passthru Link ID: 1  
CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Write Protected: No  
CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Comms Servicing Selection: Yes  
CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Message Servicing Selection: Yes  
CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex 1st AWA Append Character: \d  
CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex 2nd AWA Append Character: \a

Source ID: 1 (decimal)  
Baud: 19200  
Parity: NONE  
Control Line : No Handshaking  
Error Detection: CRC  
Embedded Responses: Auto Detect  
Duplicate Packet Detect: Yes  
ACK Timeout(x20 ms): 50  
NAK Retries: 3  
ENQ Retries: 3

## CHANNEL 1 (SYSTEM) - Driver: Ethernet

CHANNEL 1 (SYSTEM) - Driver: Ethernet Edit Resource/Owner Timeout: 60  
CHANNEL 1 (SYSTEM) - Driver: Ethernet Passthru Link ID: 1  
CHANNEL 1 (SYSTEM) - Driver: Ethernet Write Protected: No  
CHANNEL 1 (SYSTEM) - Driver: Ethernet Comms Servicing Selection: Yes  
CHANNEL 1 (SYSTEM) - Driver: Ethernet Message Servicing Selection: Yes


Hardware Address: 00:00:00:00:00:00  
IP Address: 0.0.0.0  
Subnet Mask: 0.0.0.0  
Gateway Address: 0.0.0.0  
Msg Connection Timeout (x 1mS): 15000  
Msg Reply Timeout (x mS): 3000  
Inactivity Timeout (x Min): 30  
Bootp Enable: Yes  
Dhcp Enable No  
SNMP Enable: No  
HTTP Enable: Yes  
Auto Negotiate Enable: Yes  
Port Speed Enable: 10/100 Mbps Full Duplex/Half Duplex  
Contact:  
Location:


## Program File List

| Name       | Number | Type   | Rungs | Debug | Bytes |
|------------|--------|--------|-------|-------|-------|
| [SYSTEM]   | 0      | SYS    | 0     | No    | 0     |
|            | 1      | SYS    | 0     | No    | 0     |
| MAIN       | 2      | LADDER | 4     | No    | 30    |
| IO CONFIG  | 3      | LADDER | 5     | No    | 89    |
| CTRL LOGIC | 4      | LADDER | 7     | No    | 267   |
| CALI       | 5      | LADDER | 4     | No    | 270   |


Data File List


| Name    | Number | Type | Scope  | Debug | Words | Elements | Last  |
|---------|--------|------|--------|-------|-------|----------|-------|
| OUTPUT  | 0      | O    | Global | No    | 12    | 4        | O:3   |
| INPUT   | 1      | I    | Global | No    | 18    | 6        | I:5   |
| STATUS  | 2      | S    | Global | No    | 0     | 66       | S:65  |
| BINARY  | 3      | B    | Global | No    | 1     | 1        | B3:0  |
| TIMER   | 4      | T    | Global | No    | 9     | 3        | T4:2  |
| COUNTER | 5      | C    | Global | No    | 6     | 2        | C5:1  |
| CONTROL | 6      | R    | Global | No    | 3     | 1        | R6:0  |
| INTEGER | 7      | N    | Global | No    | 6     | 6        | N7:5  |
| FLOAT   | 8      | F    | Global | No    | 22    | 11       | F8:10 |

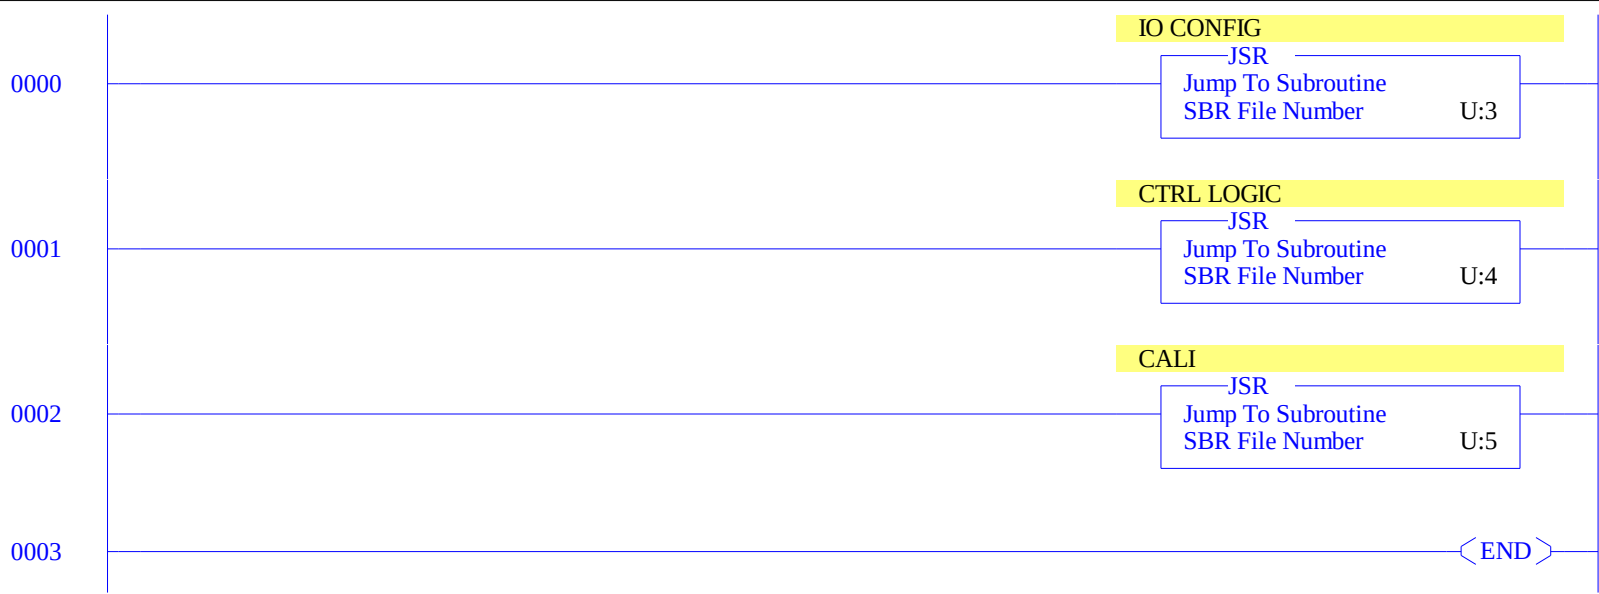


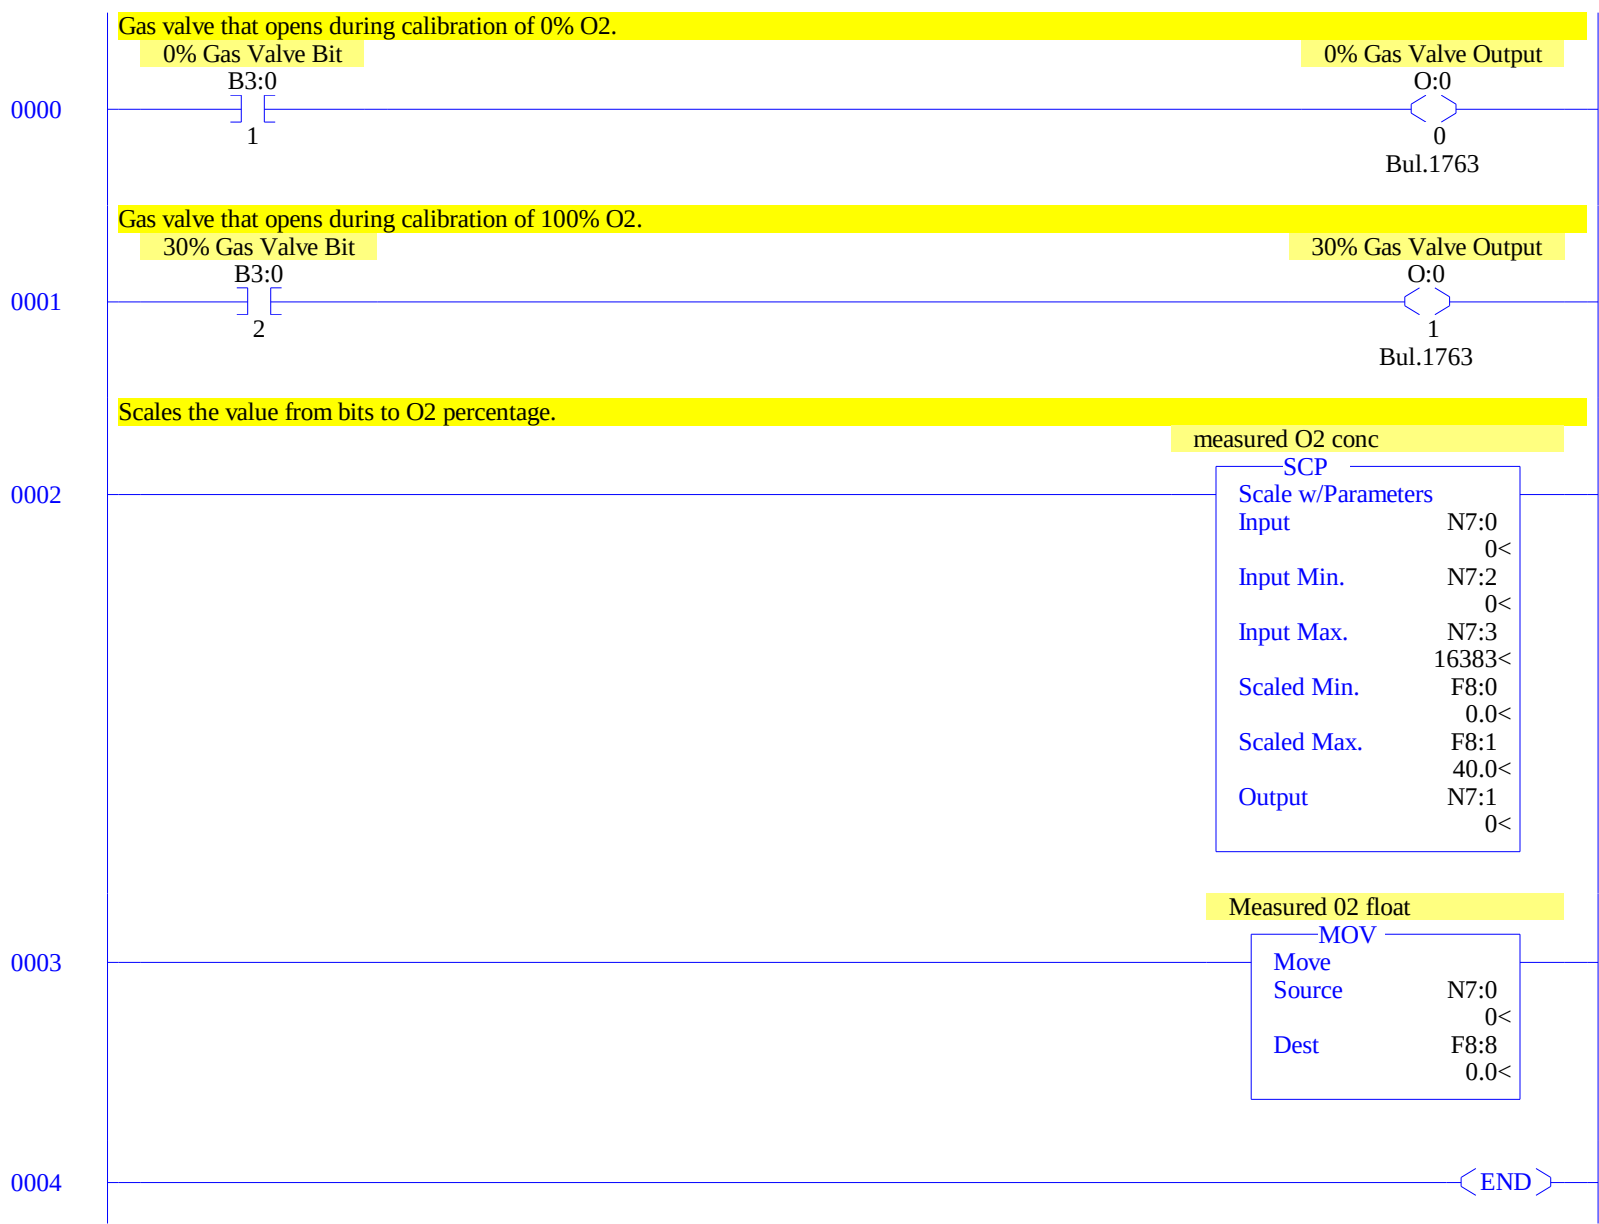

## LAD 4 - CTRL LOGIC --- Total Rungs in File = 7

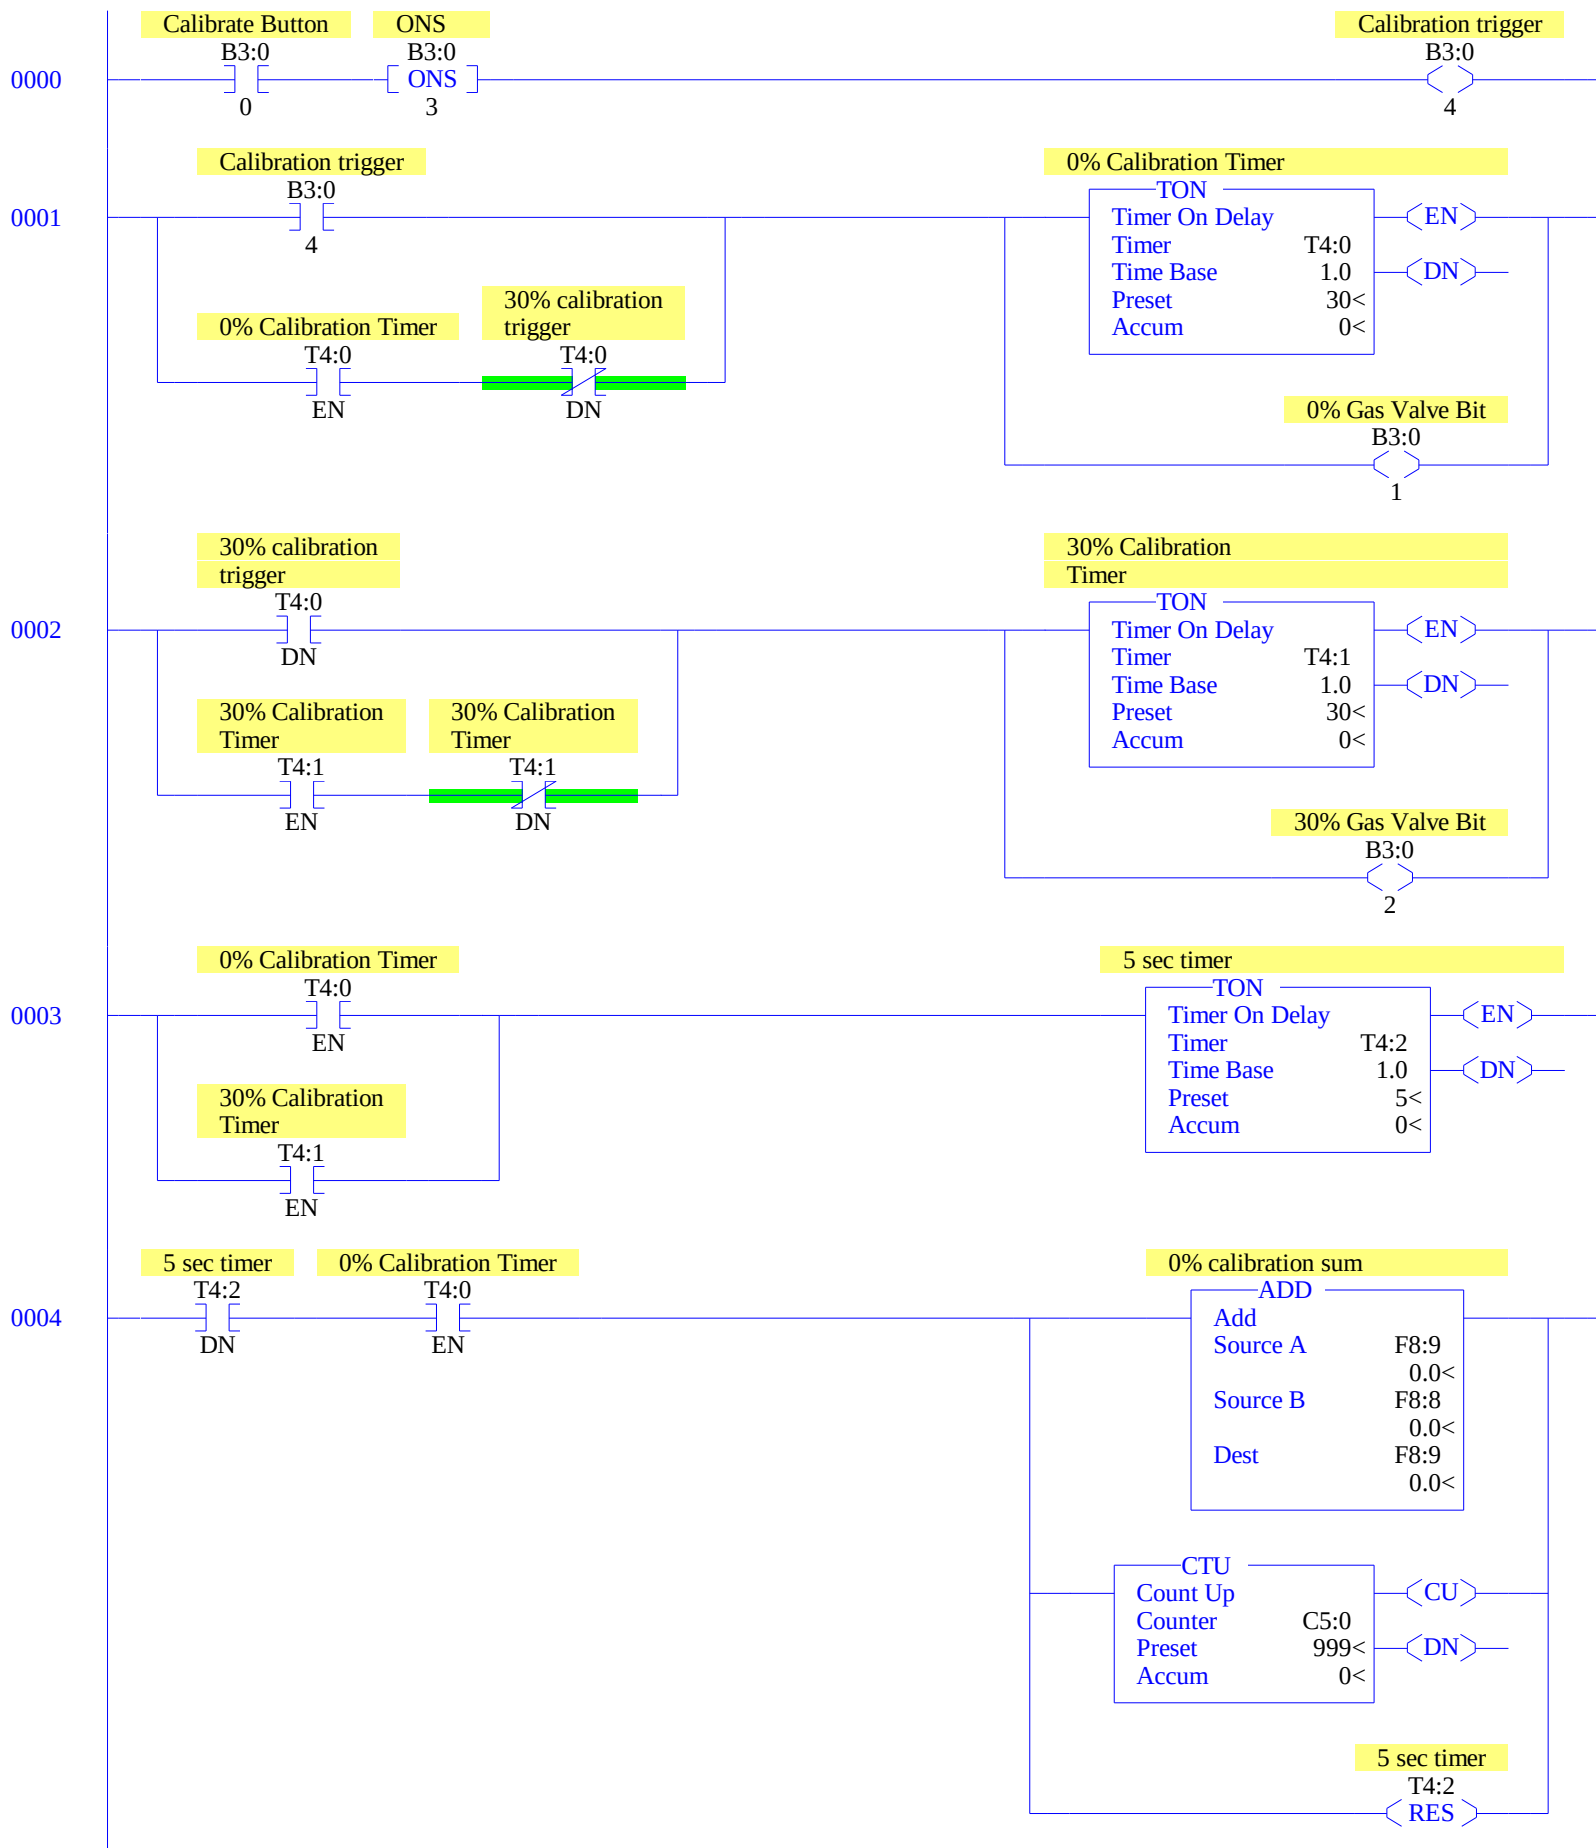

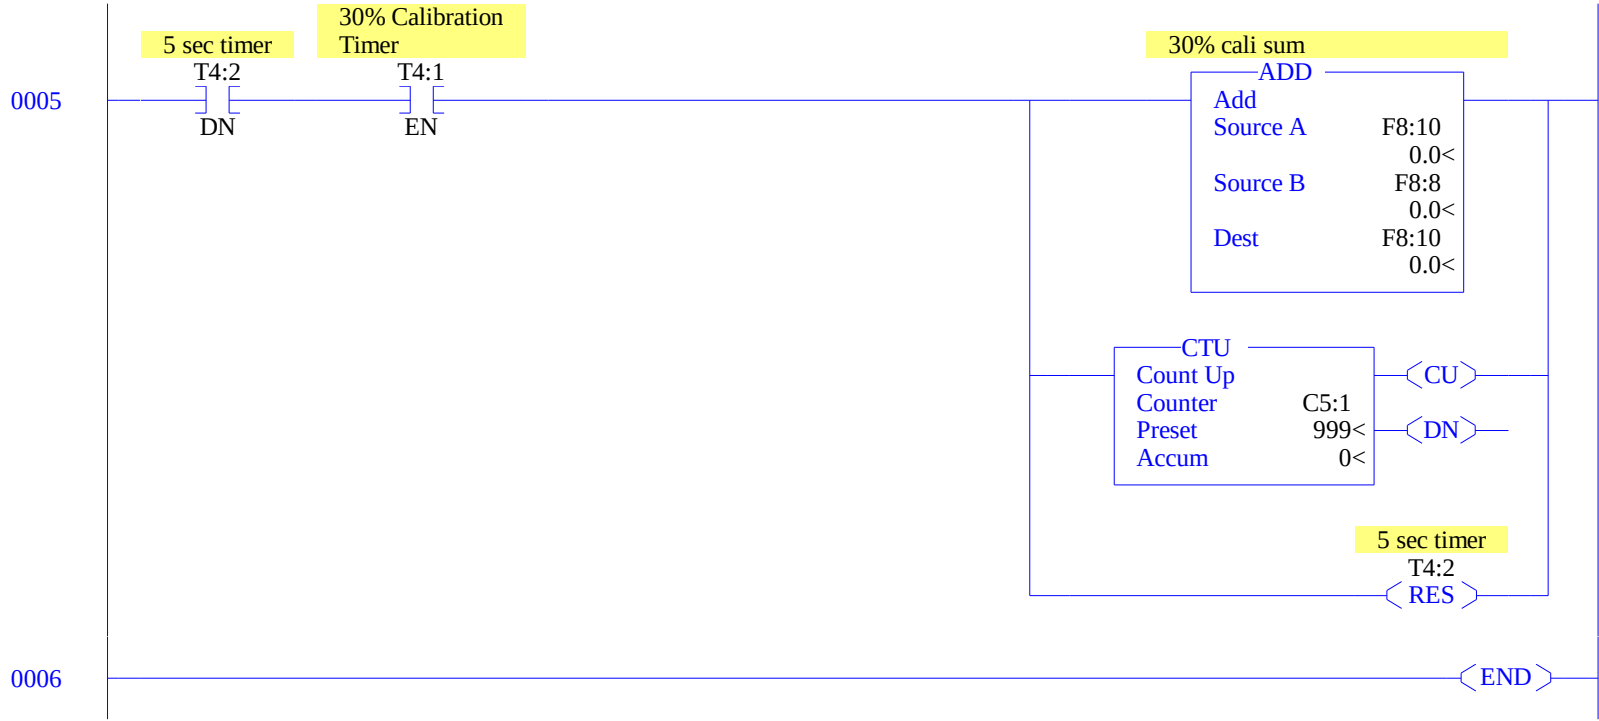

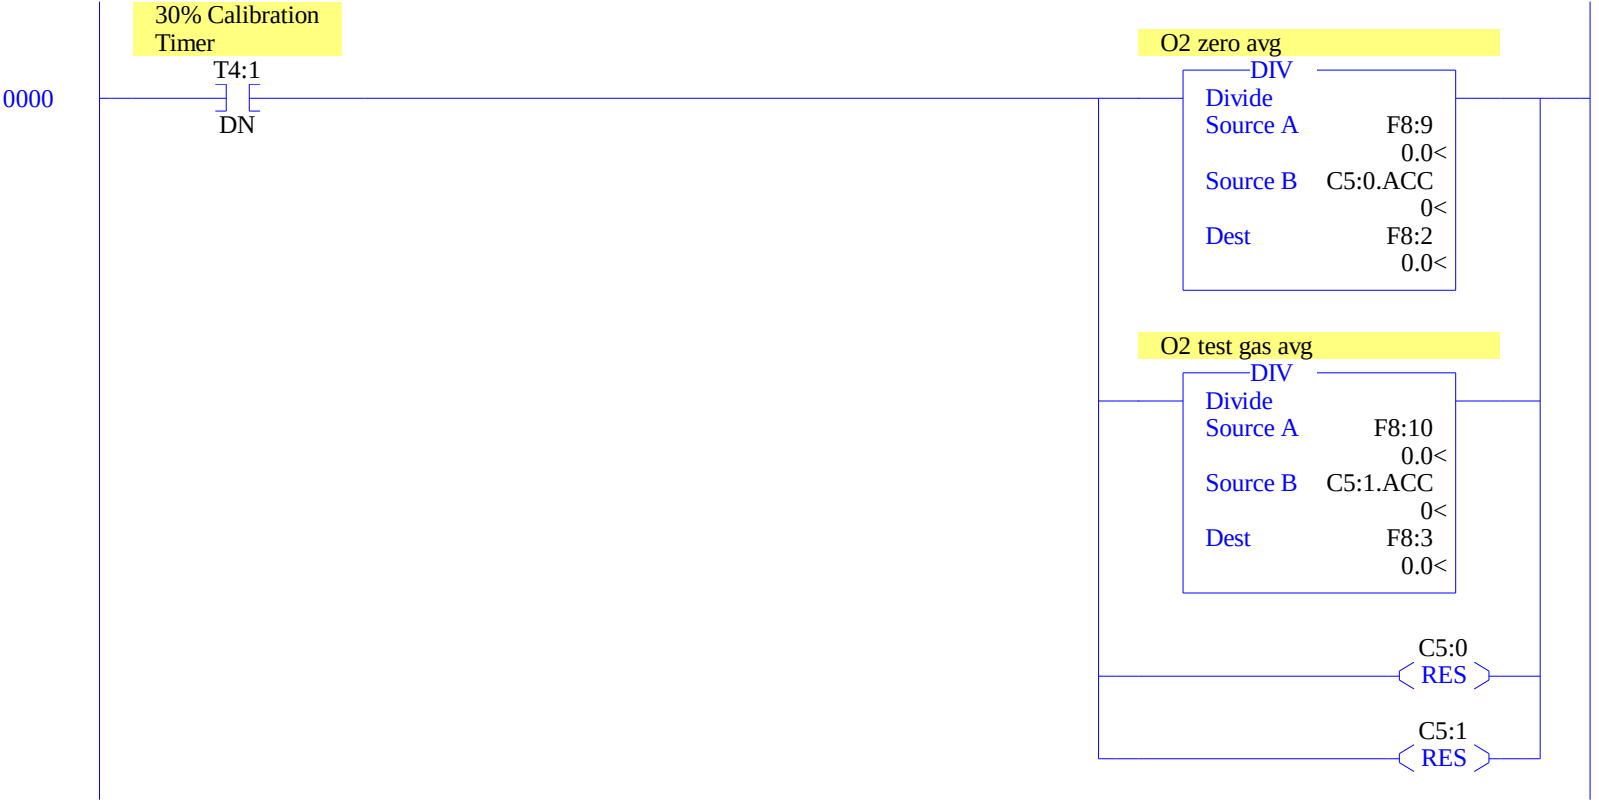

0001

30% Calibration  
Timer

T4:1  
DN

input max

DIV  
Divide  
Source A      F8:4  
                 40.0<  
Source B      F8:5  
                 30.0<  
Dest          F8:6  
                 0.0<

test hold two


SUB  
Subtract  
Source A      F8:3  
                 0.0<  
Source B      F8:2  
                 0.0<  
Dest          F8:7  
                 0.0<

input max

MUL  
Multiply  
Source A      F8:6  
                 0.0<  
Source B      F8:7  
                 0.0<  
Dest          F8:6  
                 0.0<

input max

ADD  
Add  
Source A      F8:6  
                 0.0<  
Source B      F8:2  
                 0.0<  
Dest          F8:6  
                 0.0<

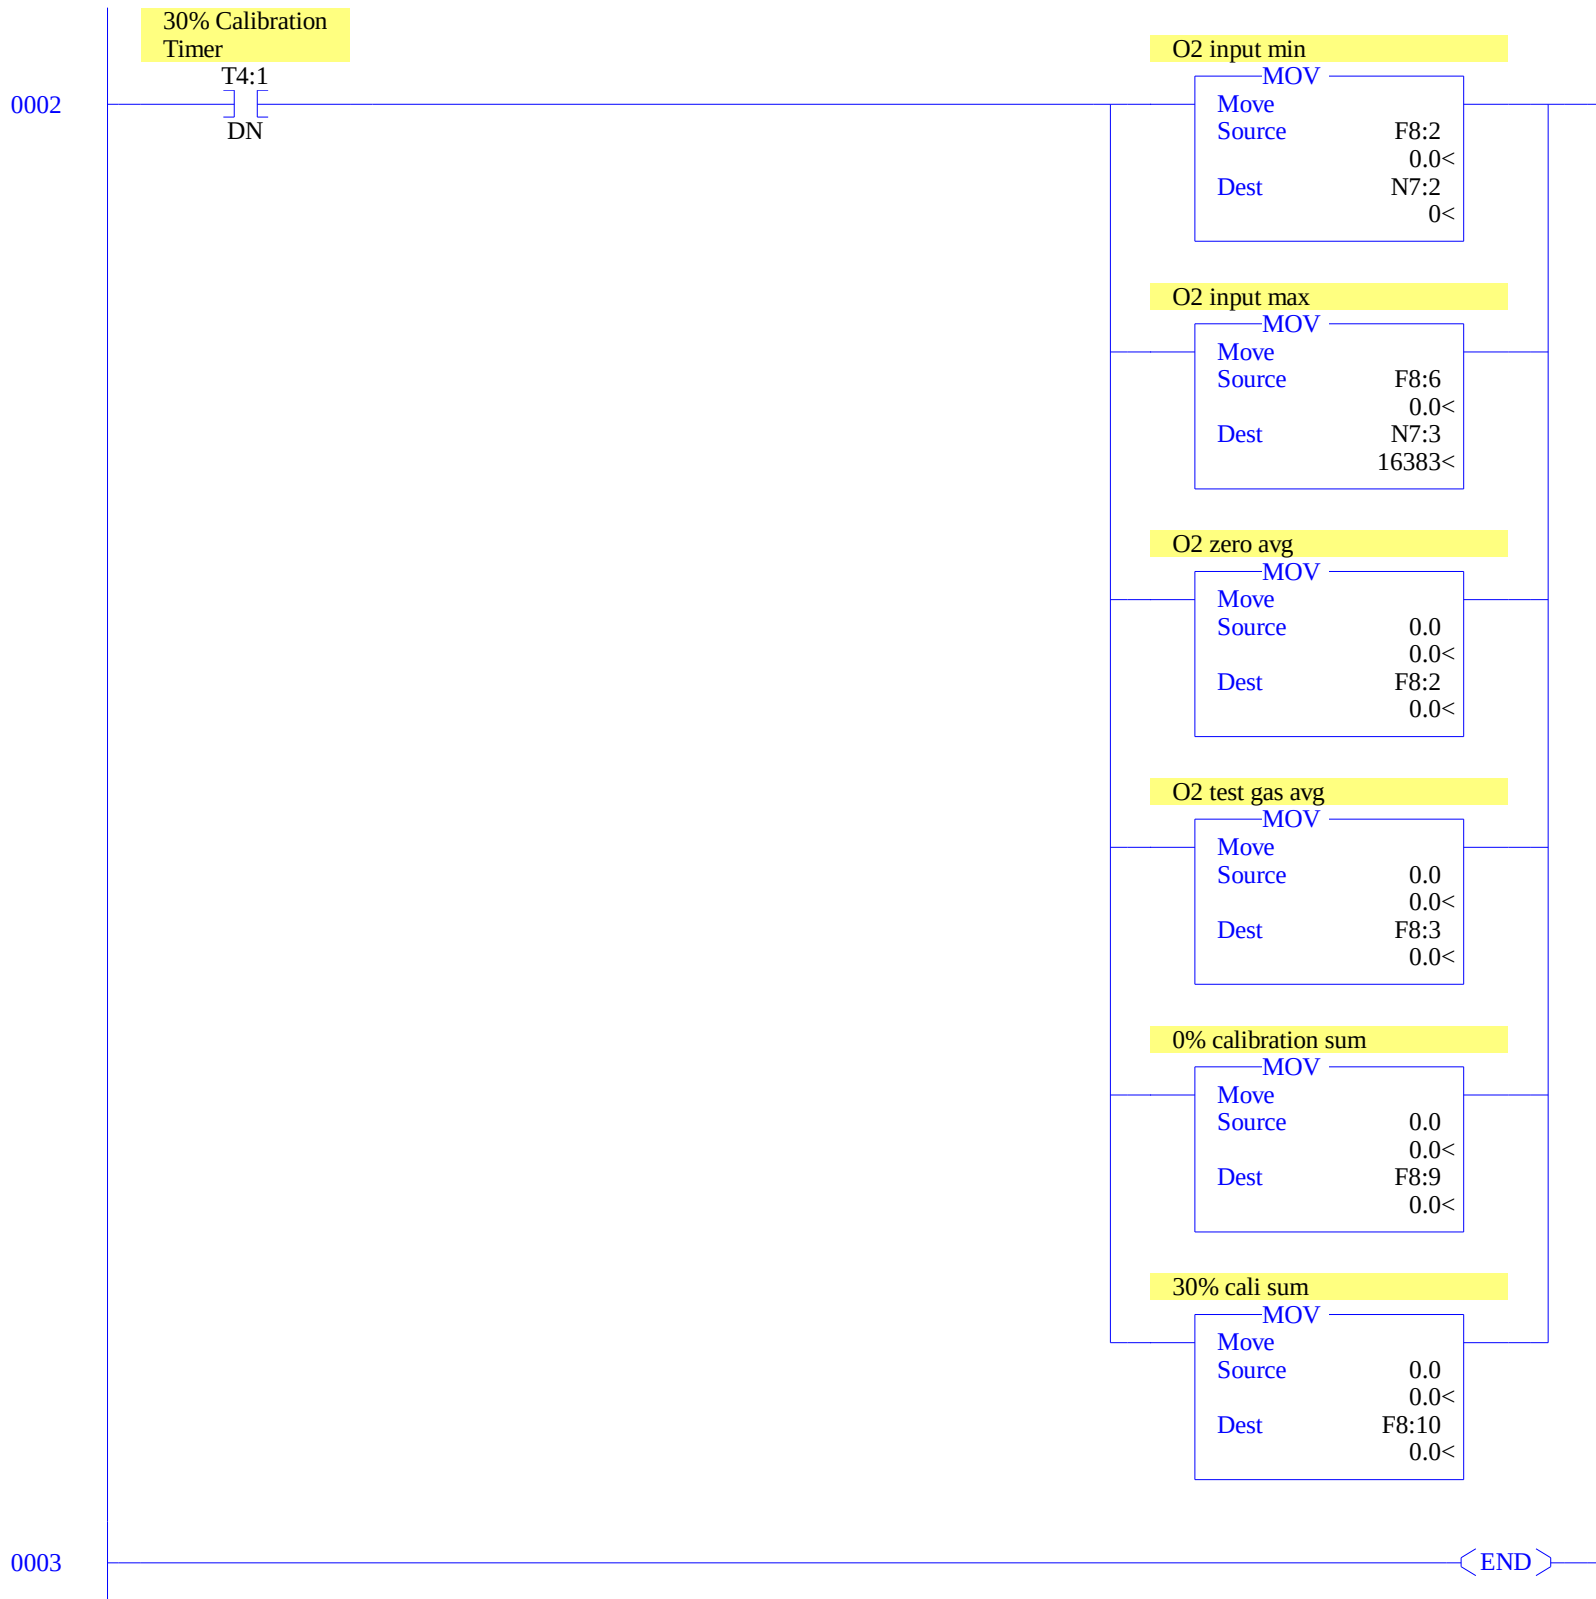

| Offset | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |          |            |      |          |  |
|--------|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|----------|------------|------|----------|--|
| 0:0.0  | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Bul.1763 | MicroLogix | 1100 | Series B |  |
| 0:0.1  | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Bul.1763 | MicroLogix | 1100 | Series B |  |
| 0:0.2  | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Bul.1763 | MicroLogix | 1100 | Series B |  |
| 0:0.3  | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Bul.1763 | MicroLogix | 1100 | Series B |  |

Data File I1 (bin) -- INPUT

| Offset | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |          |            |      |                |  |
|--------|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|----------|------------|------|----------------|--|
| I:0.0  | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Bul.1763 | MicroLogix | 1100 | Series B       |  |
| I:0.1  | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Bul.1763 | MicroLogix | 1100 | Series B       |  |
| I:0.2  | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Bul.1763 | MicroLogix | 1100 | Series B       |  |
| I:0.3  | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Bul.1763 | MicroLogix | 1100 | Series B       |  |
| I:0.4  | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Bul.1763 | MicroLogix | 1100 | Series B-Analo |  |
| I:0.5  | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Bul.1763 | MicroLogix | 1100 | Series B-Analo |  |

**Main**

Processor Mode S:1/0 - S:1/4 = Remote Program Mode  
On Power up Go To Run (Mode Behavior) S:1/12 = 0  
First Pass S:1/15 = No  
Free Running Clock S:4 = 0000-0000-0000-0000

**Proc**

OS Catalog Number S:57 = 1100                      User Program Type S:63 = 8001h  
OS Series S:58 = A                                  Compiler Revision Number S:64 =  
OS FRS S:59 =  
Processor Catalog Number S:60 =  
Processor Series S:61 = A  
Processor FRN S:62 =

**Scan Times**

Maximum (x10 ms) S:22 = 0  
Watchdog (x10 ms) S:3 (high byte) = 10  
Last 100 uSec Scan Time S:35 = 0  
Scan Toggle Bit S:33/9 = 0

**Math**

Math Overflow Selected S:2/14 = 0                      Math Register (lo word) S:13 = 0  
Overflow Trap S:5/0 = 0                              Math Register (high word) S:14-S:13 = 0  
Carry S:0/0 = 0                                      Math Register (32 Bit) S:14-S:13 = 0  
Overflow S:0/1 = 0  
Zero Bit S:0/2 = 0  
Sign Bit S:0/3 = 0

**Chan 0**

Processor Mode S:1/0- S:1/4 = Remote Program Mode  
Node Address S:15 (low byte) = 0                      Outgoing Msg Cmd Pending S:33/2 = 0  
Baud Rate S:15 (high byte) = ?  
Channel Mode S:33/3 = 0  
Comms Active S:33/4 = 0  
Incoming Cmd Pending S:33/0 = 0  
Msg Reply Pending S:33/1 = 0

**Debug**

Suspend Code S:7 = 0  
Suspend File S:8 = 0

**Errors**

Fault Override At Power Up S:1/8 = 0                      Fault Routine S:29 = 0  
Startup Protection Fault S:1/9 = 0                      Major Error S:6 = 0h  
Major Error Halt S:1/13 = 0  
Overflow Trap S:5/0 = 0                              Error Description:  
Control Register Error S:5/2 = 0  
Major Error Executing User Fault Rtn. S:5/3 = 0  
Battery Low S:5/11 = 0  
Input Filter Selection Modified S:5/13 = 0  
ASCII String Manipulation error S:5/15 = 0

**Protection**

Deny Future Access S:1/14 = No  
Data File Overwrite Protection Lost S:36/10 = False

**Mem Module**

Memory Module Loaded On Boot S:5/8 = 0  
Password Mismatch S:5/9 = 0  
Load Memory Module On Memory Error S:1/10 = 0  
Load Memory Module Always S:1/11 = 0  
On Power up Go To Run (Mode Behavior) S:1/12 = 0  
Program Compare S:2/9 = 0  
Data File Overwrite Protection Lost S:36/10 = 0

**Forces**

Forces Enabled S:1/5 = Yes  
 Forces Installed S:1/6 = No

Data File B3 (bin) -- BINARY

| Offset | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | (Symbol) | Description |
|--------|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|----------|-------------|
| B3:0   | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |          |             |

## Data File T4 -- TIMER

| Offset | EN | TT | DN | BASE    | PRE | ACC | (Symbol) | Description       |
|--------|----|----|----|---------|-----|-----|----------|-------------------|
| T4:0   | 0  | 0  | 0  | 1.0 sec | 30  | 0   | 0%       | Calibration Timer |
| T4:1   | 0  | 0  | 0  | 1.0 sec | 30  | 0   | 30%      | Calibration Timer |
| T4:2   | 0  | 0  | 0  | 1.0 sec | 5   | 0   | 5 sec    | timer             |

| Offset | CU | CD | DN | OV | UN | UA | PRE | ACC | (Symbol) | Description |
|--------|----|----|----|----|----|----|-----|-----|----------|-------------|
| C5:0   | 0  | 0  | 0  | 0  | 0  | 0  | 999 | 0   |          |             |
| C5:1   | 0  | 0  | 0  | 0  | 0  | 0  | 999 | 0   |          |             |

| Offset | EN | EU | DN | EM | ER | UL | IN | FD | LEN | POS | (Symbol) | Description |
|--------|----|----|----|----|----|----|----|----|-----|-----|----------|-------------|
| R6:0   | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0   | 0   |          |             |

Data File N7 (dec) -- INTEGER

|        |   |   |   |       |   |   |   |   |   |   |
|--------|---|---|---|-------|---|---|---|---|---|---|
| Offset | 0 | 1 | 2 | 3     | 4 | 5 | 6 | 7 | 8 | 9 |
| N7:0   | 0 | 0 | 0 | 16383 | 0 | 0 |   |   |   |   |

Data File F8 -- FLOAT

| Offset | 0  | 1  | 2 | 3 | 4  |
|--------|----|----|---|---|----|
| F8:0   | 0  | 40 | 0 | 0 | 40 |
| F8:5   | 30 | 0  | 0 | 0 | 0  |
| F8:10  | 0  |    |   |   |    |

## Address/Symbol Database

| Address  | Symbol | Scope | Description                                    | Sym Group | Dev. Code | ABV | BLW |
|----------|--------|-------|------------------------------------------------|-----------|-----------|-----|-----|
| B3:0/0   |        |       | Calibrate Button                               |           |           |     |     |
| B3:0/1   |        |       | 0% Gas Valve Bit                               |           |           |     |     |
| B3:0/2   |        |       | 30% Gas Valve Bit                              |           |           |     |     |
| B3:0/3   |        |       | ONS                                            |           |           |     |     |
| B3:0/4   |        |       | Calibration trigger                            |           |           |     |     |
| C5:0     |        |       |                                                |           |           |     |     |
| C5:0.ACC |        |       |                                                |           |           |     |     |
| C5:1     |        |       |                                                |           |           |     |     |
| C5:1.ACC |        |       |                                                |           |           |     |     |
| F8:0     |        |       |                                                |           |           |     |     |
| F8:1     |        |       |                                                |           |           |     |     |
| F8:2     |        |       | 02 zero avg                                    |           |           |     |     |
| F8:3     |        |       | 02 test gas avg                                |           |           |     |     |
| F8:4     |        |       | 02 max conc                                    |           |           |     |     |
| F8:5     |        |       | 02 cali gas conc                               |           |           |     |     |
| F8:6     |        |       | input max                                      |           |           |     |     |
| F8:7     |        |       | test hold two                                  |           |           |     |     |
| F8:8     |        |       | Measured 02 float                              |           |           |     |     |
| F8:9     |        |       | 0% calibration sum                             |           |           |     |     |
| F8:10    |        |       | 30% cali sum                                   |           |           |     |     |
| N7:0     |        |       | 02 sensor input signal                         |           |           |     |     |
| N7:1     |        |       | measured 02 conc                               |           |           |     |     |
| N7:2     |        |       | 02 input min                                   |           |           |     |     |
| N7:3     |        |       | 02 input max                                   |           |           |     |     |
| N7:4     |        |       | 02 zero sum                                    |           |           |     |     |
| N7:5     |        |       | 02 zero avg                                    |           |           |     |     |
| O:0/0    |        |       | 0% Gas Valve Output                            |           |           |     |     |
| O:0/1    |        |       | 30% Gas Valve Output                           |           |           |     |     |
| S:0      |        |       | Arithmetic Flags                               |           |           |     |     |
| S:0/0    |        |       | Processor Arithmetic Carry Flag                |           |           |     |     |
| S:0/1    |        |       | Processor Arithmetic Underflow/ Overflow Flag  |           |           |     |     |
| S:0/2    |        |       | Processor Arithmetic Zero Flag                 |           |           |     |     |
| S:0/3    |        |       | Processor Arithmetic Sign Flag                 |           |           |     |     |
| S:1      |        |       | Processor Mode Status/ Control                 |           |           |     |     |
| S:1/0    |        |       | Processor Mode Bit 0                           |           |           |     |     |
| S:1/1    |        |       | Processor Mode Bit 1                           |           |           |     |     |
| S:1/2    |        |       | Processor Mode Bit 2                           |           |           |     |     |
| S:1/3    |        |       | Processor Mode Bit 3                           |           |           |     |     |
| S:1/4    |        |       | Processor Mode Bit 4                           |           |           |     |     |
| S:1/5    |        |       | Forces Enabled                                 |           |           |     |     |
| S:1/6    |        |       | Forces Present                                 |           |           |     |     |
| S:1/7    |        |       | Comms Active                                   |           |           |     |     |
| S:1/8    |        |       | Fault Override at Powerup                      |           |           |     |     |
| S:1/9    |        |       | Startup Protection Fault                       |           |           |     |     |
| S:1/10   |        |       | Load Memory Module on Memory Error             |           |           |     |     |
| S:1/11   |        |       | Load Memory Module Always                      |           |           |     |     |
| S:1/12   |        |       | Load Memory Module and RUN                     |           |           |     |     |
| S:1/13   |        |       | Major Error Halted                             |           |           |     |     |
| S:1/14   |        |       | Access Denied                                  |           |           |     |     |
| S:1/15   |        |       | First Pass                                     |           |           |     |     |
| S:2/0    |        |       | STI Pending                                    |           |           |     |     |
| S:2/1    |        |       | STI Enabled                                    |           |           |     |     |
| S:2/2    |        |       | STI Executing                                  |           |           |     |     |
| S:2/3    |        |       | Index Addressing File Range                    |           |           |     |     |
| S:2/4    |        |       | Saved with Debug Single Step                   |           |           |     |     |
| S:2/5    |        |       | DH-485 Incoming Command Pending                |           |           |     |     |
| S:2/6    |        |       | DH-485 Message Reply Pending                   |           |           |     |     |
| S:2/7    |        |       | DH-485 Outgoing Message Command Pending        |           |           |     |     |
| S:2/15   |        |       | Comms Servicing Selection                      |           |           |     |     |
| S:3      |        |       | Current Scan Time/ Watchdog Scan Time          |           |           |     |     |
| S:4      |        |       | Time Base                                      |           |           |     |     |
| S:5/0    |        |       | Overflow Trap                                  |           |           |     |     |
| S:5/2    |        |       | Control Register Error                         |           |           |     |     |
| S:5/3    |        |       | Major Err Detected Executing UserFault Routine |           |           |     |     |
| S:5/4    |        |       | M0-M1 Referenced on Disabled Slot              |           |           |     |     |
| S:5/8    |        |       | Memory Module Boot                             |           |           |     |     |
| S:5/9    |        |       | Memory Module Password Mismatch                |           |           |     |     |
| S:5/10   |        |       | STI Overflow                                   |           |           |     |     |
| S:5/11   |        |       | Battery Low                                    |           |           |     |     |
| S:6      |        |       | Major Error Fault Code                         |           |           |     |     |
| S:7      |        |       | Suspend Code                                   |           |           |     |     |
| S:8      |        |       | Suspend File                                   |           |           |     |     |
| S:9      |        |       | Active Nodes                                   |           |           |     |     |
| S:10     |        |       | Active Nodes                                   |           |           |     |     |
| S:11     |        |       | I/O Slot Enables                               |           |           |     |     |
| S:12     |        |       | I/O Slot Enables                               |           |           |     |     |
| S:13     |        |       | Math Register                                  |           |           |     |     |
| S:14     |        |       | Math Register                                  |           |           |     |     |
| S:15     |        |       | Node Address/ Baud Rate                        |           |           |     |     |
| S:16     |        |       | Debug Single Step Rung                         |           |           |     |     |
| S:17     |        |       | Debug Single Step File                         |           |           |     |     |
| S:18     |        |       | Debug Single Step Breakpoint Rung              |           |           |     |     |
| S:19     |        |       | Debug Single Step Breakpoint File              |           |           |     |     |
| S:20     |        |       | Debug Fault/ Powerdown Rung                    |           |           |     |     |
| S:21     |        |       | Debug Fault/ Powerdown File                    |           |           |     |     |
| S:22     |        |       | Maximum Observed Scan Time                     |           |           |     |     |
| S:23     |        |       | Average Scan Time                              |           |           |     |     |

## Address/Symbol Database

| Address | Symbol | Scope | Description                                  | Sym Group | Dev. Code | ABV | BLW |
|---------|--------|-------|----------------------------------------------|-----------|-----------|-----|-----|
| S:24    |        |       | Index Register                               |           |           |     |     |
| S:25    |        |       | I/O Interrupt Pending                        |           |           |     |     |
| S:26    |        |       | I/O Interrupt Pending                        |           |           |     |     |
| S:27    |        |       | I/O Interrupt Enabled                        |           |           |     |     |
| S:28    |        |       | I/O Interrupt Enabled                        |           |           |     |     |
| S:29    |        |       | User Fault Routine File Number               |           |           |     |     |
| S:30    |        |       | STI Setpoint                                 |           |           |     |     |
| S:31    |        |       | STI File Number                              |           |           |     |     |
| S:32    |        |       | I/O Interrupt Executing                      |           |           |     |     |
| S:33    |        |       | Extended Proc Status Control Word            |           |           |     |     |
| S:33/0  |        |       | Incoming Command Pending                     |           |           |     |     |
| S:33/1  |        |       | Message Reply Pending                        |           |           |     |     |
| S:33/2  |        |       | Outgoing Message Command Pending             |           |           |     |     |
| S:33/3  |        |       | Selection Status User/DF1                    |           |           |     |     |
| S:33/4  |        |       | Communicat Active                            |           |           |     |     |
| S:33/5  |        |       | Communicat Servicing Selection               |           |           |     |     |
| S:33/6  |        |       | Message Servicing Selection Channel 0        |           |           |     |     |
| S:33/7  |        |       | Message Servicing Selection Channel 1        |           |           |     |     |
| S:33/8  |        |       | Interrupt Latency Control Flag               |           |           |     |     |
| S:33/9  |        |       | Scan Toggle Flag                             |           |           |     |     |
| S:33/10 |        |       | Discrete Input Interrupt Reconfigur Flag     |           |           |     |     |
| S:33/11 |        |       | Online Edit Status                           |           |           |     |     |
| S:33/12 |        |       | Online Edit Status                           |           |           |     |     |
| S:33/13 |        |       | Scan Time Timebase Selection                 |           |           |     |     |
| S:33/14 |        |       | DTR Control Bit                              |           |           |     |     |
| S:33/15 |        |       | DTR Force Bit                                |           |           |     |     |
| S:34    |        |       | Pass-thru Disabled                           |           |           |     |     |
| S:34/0  |        |       | Pass-Thru Disabled Flag                      |           |           |     |     |
| S:34/1  |        |       | DH+ Active Node Table Enable Flag            |           |           |     |     |
| S:34/2  |        |       | Floating Point Math Flag Disable,Fl          |           |           |     |     |
| S:35    |        |       | Last 1 ms Scan Time                          |           |           |     |     |
| S:36    |        |       | Extended Minor Error Bits                    |           |           |     |     |
| S:36/8  |        |       | DII Lost                                     |           |           |     |     |
| S:36/9  |        |       | STI Lost                                     |           |           |     |     |
| S:36/10 |        |       | Memory Module Data File Overwrite Protection |           |           |     |     |
| S:37    |        |       | Clock Calendar Year                          |           |           |     |     |
| S:38    |        |       | Clock Calendar Month                         |           |           |     |     |
| S:39    |        |       | Clock Calendar Day                           |           |           |     |     |
| S:40    |        |       | Clock Calendar Hours                         |           |           |     |     |
| S:41    |        |       | Clock Calendar Minutes                       |           |           |     |     |
| S:42    |        |       | Clock Calendar Seconds                       |           |           |     |     |
| S:43    |        |       | STI Interrupt Time                           |           |           |     |     |
| S:44    |        |       | I/O Event Interrupt Time                     |           |           |     |     |
| S:45    |        |       | DII Interrupt Time                           |           |           |     |     |
| S:46    |        |       | Discrete Input Interrupt- File Number        |           |           |     |     |
| S:47    |        |       | Discrete Input Interrupt- Slot Number        |           |           |     |     |
| S:48    |        |       | Discrete Input Interrupt- Bit Mask           |           |           |     |     |
| S:49    |        |       | Discrete Input Interrupt- Compare Value      |           |           |     |     |
| S:50    |        |       | Processor Catalog Number                     |           |           |     |     |
| S:51    |        |       | Discrete Input Interrupt- Return Number      |           |           |     |     |
| S:52    |        |       | Discrete Input Interrupt- Accumulat          |           |           |     |     |
| S:53    |        |       | Reserved/ Clock Calendar Day of the Week     |           |           |     |     |
| S:55    |        |       | Last DII Scan Time                           |           |           |     |     |
| S:56    |        |       | Maximum Observed DII Scan Time               |           |           |     |     |
| S:57    |        |       | Operating System Catalog Number              |           |           |     |     |
| S:58    |        |       | Operating System Series                      |           |           |     |     |
| S:59    |        |       | Operating System FRN                         |           |           |     |     |
| S:61    |        |       | Processor Series                             |           |           |     |     |
| S:62    |        |       | Processor Revision                           |           |           |     |     |
| S:63    |        |       | User Program Type                            |           |           |     |     |
| S:64    |        |       | User Program Functional Index                |           |           |     |     |
| S:65    |        |       | User RAM Size                                |           |           |     |     |
| S:66    |        |       | Flash EEPROM Size                            |           |           |     |     |
| S:67    |        |       | Channel 0 Active Nodes                       |           |           |     |     |
| S:68    |        |       | Channel 0 Active Nodes                       |           |           |     |     |
| S:69    |        |       | Channel 0 Active Nodes                       |           |           |     |     |
| S:70    |        |       | Channel 0 Active Nodes                       |           |           |     |     |
| S:71    |        |       | Channel 0 Active Nodes                       |           |           |     |     |
| S:72    |        |       | Channel 0 Active Nodes                       |           |           |     |     |
| S:73    |        |       | Channel 0 Active Nodes                       |           |           |     |     |
| S:74    |        |       | Channel 0 Active Nodes                       |           |           |     |     |
| S:75    |        |       | Channel 0 Active Nodes                       |           |           |     |     |
| S:76    |        |       | Channel 0 Active Nodes                       |           |           |     |     |
| S:77    |        |       | Channel 0 Active Nodes                       |           |           |     |     |
| S:78    |        |       | Channel 0 Active Nodes                       |           |           |     |     |
| S:79    |        |       | Channel 0 Active Nodes                       |           |           |     |     |
| S:80    |        |       | Channel 0 Active Nodes                       |           |           |     |     |
| S:81    |        |       | Channel 0 Active Nodes                       |           |           |     |     |
| S:82    |        |       | Channel 0 Active Nodes                       |           |           |     |     |
| S:83    |        |       | DH+ Active Nodes                             |           |           |     |     |
| S:84    |        |       | DH+ Active Nodes                             |           |           |     |     |
| S:85    |        |       | DH+ Active Nodes                             |           |           |     |     |
| S:86    |        |       | DH+ Active Nodes                             |           |           |     |     |
| T4:0    |        |       | 0% Calibration Timer                         |           |           |     |     |
| T4:0/DN |        |       | 30% calibration trigger                      |           |           |     |     |
| T4:0/EN |        |       |                                              |           |           |     |     |
| T4:1    |        |       | 30% Calibration Timer                        |           |           |     |     |

Address/Symbol Database

| Address | Symbol | Scope | Description | Sym Group | Dev. Code | ABV | BLW |
|---------|--------|-------|-------------|-----------|-----------|-----|-----|
| T4:1/DN |        |       |             |           |           |     |     |
| T4:1/EN |        |       |             |           |           |     |     |
| T4:2    |        |       | 5 sec timer |           |           |     |     |
| T4:2/DN |        |       |             |           |           |     |     |
| U:3     |        |       | IO CONFIG   |           |           |     |     |
| U:4     |        |       | CTRL LOGIC  |           |           |     |     |
| U:5     |        |       | CALI        |           |           |     |     |

Instruction Comment Database

| Address | Instruction | Description |
|---------|-------------|-------------|
|---------|-------------|-------------|

Symbol Group Database

| Group_Name | Description |
|------------|-------------|
|------------|-------------|