


KAIROS THERMO HF

Natural circulation solar system for the production of domestic hot water

PERFORMANCES

- Kairos Thermo HF has a new optimized heat exchanger that allows a **very quick production of domestic hot water**;
- The blue selective surface treatment forgives **very high performances** with the 95% absorption and only 5% reflection;
- The collectors' **increased surface** gives the possibility to produce even more domestic hot water;
- The laser welding technology guarantees a very smooth absorbing surface, **maximizing the exploitation of the solar energy**;
- The polyurethane insulation free of CFC & HCFC, and the collectors' lower insulation in glass wool ensure **maximum protection against heat losses**;

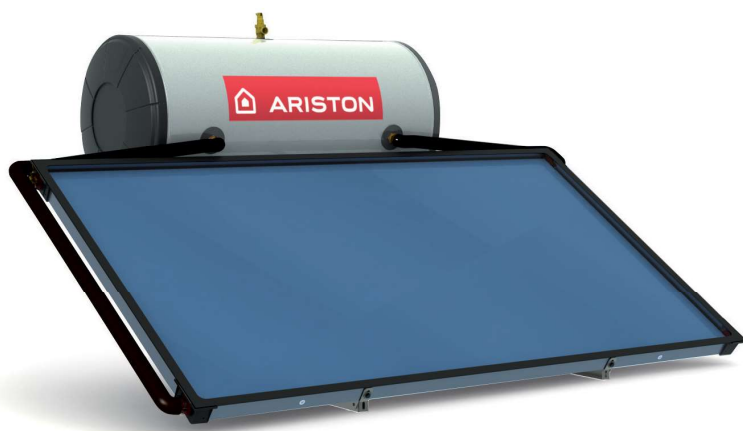

TECHNICAL DATA


Solar collectors

		HF 150/1 TR	HF 150/1 TT	HF 200/1 TR	HF 200/1 TT	HF 200/2 TR	HF 200/2 TT	HF 300/2 TR	HF 300/2 TT
Installation		Ground or flat roof	Sloped roof	Ground or flat roof	Sloped roof	Ground or flat roof	Sloped roof	Ground or flat roof	Sloped roof
Collector gross surface	m ²	2,2	2,2	2,2	2,2	4,4	4,4	4,4	4,4
Collector aperture surface	m ²	2,01	2,01	2,01	2,01	4,02	4,02	4,02	4,02
Empty mass	kg	135	133	153	151	200	190	231	218
Solar circuit capacity	l	6	6	6	6	8	8	11	11


Tank module

Domestic hot water storage tank capacity	l	153	153	202	202	202	202	270	270
DHW circuit max. pressure	bar	8	8	8	8	8	8	8	8
Solar circuit safety valve calibration	bar	1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5
Heat losses	kWh/24h	2,39	2,39	2,67	2,67	2,67	2,67	2,81	2,81

CODE (without antifreeze liquid)	3023551	3023552	3023553	3023554	3023511	3023512	3023555	3023556
CODE (with 2 kW electrical heating element)	3022175	3022174	3022177	3022176	3022179	3022178	3022181	3022180

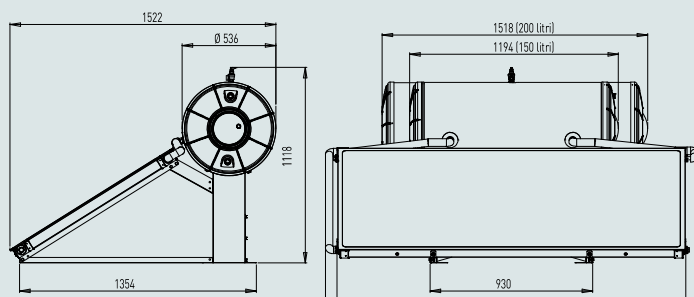

These drawings refer to 150/1 and 200/1 models

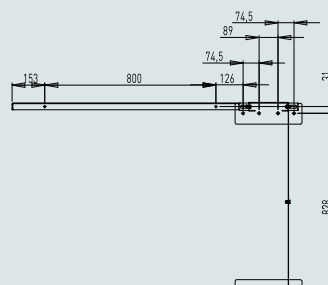

These drawings refer to 200/2 and 300/2 models