

MBB 6F产品包

2026.05

版本更新说明

[illegible]

Discussing part: Launch time and specification TBD

Plan/ Developing

H173-383 (全球双网口)
EDCP 6.15; ADCP 7.21

H173-381 (全球单网口)
EDCP 6.30; ADCP 7.27

H173-581 (拉美)
ADCP 10.14

H173-881 (中国区+N79)
ADCP 9.24

Discussing part: Launch time and specification TBD

Plan/ Developing

Category	Launched	2026Q2			2026Q3			2026Q4			2027Q1			2027Q2		
		Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan	Feb	Mar	Apr	May	Jun
Indoor CPE	5G CPE MAX 6 • H362-383 • NR 3CC,300MHz • 2.5GE • High gain 11dBi	5G Super ODU 6 (H562-383-S) 5G 18dBi ADCP: 2026.05			5G CPE MAX 7 (H372-383) 5.5G NR 4CC,400MHz 2.5GE M平台 2026.09 EDCP 2026.10 ADCP											
Mobile WiFi	5G Mobile WiFi Pro 5 • E6888-982 (Third-party) NR 2CC Battery 7000mAh 1.75" OLED touch screen	5G Mobile WiFi X E6898-982 NR 4CC 400MHz/5CC 300MHz Wi-Fi 6 4*4 1.8" OLED touch screen 12000mAh ADCP: 7.25									F平台XG MiFi E6872 (不带屏, 6000mAh E6876(带屏, 6000mAh)					
Redcap CPE	5G CPE 5 SE H151-370 SA Network only Wi-Fi 6 2*2 RJ11*1 1Gbps network port*4 High gain 8dBi 5G CPE 3 SE • H150-370 4G & 5G RedCap Wi-Fi 4 2*2 2*FE, 5dBi															

MBB 6F Product prototype code and time point

Product category	Promotion name 传播名	Sub-model 型号名	Expansion sample (V3) time 拓展样机时间	Testing sample(VN1) time 测试样机时间	General software Version time (TR5 version) 通用软件时间	Available batch supply time 批量供应时间	Expansion strategy 拓展策略
Outdoor CPE	5G CPE Max 6	H362-383	Ready	Ready 51060KYX	Ready	Ready	Ready for Major global expansion
Indoor CPE	5G CPE 6 Ultra	H168-383	Ready	Ready 51060LGW	Ready	Ready	Ready for Major global expansion
	5G CPE 6	H165-383	Ready	Ready 51060KQF 欧规 51060KQN 英规	Ready	Ready	Ready for Major global expansion
	5G CPE 7	H162-383	Ready	Ready 51060LMT	Ready	Ready	Ready for Major global expansion
	5G CPE 5	H155-383	Ready	Ready 51060KGN 51060LKT (H155-383-A)	Ready	Ready	Ready for Major global expansion
		H155-383-E	Ready	Ready 51060KKX	Ready	Ready	Ready for Major global expansion
		H155-386	Ready	Ready 51060KYW	Ready	Ready	Ready for Major global expansion
	5G CPE 5s	H153-381	Ready	Ready 51060KEU 51060LMK (H153-381-A)	Ready	Ready	Ready for Major global expansion
		H153-581	Ready	Ready 51060KNX	Ready	Ready	Ready for Latin America expansion

MBB 6F Product prototype code and time point

Product category	Promotion name 传播名	Sub-model 型号名	Expansion sample (V3) time 拓展样机时间	Testing sample(VN1) time 测试样机时间	General software Version time (TR5 version) 通用软件时间	Available batch supply time 批量供应时间	Expansion strategy 拓展策略
Indoor CPE	5G CPE C7	H173-383	Ready	Ready 51060MAW 欧规 51060LYW 英规 51060LYV 美规 51060LYU 澳规	6月初	7.21	Ready for Major global expansion
		H173-381	/	Ready 欧规 51060MAX 英规 51060MBA 美规 51060MAY	6月底	7.27	Ready for Major global expansion (except for Latin America)
		H173-881	6.23	7.21	9.11	9.24	Expansion in China, Asia Pacific, and Eurasia regions
		H173-581	/	7.31	9.30	10.14	Latin America regional expansion
Redcap CPE	5G CPE 5 SE	H151-370-A	Ready	Ready 51060KCE	Ready	Ready	Ready for Major global expansion
	5G CPE 3 SE	H150-370	Ready	Ready 51060KWK	Ready	Ready	Ready for Major global expansion
Mobile WiFi	5G Mobile WiFi Pro 5	E6888-982	Ready	Ready 51071VNY	Ready	Ready	Ready for Major global expansion
Super CPE	5G Super ODU 6	H562-383-S	Ready	Ready H562-383 51060LPB ANT-001-M 02234LHE ANT-001 02234LHF	Ready	Ready	Ready for Major global expansion

Product information download link

*Note that the document hyperlink needs to be clicked to open when the PPT is playing;
*The product package information corresponding to the product model before TR4 is not yet clear, and will be updated irregularly according to the product progress

Promotion name 传播名	Model 型号名	CE certification CE认证	Custom start time 定制启动时间	Product description 产品概述	Main film 主打胶片	Product shots 产品拍图	Sell-in sheet
5G CPE ODU 6	H562-383-S	Ready	Ready	Ready	Main film Video	Ready	Ready
5G CPE Max 6	H362-383	TBD	Ready	Ready	Main film	Ready	Ready
5G CPE Max 5	H352-381	Ready	Ready	Ready	Main film Installation video	Ready	Ready
5G CPE 6	H165-383	Ready	Ready	Ready	Main Slide Video	Ready	Ready
5G CPE 7	H162-383	Ready	Ready	Ready	Main Slide Video	Ready	Ready
5G CPE Pro 5	H158-381	Ready	Ready	Ready	Ready	Ready	Ready
5G CPE 5	H155-381	Ready	Ready	Ready	Main Film Installation video	Ready	Ready
	H155-382	Ready	Ready	Ready	Ready	Ready	/
	H155-580	Ready	Ready	Ready	Ready	Ready	/
	H155-381-E	Ready	Ready	Ready	Ready	Ready	/
	H155-383	Ready	Ready	Ready	Ready	Ready	Ready
	H155-386	Ready	Ready	Ready	Main Slide Video	Ready	Ready
5G CPE 5s	H153-381	Ready	Ready	Ready	Ready	Ready	Ready
	H153-581	Ready	Ready	Ready	Ready	Ready	Ready

Product information download link

*Note that the document hyperlink needs to be clicked to open when the PPT is playing;
*The product package information corresponding to the product model before TR4 is not yet clear, and will be updated irregularly according to the product progress

Promotion name 传播名	Model 型号名	CE certification CE认证	Custom start time 定制启动时间	Product description 产品概述	Main film 主打胶片	Product shots 产品拍图	Sell-in sheet
5G CPE C7	H173-383	Ready	Ready	Ready	Ready	Ready	TBD
5G CPE C7	H173-381	6月中	Ready	Ready	Ready	Ready	TBD
5G CPE C7	H173-581	7月底		TBD	Ready	Ready	TBD
5G CPE C7	H173-881	8月底		TBD	TBD	Ready	TBD
5G CPE 5 SE	H151-370	Ready	Ready	Ready	Ready	Ready	/
5G CPE 3 SE	H150-370	Ready	Ready	Ready	Ready	Ready	Ready
5G Mobile WiFi Pro 5	E6888-982	Ready	Ready	Ready	Main Slide Video & Lifestyle	KV Photo	Ready
5G Mobile WiFi X	E6898-982	TBD	Ready	TBD	TBD	Ready	TBD

H352 Mounting Accessories to Windows


Product name 产品名	Sample BOM Code 样机BOM编码	QSG 快速入门指南
Installation Kit	96663713	Ready

5G Super ODU 6 Specification (H562-383-S)



Item		Specification
3GPP	3GPP protocol	Release 16
	5G-4G interworking	NSA option 3/3x, SA option 2
5G	Frequency Band	FDD: N1/3/5/7/8/20/28/71 TDD: N38/40/41/77/78 SUL: N80/81/82/83/84 SDL: N75
	Bandwidth	TDD: 100/90/80/70/60/50/40/20/15/10MHz FDD: 50/40/30/20/15/10/5MHz
	DL MIMO	4*4 MIMO DL: N1/3/7/28/38/40/41/75/77/78 2*2 MIMO DL: N5/8/20/71
	UL MIMO	2*2: N38/41/77/78 (SA only)
	DL/UL modulation	256QAM/256QAM
	DL/UL Peak throughput	5G NR 5.4Gbps/500Mbps (@300MHz,SA TDD 8:2 ratio)
	No. of Carriers	DL 3CC 300MHz UL 2CC 200MHz
4G	Frequency Band	B1/3/5/7/8/20/28/32/38/40/41/42/43
	MIMO	4*4: B1/3/7/28/38/40/41/42/43 2*2: B5/8/20
	DL/UL modulation	256QAM/256QAM
Antenna	Antenna Gain	18dBi
Reflect Antenna	Azimuth	Vertical / Horizontal
	Adjustment Method	Manual / Electric
	Electric Mounting Module	Optional
	Mounting Method	Pole / Wall
Wi-Fi	Protocol	802.11 n 1*1 MIMO 2.4GHz, used for management purpose only
	Feature	Smart Phone APP
Basic Feature	Dimension	197.5mm*126mm*35.5mm + 760mm*480mm*820mm(Reflect Antenna)
	Weight	≈700g (excluding the power adapter) + 5.5kg (Reflect Antenna)
	Interface	1 RJ45*2.5GE, Power*1, SIM*1(4FF)
	LED	4G/5G
	Button	Reset
	Working temperature	-40℃ ~ +55℃, without solar radiation
	Waterproof	IP65


5G CPE MAX5 Specification (H352-381)

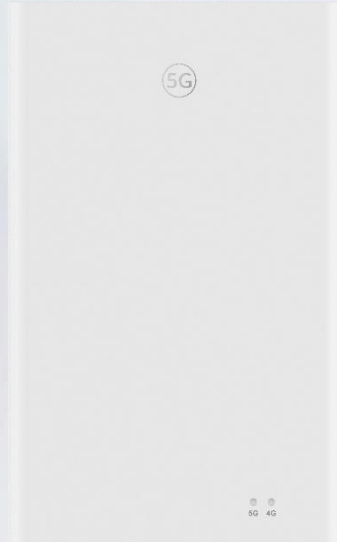

MAX5 ID

Item		Specification
3GPP	3GPP protocol	Release 16
	5G-4G interworking	NSA option 3/3x, SA option 2
5G	Frequency Band	FDD: N1/3/5/7/8/20/28 TDD: N38/40/41/77/78/79 SUL: N80/81/82/83/84 SDL: N75
	Bandwidth	TDD: 100/90/80/70/60/50/40/20/15/10MHz FDD: 40/30/20/15/10/5MHz Note: Different frequency bands support different bandwidths
	DL MIMO	4*4 MIMO DL: N1/3/7/38/40/41/77/78/79 2*2 MIMO DL: N5/8/20/28/75
	UL MIMO	2*2: N1/38/40/41/77/78/79
	DL/UL modulation	256QAM/256QAM
	DL/UL Peak throughput	5G NR 5.4Gbps/500Mbps (@ DL300MHz/UL 200MHz,SA TDD 8:2 ratio)
	No. of Carriers	DL 3CC, 300MHz UL 2CC, 200MHz
4G	Frequency Band	B1/3/5/7/8/18/19/20/26/28/32/34/38/39/40/41/42/43
	MIMO	4*4: B1/3/7/38/39/40/41/42/43 2*2: B5/8/18/19/20/26/28/32/34
	DL/UL modulation	256QAM/64QAM
Antenna	Antenna Gain	11dBi
Wi-Fi	Protocol	802.11 n 1*1 MIMO 2.4GHz, used for management purpose only
	Feature	Smart Phone APP
Basic Feature	Dimension	230x142x58(mm)
	Weight	<1kg (excluding the power adapter)
	Interface	1 RJ45*2.5GE, Power*1, SIM*1(4FF)
	LED	4G/5G
	Button	Reset
	Working temperature	-40°C ~ +55°C, without solar radiation
	Waterproof	IP65

5G CPE MAX6 Specification (H362-383)

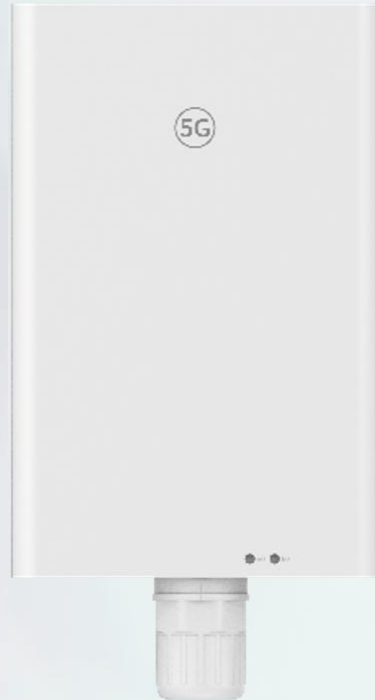

Item		Specification
3GPP	3GPP protocol	Release 16
	5G-4G interworking	NSA option 3/3x, SA option 2
5G	Frequency Band	FDD: N1/3/5/7/8/20/28/71 TDD: N38/40/41/77/78 SUL: N80/81/82/83/84 SDL: N75
	Bandwidth	TDD: 100/90/80/70/60/50/40/20/15/10MHz FDD: 50/40/30/20/15/10/5MHz
	DL MIMO	4*4 MIMO DL: N1/3/7/28/38/40/41/75/77/78 2*2 MIMO DL: N5/8/20/71
	UL MIMO	2*2: N38/41/77/78 (SA only)
	DL/UL modulation	256QAM/256QAM
	DL/UL Peak throughput	5G NR 5.4Gbps/500Mbps (@300MHz,SA TDD 8:2 ratio)
	No. of Carriers	DL 3CC 300MHz UL 2CC 200MHz
4G	Frequency Band	B1/3/5/7/8/20/28/32/38/40/41/42/43
	MIMO	4*4: B1/3/7/28/38/40/41/42/43 2*2: B5/8/20
	DL/UL modulation	256QAM/256QAM
Antenna	Antenna Gain	11dBi(TBD)
Wi-Fi	Protocol	802.11 n 1*1 MIMO 2.4GHz, used for management purpose only
	Feature	Smart Phone APP
Basic Feature	Dimension	197.5mm*126mm*35.5mm
	Weight	≈700g (excluding the power adapter)
	Interface	1 RJ45*2.5GE, Power*1, SIM*1(4FF)
	LED	4G/5G
	Button	Reset
	Working temperature	-40°C ~ +55°C, without solar radiation
	Waterproof	IP65

5G CPE 6 Ultra(H168-383) Specification



5G-Advance CPE, R18



14dBi High Gain Antenna



5G NR DL 5CC, 8x8 MIMO



NFC One-touch connect



1*5GE RJ45 Port

Item		Specification
3GPP	3GPP protocol	Release 18
	5G-4G interworking	NSA option 3/3x, SA option 2
5G	Frequency Band	FDD: n1/3/5/7/8/20/28/71/75 TDD: n38/40/41/77/78/79
	SUL/SDL	SUL: N80/81/82/83/84
	Bandwidth	TDD: 100/90/80/70/60/50/40/20/15/10MHz FDD: 50/40/30/20/15/10/5MHz
	DL MIMO	8*8 MIMO DL: N38/40/41/77/78 4*4 MIMO DL: N1/3/7/20/28/75/79 2*2 MIMO: N5/8/71
	UL MIMO	2*2: N1/38/41/77/78/79 (SA only)
	DL/UL modulation	DL 1024QAM/UL 256QAM
	DL/UL Peak throughput	5G NR 11.7Gbps/ 上行2.5G (@200M+8x8MIMO or 4CC 400M 4x4MIMO ,全时隙立理论速率) 5G NR 9.36Gbps/ 500Mbps (2CC 200MHz 8x8MIMO or 4CC 400MHz 4x4MIMO, SA TDD 8:2 ratio)
	No. of Carriers	5CC@DL, 2CC@UL
4G	Frequency Band	B1/3/5/7/8/20/28/32/38/40/41/42/43/71
	MIMO	4*4 : B1/3/7/28/32/38/40/41/42/43 2*2 : B5/8/20/71
Antenna	Antenna Gain	14dBi
Wi-Fi	Protocol	WiFi7 2*2 + WiFi6 4*4 9400
	Feature	Support HiLink
	Mesh	Easy Mesh、 Mesh+
NFC	NFC	One touch connect
BOX	Interface	1 RJ45*5GE+ 1 RJ45*GE (1 LAN/WAN+1 LAN)
		1xRJ11 for voice
		2* external antenna interface
		1xSIM card slot (4FF), 1x power interface

5G CPE 6(H165-383) Specification



Item		H165-383
3GPP	3GPP protocol	Release 18
	5G-4G interworking	NSA option 3/3x, SA option 2
5G	Frequency Band	FDD: n1/3/5/7/8/20/28/71/75 TDD: n38/40/41/77/78/79
	SUL/SDL	SUL: N80/81/82/83/84
	Bandwidth	TDD: 100/90/80/70/60/50/40/20/15/10MHz FDD: 50/40/30/20/15/10/5MHz
	DL MIMO	8*8 MIMO DL: N77/79 4*4 MIMO DL: N1/3/7/28/N38/40/41/75/79 2*2 MIMO: N5/8/20/71
	UL MIMO	2*2:N1/38/41/77/78/79 (SA only)
	DL/UL modulation	DL 1024QAM/UL 256QAM
	DL/UL Peak throughput	5G NR 11.7Gbps/ 2.5G (2CC 200MHz 8x8MIMO, 100% duty cycle in theory) 5G NR 9.36Gbps/ 500Mbps (2CC 200MHz 8x8MIMO, SA TDD 8:2 ratio)
	No. of Carriers	3CC@DL, 2CC@UL 4CC@DL (optional)
4G	Frequency Band	B1/3/5/7/8/20/28/32/38/40/41/42/43
	MIMO	4*4 : B1/3/7/28/32/38/40/41/42/43 2*2 : B5/8/20
Antenna	Antenna Gain	12dBi
Wi-Fi	Protocol	WiFi 7
	Feature	Smart Phone APP
	Mesh	EasyMesh R4、Mesh+
BOX	Interface	1 RJ45*2.5GE+ 1 RJ45*GE (1 LAN/WAN+1 LAN)
		1xRJ11 for voice
		2* external antenna interface
		1xSIM card slot (4FF), 1x power interface

5G CPE 7 (H162-383) Specification



11dBi High Gain Antenna



5G NR DL 3CC/UL 2CC 5.4Gbps/500Mbps



WiFi 7 BE3600

Item		Specification
3GPP	3GPP protocol	Release 16
	5G-4G interworking	NSA option 3/3x, SA option 2
5G	Frequency Band	FDD: N1/3/5/7/8/20/28/71 TDD: N38/40/41/77/78 SUL: N80/81/82/83/84 SDL: N75
	Bandwidth	TDD: 100/90/80/70/60/50/40/20/15/10MHz FDD: 50/40/30/20/15/10/5MHz
	DL MIMO	4*4 MIMO DL: N1/3/7/20/28/38/40/41/75/77/78 2*2 MIMO DL: N5/8/71
	UL MIMO	2*2: N38/41/77/78 (SA only)
	DL/UL modulation	256QAM/256QAM
	DL/UL Peak throughput	5G NR 5.4Gbps/500Mbps (@300MHz,SA TDD 8:2 ratio)
	No. of Carriers	NR 3CC NR 2CC UL CA
4G	Frequency Band	B1/3/5/7/8/20/28/32/38/40/41/42/43
	MIMO	4*4: B1/3/7/20/28/32/38/40/41/42/43 2*2: B5/8
	DL/UL modulation	256QAM/256QAM
Antenna	Antenna Gain	11dBi
Wi-Fi	Protocol	Wi-Fi 7 2x2 (2.4G 2x2 + 5G 2x2)
	Feature	Smart Phone APP
Basic Feature	Dimension	90mm*90mm*188.6mm
	Weight	590g (excluding the power adapter)
	Interface	1 RJ45*2.5GE+ 1 RJ45*GE , Power*1, SIM*1(4FF)
	LED	4G/5G
	Voice	RJ11
	Button	Reset/WPS
	External Ports	2 x TS-9 external antenna ports (N77/N78)

5G CPE 5 (H155-386) Specification



9dBi High Gain Antenna



5G NR DL 3CC/UL 2CC 5.4Gbps/500Mbps



WiFi 6 AX3000

Item		Specification
3GPP	3GPP protocol	Release 16
	5G-4G interworking	NSA option 3/3x, SA option 2
5G	Frequency Band	FDD: N1/3/5/7/8/20/28/71 TDD: N38/40/41/77/78 SUL: N80/81/82/83/84 SDL: N75
	Bandwidth	TDD: 100/90/80/70/60/50/40/20/15/10MHz FDD: 50/40/30/20/15/10/5MHz
	DL MIMO	4*4 MIMO DL: N1/3/7/28/38/40/41/75/77/78 2*2 MIMO DL: N5/8/20/71
	UL MIMO	2*2: N38/41/77/78 (SA only)
	DL/UL modulation	256QAM/256QAM
	DL/UL Peak throughput	5G NR 3.6Gbps/500Mbps (@200MHz,SA TDD 8:2 ratio)
	No. of Carriers	NR 2CC DL CA (3CC optional) NR 2CC UL CA
4G	Frequency Band	B1/3/5/7/8/20/28/32/38/40/41/42/43
	MIMO	4*4: B1/3/7/28/32/38/40/41/42/43 2*2: B5/8/20
	DL/UL modulation	256QAM/256QAM
Antenna	Antenna Gain	9dBi(TBD)
Wi-Fi	Protocol	Wi-Fi 6 2x2 (2.4G 2x2 + 5G 2x2)
	Feature	Smart Phone APP
Basic Feature	Dimension	TBD
	Weight	TBD
	Interface	1 RJ45*2.5GE+ 1 RJ45*GE , Power*1, SIM*1(4FF)
	LED	4G/5G
	Voice	RJ11
	Button	Reset/WPS
	External Ports	2 x TS-9 external antenna ports

5G CPE 5 (H155-383) Specification



Item		Specification
3GPP	3GPP protocol	Release 16
	5G-4G interworking	NSA option 3/3x, SA option 2
5G	Frequency Band	FDD: n1/3/5/7/8/20/28/71 TDD: n38/40/41/77/78 SUL: N80/81/82/83/84
	Bandwidth	TDD: 100/90/80/60/50/40/20/15/10MHz FDD: 50/40/30/20/15/10/5MHz Note: Different frequency bands support different bandwidths
	DL MIMO	4*4 MIMO DL: N1/3/7/28/38/40/41/77/78 2*2 MIMO DL: N5/N8/N20/N71
	UL MIMO	2*2: N38/40/41/77/78
	DL/UL modulation	256QAM/256QAM
	DL/UL Peak throughput	5G NR 3.6Gbps/500Mbps (@200MHz,SA TDD 8:2 ratio)
	No. of Carriers	NR 2CC, 200MHz NR 2CC, 200MHz
4G	Frequency Band	B1/3/5/7/8/20/28/38/40/41/42/43
	MIMO	4*4: B1/3/7/28/38/40/41/42/43 2*2: B5/8/20
	DL/UL modulation	256QAM/64QAM
Antenna	Antenna Gain	9dBi
Wi-Fi	Protocol	WiFi6 AX3000
	Feature	Smart Phone APP
Basic Feature	Dimension	90 mm (Top side length) x 90mm (Bottom side length) x 183 mm (Height)
	Weight	About 440 g (excluding the power adapter)
	Interface	1 RJ45*2.5GE+ 1 RJ45*GE , Power*1, SIM*1(4FF)
	LED	4G/5G
	Button	WPS, Reset
	Voice	1*RJ11
	External antenna port	2*TS-9

5G CPE 5s (H153-381) Specification




Item		Specification
3GPP	3GPP protocol	Release 16
	5G-4G interworking	NSA option 3/3x, SA option 2
5G	Frequency Band	FDD: n1/3/5/7/8/20/28 TDD: n38/40/41/77/78 SUL: N80/81/82/83/84
	Bandwidth	TDD: 100/90/80/60/50/40/20/15/10MHz FDD: 50/40/30/20/15/10/5MHz Note: Different frequency bands support different bandwidths
	DL MIMO	4*4 MIMO DL: N1/3/7/28/38/40/41/77/78 2*2 MIMO DL: N5/N8/N20
	UL MIMO	2*2: N38/40/41/77/78
	DL/UL modulation	256QAM/256QAM
	DL/UL Peak throughput	5G NR 3.6Gbps/500Mbps (@200MHz,SA TDD 8:2 ratio)
	No. of Carriers	NR 2CC, 200MHz
4G	Frequency Band	B1/3/5/7/8/20/28/38/40/41/42/43
	MIMO	4*4: B1/3/7/28/38/40/41/42/43 2*2: B5/8/20
	DL/UL modulation	256QAM/256QAM
Antenna	Antenna Gain	9dBi
Wi-Fi	Protocol	WiFi6 AX3000
	Feature	Smart Phone APP
Basic Feature	Dimension	90 mm (Top side length) x 90mm (Bottom side length) x 183 mm (Height)
	Weight	About 440 g (excluding the power adapter)
	Interface	1GE RJ45*1, Power*1, SIM*1(4FF)
	LED	4G/5G
	Button	WPS, Reset
	Voice	1*RJ11

H158-381 & H155-381 Specification




Pro 5 ID

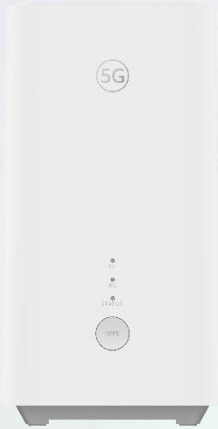

CPE 5 ID

Item		H158-381 Specification	H155-381 Specification
3GPP	3GPP protocol	Release 16	Release 16
	5G-4G interworking	NSA option 3/3x, SA option 2	NSA option 3/3x, SA option 2
5G	Frequency Band	FDD: N1/3/5/7/8/20/28 TDD: N38/40/41/77/78/79 SUL: N80/81/82/83/84 SDL: N75	FDD: N1/3/5/7/8/20/28 TDD: N38/40/41/77/78/79 SUL: N80/81/82/83/84 SDL: N75
	Bandwidth	TDD: 100/90/80/70/60/50/40/20/15/10MHz FDD: 50/40/30/20/15/10/5MHz	TDD: 100/90/80/70/60/50/40/20/15/10MHz FDD: 50/40/30/20/15/10/5MHz
	DL MIMO	4*4 MIMO DL: N1/3/7/38/40/41/77/78/79 2*2 MIMO DL: N5/8/20/28/75	4*4 MIMO DL: N1/3/7/38/40/41/77/78/79 2*2 MIMO DL: N5/8/20/28/75
	UL MIMO	2*2: N38/41/77/78/79 (SA only)	2*2: N38/41/77/78/79 (SA only)
	DL/UL modulation	256QAM/256QAM	256QAM/256QAM
	DL/UL Peak throughput	5G NR 5.4Gbps/500Mbps (@300MHz,SA TDD 8:2 ratio)	5G NR 3.6Gbps/500Mbps (@200MHz,SA TDD 8:2 ratio)
	No. of Carriers	NR 3CC DL CA NR 2CC UL CA	NR 2CC DL CA NR 2CC UL CA
4G	Frequency Band	B1/3/5/7/8/18/19/20/26/28/32/34/38/39/40/41/42/43	B1/3/5/7/8/18/19/20/26/28/32/34/38/39/40/41/42/43
	MIMO	4*4: B1/3/7/32/38/39/40/41/42/43 2*2: B5/8/18/19/20/26/28/34	4*4: B1/3/7/38/39/40/41/42/43 2*2: B5/8/18/19/20/26/28/32/34
	DL/UL modulation	256QAM/64QAM	256QAM/64QAM
Antenna	Antenna Gain	12dBi	11dBi
Wi-Fi	Protocol	Wi-Fi 6 4x4 (2.4G 4x4 + 5G 4x4)	Wi-Fi 6 2x2 (2.4G 2x2 + 5G 2x2)
	Feature	Smart Phone APP	Smart Phone APP
Basic Feature	Dimension	103x103x225(mm)	90×96.6×181(mm)
	Weight	850g (excluding the power adapter)	550g (excluding the power adapter)
	Interface	1 RJ45*2.5GE+ 1 RJ45*GE , Power*1, SIM*1(4FF)	2 RJ45*GE , Power*1, SIM*1(4FF)
	LED	4G/5G	4G/5G
	Voice	Support Voice	NA
	Button	Reset/WPS	Reset/WPS

H155-382&H155-580 Specification

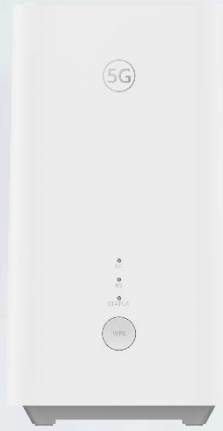

CPE 5 ID

Item		H155-382 Specification	H155-580 Specification
3GPP	3GPP protocol	Release 16	Release 16
	5G-4G interworking	NSA option 3/3x, SA option 2	NSA option 3/3x, SA option 2
5G	Frequency Band	FDD: N1/3/5/7/8/20/28/71 TDD: N38/40/41/77/78 SUL: 80/81/82/83/84 SDL: N75	FDD: n2/4/5/7/8/28/66 TDD: n38/n40/n41/n77/n78 SDL: N81/N83
	Bandwidth	TDD: 100/90/80/70/60/50/40/20/15/10MHz FDD: 50/40/30/20/15/10/5MHz	TDD: 100/90/80/70/60/50/40/20/15/10MHz FDD: 50/40/30/20/15/10/5MHz
	DL MIMO	4*4 MIMO DL: N1/3/7/38/40/41/77/78 2*2 MIMO DL: N5/8/20/28/71/75	4*4 MIMO DL: N2/7/38/40/41/66/77/78 2*2 MIMO DL: N5/8/28
	UL MIMO	2*2: N1/38/40/41/77/78 (SA only)	2*2 MIMO: N38/41/78 (SA only)
	DL/UL modulation	256QAM/256QAM	256QAM/256QAM
	DL/UL Peak throughput	5G NR 3.6Gbps/500Mbps (@200MHz,SA TDD 8:2 ratio)	5G NR 3.6Gbps/500Mbps (@200MHz,SA TDD 8:2 ratio)
	No. of Carriers	NR 2CC DL CA NR 2CC UL CA	NR 2CC DL CA NR 2CC UL CA
	UL 3T	No	No
4G	Frequency Band	B1/3/5/7/8/20/28/32/38/40/41/42/43	B1/2/3/4/5/7/8/26/28/38/40/41/42/43/66
	MIMO	4*4: B1/3/7/38/40/41/42/43 2*2: B5/8/20/28/32	4*4: B1/2/3/4/7/38/40/41/42/43/66 2*2: B5/8/26/28
	DL/UL modulation	256QAM/64QAM	256QAM/64QAM
Antenna	Antenna Gain	N77.78:10dBi	N77/N78:10dBi
Wi-Fi	Protocol	Wi-Fi 6 AX3000 (2.4G 2x2 + 5G 2x2)	Wi-Fi 6 AX3000 (2.4G 2x2 + 5G 2x2)
	Feature	Smart Phone APP	Smart Phone APP
Basic Feature	Dimension	90×96.6×181(mm)	90×96.6×181(mm)
	Weight	550g (excluding the power adapter)	550g (excluding the power adapter)
	Interface	1*GE RJ45, 1*RJ11, 1*Power, SIM*1(4FF)	1*GE RJ45, 1*RJ11, 1*Power, SIM*1(4FF)
	LED	4G/5G/Status	4G/5G/Status
	Voice	Support Voice	Support Voice
	Button	Reset/WPS	Reset/WPS

5G CPE C7 Specification (H173-383)



9dBi High Gain Antenna



5G NR DL 2CC/UL 2CC 5.8Gbps/2.5Gbps



WiFi6 AX3000

	Item	H173-383
5G	Frequency Band	FDD: n1/3/5/7/8/20/26/28/71
		TDD: n38/40/41/77/78
		SUL: N80/81/82/83/84
		SDL: N75
	DL MIMO	4*4 MIMO DL: N1/3/7/20/28/38/40/41/75/77/78
		2*2 MIMO DL: N5/8/26/71
	UL MIMO	2*2: N1/3/7/20/38/40/41/77/78
	DL/UL modulation	1024QAM/256QAM
4G	DL/UL Peak throughput	5.8Gbps/2.5Gbps(@200MHz, 100% Duty Cycle)
	No. of Carriers	NR 2CC, 200MHz
	Frequency Band	B1/3/5/7/8/20/28/26/38/32/40/41/42/43/71
		4*4: 1/3/7/20/28/32/38/40/41/42/43
		2*2: B5/8/26/71
	DL/UL modulation	256QAM/256QAM
	cat	Cat18
Antenna	Antenna Gain	9dBi
Wi-Fi	Protocol	WiFi6 AX3000
Basic Feature	RAM/ROM	512MB/512MB
	Interface	2*RJ45*GE , Power*1, SIM*1(4FF)
	LED	4G/5G
	Button	WPS, Reset
	Voice	1*RJ11
	External antenna	2*TS-9 NR: 1/3/7/38/41/77/78 LTE: 1/3/7/38/41/42/43

5G CPE C7 Specification (H173-381)



-  9dBi High Gain Antenna
-  5G NR DL 2CC/UL 2CC 5.8Gbps/2.5Gbps
-  WiFi6 AX3000

	Item	H173-381
5G	Frequency Band	FDD: n1/3/5/7/8/20/28
		TDD: n38/40/41/77/78
		SUL: N80/81/82/83/84
	DL MIMO	4*4 MIMO DL: N1/3/7/20/28/38/40/41/77/78
		2*2 MIMO DL: N5/8
	UL MIMO	2*2: N1/3/7/20/38/40/41/77/78
	DL/UL modulation	1024QAM/256QAM
	DL/UL Peak throughput	5.8Gbps/2.5Gbps(@200MHz, 100% Duty Cycle)
	No. of Carriers	NR 2CC, 200MHz
4G	Frequency Band	B1/3/5/7/8/20/28/38/40/41/42/43
	MIMO	4*4:B1/3/7/20/28/38/40/41/42/43
		2*2: B5/8
	DL/UL modulation	256QAM/256QAM
	cat	Cat18
Antenna	Antenna Gain	9dBi
Wi-Fi	Protocol	WiFi6 AX3000
Basic Feature	RAM/ROM	512MB/512MB
	Interface	1*RJ45*GE , Power*1, SIM*1(4FF)
	LED	4G/5G
	Button	WPS, Reset

5G CPE C7 Specification (H173-881)



9dBi High Gain Antenna



5G NR DL 2CC/UL 2CC 5.8Gbps/2.5Gbps



WiFi6 AX3000

	Item	H173-881
5G	Frequency Band	FDD: n1/3/5/7/8/28
		TDD: n38/40/41/77/78/79
		SUL: N80/81/82/83/84/98
	DL MIMO	4*4 MIMO DL: N1/3/7/28/38/40/41/77/78/79
		2*2 MIMO DL: N5/8
	UL MIMO	2*2: N1/3/7/38/40/41/77/78/79
	DL/UL modulation	1024QAM/256QAM
	DL/UL Peak throughput	5.8Gbps/2.5Gbps(@200MHz, 100% Duty Cycle)
4G	No. of Carriers	NR 2CC, 200MHz
	Frequency Band	B1/3/5/7/8/28/38/39/40/41
		4*4: B1/3/5/7/8/28/38/39/40/41
	MIMO	2*2: B5/8
		256QAM/256QAM
Antenna	DL/UL modulation	256QAM/256QAM
	cat	Cat18
Antenna	Antenna Gain	9dBi
Wi-Fi	Protocol	WiFi6 AX3000
	RAM/ROM	512MB/512MB
Basic Feature	Interface	2*RJ45*GE , Power*1, SIM*1(4FF)
	LED	4G/5G
	Button	WPS, Reset

5G CPE C7 Specification (H173-581)



-  9dBi High Gain Antenna
-  5G NR DL 2CC/UL 2CC 5.8Gbps/2.5Gbps
-  WiFi6 AX3000

	Item	H173-581
5G	Frequency Band	FDD: n2/5/7/8/26/28/66/71
		TDD: n38/40/41/78
		SUL: N83
	DL MIMO	4*4 MIMO DL: N1/3/7/28/38/40/41/78
		2*2 MIMO DL: N5/8/26/71
	UL MIMO	2*2: 2/7/38/40/41/66/78
	DL/UL modulation	1024QAM/256QAM
	DL/UL Peak throughput	5.8Gbps/2.5Gbps(@200MHz, 100% Duty Cycle)
	No. of Carriers	NR 2CC, 200MHz
4G	Frequency Band	B2/4/5/7/8/26/28/38/40/41/42/43/66
	MIMO	4*4: B2/4/7/28/38/40/41/42/43/66
		2*2: B5/8/26
	DL/UL modulation	256QAM/256QAM
Antenna	cat	Cat18
	Antenna Gain	9dBi
Wi-Fi	Protocol	WiFi6 AX3000
Basic Feature	RAM/ROM	512MB/512MB
	Interface	2*RJ45*GE , Power*1, SIM*1(4FF)
	LED	4G/5G
	Button	WPS, Reset
	Voice	1*RJ11

5G CPE 5s (H153-581) Specification



Item		Specification
3GPP	3GPP protocol	Release 16
	5G-4G interworking	NSA option 3/3x, SA option 2
5G	Frequency Band	FDD: n2/5/7/26/28/66 TDD: n38/41/40/n78 SUL: N83
	Bandwidth	TDD: 100/90/80/60/50/40/20/15/10MHz FDD: 50/40/30/20/15/10/5MHz Note: Different frequency bands support different bandwidths
	DL MIMO	4*4 MIMO DL: n2/7/28/66/38/40/41/78 2*2 MIMO DL: N5/N26
	UL MIMO	2*2: N38/40/41/78
	DL/UL modulation	256QAM/256QAM
	DL/UL Peak throughput	5G NR 3.6Gbps/500Mbps (@200MHz,SA TDD 8:2 ratio)
	No. of Carriers	NR 2CC, 200MHz
4G	Frequency Band	B2/4/5/7/26/28/38/40/41/42/43/66
	MIMO	4*4: B2/4/7/28/38/40/41/42/43/66 2*2: B5/26
	DL/UL modulation	256QAM/256QAM
Antenna	Antenna Gain	9dBi
Wi-Fi	Protocol	WiFi6 AX3000
	Feature	Smart Phone APP
Basic Feature	Dimension	90 mm (Top side length) x 90mm (Bottom side length) x 183 mm (Height)
	Weight	About 440 g (excluding the power adapter)
	Interface	1GE RJ45*1, Power*1, SIM*1(4FF)
	LED	4G/5G
	Button	WPS, Reset
	Voice	1*RJ11

5G CPE 5 SE (H151-370) Specification



CPE 5 SE

5G RedCap | Wi-Fi 6 | Gigabit Ethernet Port

Item	Specification
Form Factor	Dimension: 240 * 155 *78 mm
Speed	NR : FDD 226Mbps/120Mbps TDD 168Mbps/23Mbps LTE : FDD 400Mbps(DL), 200Mbps(UL) TDD 290Mbps(DL), 46Mbps(UL) DL 256QAM, UL 256QAM
Band	LTE :B1/3/5/7/8/20/28/40/38/B39/41/42/43 NR: N1/3/5/7/8/20/28/38/40/41/77/78/71/79 SRS: N38/40/41/77/78/79 SUL:SUL_n41A-n83A/SUL_n77A-n80A/SUL_n77A-n84A/SUL_n78A-n80A/SUL_n78A-n81A/SUL_n78A-n82A/SUL_n78A-n83A/SUL_n78A-n84A/SUL_79A_80A/SUL_79A_81A
Antenna Gain	N77/78/79 9dBi
Interface	4xRJ-45 for data, GE (1 LAN/WAN+3 LAN)
	1xRJ11 for voice, Voice: VoIP&VoLTE, VoIP need to customized
	2xSMA external antenna interface for NR/LTE
	1xSIM card slot (4FF), *eSIM (optional, Need to be Customized) 1x power interface
	1*WPS(Hi) KEY/1*Reset KEY
WiFi	WiFi6 802.11 b/g/n/ax 2*2 MIMO 2.4GHz & 802.11a/n/ac/ax 2*2 MIMO 5GHz 2.4GHz &5GHz DBDC
Power	AC/DC:AC: 100 V ~ 240 V; DC: 12 V, 1 A (TBD)

5G CPE 3 SE (H150-370) Specification



CPE 3 SE

5G RedCap | Wi-Fi 300Mbps | 2 Ethernet Port

Item	Specification
Form Factor	Dimension: 240 * 155 *78 mm (TBD)
Speed	NR : FDD 226Mbps/120Mbps TDD 168Mbps/23Mbps DL 256QAM, UL 256QAM LTE : TDD 146Mbps/23Mbps FDD 195Mbps/103Mbps DL 256QAM, UL 256QAM
Band	H150-370 LTE: B1/3/5/7/8/28/39/40/41/42 NR: n1/3/8/7/28/40/41/78 SRS: n40/41/78 SUL: SUL_n78A-n83A/SUL_n78A-n84A
Interface	2xRJ-45 for data, FE (1 LAN/WAN + 1 LAN)
	1xSMA external antenna interface for LTE
	1xSIM card slot (4FF) 1x power interface
	1*Hi(WPS) KEY/1*Reset KEY/1*Power KEY
WiFi	WiFi 2*2 MIMO 2.4GHz, 300Mbps
Power	AC/DC:AC: 100 V ~ 240 V; DC: 12 V, 1 A

5G Mobile WiFi Pro 5(E6888-982) Specification



Key Point:

- 3.6Gbps
- Wi-Fi 6
- 7000mAh Battery

Item		Specification
3Gpp	3Gpp Rel	R16
	5G-4G interworking	NSA option 3/3x, SA option 2
5G	Frequency Band& MIMO	DL 4*4 MIMO: N1/3/7/38/40/41/77/78 DL 2*2 MIMO: N5/8/20/28/71/75 UL 2*2 MIMO: N1/38/40/41/77/78 SUL: n80/81/82/83/84
	DL/UL modulation	DL 256QAM/UL 256QAM
	NR Bandwidth	DL/UL 2CC 200MHz
	XTXR	2T4R
	max transmit power	26dBm
	DL/UL Peak throughput	DL 3.6Gbps/UL 500Mbps(@200MHz,8:2 Ratio)
4G	Frequency Band& MIMO	DL 4*4 MIMO: B1/3/7/28/34/38/39/40/41/42/43 DL 2*2 MIMO: B5/8/20/32/71
	DL/UL modulation	DL 256QAM/UL 256QAM
	LTE Category	DL Cat. 20/UL Cat. 18
Wi-Fi	Protocol	AX3600: Wi-Fi 6 2+2 (2.4G+5G) , DBDC
	Bandwidth	2.4G 40MHz/5G 160MHz
	Support Users	32
Display	Screen	1.75" OLED Touch Screen
Battery	Capacity	7000mAh
	Charge	INPUT: 22.5W / OUTPUT: 18W
	Working Time	10h under the typical application (Usage duration of a single user)
Basic Feature	USB Interface	1*USB Type C
	Dimension	164x76x12mm
	Adapter	Charger(22.5W)+ USB cable (USB2.0 A-C)

5G Mobile WiFi X(E6898-982) Specification



Launch:2026.7

Key Point:

- Foldable 2-in-1 design
- 5G-A DL 11.7Gbps, UL 2.5Gbps
- 12000mAh Battery, Support reverse charging

Item		Specification
3Gpp	3Gpp Rel	R18
	5G-4G interworking	NSA option 3/3x, SA option 2
5G	Frequency Band& MIMO	DL 4*4 MIMO: N1/3/7/28/38/40/41/77/78/79 DL 2*2 MIMO:N5/8/20/71/75 UL 2*2 MIMO:N1/3/28/38/40/41/77/78/79 SUL: n80/81/82/83/84/95/98
	DL/UL modulation	DL 1024QAM/UL 256QAM
	NR Bandwidth	DL 4CC 400MHz/5CC 300MHz; UL 2CC 200MHz
	XTXR	3T4R
	Antenna Gain	TBD
	max transmit power	26dBm
	DL/UL Peak throughput	DL 11.7Gbps 4CC 400MHz UL 2.5Gbps 2CC 200MHz (Theoretical value, full timeslot allocation)
4G	Frequency Band& MIMO	DL 4*4 MIMO: B1/3/7/28/34/38/39/40/41/42/43 DL 2*2 MIMO: B5/8/20/32/71
	DL/UL modulation	DL 256QAM/UL 256QAM
	LTE Category	DL Cat. 20/UL Cat. 18
Wi-Fi	Protocol	AX3600: Wi-Fi 6 2+2 (2.4G+5G) ,DBDC
	Bandwidth	2.4G 40MHz/5G 160MHz
	Support Users	32
Display	Screen	1.8" OLED Touch Screen
Battery	Capacity	12000mAh
	Charge	INPUT: 66W(MAX) / OUTPUT: 40W(MAX)
	Working Time	24h under the typical application (Usage duration of a single user)
Basic Feature	USB Interface	2*USB Type C
	Quick connection	NFC
	Dimension	188x85x25mm
	Adapter	Charger(22.5W)+ USB cable (USB2.0 A-C)


室外CPE 磁吸配件



Launch:2025.10

Item	Specification
型号	MA-01
尺寸	183*100*50mm(双模块) 183*100*25mm(单模块) 标准版和PRO版外形尺寸一致
重量	1KG
安装说明	安装玻璃厚度（标准版）：6~24mm 安装玻璃厚度（Pro 版）：6~36mm
	安装使用方法：QSG(待开发)
	注意事项：（QSG指导体现） 1. 要求客户测玻璃厚度； 2. 用户安装玻璃表面需光滑； 3. 要求用户先固定安全绳； 4. 要求生命周期按时拆除； 5. 要求有玻璃自爆免责； 6. 可安装窗户类型需选择； 7. 玻璃表面需简单清洁；
使用温度	-40~55℃
安全绳长度	1.5m

Specification comparison：H155-386 VS H162-383

对比项 \ 产品	规格	H155-386	H162-383 绿色主要基于和H155-386对比
外观形态	尺寸及外观	桶式：90*90*188 mm 	桶式：90*90*188 mm 
	外部接口	1 LAN/WAN 2.5Gbps+1 LAN 1Gbps (RJ45)；1个语音口 (RJ11)	1 LAN/WAN 2.5Gbps+1 LAN 1Gbps (RJ45)；1个语音口 (RJ11)
XG规格	XG频段	FDD: n1/3/5/7/8/20/28/71 TDD: n38/40/41/77/78 SUL: n80/81/82/83/84 SDL: n75	FDD: n1/3/5/7/8/20/28/71 TDD: n38/40/41/77/78 SUL: n80/81/82/83/84 SDL: n75
	MIMO	DL 4*4: n1/3/7/28/38/40/41/75/77/78 DL 2*2: n5/8/20/71 UL 2*2: n1/38/40/41/77/78	DL 4*4: n1/3/7/28/38/40/41/75/77/78 DL 2*2: n5/8/20/71 UL 2*2: n1/38/40/41/77/78
	XG CA 带宽	DL: 3CC (300MHz)；UL: 2CC (200MHz)	DL: 3CC (300MHz)；UL: 2CC (200MHz)
	XG理论最大速率 (SA, 8:2)	DL: 5.4Gbps；UL: 500Mbps (@300MHz,SA TDD 8:2 ratio)	DL: 5.4Gbps；UL: 500Mbps (@300MHz,SA TDD 8:2 ratio)
4G规格	LTE频段	FDD: B1/3/5/7/8/18/19/20/26/28/32 TDD: B38/40/41/42/43	FDD: B1/3/5/7/8/18/19/20/26/28/32 TDD: B38/40/41/42/43
	MIMO	4*4: B1/3/7/28/32/38/40/41/42/43 2*2: B5/8/20	4*4: B1/3/7/28/32/38/40/41/42/43 2*2: B5/8/20
	LTE Category CA	DL: 5CC；UL: 2CC	DL: 5CC；UL: 2CC
	LTE理论最大速率	DL: 2.0Gbps；UL: 150Mbps (@5*20MHz)	DL: 2.0Gbps；UL: 150Mbps (@5*20MHz)
3G规格	3G频段	/	/
上行增强	上行增强	支持上行2T	支持上行2T
天线增益	XG天线增益	9dBi	11dBi
WIFI	WIFI频段 带宽	2.4GHz: 20/40MHz；5GHz: 20/40/80MHz/160MHz	2.4GHz: 20/40MHz；5GHz: 20/40/80MHz/160MHz
	WIFI理论最大速率	AX3000	BE3600
	WIFI最大接入用户数	64+64	64+64
适配器	功率规格	12V2A	12V2A

Specification comparison : H158-381 VS H155-381

Item		H158-381	H165-383(5G-Advance)
3GPP	3GPP protocol	Release 16	Release 18
	5G-4G interworking	NSA option 3/3x, SA option 2	NSA option 3/3x, SA option 2
5G	Frequency Band	FDD: N1/3/5/7/8/20/28 TDD: N38/40/41/77/78/79	FDD: n1/3/5/7/8/20/28/71/75 TDD: n38/40/41/77/78/79
	SUL/SDL	SUL: N80/81/82/83/84	SUL: N80/81/82/83/84
	Bandwidth	TDD: 100/90/80/70/60/50/40/20/15/10MHz FDD: 50/40/30/20/15/10/5MHz	TDD: 100/90/80/70/60/50/40/20/15/10MHz FDD: 50/40/30/20/15/10/5MHz
	DL MIMO	4*4 MIMO DL: N1/3/7/38/40/41/77/78/79 2*2 MIMO DL: N5/8/20/28/75	8*8 MIMO DL: N77/79 4*4 MIMO DL: N1/3/7/28/N38/40/41/75/79 2*2 MIMO: N5/8/20/71
	UL MIMO	2*2: N1/38/41/77/78/79 (SA only)	2*2:N1/38/41/77/78/79 (SA only)
	DL/UL modulation	256QAM/256QAM	DL 1024QAM/UL 256QAM
	DL/UL Peak throughput	5G NR 5.4Gbps/500Mbps (@300MHz,SA TDD 8:2 ratio)	5G NR 11.7Gbps/ 2.5G (2CC 200MHz 8x8MIMO, 100% duty cycle in theory) 5G NR 9.36Gbps/ 500Mbps (2CC 200MHz 8x8MIMO, SA TDD 8:2 ratio)
	No. of Carriers	3CC@DL, 2CC@UL	3CC@DL, 2CC@UL 4CC@DL (optional)
4G	Frequency Band	B1/3/5/7/8/18/19/20/26/28/32/34/38/39/40/41/42/43	B1/3/5/7/8/20/28/32/38/40/41/42/43
	MIMO	4*4 : B1/3/7/32/38/39/40/41/42/43 2*2 : B5/8/18/19/20/26/28/34	4*4 : B1/3/7/28/32/38/40/41/42/43 2*2 : B5/8/20
Antenna	Antenna Gain	12dBi	12dBi
Wi-Fi	Protocol	WiFi 6	WiFi 7
	Mesh	Easy Mesh、 Mesh+	Easy Mesh、 Mesh+
BOX	Interface	1 RJ45*2.5GE+ 1 RJ45*GE (1 LAN/WAN+1 LAN)	1 RJ45*2.5GE+ 1 RJ45*GE (1 LAN/WAN+1 LAN)
		1xRJ11 for voice, Voice: VoIP & VoLTE, VoLTE/VoIP need to customized	1xRJ11 for voice, Voice: VoIP & VoLTE, VoLTE/VoIP need to customized
		1xSIM card slot (4FF), 1x power interface	1xSIM card slot (4FF), 1x power interface, 2 x External antenna interface

Specification comparison : H158-381 VS H155-381

Item		H158-381	H155-381	comparison
3GPP	3GPP protocol	Release 16	Release 16	equal
	5G-4G interworking	NSA option 3/3x, SA option 2	NSA option 3/3x, SA option 2	equal
5G	Frequency Band	FDD: N1/3/5/7/8/20/28 TDD: N38/40/41/77/78/79	FDD: N1/3/5/7/8/20/28 TDD: N38/40/41/77/78/79	equal
	SUL/SDL	SUL: N80/81/82/83/84 SDL:N75	SUL: N80/81/82/83/84 SDL:N75	equal
	Bandwidth	TDD: 100/90/80/70/60/50/40/20/15/10MHz FDD: 50/40/30/20/15/10/5MHz	TDD: 100/90/80/70/60/50/40/20/15/10MHz FDD: 50/40/30/20/15/10/5MHz	equal
	DL MIMO	4*4 MIMO DL: N1/3/7/38/40/41/77/78/79 2*2 MIMO DL: N5/8/20/28/75	4*4 MIMO DL: N1/3/7/38/40/41/77/78/79 2*2 MIMO DL: N5/8/20/28/75	equal
	UL MIMO	2*2: N1/38/41/77/78/79 (SA only)	2*2: N1/38/41/77/78/79 (SA only)	equal
	DL/UL modulation	256QAM/256QAM	DL 256QAM/UL 256QAM	equal
	DL/UL Peak throughput	5G NR 5.4Gbps/500Mbps (@300MHz,SA TDD 8:2 ratio)	5G NR 3.6Gbps/500Mbps (@200MHz,SA TDD 8:2 ratio)	higher
	No. of Carriers	3CC@DL, 2CC@UL	2CC@DL, 2CC@UL	higher
4G	Frequency Band	B1/3/5/7/8/18/19/20/26/28/32/34/38/39/40/41/42/43	B1/3/5/7/8/18/19/20/26/28/32/34/38/39/40/41/42/43	equal
	MIMO	4*4 : B1/3/7/32/38/39/40/41/42/43 2*2 : B5/8/18/19/20/26/28/34	4*4 : B1/3/7/38/39/40/41/42/43 2*2 : B5/8/18/19/20/26/28/32/34	equal
Antenna	Antenna Gain	12dBi	11dBi	higher
Wi-Fi	Protocol	802.11 b/g/n/ax 4*4MIMO 2.4GHz 802.11a/n/ac/ax 4*4 MIMO 5GHz 2.4GHz &5GHz DBDC	802.11 b/g/n/ax 2*2MIMO 2.4GHz 802.11a/n/ac/ax 2*2 MIMO 5GHz 2.4GHz &5GHz DBDC	higher
	Feature	Support HiLink	Support HiLink	equal
	Mesh	Easy Mesh、 Mesh+	Easy Mesh、 Mesh+	equal
BOX	Interface	1 RJ45*2.5GE+ 1 RJ45*GE (1 LAN/WAN+1 LAN)	2xRJ-45 for data, 1GE (1 LAN/WAN+1 LAN)	higher
		1xRJ11 for voice, Voice: VoIP & VoLTE, VoLTE/VoIP need to customized	No voice	higher
		1xSIM card slot (4FF), 1x power interface	1xSIM card slot (4FF), 1x power interface	equal

Specification comparison : H155-381 VS H155-382 VS H155-580

Item		H155-381	comparison	H155-382	comparison	H155-580
3GPP	3GPP protocol	Release 16	equal	Release 16	equal	Release 16
	5G-4G interworking	NSA option 3/3x, SA option 2	equal	NSA option 3/3x, SA option 2	equal	NSA option 3/3x, SA option 2
5G	Frequency Band	FDD: N1/3/5/7/8/20/28 TDD: N38/40/41/77/78/79 SUL: N80/81/82/83/84 SDL:N75	higher	FDD: N1/3/5/7/8/20/28/71 TDD: N38/40/41/77/78 SUL: N80/81/82/83/84 SDL: N75	higher	FDD: n2/5/7/8/28/66 TDD: n38/n40/n41/n77/n78 SDL: N81/N83
	Bandwidth	TDD: 100/90/80/70/60/50/40/20/15/10MHz FDD: 50/40/30/20/15/10/5MHz	equal	TDD: 100/90/80/70/60/50/40/20/15/10MHz FDD: 50/40/30/20/15/10/5MHz	equal	TDD: 100/90/80/70/60/50/40/20/15/10MHz FDD: 50/40/30/20/15/10/5MHz
	DL MIMO	4*4 MIMO DL: N1/3/7/38/40/41/77/78/79 2*2 MIMO DL: N5/8/20/28/75	higher	4*4 MIMO DL: N1/3/7/38/40/41/77/78 2*2 MIMO DL: N5/8/20/28/71/75	higher	4*4 MIMO DL: N2/7/38/40/41/66/77/78 2*2 MIMO DL: N5/8/28
	UL MIMO	2*2: N1/38/40/41/77/78/79 (SA only)	higher	2*2: N1/38/40/41/77/78 (SA only)	higher	2*2 MIMO: N38/41/78 (SA only)
	DL/UL modulation	DL 256QAM/UL 256QAM	equal	DL 256QAM/UL 256QAM	equal	DL 256QAM/UL 256QAM
	DL/UL Peak throughput	5G NR 3.6Gbps/500Mbps (@200MHz,SA TDD 8:2 ratio)	equal	5G NR 3.6Gbps/500Mbps (@200MHz,SA TDD 8:2 ratio)	equal	5G NR 3.6Gbps/500Mbps (@200MHz,SA TDD 8:2 ratio)
	No. of Carriers	2CC@DL, 2CC@UL	equal	2CC@DL, 2CC@UL	equal	2CC@DL, 2CC@UL
4G	Frequency Band	B1/3/5/7/8/18/19/20/26/28/32/34/38/39/40/41/42/43	higher	B1/3/5/7/8/20/28/32/38/40/41/42/43	higher	B1/2/3/4/5/7/8/26/28/38/40/41/42/43/66
	MIMO	4*4 : B1/3/7/38/39/40/41/42/43 2*2 : B5/8/18/19/20/26/28/32/34	higher	4*4: B1/3/7/38/40/41/42/43 2*2: B5/8/20/28/32	higher	4*4: B1/2/4/7/38/40/41/42/43/66 2*2: B3/5/8/26/28
Antenna	Antenna Gain	11dBi	higher	10dBi	equal	10dBi
Wi-Fi	Protocol	802.11 b/g/n/ax 2*2MIMO 2.4GHz 802.11a/n/ac/ax 2*2 MIMO 5GHz 2.4GHz&5GHz DBDC	equal	802.11 b/g/n/ax 2*2MIMO 2.4GHz 802.11a/n/ac/ax 2*2 MIMO 5GHz 2.4GHz&5GHz DBDC	equal	802.11 b/g/n/ax 2*2MIMO 2.4GHz 802.11a/n/ac/ax 2*2 MIMO 5GHz 2.4GHz&5GHz DBDC
	Mesh	Easy Mesh、 Mesh+	equal	Easy Mesh、 Mesh+	equal	Easy Mesh、 Mesh+
BOX	Interface	2xRJ-45 for data, 1GE (1 LAN/WAN+1 LAN)	higher	1xRJ-45 for data, 1GE (1 LAN/WAN)	equal	1xRJ-45 for data, 1GE (1 LAN/WAN)
		No voice	lower	1xRJ11	equal	1xRJ11
		1xSIM card slot (4FF), 1x power interface	equal	1xSIM card slot (4FF), 1x power interface	equal	1xSIM card slot (4FF), 1x power interface

Specification comparison : H155-381 VS H155-383 VS H153-381

Item		H155-381	comparison	H155-383	comparison	H153-381
3GPP	3GPP protocol	Release 16	equal	Release 16	equal	Release 16
5G	Frequency Band	FDD: N1/3/5/7/8/20/28 TDD: N38/40/41/77/78/79 SUL: N80/81/82/83/84 SDL: N75	higher	FDD: n1/3/5/7/8/20/28/71 TDD: n38/40/41/77/78 SUL: N80/81/82/83/84	equal	FDD: n1/3/5/7/8/20/28 TDD: n38/40/41/77/78 SUL: N80/81/82/83/84
	Bandwidth	TDD: 100/90/80/70/60/50/40/20/15/10MHz FDD: 50/40/30/20/15/10/5MHz	equal	TDD: 100/90/80/60/50/40/20/15/10MHz FDD: 50/40/30/20/15/10/5MHz Note: Different frequency bands support different bandwidths	equal	TDD: 100/90/80/60/50/40/20/15/10MHz FDD: 50/40/30/20/15/10/5MHz Note: Different frequency bands support different bandwidths
	DL MIMO	4*4 MIMO DL: N1/3/7/38/40/41/77/78/79 2*2 MIMO DL: N5/8/20/28/75	higher	4*4 MIMO DL: N1/3/7/28/38/40/41/77/78 2*2 MIMO DL: N5/N8/N20/71	higher	4*4 MIMO DL: N1/3/7/28/38/40/41/77/78 2*2 MIMO DL: N5/N8/N20
	UL MIMO	2*2: N38/41/77/78/79 (SA only)		2*2: N1/38/40/41/77/78		2*2: N1/38/40/41/77/78
	DL/UL modulation	256QAM/256QAM	equal	256QAM/256QAM	equal	256QAM/256QAM
	DL/UL Peak throughput	5G NR 3.6Gbps/500Mbps (@200MHz,SA TDD 8:2 ratio)	equal	5G NR 3.6Gbps/500Mbps (@200MHz,SA TDD 8:2 ratio)	equal	5G NR 3.6Gbps/500Mbps (@200MHz,SA TDD 8:2 ratio)
	No. of Carriers	NR 2CC, 200MHz NR 2CC, 200MHz	equal	NR 2CC, 200MHz NR 2CC, 200MHz	equal	NR 2CC, 200MHz NR 2CC, 200MHz
4G	Frequency Band	B1/3/5/7/8/18/19/20/26/28/32/34/38/39/40/41/42/43	higher	B1/3/5/7/8/20/28/38/40/41/42/43	equal	B1/3/5/7/8/20/28/38/40/41/42/43
	MIMO	4*4: B1/3/7/38/39/40/41/42/43 2*2: B5/8/18/19/20/26/28/32/34	higher	4*4: B1/3/7/28/38/40/41/42/43 2*2: B5/8/20	equal	4*4: B1/3/7/28/38/40/41/42/43 2*2: B5/8/20
	DL/UL modulation	256QAM/64QAM	equal	256QAM/64QAM	equal	256QAM/64QAM
Antenna	Antenna Gain	11dBi	higher	9dBi	equal	9dBi
Wi-Fi	Protocol	WiFi6 2*2 AX3000	equal	WiFi6 2*2 AX3000	equal	WiFi6 2*2 AX3000
	Feature	Smart Phone APP	equal	Smart Phone APP	equal	Smart Phone APP
Basic Feature	Dimension	90×96.6×181(mm)		TBD		TBD
	Weight	550g (excluding the power adapter)		TBD		TBD
	Interface	2 RJ45*GE , Power*1, SIM*1(4FF)	lower	2.5GE*1, GE RJ45*1, Power*1, SIM*1(4FF)	higher	1GE RJ45*1, Power*1, SIM*1(4FF)
	LED	4G/5G	equal	4G/5G	equal	4G/5G
	Button	WPS,Reset	Equal	WPS, Reset	equal	WPS, Reset
	Voice	NA	lower	1*RJ11	equal	1*RJ11

Specification comparison : H155-381 VS H153-381 VS H151-370

Item		H155-381	comparison	H153-381	comparison	H151-370
3GPP	3GPP protocol	Release 16	equal	Release 16	equal	Release 17
5G	Frequency Band	FDD: N1/3/5/7/8/20/28 TDD: N38/40/41/77/78/79 SUL: N80/81/82/83/84 SDL: N75	higher	FDD: n1/3/5/7/8/20/28 TDD: n38/40/41/77/78 SUL: N80/81/82/83/84		NR: N1/3/5/7/8/20/28/38/40/41/77/78/79/79 SUL:SUL_n41A-n83A/SUL_n77A-n80A/SUL_n77A-n84A/SUL_n78A-n80A/SUL_n78A-n81A/SUL_n78A-n82A/SUL_n78A-n83A/SUL_n78A-n84A/SUL_79A_80A/SUL_79A_81A
	Bandwidth	TDD: 100/90/80/70/60/50/40/20/15/10MHz FDD: 50/40/30/20/15/10/5MHz	equal	TDD: 100/90/80/60/50/40/20/15/10MHz FDD: 50/40/30/20/15/10/5MHz Note: Different frequency bands support different bandwidths	higher	TDD: 20/15/10MHz FDD: 20/15/10/5MHz
	DL MIMO	4*4 MIMO DL: N1/3/7/38/40/41/77/78/79 2*2 MIMO DL: N5/8/20/28/75	higher	4*4 MIMO DL: N1/3/7/28/38/40/41/77/78 2*2 MIMO DL: N5/N8/N20	higher	2*2MIMO
	UL MIMO	2*2: N38/41/77/78/79 (SA only)		2*2: N1/38/40/41/77/78	higher	2*2MIMO
	DL/UL modulation	256QAM/256QAM	equal	256QAM/256QAM	equal	256QAM/256QAM
	DL/UL Peak throughput	5G NR 3.6Gbps/500Mbps (@200MHz,SA TDD 8:2 ratio)	equal	5G NR 3.6Gbps/500Mbps (@200MHz,SA TDD 8:2 ratio)	higher	NR :FDD 226Mbps/120Mbps TDD 168Mbps/23Mbps
	No. of Carriers	NR 2CC, 200MHz NR 2CC, 200MHz	equal	NR 2CC, 200MHz NR 2CC, 200MHz	higher	NR1CC, 20MHz
4G	Frequency Band	B1/3/5/7/8/18/19/20/26/28/32/34/38/39/40/41/42/43	higher	B1/3/5/7/8/20/28/38/40/41/42/43		B1/3/5/7/8/20/28/40/38/B39/41/42/43 FDD 400Mbps(DL), 200Mbps(UL) 2CC TDD 290Mbps(DL), 46Mbps(UL) 2CC
	MIMO	4*4: B1/3/7/38/39/40/41/42/43 2*2: B5/8/18/19/20/26/28/32/34	higher	4*4: B1/3/7/28/38/40/41/42/43 2*2: B5/8/20	higher	2*2MIMO
	DL/UL modulation	256QAM/64QAM	equal	256QAM/64QAM	lower	DL 256QAM, UL 256QAM
Antenna	Antenna Gain	11dBi	higher	9dBi	equal	N77/78/79 >8dBi
Wi-Fi	Protocol	WiFi6 2*2 AX3000	equal	WiFi6 2*2 AX3000	equal	WiFi6 2*2 AX3000
	Feature	Smart Phone APP	equal	Smart Phone APP	equal	Smart Phone APP
Basic Feature	Dimension	90×96.6×181(mm)		TBD		Dimension: 240 * 155 *78 mm
	Weight	550g (excluding the power adapter)		TBD		TBD
	Interface	2 RJ45*GE , Power*1, SIM*1(4FF)	higher	1GE RJ45*1, Power*1, SIM*1(4FF)	lower	4xRJ-45 for data, GE (1 LAN/WAN+3 LAN)
	LED	4G/5G	equal	4G/5G	equal	4G/5G
	Button	WPS,Reset	Equal	WPS, Reset	equal	WPS, Reset
	Voice	NA	lower	1*RJ11	equal	1*RJ11

Specification comparison : H173-383 VS H153-381

Item		H173-383	H153-381	comparison
3GPP	3GPP protocol	Release 18	Release 16	higher
5G	Frequency Band	FDD: n1/3/5/7/8/20/26/28/71 TDD: n38/40/41/77/78 SUL: N80/81/82/83/84 SDL: N75	FDD: n1/3/5/7/8/20/28 TDD: n38/40/41/77/78 SUL: N80/81/82/83/84	higher
	Bandwidth	TDD: 100/90/80/60/50/40/20/15/10MHz FDD: 50/40/30/20/15/10/5MHz Note: Different frequency bands support different bandwidths	TDD: 100/90/80/60/50/40/20/15/10MHz FDD: 50/40/30/20/15/10/5MHz Note: Different frequency bands support different bandwidths	equal
	DL MIMO	4*4 MIMO DL: N1/3/7/20/28/38/40/41/75/77/78 2*2 MIMO DL: N5/8/26/71	4*4 MIMO DL: N1/3/7/28/38/40/41/77/78 2*2 MIMO DL: N5/N8/N20	higher
	UL MIMO	2*2: N1/3/7/20/38/40/41/77/78	2*2: N1/38/40/41/77/78	higher
	DL/UL modulation	1024QAM/256QAM	256QAM/256QAM	higher
	DL/UL Peak throughput	5G NR 5.8Gbps/2.5Gbps(@200MHz, 100% Duty Cycle)	5G NR 4.67Gbps/2.5Gbps (@200MHz, 100% Duty Cycle)	higher
	No. of Carriers	NR 2CC, 200MHz NR 2CC, 200MHz	NR 2CC, 200MHz NR 2CC, 200MHz	equal
4G	Frequency Band	B1/3/5/7/8/20/28/26/38/32/40/41/42/43/71	B1/3/5/7/8/20/28/38/40/41/42/43	higher
	MIMO	4*4: B1/3/7/20/28/32/38/40/41/42/43 2*2: B5/8/26/71	4*4: B1/3/7/28/38/40/41/42/43 2*2: B5/8/20	higher
	DL/UL modulation	256QAM/256QAM	256QAM/64QAM	equal
Antenna	Antenna Gain	9dBi	9dBi	equal
Wi-Fi	Protocol	WiFi6 2*2 AX3000	WiFi6 2*2 AX3000	equal
	Feature	Smart Phone APP	Smart Phone APP	equal
Basic Feature	Dimension	65*140*183mm	90*90*183mm	
	Weight	520g	TBD	
	Interface	2GE RJ45*1, Power*1, SIM*1(4FF)	1GE RJ45*1, Power*1, SIM*1(4FF)	higher
	LED	4G/5G	4G/5G	equal
	Button	WPS, Reset	WPS, Reset	equal
	Voice	1*RJ11	1*RJ11	equal

Specification comparison : H352-381 VS H362-383

Item		5G CPE MAX 5 (H352-381)	5G CPE MAX 5 (H362-383)	comparison
3GPP	3GPP protocol	Release 16	Release 16	equal
	5G-4G interworking	NSA option 3/3x, SA option 2	NSA option 3/3x, SA option 2	equal
5G	Frequency Band	FDD: N1/3/5/7/8/20/28	FDD: N1/3/5/7/8/20/28/71	higher
		TDD: N38/40/41/77/78/79	TDD: N38/40/41/77/78	lower
	SUL	SUL: N80/81/82/83/84	SUL: N80/81/82/83/84 SDL: N75	higher
	Bandwidth	TDD: 100/90/80/70/60/50/40/20/15/10MHz	TDD: 100/90/80/70/60/50/40/20/15/10MHz	equal
		FDD: 50/40/30/20/15/10/5MHz	FDD: 50/40/30/20/15/10/5MHz	equal
	DL MIMO	4*4 MIMO DL: N1/3/7/38/40/41/77/78/79	4*4 MIMO DL: N1/3/7/20/28/38/40/41/75/77/78	higher
		2*2 MIMO DL: N5/8/20/28/75	2*2 MIMO DL: N5/8/71	equal
	UL MIMO	2*2 MIMO: N1/38/40/41/77/78/79	2*2: N38/41/77/78 (SA only)	equal
	DL/UL modulation	DL 256QAM/UL 256QAM	DL 256QAM/UL 256QAM	equal
	DL/UL Peak throughput	5G NR 5.4Gbps/500Mbps (@300MHz,SA TDD 8:2 ratio)	5G NR 5.4Gbps/500Mbps (@300MHz,SA TDD 8:2 ratio)	equal
4G	Frequency Band	DL 3CC 300MHz UL 2CC 200MHz	DL 3CC 300MHz UL 2CC 200MHz	equal
		B1/3/5/7/8/18/19/20/26/28/32/34/38/39/40/41/42/43	B1/3/5/7/8/20/28/32/38/40/41/42/43/71	higher
	MIMO	4*4 : B1/3/7/38/39/40/41/42/43 2*2 : B5/8/18/19/20/26/28/32/34	4*4: B1/3/7/20/28/38/40/41/42/43 2*2: B5/8	higher equal
Antenna	Antenna	11dBi	11dBi	equal
WiFi	Protocol	802.11 n 1*1 MIMO 2.4GHz, used for management purpose only	802.11 n 1*1 MIMO 2.4GHz, used for management purpose only	equal
	Feature	Smart Phone APP	Smart Phone APP	equal
Basic Feature	Dimension	230x142x58(mm)	TBD	equal
	Weight	<1000 g (excluding the power adapter)	<1kg (excluding the power adapter) TBD	equal
	Interface	2.5GE LAN port (RJ45) , SIM card slot (Nano-SIM)	2.5GE LAN port (RJ45) , SIM card slot (Nano-SIM)	equal
	LED	4G/5G	4G/5G	equal
	Button	Reset	Reset	equal
	Working temperature	-40°C to +55°C (No solar radiation)	-40°C ~ +55°C, without solar radiation	equal
	Waterproof	IP65	IP65	equal

Specification comparison : H352-381 VS N5368X

Item		5G CPE MAX 5 (H352-381)	5G CPE MAX (N5368X)	comparison
3GPP	3GPP protocol	Release 16	Release 15	higher
	5G-4G interworking	NSA option 3/3x, SA option 2	NSA option 3/3x, SA option 2	equal
5G	Frequency Band	FDD: N1/3/5/7/8/20/28 TDD: N38/40/41/77/78/79	TDD: N38/41/78	higher
	SUL	SUL: N80/81/82/83/84	NA	higher
	Bandwidth	TDD: 100/90/80/70/60/50/40/20/15/10MHz FDD: 40/30/20/15/10/5MHz	TDD: 100/80/60/50/40/20MHz	higher
	DL MIMO	4*4 MIMO DL: N1/3/7/38/40/41/77/78/79 2*2 MIMO DL: N5/8/20/28/75	4*4 MIMO: n38/41/78	higher
	UL MIMO	2*2 MIMO: N1/38/40/41/77/78/79	2*2 MIMO: N38/41/78 (SA only)	higher
	DL/UL modulation	DL 256QAM/UL 256QAM	DL 256QAM/UL 256QAM	equal
	DL/UL Peak throughput	5G NR 5.4Gbps/500Mbps (@300MHz,SA TDD 8:2 ratio)	5G NR 1.8Gbps/250Mbps (@100MHz,SA TDD 8:2 ratio)	higher
	No. of Carriers	3CC@DL, 2CC@UL	1CC	higher
4G	Frequency Band	B1/3/5/7/8/18/19/20/26/28/32/34/38/39/40/41/42/43	B1/3/7/8/20/28/38/40/41/42/43	higher
	MIMO	4*4 : B1/3/7/38/39/40/41/42/43 2*2 : B5/8/18/19/20/26/28/32/34	4*4 : B1/3/7/38/40/41/42/43 2*2 : B8/20/28	higher
Antenna	Antenna	11dBi	10dBi	higher
Wi-Fi	Protocol	802.11 n 1*1 MIMO 2.4GHz, used for management purpose only	802.11 b/g/n 2*2MIMO 2.4GHz 802.11a/n/ac 2*2 MIMO 5GHz 2.4GHz &5GHz DBDC	lower
BOX	Interface	1xRJ-45 for data, 2.5GE	1xRJ-45 for data, 1GE	higher

Specification comparison : E6888-982 VS E6898-982

Item		E6888-982	E6898-982	comparison
3GPP	3GPP protocol	Release 16	Release 18	higher
	5G-4G interworking	NSA option 3x, SA option 2	NSA option 3/3x, SA option 2	equal
5G	Frequency Band	N1/3/5/7/8/20/28/38/40/41/71/75/77/78 SUL: n80/81/82/83/84	N1/3/5/7/8/20/28/38/40/41/71/75/77/78/ 79 SUL: n80/81/82/83/84/ 95/98	higher
	Bandwidth	DL/UL 2CC 200MHz	DL 4CC 400MHz/5CC 300MHz; UL 2CC 200MHz	higher
	DL MIMO	DL 4*4 MIMO: N1/3/7/38/40/41/77/78 DL 2*2 MIMO:N5/8/20/28/71/75	DL 4*4 MIMO: N1/3/7/ 28 /38/40/41/77/78/ 79 DL 2*2 MIMO:N5/8/20/71/75	higher
	UL MIMO	UL 2*2 MIMO: N1/38/40/41/77/78 (SA only)	UL 2*2 MIMO:N1/3/28/38/40/41 (SA only) UL 2*2 MIMO: 77/78/79(SA&NSA) SUL: n80/81/82/83/84/95/98	higher
	DL/UL modulation	DL 256QAM/UL 256QAM	DL 1024QAM /UL 256QAM	higher
	DL/UL Peak throughput	DL 3.6Gbps/UL 500Mbps(@200MHz,8:2 Ratio)	DL 11.7Gbps 4CC 400MHz UL 2.5Gbps 2CC 200MHz (Theoretical value, full timeslot allocation)	higher
4G	Frequency Band	DL 4*4 MIMO: B1/3/7/38/39/40/41/42/43 DL 2*2 MIMO: B5/8/20/28/32	DL 4*4 MIMO: B1/3/7/ 28/34 /38/39/40/41/42/43 DL 2*2 MIMO: B5/8/20/32/ 71	higher
Wi-Fi	Protocol	IEEE 802.11a/b/g/n/ac/ax 2*2, Ax3600, 2.4G&5G DBDC	IEEE 802.11a/b/g/n/ac/ax 2*2, Ax3600, 2.4G&5G DBDC	equal
	Support Users	32	32	equal
Battery	Capacity	7000mAh	12000mAh	higher
	Charge	INPUT: 22.5W / OUTPUT: 18W	INPUT: 66W(MAX) / OUTPUT: 40W(MAX)	Higher
	Working Time	10h	24h	higher
Interface	Type C	1*USB Type C	2*USB Type C	higher
Display	Screen	1.75" OLED touch screen	1.8" OLED Touch Screen	higher

6F CPE Testing Guideline

Promotion name 传播名	Model 型号名	Testing Guideline 测试指导
5G CPE 5 SE	H151-370	Ready

THANK YOU