

SEALING COMPOUND AND FIBER

(FOR EYS / EYK / EYD SERIES)

EXPLOSION PROOF



BELGIUM
A QUALITY PRODUCT

APPLICATION

Sealing Fiber: Used to create a "dam" at the top and bottom of sealing fittings to prevent the sealant from leaking out before it hardens.

Sealing Compound: Poured into the joints to create a strong seal around the electrical conductor. It acts as a barrier, preventing flames, hot gases, and vapors from spreading through the conduit system.

Duct Seal Compound: It is a putty-like filler that is ready to use without mixing with water or other solvents. It is highly viscous and flexible, making it easy to mold and fill into various shapes.




Feature


- Sealing Fiber** : It is a fiber that can be easily molded into dams for use as sealing material.
- Sealing Compound** : The sealant is a water-soluble powder that is easy to mix and pour. Mix 2 parts (by volume) of sealant with 1 part clean water in a clean container. Stir immediately and thoroughly. Then pour this sealant onto the area to be sealed. The sealant will harden within 60 minutes, creating a tight, non-shrinking seal that is resistant to acids, water, and oils.
- Duct Seal Compound** : Draw out the required amount of sealant, soften it with your hands, and then firmly press it into the gap around the wire or conduit end to seal the leak.

TECHNICAL DATA


Hazardous Area	GAS	DUST
Zones	1 & 2	21 & 22
Conformity to Standards	EN IEC 60079-0 , EN 60079-1 , EN 60079-14 IEC 60079-0 , IEC 60079-1 , IEC 60079-14	
Ambeint Temperature	-20°c to +75°c	

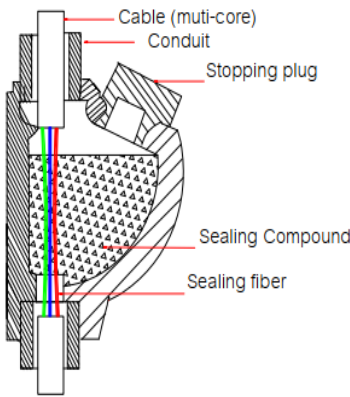

EYS Vertical seal

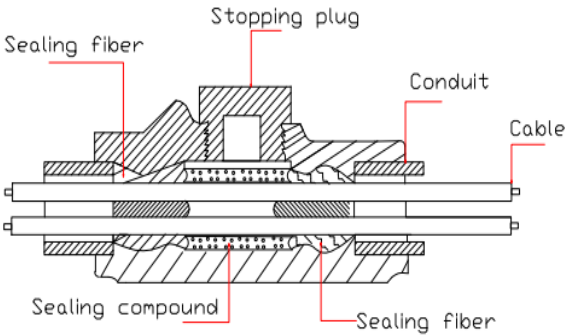

EYK Horizontal seal

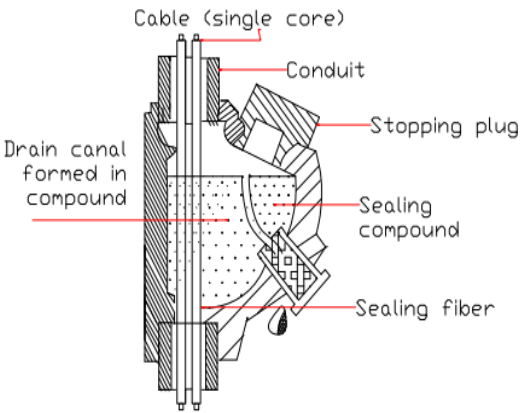

EYD Vertical seal and Water drain

The depth of the sealing compound should be equal to the trade size of the conduit, with a minimum thickness of 5/8 inch.
Close the plug immediately after pouring.

Caution : Do not mix more than can be poured within 10 minutes after adding water. Use cold water only, as warm water increases the setting speed. Particles from previous mixes or dirt may spoil the seal.