

CABLE GLAND FOR NON-ARMoured CABLE

ENCG-MF Series (Female Threads ended)

FLAMEPROOF / INCREASED SAFETY AND DUST PROTECTION BY ENCLOSURE



APPLICATION

The ENCG-MF cable glands are suitable for used in zone 1,2 and zone 21,22 hazardous areas to enable direct insertion of normal non-armoured cable into Ex d equipment or enclosure. The gland nut is provided with female threads ended.

Specification


Body, gland nut	: Stainless Steel 304
Sealing ring	: Neoprene or O-Ring for IP66
Connection	: Metric thread is standard MM or NPT Thread



TECHNICAL DATA

Hazardous Area	GAS	DUST
Zones	1 & 2	21 & 22
Conforming To IEC	Ex II 2G	Ex II 2D
Symbol of Protection IEC	Ex d IIC Gb. Ex e II Gb	Ex tb A21
T Rating	Temperature class of enclosure to which will be connected.	
Compliance with	EC Directive for "Appartus and protective systems for use in explosive atmospheres "(2014/34/EU)	
Standards	EN 60079-2:2012 , EN 60079-1:2014 , EN 60079-7:2015 IEC 60079-0:2012 , IEC 60079-1:2014 , IEC 60079-7:2015 EN 60079-31:2014 & IEC 60079-31:2014	

Dimension

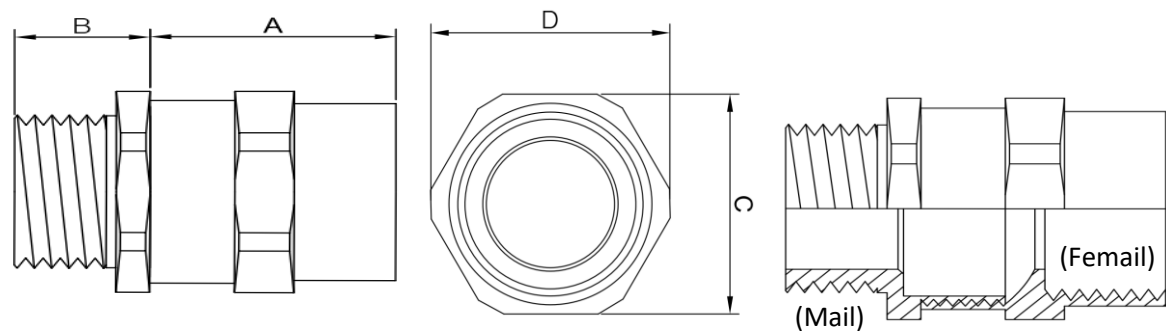

Ordering Requirements

Cat.,No.	Cable Jacket Dia (MM.)	Entries Thread	Dimension MM.				
			A	B	C	D	E
Male + Female	Min - Max	NPT - NPT					
ENCG 1MF	7 - 12	1/2" - 1/2"	31	15	24	27	-
ENCG 2MF	13 - 18	3/4" - 3/4"	29	21	30	33	-
ENCG 3MF	18 - 25	1" - 1"	33	20	38	42	-
ENCG 4MF	24 - 30	1.1/4" - 1.1/4"	44	18	45	51	-
ENCG 5MF	32 - 40	1.1/2" - 1.1/2"	47	20	58	66	-
ENCG 6MF	38 - 44	2" - 2"	26	44	65	74	-
Male + Female		M - M					
ENCG 7MF	7 - 12	M20 - M20	31	15	24	27	-
ENCG 8MF	13 - 18	M25 - M25	29	21	30	33	-
ENCG 9MF	18 - 25	M32 - M32	33	20	38	42	-
ENCG 10MF	24 - 30	M40 - M40	44	18	45	51	-
ENCG 11MF	32 - 40	M50 - M50	47	20	58	66	-
ENCG 12MF	38 - 44	M63 - M63	26	44	65	74	-
Male + Female		M - NPT					
ENCG 13MF	7 - 12	M20 - 1/2"	31	15	24	27	27
ENCG 14MF	13 - 18	M25 - 3/4"	29	21	30	34	30
ENCG 15MF	18 - 25	M32 - 1"	33	20	38	42	29
ENCG 16MF	24 - 30	M40 - 1.1/4"	-	-	-	-	-
ENCG 17MF	32 - 40	M50 - 1.1/2"	-	-	-	-	-
ENCG 18MF	38 - 44	M63 - 2"	-	-	-	-	-

