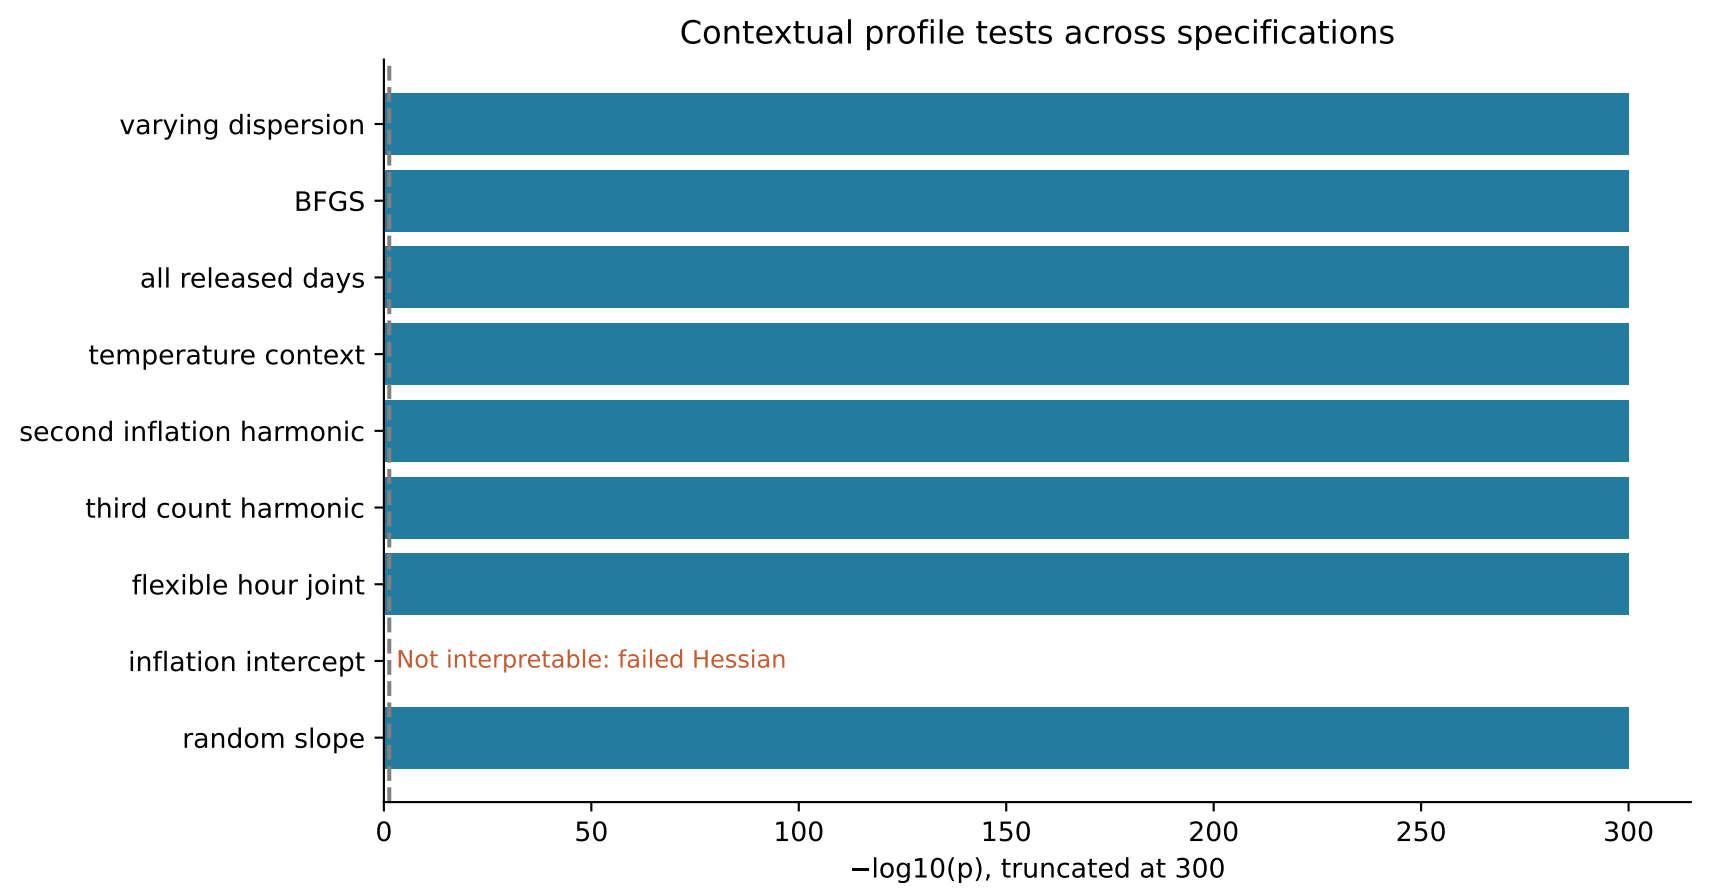

Different clock-time bases imply different test dimensions. Numerical flags are retained in the accompanying audit.