Exp-10 ~~Customize~~ Date: 21/08/24

AIM:

To learn how to add a network module to a cisco switch, connect Multiple PCs and a Server, assign IP addresses, and ~~the~~ Test Connectivity in Cisco Packet Tracer.

DESCRIPTION:

This Experiment is about building a Simple ~~computer~~ Network using a Switch with Extra Module Ports. You will connect five PCs and one Server, assign IPs and check if all devices can communicate. This type helps you understand how module switches are ~~added~~ used to create flexible networks.

Definition:

A network module is an Extra component can add to a Switch. It ~~signs~~ gives you more Ports or adds new types of connections. In Packet Tracer, module such as HWIC-4ESW let you Expand the Switches capabilities.

Procedure:

1) open Cisco Packet Tracer and set up workspace

2) Drag and Drop a 2960-24TT Switch to the center

3) Add two PC's and one Server or form and decimal Panel.

4) Power Off the Switch
   - click the switch, open Physical tab, and turn off the Power Button.

5) Install HWIC-4ESW module on the Switch
   - On the Physical tab, drag HWIC-4ESW into an Empty module slot.

6) Power on the Switch and let it Boot

7) Connect all the devices using copper straight through cables

PC0 - Switch Fast Ethernet 0/1

PC1 - Switch Fast Ethernet 0/2

PC2 - Switch module Port 1

PC3 - Switch Module Port 2

PC4 - Switch Module Port 3

Server 0 - Switch module Port 4 el assign IP addresses to Each device

PC0: 192.168.1.10

PC_1 : 192.168.1.11

PC_2 : 192.168.1.12

PC_3 : 192.168.1.13

PC_4 : 192.168.1.14

Server 0 : 192.168.1.100

All subset masks : 255.255.255.0

8) Test Connectivity (From any PC - Open Command Prompt and Ping other devices

Input :

Devices:

1 CISW 2960 - 24 TT Switch

1 HWIC - 4ESW network module

5 PCs (PC0 - PC4)

1 Server - PC (Server 0)

Cables:

1. Copper Straight through cables IP Configuration

2. use Static IP Addresses as listed Above

Server 0 – Switch

IP addresses to

PC0: 192.168.1.1

PC1 : 192.168.1.11

PC2 : 192.168.1.12

PC3 : 192.168.1.13


PC4 : 192.168.1.14

Server 0 : 192.168.1.

All subset

3) Test Connectivity

Command

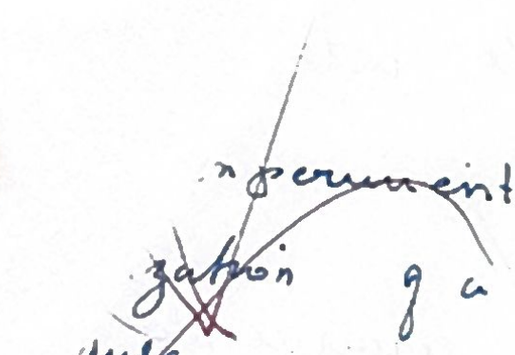

experiment demonstrates Successfully

gation of a Switch with a network

rule and connectivity Between all

devices the network works as Expected

and all devices communicates.