

Exercise - 03

Aim :

To Study the packet tracer tool Installation and user Interface Overview.

d. Analyse the behaviour of network devices using CISCO PACKET TRACER Simulator.

1. From the network box, click and drag-and-drop the

a. 4 Generic PCs and one HUB

b. 4 Generic PCs and one Switch

2. Click on Connections :

a. Click on Copper Straight-Through cable,


b. Select one of the PC and connect it to HUB using the cable. The link LED should glow in green, indicating that the link is up. Similarly connect remaining 3 PCs to the HUB.

c. Similarly connect 4 PCs to the switch using Copper Straight-through cable.

3. Click on the PCs connected to hub, go to the Desktop tab, click on IP Configuration, and enter an IP address and Subnet mask. Here, the default gateway and DNS Server information is not needed as there are only two end devices in the network.

4. Observe the flow of PDU from source PC to destination PC by selecting the Realtime mode of simulation.

5. Repeat Step #3 to Step #5 for the PCs Connected to the Switch.
6. Observe how HUB and switch are forwarding the PDU and write your observation and conclusion about the behaviour of switch and HUB.

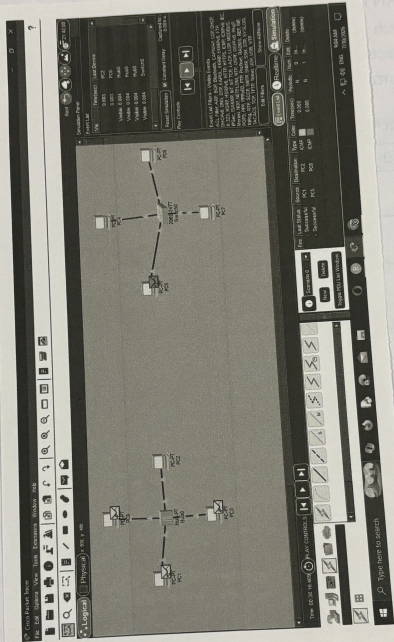

Result: Thus study of the packet tracer tool Installation and user Interface overview is completed successfully.