

Lab Task Week # 8

Subject: Computer Networks



Submitted by:

Mian Daniyal Hassan

Sap ID:

70150006

Major:

**BS Computer
Science**

Section:

(C)

Date:


22th May, 2026

Submitted To:

Sir Shehzad

STATIC ROUTING:

Topology Pic:

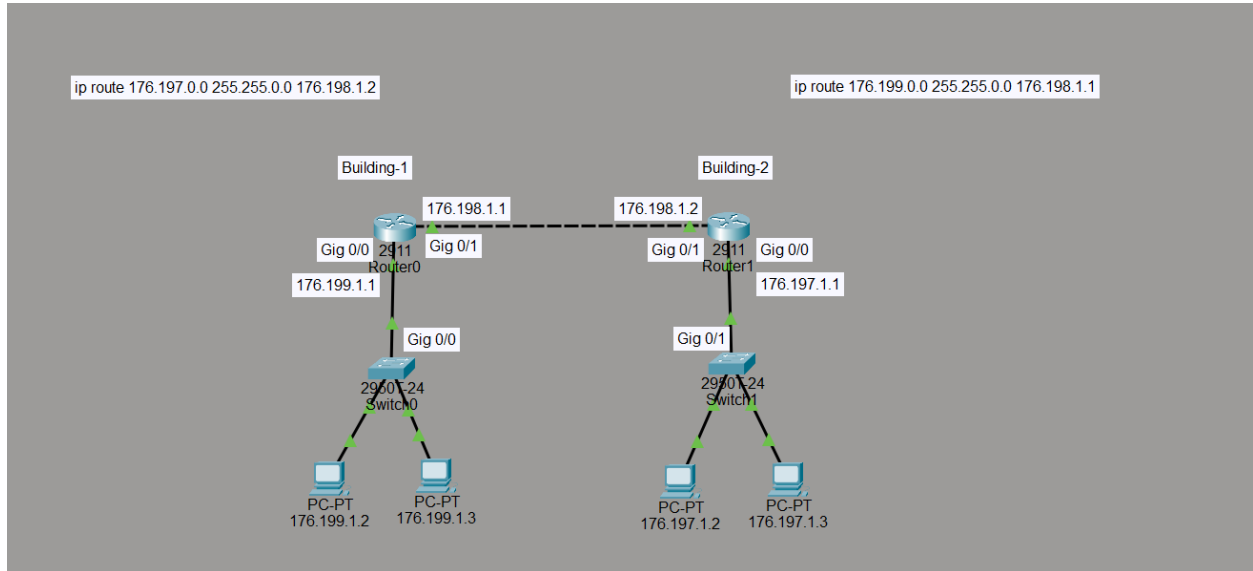

Building-1

Router 0:

Information:

Device Name: Router0
Device Model: 2911
Hostname: Router

Port	Link	VLAN	IP Address	IPv6 Address	MAC Address
GigabitEthernet0/0	Up	--	176.199.1.1/16	<not set>	0001.C7E5.0101
GigabitEthernet0/1	Up	--	176.198.1.1/16	<not set>	0001.C7E5.0102
GigabitEthernet0/2	Down	--	<not set>	<not set>	0001.C7E5.0103
Vlan1	Down	1	<not set>	<not set>	0003.E4B8.60DA

Physical Location: Intercity > Home City > Corporate Office > Main Wiring Closet > Rack > Router0

Configuration:

Router>en

Router#show run

Building configuration...

Current configuration : 761 bytes

!

```
version 15.1

no service timestamps log datetime msec

no service timestamps debug datetime msec

no service password-encryption

!

hostname Router

ip cef

no ipv6 cef

!

license udi pid CISCO2911/K9 sn FTX152493A0-

!

spanning-tree mode pvst

!

interface GigabitEthernet0/0

ip address 176.199.1.1 255.255.0.0

duplex auto

speed auto

!

interface GigabitEthernet0/1

ip address 176.198.1.1 255.255.0.0

duplex auto

speed auto

!

interface GigabitEthernet0/2

no ip address

duplex auto

speed auto

shutdown

!

interface Vlan1

no ip address
```

shutdown

!

ip classless

ip route 176.197.0.0 255.255.0.0 176.198.1.2

!

ip flow-export version 9

!

line con 0

!

line aux 0

!


line vty 0 4

login


!end

Switch0 → 2960-24 :

➤ PC0 → 176.199.1.2

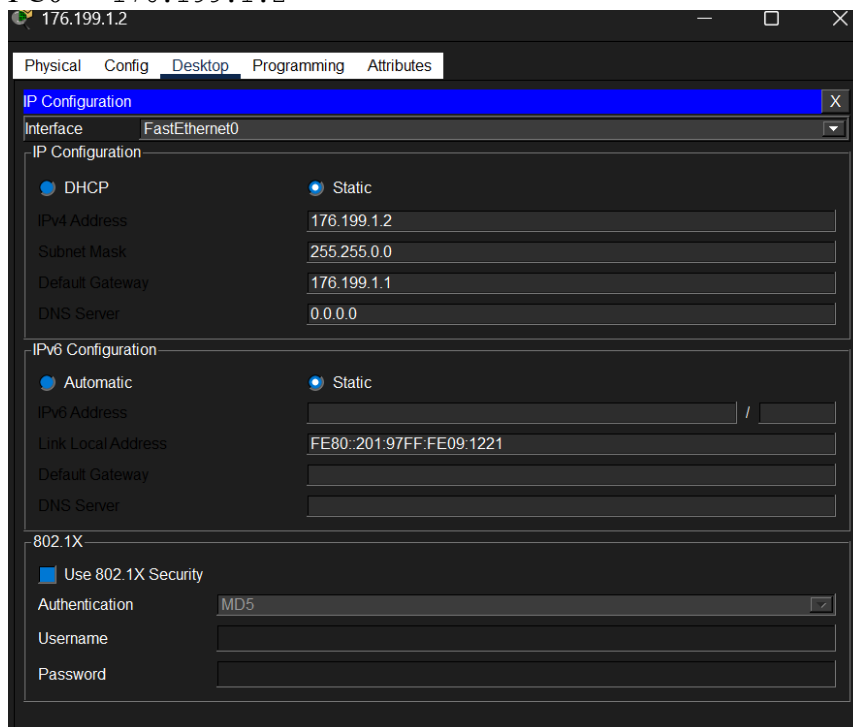

➤ PC1 → 176.199.1.3

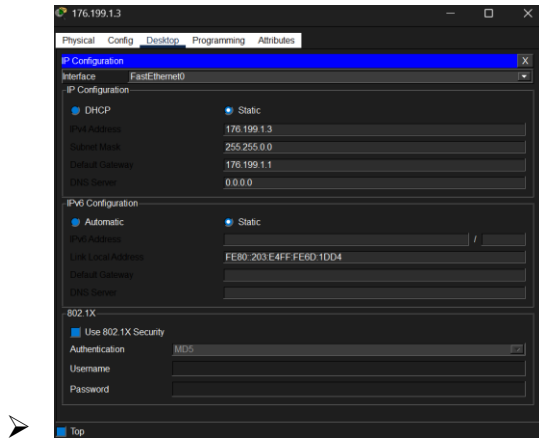

Building-2:

Router 1:

Information:

Device Name: Router1					
Device Model: 2911					
Hostname: Router					
Port	Link	VLAN	IP Address	IPv6 Address	MAC Address
GigabitEthernet0/0	Up	--	176.197.1.1/16	<not set>	0060.3EE8.B001
GigabitEthernet0/1	Up	--	176.198.1.2/16	<not set>	0060.3EE8.B002
GigabitEthernet0/2	Down	--	<not set>	<not set>	0060.3EE8.B003
Vlan1	Down	1	<not set>	<not set>	00D0.97D6.B594
Physical Location: Intercity > Home City > Corporate Office > Main Wiring Closet > Rack > Router1					

Configuration:

Router>en

Router#show run

Building configuration...

Current configuration : 761 bytes

!

version 15.1

no service timestamps log datetime msec

no service timestamps debug datetime msec

no service password-encryption

!

hostname Router

ip cef

no ipv6 cef

!

license udi pid CISCO2911/K9 sn FTX1524DID4-

```
!  
spanning-tree mode pvst  
!  
!  
interface GigabitEthernet0/0  
ip address 176.197.1.1 255.255.0.0  
duplex auto  
speed auto  
!  
interface GigabitEthernet0/1  
ip address 176.198.1.2 255.255.0.0  
duplex auto  
speed auto  
!  
interface GigabitEthernet0/2  
no ip address  
duplex auto  
speed auto  
shutdown  
!  
interface Vlan1  
no ip address  
shutdown  
!  
ip classless  
ip route 176.199.0.0 255.255.0.0 176.198.1.1  
!  
ip flow-export version 9  
!  
line con 0  
!  
line aux 0  
!  
line vty 0 4  
login  
end
```

Switch1 → 2960-24:

➤ **PC2 → 176.197.1.2**

The screenshot shows a configuration window for PC2 with the title bar '176.197.1.2'. It has tabs for 'Physical', 'Config', 'Desktop', 'Programming', and 'Attributes'. The 'Config' tab is active, and the 'IP Configuration' section is expanded. The 'Interface' dropdown is set to 'FastEthernet0'. Under 'IP Configuration', the 'Static' radio button is selected. The fields are filled with: IPv4 Address: 176.197.1.2, Subnet Mask: 255.255.0.0, Default Gateway: 176.197.1.1, and DNS Server: 0.0.0.0. The 'IPv6 Configuration' section has 'Static' selected, with IPv6 Address and DNS Server fields empty, and Link Local Address: FE80::202:17FF:FE97:8DC6. The '802.1X' section has 'Use 802.1X Security' checked, Authentication set to MD5, and empty fields for Username and Password. A 'Top' button is at the bottom left.

IP Configuration	
Interface: FastEthernet0	
IP Configuration	
☒ DHCP	☒ Static
IPv4 Address	176.197.1.2
Subnet Mask	255.255.0.0
Default Gateway	176.197.1.1
DNS Server	0.0.0.0
IPv6 Configuration	
☒ Automatic	☒ Static
IPv6 Address	
Link Local Address	FE80::202:17FF:FE97:8DC6
Default Gateway	
DNS Server	
802.1X	
☒ Use 802.1X Security	
Authentication	MD5
Username	
Password	


➤ **PC3 → 176.197.1.3**

The screenshot shows a configuration window for PC3 with the title bar '176.197.1.3'. It has tabs for 'Physical', 'Config', 'Desktop', 'Programming', and 'Attributes'. The 'Config' tab is active, and the 'IP Configuration' section is expanded. The 'Interface' dropdown is set to 'FastEthernet0'. Under 'IP Configuration', the 'Static' radio button is selected. The fields are filled with: IPv4 Address: 176.197.1.3, Subnet Mask: 255.255.0.0, Default Gateway: 176.197.1.1, and DNS Server: 0.0.0.0. The 'IPv6 Configuration' section has 'Static' selected, with IPv6 Address and DNS Server fields empty, and Link Local Address: FE80::250:FFF:FE91:EDC. The '802.1X' section has 'Use 802.1X Security' checked, Authentication set to MD5, and empty fields for Username and Password. A 'Top' button is at the bottom left.

IP Configuration	
Interface: FastEthernet0	
IP Configuration	
☒ DHCP	☒ Static
IPv4 Address	176.197.1.3
Subnet Mask	255.255.0.0
Default Gateway	176.197.1.1
DNS Server	0.0.0.0
IPv6 Configuration	
☒ Automatic	☒ Static
IPv6 Address	
Link Local Address	FE80::250:FFF:FE91:EDC
Default Gateway	
DNS Server	
802.1X	
☒ Use 802.1X Security	
Authentication	MD5
Username	
Password	

PING Command:

Building 1 with both pc of building 2:

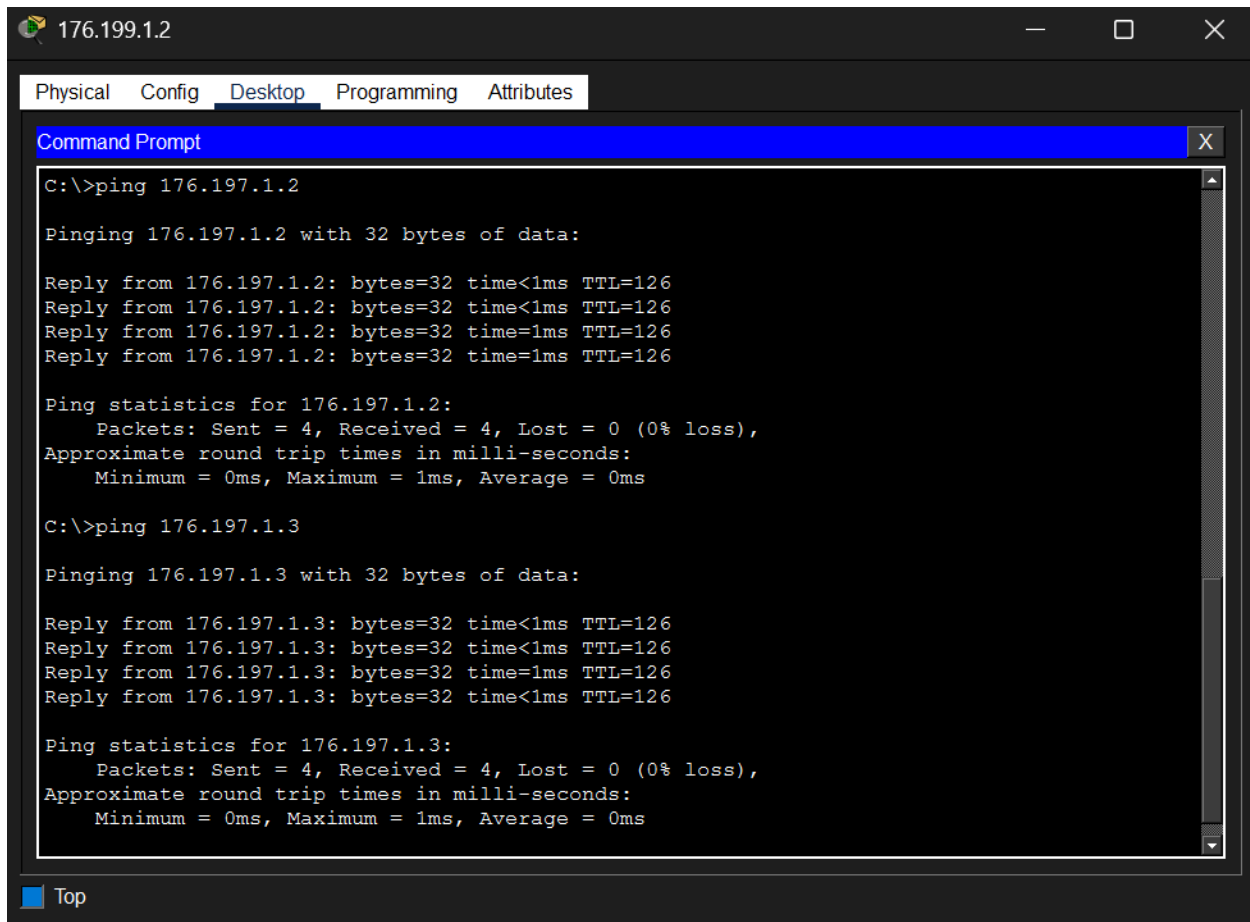

The screenshot shows a Packet Tracer PC configuration window for the IP address 176.199.1.2. The window has tabs for Physical, Config, Desktop, Programming, and Attributes. The Desktop tab is active, displaying a Command Prompt window. The Command Prompt shows the execution of two ping commands: 'ping 176.197.1.2' and 'ping 176.197.1.3'. Both commands result in successful pings with 0% loss and 0ms average round trip time.

```
C:\>ping 176.197.1.2

Pinging 176.197.1.2 with 32 bytes of data:

Reply from 176.197.1.2: bytes=32 time<1ms TTL=126
Reply from 176.197.1.2: bytes=32 time<1ms TTL=126
Reply from 176.197.1.2: bytes=32 time=1ms TTL=126
Reply from 176.197.1.2: bytes=32 time=1ms TTL=126

Ping statistics for 176.197.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 176.197.1.3

Pinging 176.197.1.3 with 32 bytes of data:

Reply from 176.197.1.3: bytes=32 time<1ms TTL=126
Reply from 176.197.1.3: bytes=32 time<1ms TTL=126
Reply from 176.197.1.3: bytes=32 time=1ms TTL=126
Reply from 176.197.1.3: bytes=32 time<1ms TTL=126

Ping statistics for 176.197.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

Top

Building 2 with both pc of building 1:



176.197.1.2

Physical Config Desktop Programming Attributes

Command Prompt



```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 176.199.1.2

Pinging 176.199.1.2 with 32 bytes of data:

Reply from 176.199.1.2: bytes=32 time<1ms TTL=126
Reply from 176.199.1.2: bytes=32 time=1ms TTL=126
Reply from 176.199.1.2: bytes=32 time=1ms TTL=126
Reply from 176.199.1.2: bytes=32 time=1ms TTL=126

Ping statistics for 176.199.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 176.199.1.3

Pinging 176.199.1.3 with 32 bytes of data:

Request timed out.
Reply from 176.199.1.3: bytes=32 time=1ms TTL=126
Reply from 176.199.1.3: bytes=32 time=1ms TTL=126
Reply from 176.199.1.3: bytes=32 time<1ms TTL=126

Ping statistics for 176.199.1.3:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

Top