

# Localisation and radiation in thin complex plates

Carlos García A., Nicolas Dauchez and Gautier Lefebvre

Université de technologie de Compiègne, Laboratoire Roberval (Mechanics, energy and electricity), Centre de recherche Royallieu  
CS 60319 - 60203 Compiègne cedex, France

## Localization

The landscape of localisation constrains the vibrational modes by

$$\frac{|\phi_m|}{\|\phi_m\|_{L^2(\Omega)}} \leq \omega_m^2 u \quad \text{in } \Omega \quad (1)$$

where  $u$  is the landscape function. The landscape of localization is summarized in Dirichlet problem

$$\begin{aligned} \mathcal{L}u &= 1 & \text{in } \Omega \\ u &= 0 & \text{on } \partial\Omega. \end{aligned} \quad (2)$$

## Radiation

The acoustical power is defined as

$$\mathcal{P}(\omega) = \frac{1}{2} \{\hat{v}_n\}^H [\Psi^H] [\mathbf{R}] [\Psi] \{\hat{v}_n\} \quad (3)$$

where  $[\mathbf{R}]$  is the radiation resistance matrix.

The spatial average mean squared velocity

$$\bar{v}^2 = \sum_m^{\infty} \frac{F^2}{2M^2} \frac{\omega^2}{(\omega_m^2 - \omega^2)^2 + \eta^2 \omega_m^4} \quad (4)$$

and the average radiation efficiency

$$\bar{\sigma} = \frac{\sum_{m=1}^{\infty} \sigma_m \left[ (\omega_m^2 - \omega^2)^2 + \eta^2 \omega_m^4 \right]^{-1}}{\sum_{m=1}^{\infty} \left[ (\omega_m^2 - \omega^2)^2 + \eta^2 \omega_m^4 \right]^{-1}} \quad (5)$$

$\sigma_m$  is the modal radiation efficiency and  $\omega_m$  the resonant frequency.

## Landscape of localisation and modes

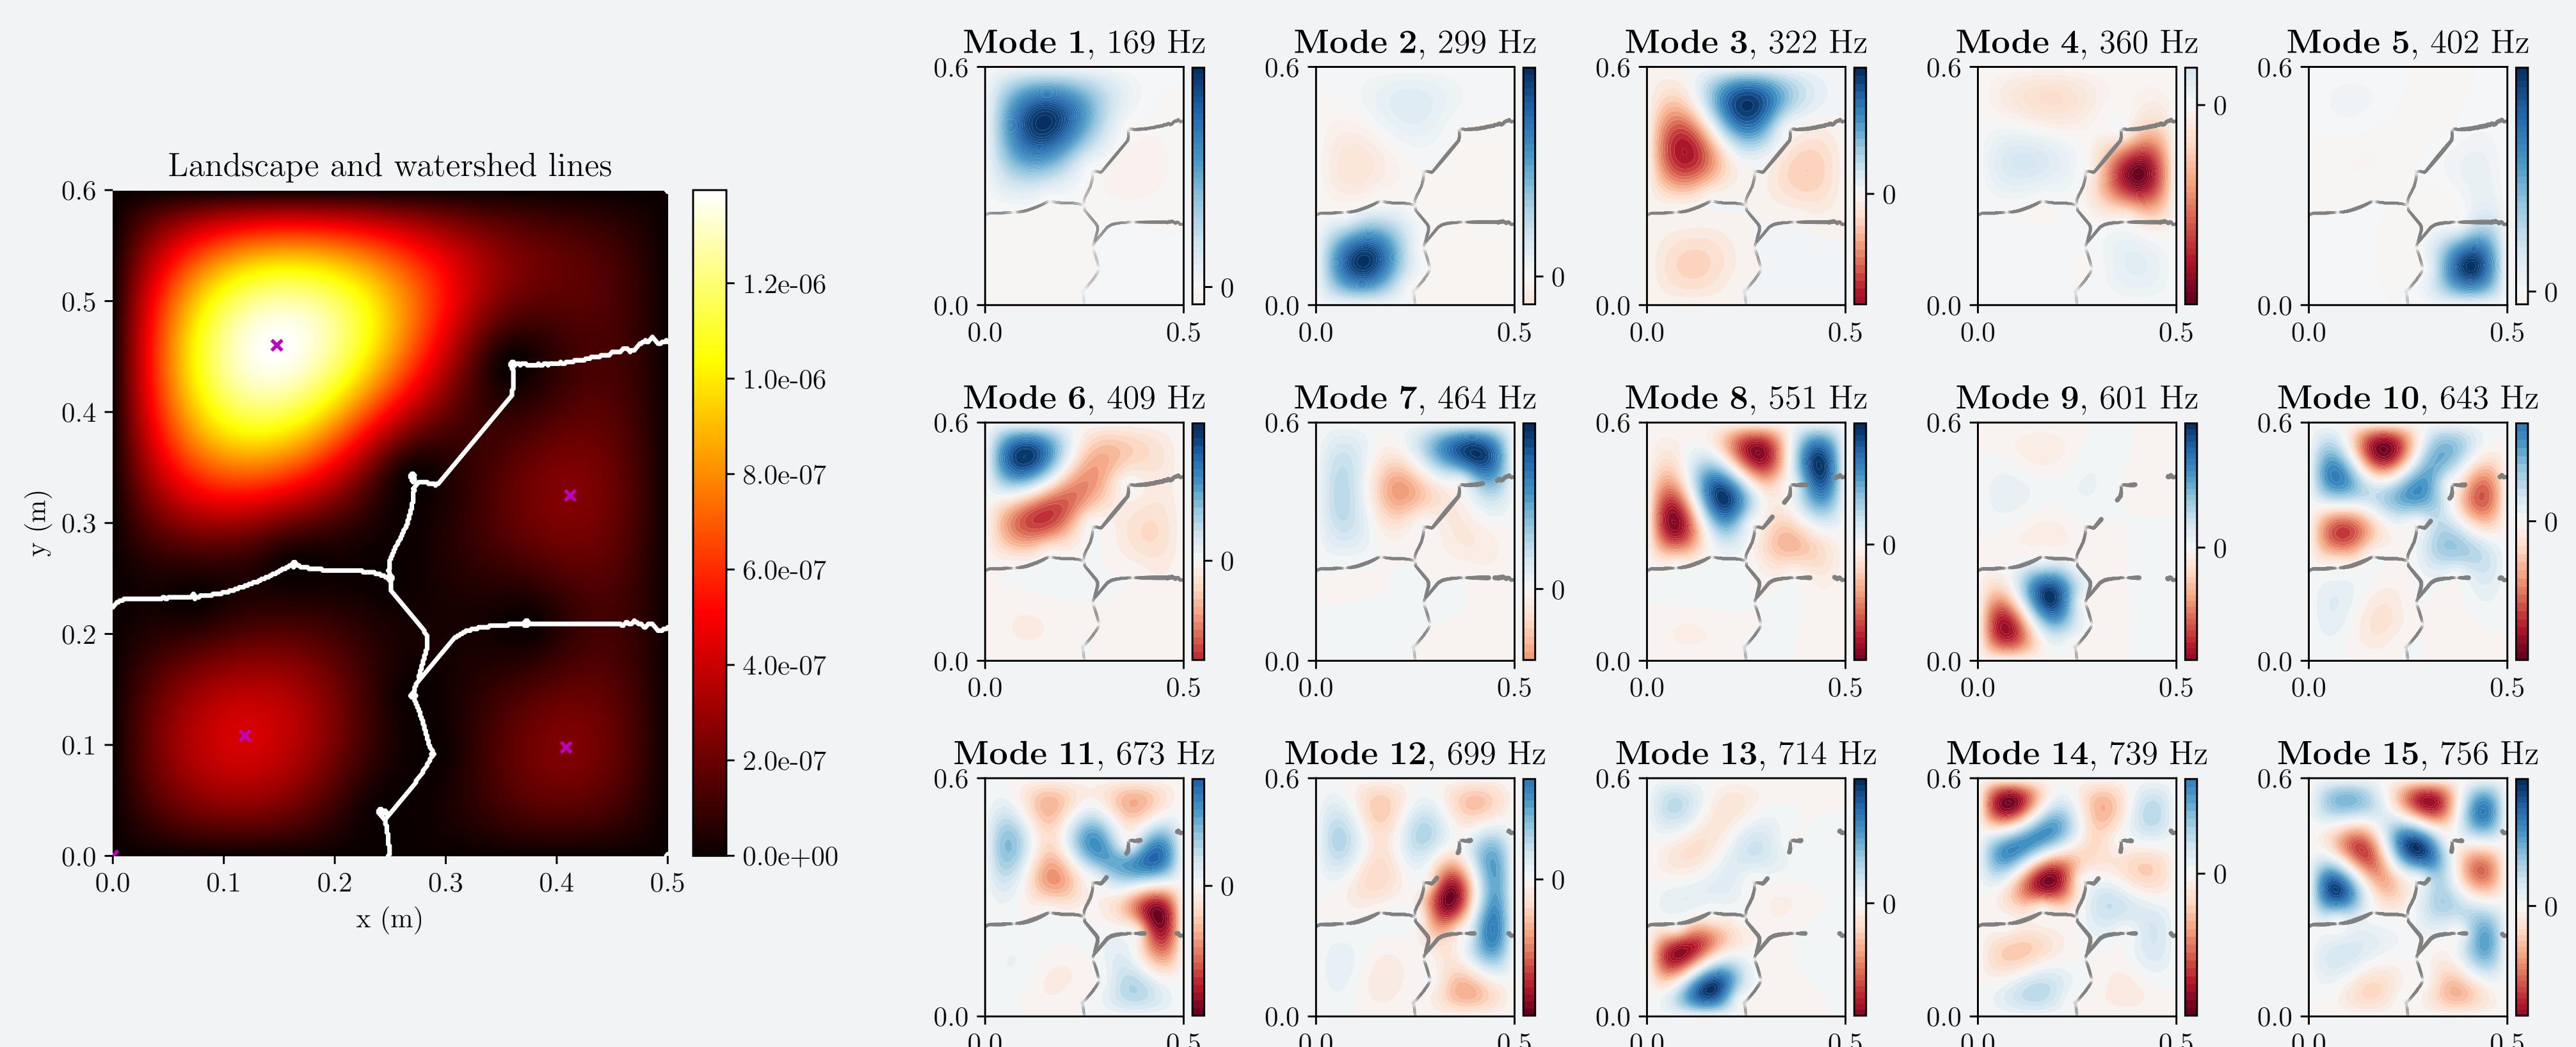


Figure 1. Simply supported homogeneous plate with fixed points inside the domain to induce localisation.

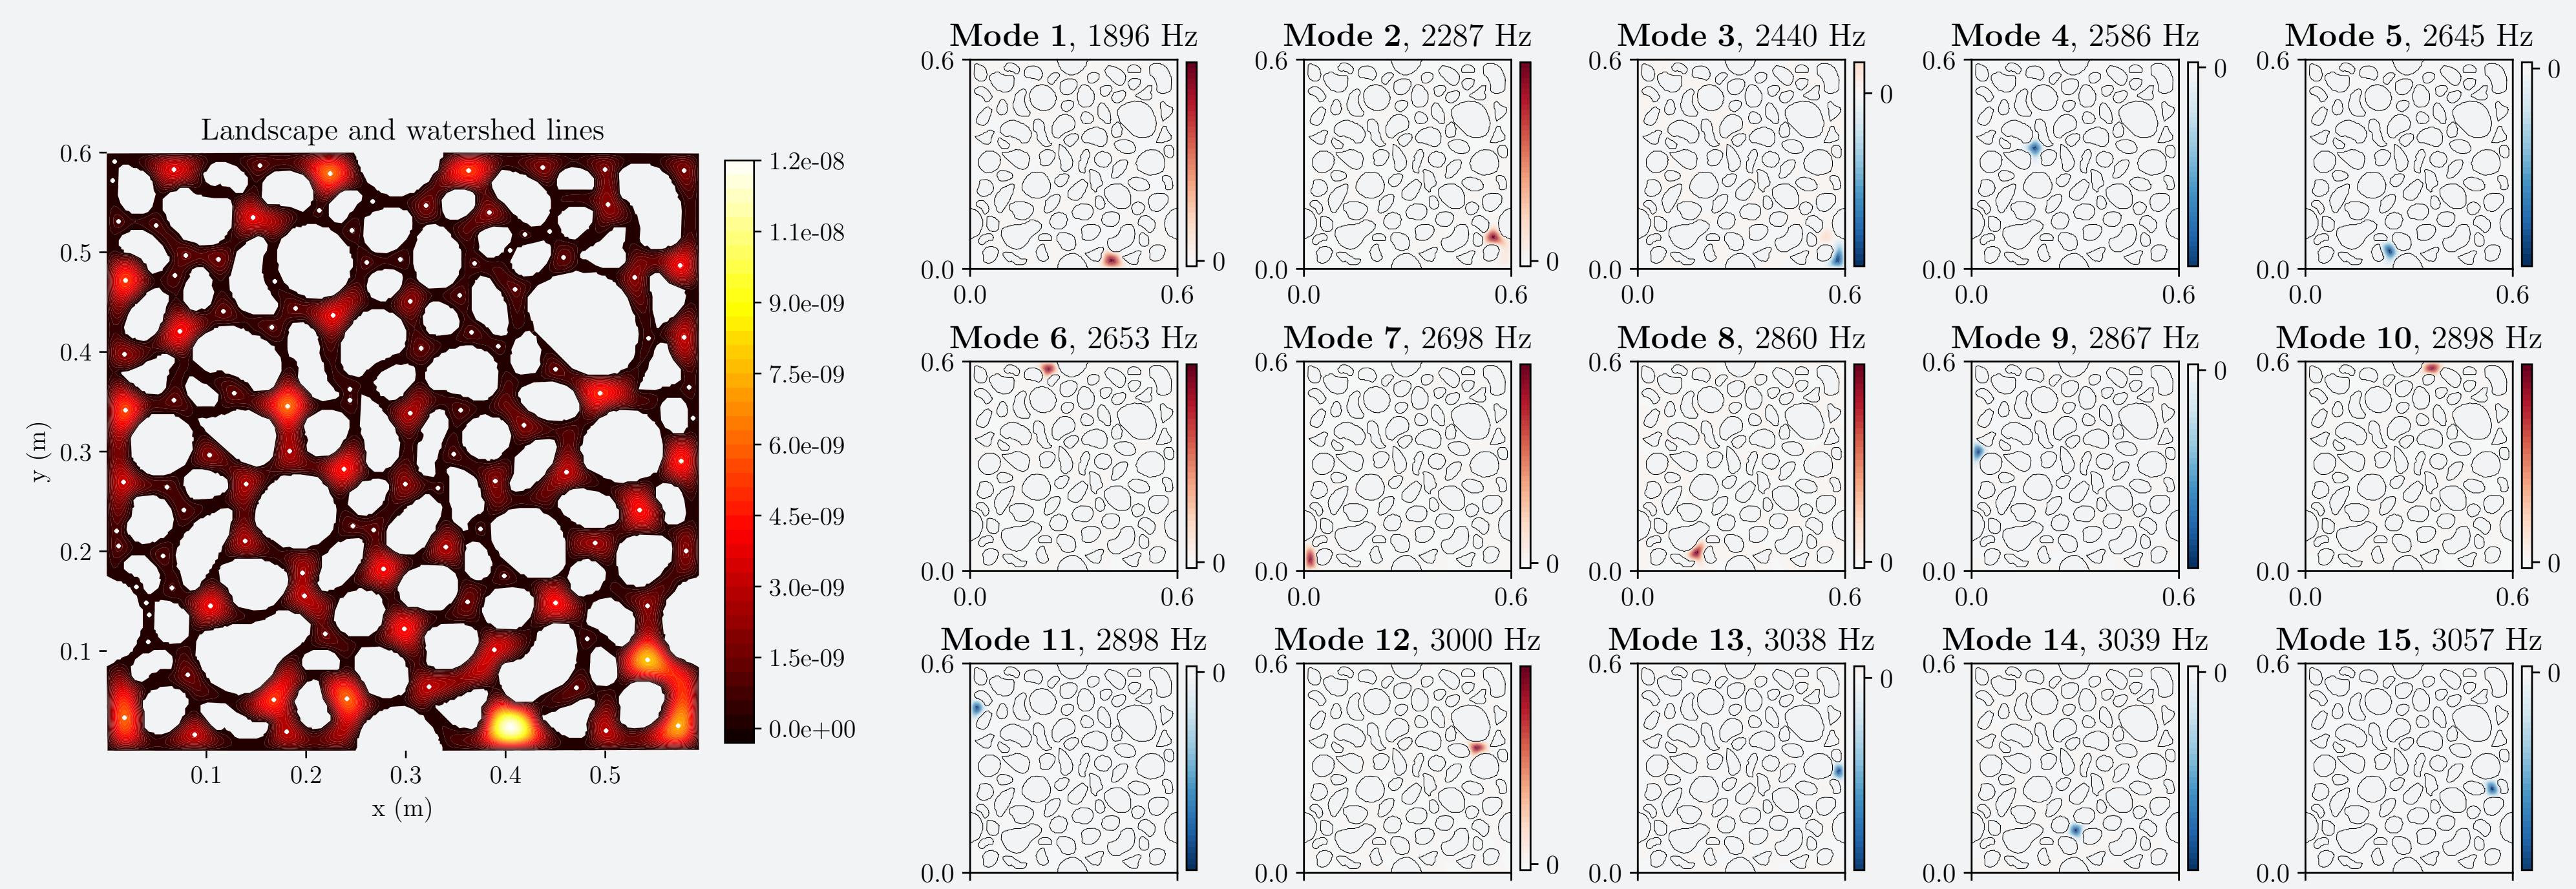


Figure 2. Simply supported plate with irregular perforations inside the domain.

## Global indicators

When a small amount of l-modes are present, we might use standard global indicators. For a baffled plate in Fig. (1).


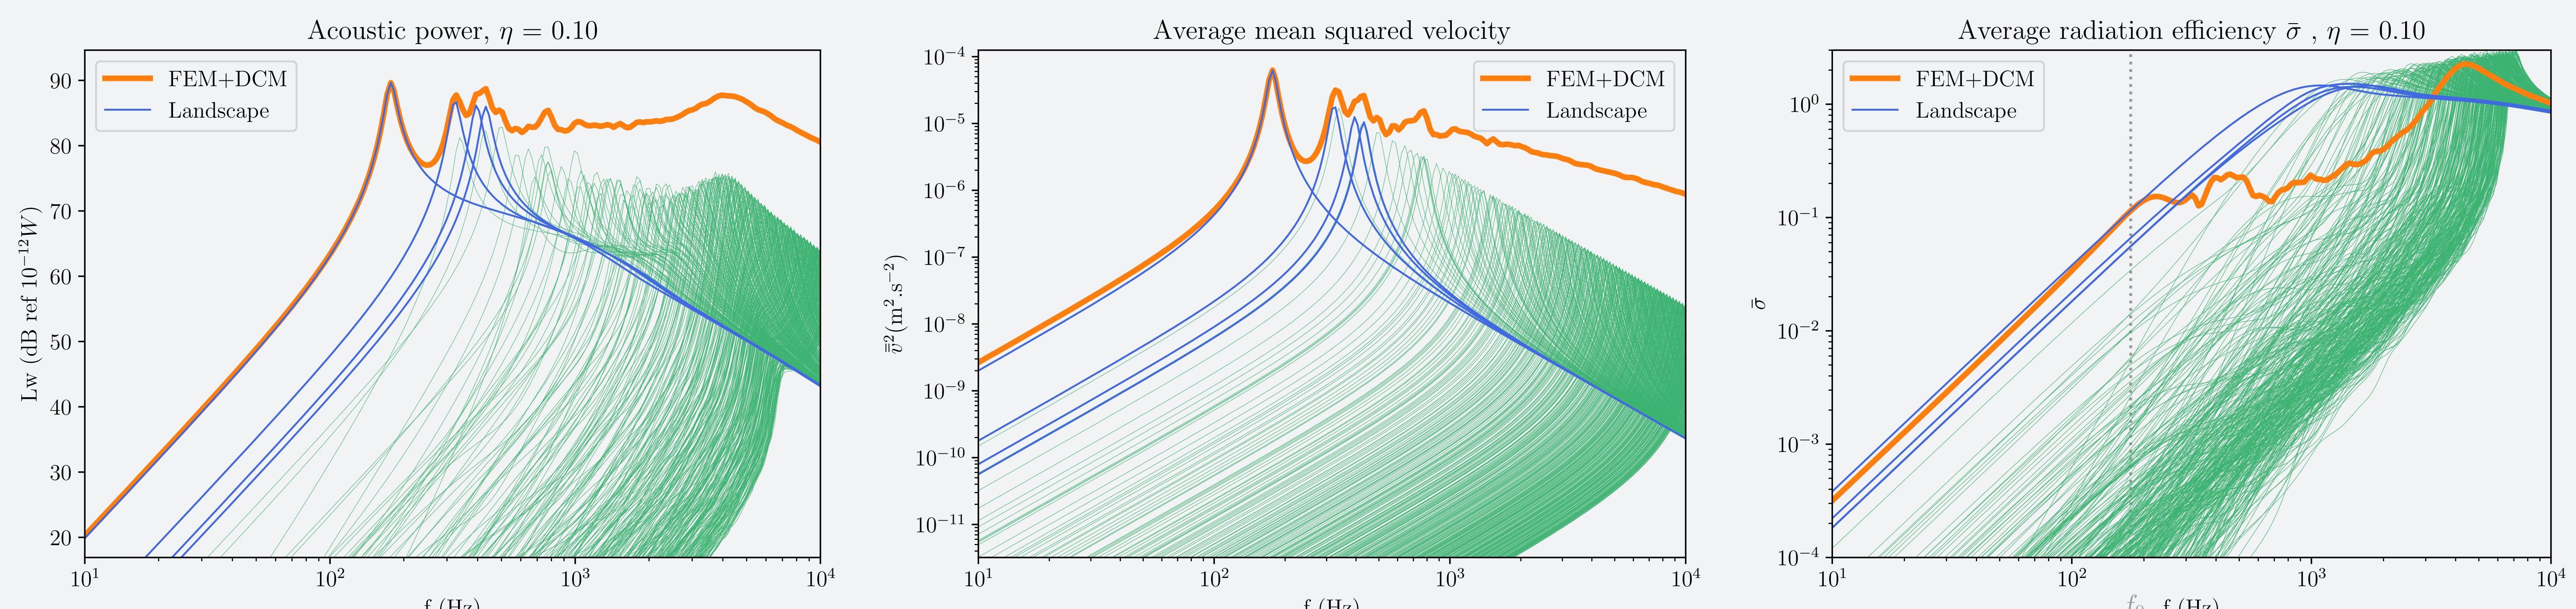


Figure 3. By taking all possible punctual excitations, the radiation indicators are expressed as an independent contribution of each mode (in green).

## Frequency estimation

For a large amount of l-modes, we can still easily estimate the frequency of the l-modes. For a the plate in Fig. (2).

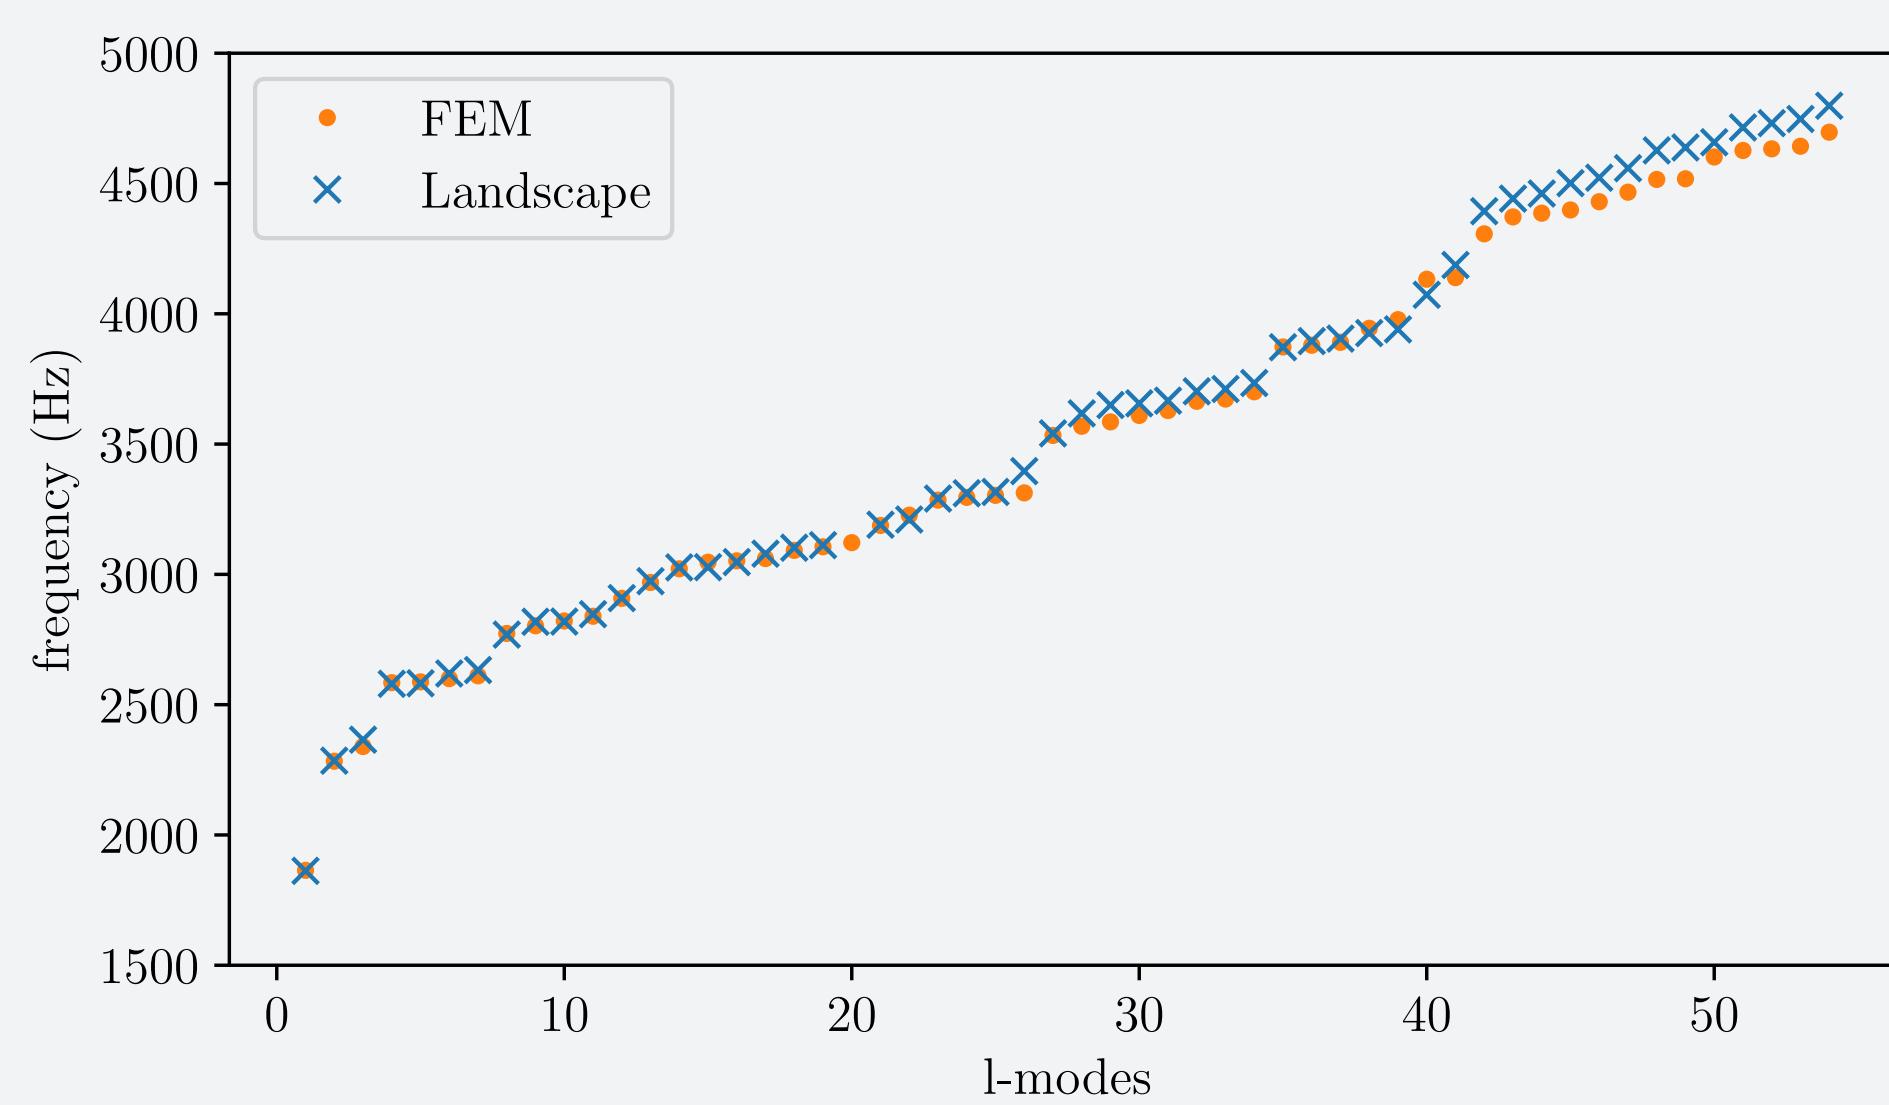

	Mode number				
	1	2	3	30	50
FEM (Hz)	1864.19	2282.99	2339.51	3609.94	4601.69
Landscape (Hz)	1862.33	2285.07	2365.65	3656.33	4658.29
diff %	-0.09	0.09	1.10	1.26	1.21

Table 1. Estimation of the fist l-modes with just one calculation.

## Conclusion

The main features of the radiation of localizing structures can be recovered by means of the landscape of localisation.

## Scan some references here ->

