



HEADBOARD — OVERALL ENVELOPE

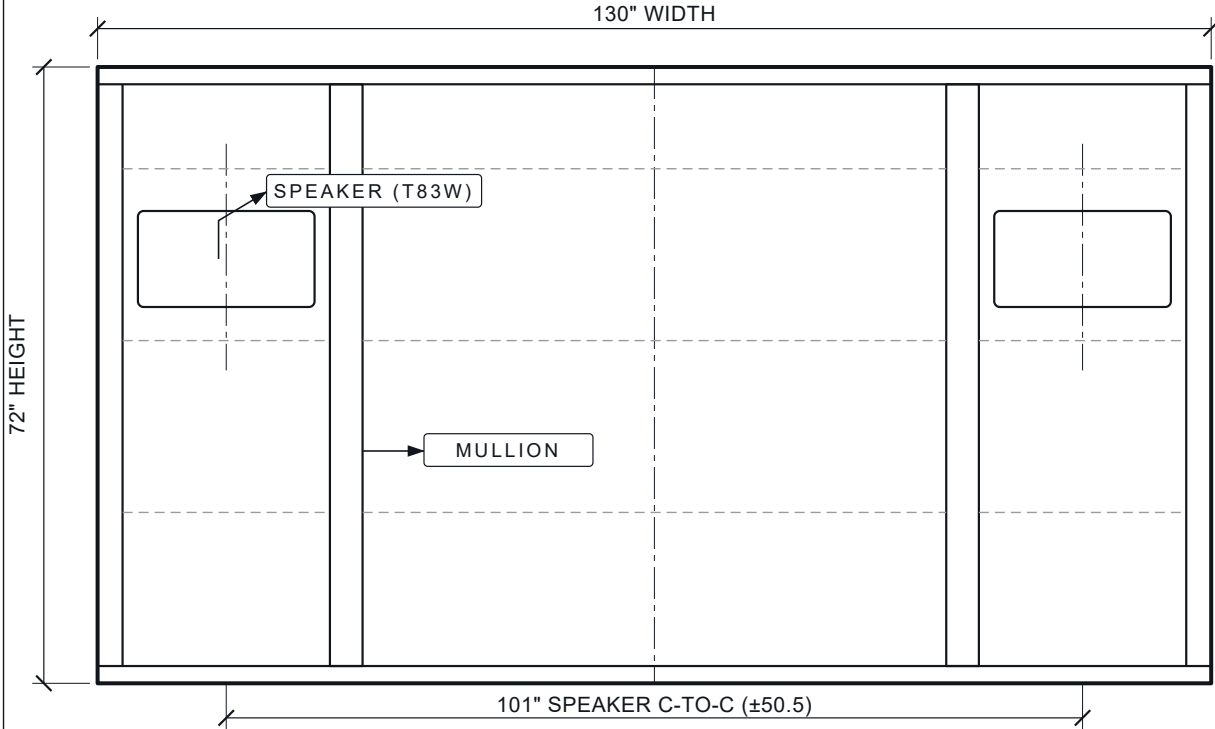

FRONT ELEVATION

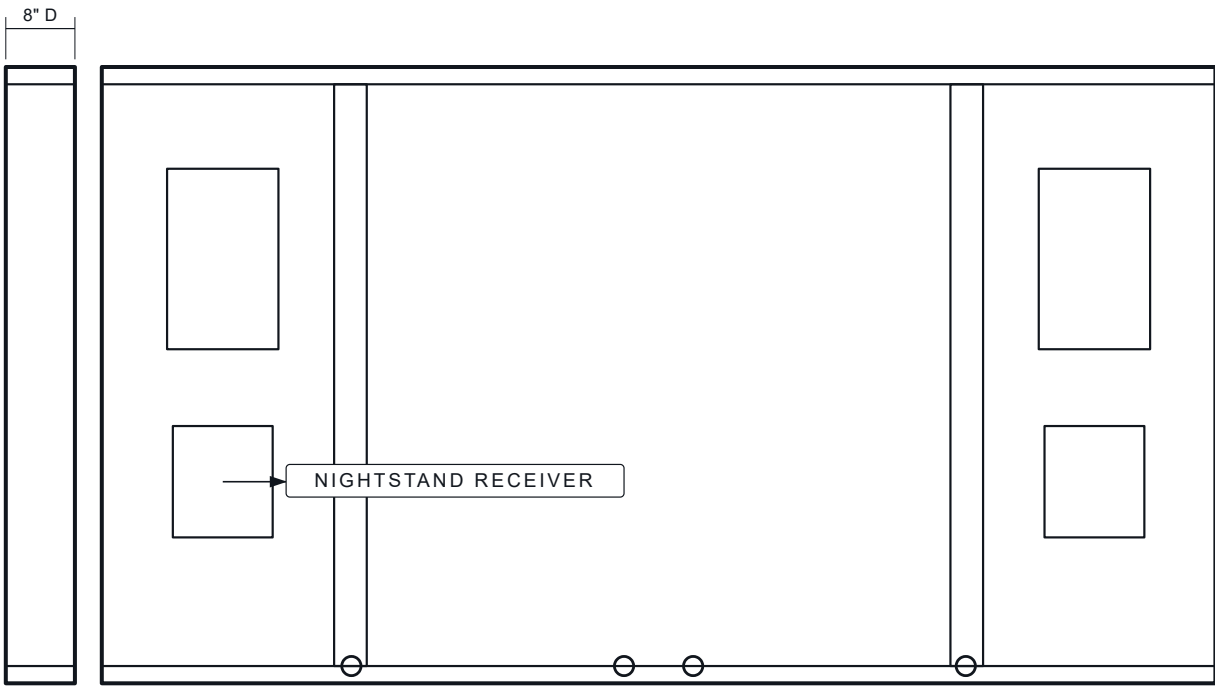

SIDE

REAR ELEVATION (OPEN-BACK)

SHEETS IN THIS SET

- 1 OVERALL ENVELOPE (this sheet)
- 2 PART DRAWINGS + CUT LIST
- 3 SECTION DETAILS
- 4 CRITICAL INTERFACES
- 5 HARDWARE SCHEDULE

GENERAL NOTES

1. All dimensions in inches ("). AFF = above finished floor. Figured dimensions govern — DO NOT scale.
2. Headboard overall 130 W × 72 H × 8 D. Open-back rail-and-stile frame; twelve 7/8" front skins in 4 horizontal courses.
3. Mullions at ±36; bolts to the base at ±36 + ±4. Receivers / USB-C at ±51; speakers bay-centered at ±50.5.
4. Joinery method + grain not specified here. Parts (sheet 2) NOT to a single scale — the cut list governs.
5. Speakers mount horizontal: AMT/mid pod inboard (toward bed center), 8" woofer outboard, mirror-imaged L/R. Cutout in a solid course (sheet 2).

GRAPHIC SCALE (FEET) · ELEVATIONS s = 4.46 px/in



PROJECT
HEIRLOOM BED

DRAWING
Headboard — Cabinet Construction


REV
4.1

DRAWING NO.
Headboard-Shop_Blueprint


SHEET
1 OF 5

PART DRAWINGS & CUT LIST


1 TOP CAP
2" THK · ×1

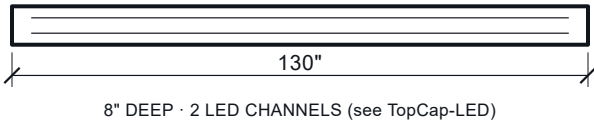


2 BOTTOM RAIL
2" THK · ×1

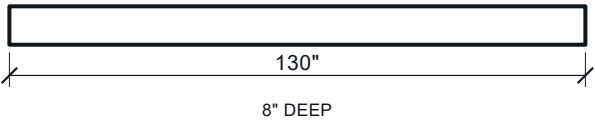


3 SIDE STILE
2" W · ×2




4 MULLION
4" W · ×2 (at ±36)

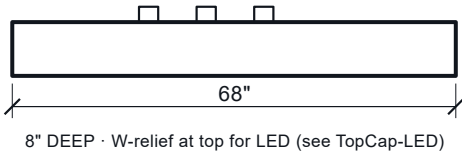

5 SKIN — OUTER
7/8" THK · ×8



6 SKIN — CENTER
7/8" THK · ×4

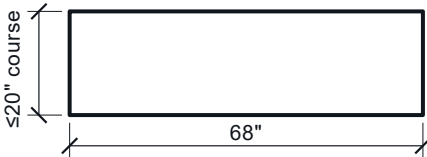

FRONT SKINS — HORIZONTAL COURSES Front field = horizontal courses, each ≤20" tall (board-width / warp limit), grain horizontal; seams AFF 20/40/60 → courses 18/20/20/10"; skins kept whole per bay (no vertical breakup).
Speaker cutout (AFF 44–55) sits inside the 40–60 course — NO seam crosses the hole. Rear support = housed cross-rails at AFF 20/40/60. [TBD-CONFIRM Lee: continuous 68" center run warp-safe length.]

CUT LIST


#	PART	QTY	THK	WIDTH	LENGTH	NOTES
1	Top cap	1	2"	8"	130"	LED channels routed — see TopCap-LED
2	Bottom rail	1	2"	8"	130"	full-width bottom frame member
3	Side stile	2	2"	8"	68"	captured between the rails (mirror pair)
4	Mullion	2	4"	8"	68"	at x = ±36; W-relief at top for the LED channels
5	Front skin — outer	8	7/8"	25"	≤20"	4 courses/side: 18/20/20/10" tall, grain horiz.; the 20" (40–60) course carries the speaker cutout
6	Front skin — center	4	7/8"	68"	≤20"	per course (18/20/20/10" tall); grain horiz.
7	Course cross-rail	9	1.25"	7"	25/68"	behind seams AFF 20/40/60 — rear support

PROJECT HEIRLOOM BED	
DRAWING Headboard — Cabinet Construction	DRAWING NO. Headboard-Shop_Blueprint
REV 4.1	SHEET 2 OF 5

SECTION DETAILS


SECTION A-A

VERTICAL · FRONT (LEFT) → OPEN BACK (RIGHT)

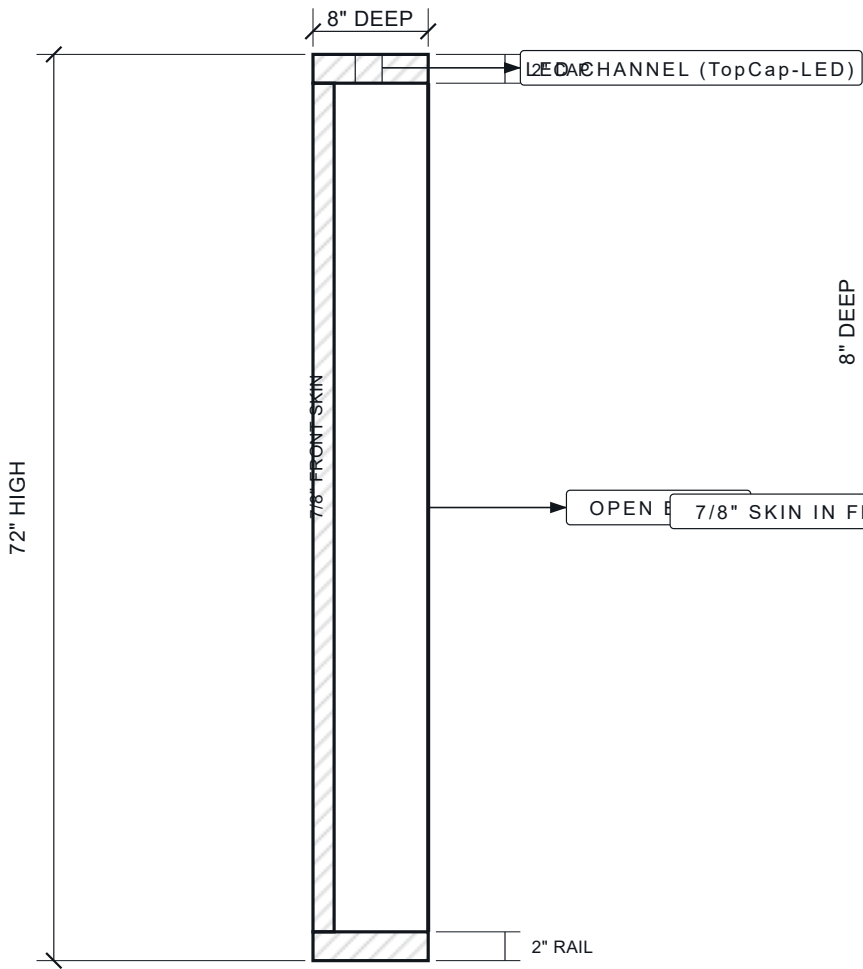

SECTION B-B

PLAN THROUGH A MULLION · OPEN BACK AT TOP

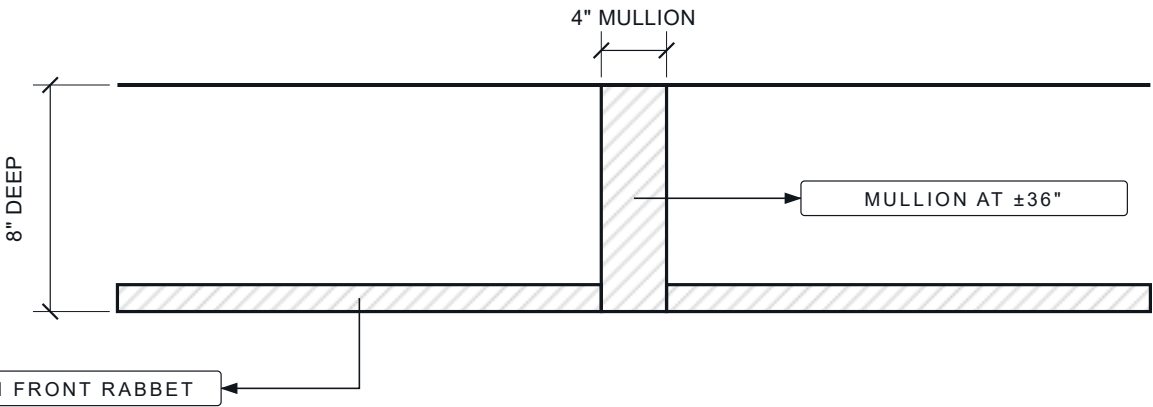


SECTION A-A — vertical, front (left) → open back (right). SECTION B-B — horizontal plan through a mullion.
Sections show the depth build + the panel-in-frame; the top-cap LED channel is detailed on TopCap-LED. Joint method + grain not specified here. Not to a single scale.

PROJECT HEIRLOOM BED	
DRAWING Headboard — Cabinet Construction	DRAWING NO. Headboard-Shop_Blueprint
REV 4.1	SHEET 3 OF 5

CRITICAL INTERFACES

HEADBOARD REAR (OPEN-BACK) · base bolts · nightstand receivers · speakers · USB-C

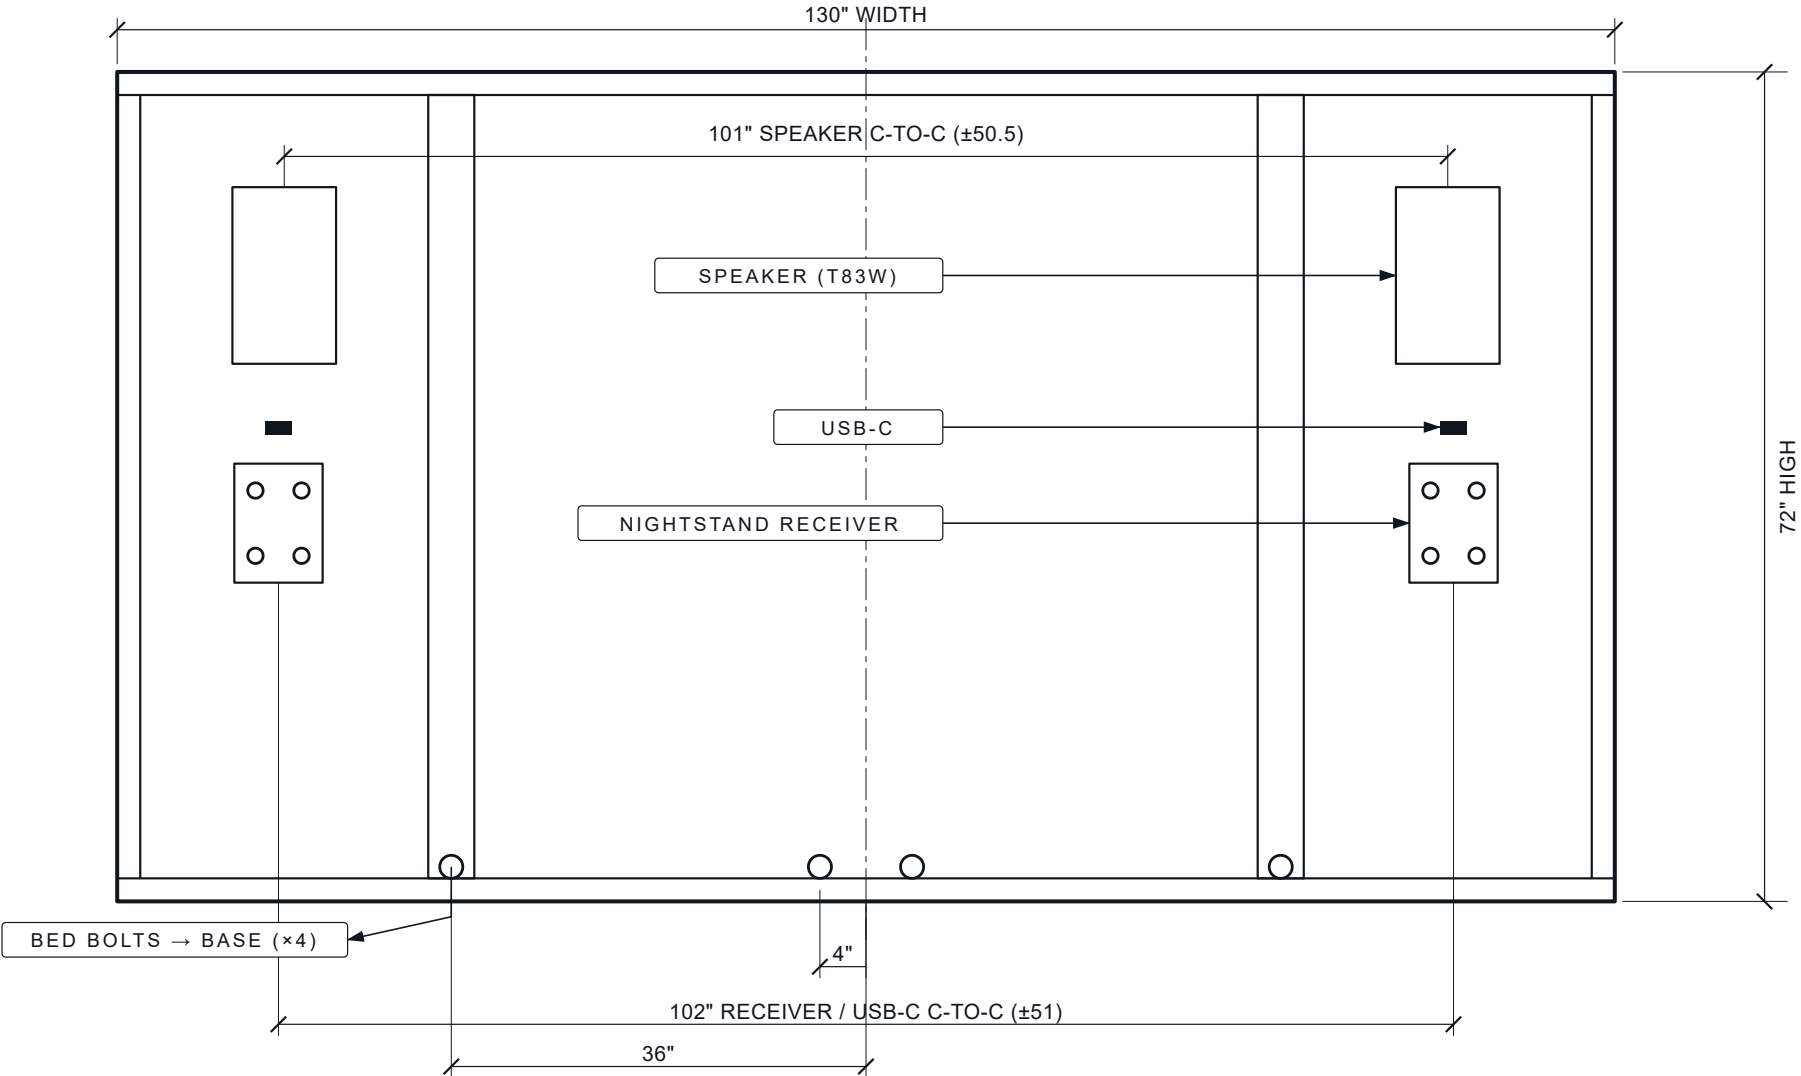


Open-back rail-and-stile frame. Mullions bolt to the base with 4 bed bolts at $x = \pm 36 + \pm 4$ (through the bottom rail).
Nightstand receivers and USB-C ports center at ± 51 ; speakers bay-centered at ± 50.5 . Bolt + receiver hardware on sheet 5. Cutouts straight/flush — no toe-in.
Speaker cutout is HORIZONTAL (landscape 20.71×11.26 , AFF $\sim 44\text{--}55$). Speakers mount horizontal: AMT/mid pod inboard (toward bed center), 8" woofer outboard, mirror-imaged L/R.
Supports: speaker board centered in its outer bay (± 50.5 , ~ 0.5 " inboard of the ± 51 receiver/USB-C line), EQUAL ~ 2.1 " reveal BOTH sides — side stile stays 2", outer panel 25".
The ± 36 mullions / bolt lines do not move. Clear solid-ash band, cutout top $\rightarrow$ LED cap zone bottom (70 AFF) ≈ 15 ".

PROJECT HEIRLOOM BED	
DRAWING Headboard — Cabinet Construction	DRAWING NO. Headboard-Shop_Blueprint
REV 4.1	SHEET 4 OF 5

HARDWARE SCHEDULE

#	ITEM	QTY	SPECIFICATION	LOCATION / NOTE
1	Bed bolt	4	3/8"-16 steel, hex head; length to suit	Bottom rail → base · x = ±36 + ±4
2	Cross-dowel (barrel nut)	4	3/8"-16 steel	In the base; receives each bed bolt
3	Nightstand receiver bolt	8	Captive square-nut + machine bolt	Nightstand → rear receiver (4 per side)
4	USB-C insert	4	Supplied separately · 4-port, locking	Headboard face · ±51 · ~30" AFF — opening cut to suit
5	In-wall speaker	2	Supplied separately · in-wall	Cutout ±50.5 · 20.71 × 11.26 (horizontal) — straight/flush, AMT-mid inboard; opening cut to suit

DETAIL — BED-BOLT CONNECTION (HEADBOARD → BASE)

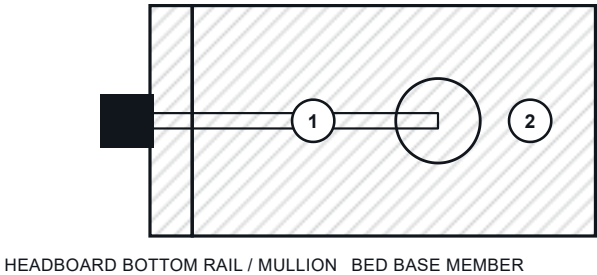


- 1 3/8" bed bolt — steel, hex head (×4 at ±36 / ±4)
- 2 Cross-dowel / barrel nut — set in the base (×4)

Case joinery + grain not specified here. USB-C inserts + in-wall speakers are installed separately — provide the cutouts only.
Bed-bolt + receiver positions locate on sheet 4 (Critical Interfaces). The top-cap LED hardware is on the TopCap-LED sheet.

DETAIL — NIGHTSTAND RECEIVER

rear · one side (mirror-imaged) · receiver = headboard structure

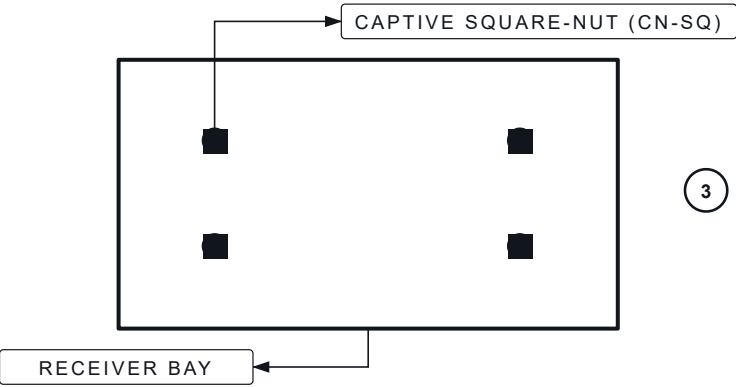

PROJECT HEIRLOOM BED	
DRAWING Headboard — Cabinet Construction	DRAWING NO. Headboard-Shop_Blueprint
REV 4.1	SHEET 5 OF 5