



BF-S01 — HEADBOARD ASSEMBLY — FRONT / SIDE / PLAN

Solid Ash Heirloom Bed — open-back rail-and-stile frame with SIX 1.0 in removable front panels — 130 W × 72 H × 8 D — master model BF-M01 — top-cap LED per BF-D01 — mullion/top-cap joint per BF-D08 — controls on the mullion faces.


FRONT ELEVATION (foot-end view)

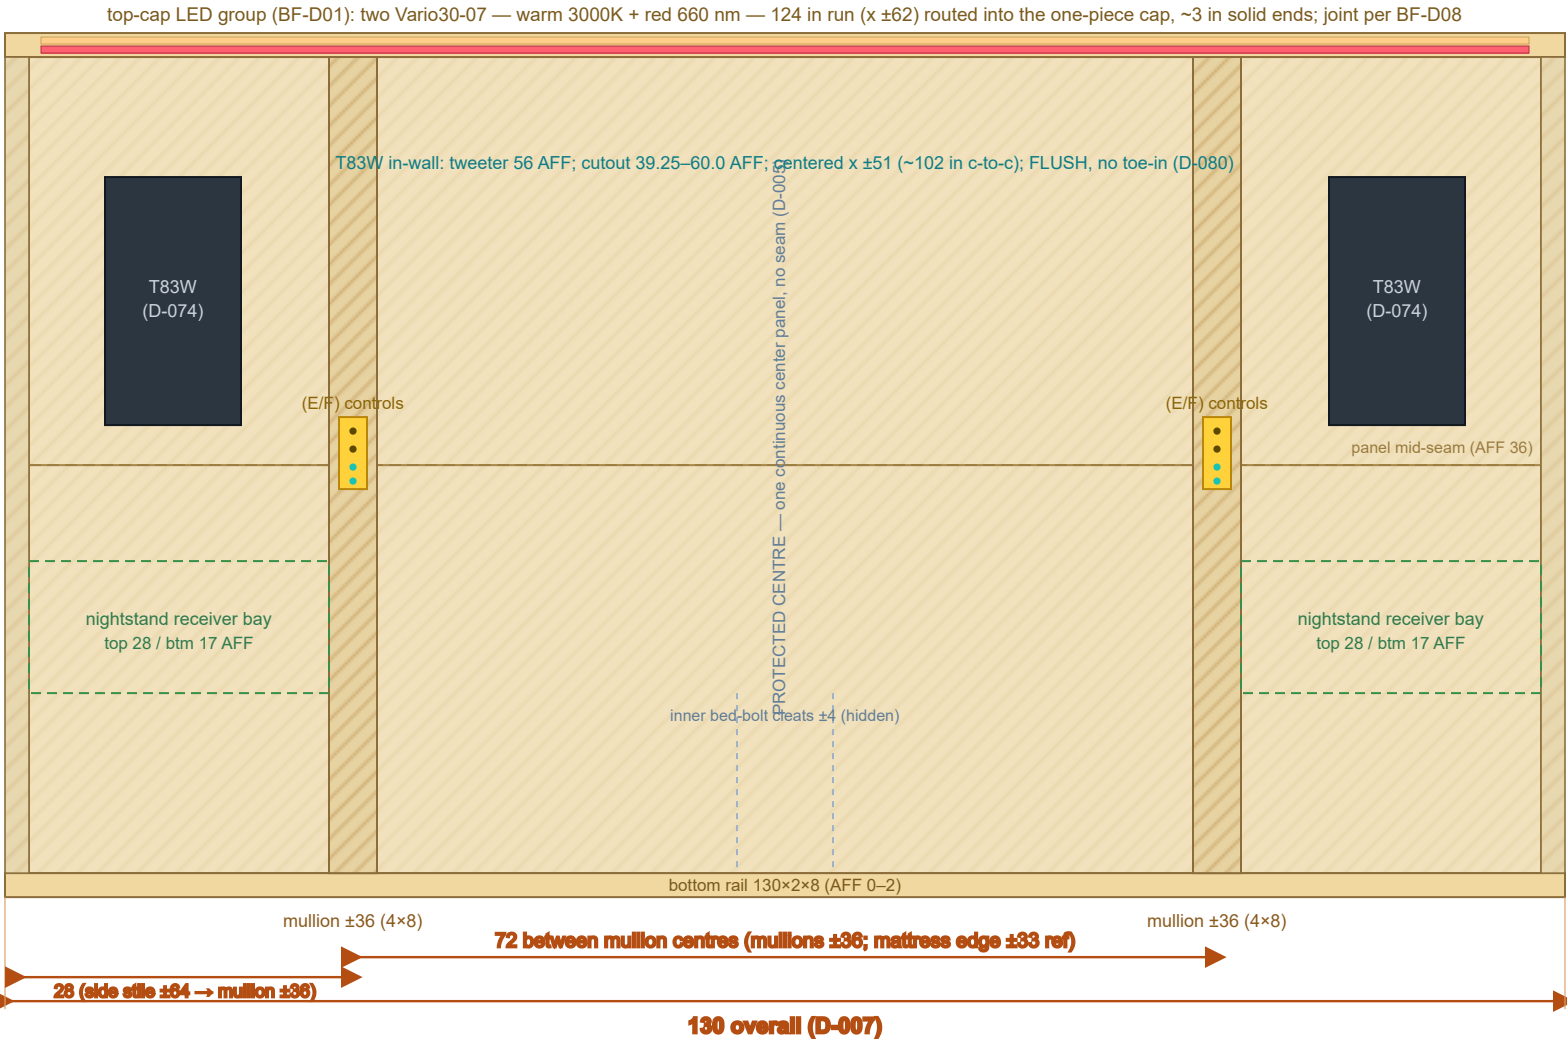

PLAN (top view; wall/rear at top, foot/front at bottom)

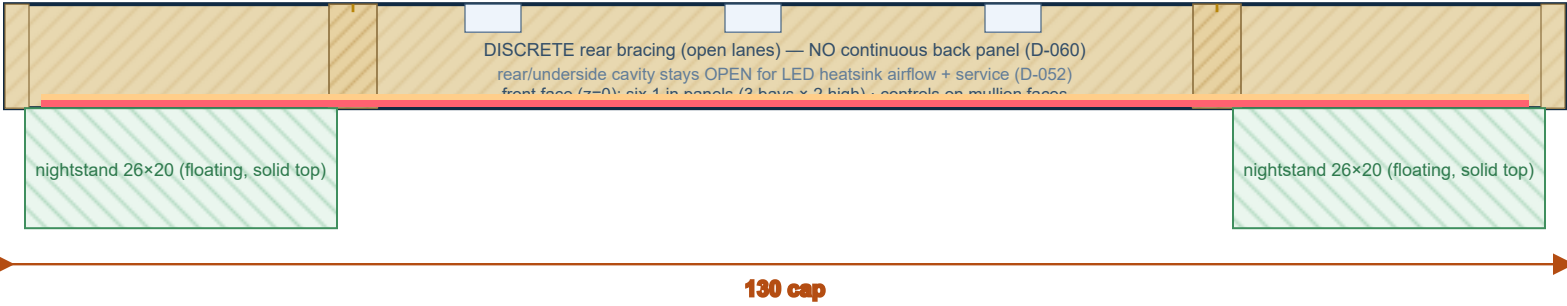

SIDE (wall/rear left, foot/front right)

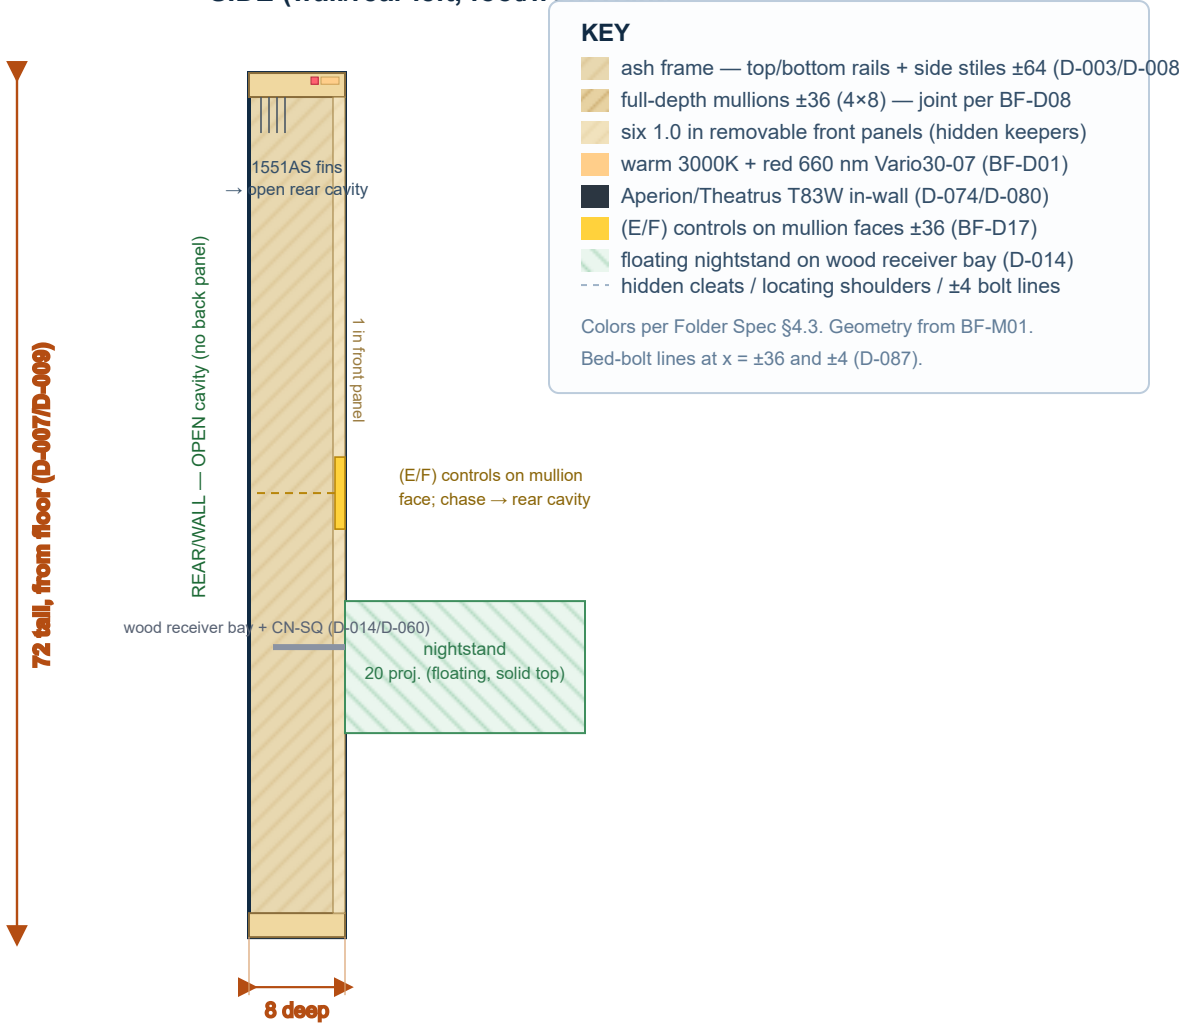

NOTES

- Master model = **BF-M01** (interactive 3-D); this sheet is distilled from it. DO NOT SCALE.
- Open-back rail-and-stile frame: full-width top + bottom rails (130×2×8 each), two side stiles ±64 (2×8), two full-depth mullions ±36 (4×8). 8 in deep, FREESTANDING — bolted to the base, NO wall cleat / no wall attachment.
- Six removable 1.0 in front panels (3 bays — 25 / 68 / 25 W — × 2 high, split at AFF 36), face flush at z=0, held by **hidden keepers** + locating shoulders (no visible fasteners).
- Top-cap LED = **BF-D01**: two Vario30-07 (warm + red), 124 in centered run (x ±62), ~3 in solid ash at each end (one-piece cap), light emits UP; mullion/top-cap U-joint per **BF-D08**.
- Rear/underside cavity stays **OPEN** (no continuous back panel) for heatsink airflow + service; builder engineers the exact discrete bracing (D-052/D-060).
- (E/F) Controls on the mullion faces (±36), ~34–40 in AFF: USB-C + bedside switches behind a removable panel; wiring runs in a chase through the mullion to the open rear cavity (BF-D17). Nightstand tops stay SOLID — no charge holes in the tops (D-042/D-063/D-014).
- Floating nightstands (26×20, solid top) engage a wood receiver bay in each outer bay, drawn with CN-SQ captive square nuts — no metal bracket (D-014/D-060).
- T83W in-walls in the upper outer panels: tweeter 56 AFF, cutout 39.25–60.0 AFF, centered x ±51, FLUSH no toe-in; ~10 in clear ash from cutout top (60) to LED rail bottom (70 AFF) (D-074/D-080).

OPEN ITEMS (genuinely unresolved)

- Exact discrete rear-bracing layout — builder engineering (D-060/G1).
- Mullion throat land vs side-drive bore — sample-confirm (BF-D08).
- Panel threaded-insert family + edge distance in white ash (BF-D16).
- Nightstand receiver-bay bolt spec + pocket (D-014/D-060).

CONFIRMED CURRENT (V1): six 1 in panels; mullions ±36 (4×8); side stiles ±64; controls on mullion faces; nightstand wood receiver bays. Master model BF-M01; history in git.

PART / CODE	Headboard assembly — BF-S01
STATUS / DATE	CURRENT (V1) · 2026-06-05
DATE / SHEET	2026-06-05 — 1 of 1
MASTER MODEL	BF-M01 (interactive)
JOINT DETAIL	BF-D01 LED · BF-D08 joint
SOURCE OF TRUTH	LEDGER D-087 + D-005/7/8/9/14/27/32
REVISIONS	history in git + CHANGELOG.md
TOLERANCE	±1/32 in U.N.O.