

LaminaLab User Guide

Version: 1.0

Date: 26-04-2024

TABLE OF CONTENTS

1. Introduction

- 1.1. Purpose of GUI
- 1.2. Audience
- 1.3. Prerequisites

2. Getting Started

- 2.1. Launching the GUI
- 2.2. Basic Calculation Tutorial
- 2.3. GUI Interface Overview

3. Methodology

- 3.1. Rule of Mixture
- 3.2. Mori-Tanaka model
- 3.3. Halpin-Tsai model

4. GUI

5. Test Case

- 5.1. Objective
- 5.2. Input Data
- 5.3. Calculations
- 5.4. Data Validation

6. References

7. Acknowledgements

1. Introduction

Welcome to the **LaminaLab User Guide**. This guide is designed to provide operational instructions for the generic Graphical User Interface (GUI) dedicated to computing properties of composite materials based on the attributes of their constituent materials.

1.1 Purpose of GUI

The LaminaLab is a computational tool developed to simplify the process of homogenization. Homogenization in the context of composite materials refers to the process of determining the effective or macroscopic properties of a composite material based on the properties of its individual constituents and their arrangement. This is important because composite materials are made up of multiple components with different properties (e.g., fibers and matrix) that interact with each other to give the material its overall behavior.

There are several reasons why homogenization is crucial in composite materials:

Homogenization is important in composites for several reasons:

- **Macroscopic behavior prediction:** By knowing the effective properties of composite materials engineers and researchers can predict how the material will behave under different loads. This information is important for the design and analysis of structures with composite materials.
- **Optimizing Material Design:** Homogenization helps in the design and selection of constituent materials to achieve desired performance characteristics in the composite.
- **Simplifying Analysis:** Instead of modeling the behavior of each fiber or matrix element, homogenization allows for simplified models that consider the composite material. This significantly reduces computational complexity.

There are different methods for homogenizing composite materials, including analytical models. Methods included in the generic GUI are the Rule of Mixture, Mori-Tanaka model, and Halpin-Tsai model.

Overall, homogenization is a critical step in the analysis, design, and manufacturing of composite materials, as it provides a framework for

understanding and predicting their macroscopic behavior based on the properties of their constituents.

1.2 Audience

This user guide is for professionals and experts in engineering, material science, research, and related disciplines, who have a solid foundation in material properties, mechanics, and engineering principles. It also caters to students and academics pursuing advanced studies in these areas. Familiarity with composite materials, including an understanding of their constituents and their respective properties, is assumed. Additionally, this guide may be of interest to individuals involved in industries where knowledge of composite material behavior and properties is essential for informed decision-making and product development.

1.3 Prerequisites

To effectively utilize this GUI, a basic comprehension of:

Material properties, encompassing Young's Modulus, Poisson's Ratio, and Density.

Fundamental concepts pertaining to composite materials.

The specific attributes and traits of the constituent materials being utilized is advised.

With this foundational understanding of GUI's purpose and target user base, we shall proceed to delve into the installation process.

2. Getting started

This section will guide you through the initial steps of using the LaminaLab GUI.

2.1 Launching the GUI

To begin using the GUI, follow these steps:

2.1.1 Locate the Application Icon:

- Find the LaminaLab icon on your desktop or in your application menu.
- Double-click on the icon to launch the GUI.

2.2 Basic Calculation Tutorial

In this tutorial, we will perform a simple calculation to acquaint you with the GUI's functionality.

- Navigate to the Input Section
 - Locate the "Input Data" section on the GUI interface.
- Enter Material Properties:
 - Input the material properties for each constituent material:
 - E11 for both fiber and matrix.
 - E22 for both fiber and matrix.
 - G12 for both fiber and matrix.
 - G23 for both fiber and matrix.
 - Γ_{12} (poisson's ratio) for both fiber and matrix.
 - Volume fraction for both fiber and matrix.
 - Additional parameters
 - User can select the unit of his convenience for input data using the drop down available in the input data section.
 - Verify and Cross-Check:
 - Double-check all entered data to ensure accuracy before proceeding.
 - Initiate the Calculation:

- Locate the buttons available in GUI labeled with method name and click on the button as per your requirement to start the calculation process.
- Wait for Results:
 - The GUI will now process the data and perform the calculations. This may take a few moments depending on the complexity of the calculation.
- Viewing results:
 - Once the calculation is complete, the results will be displayed in the designated output section.

2.3 GUI Interface Overview

LaminaLab

Unit selection for input :

E11 of fiber : GPa
 E22 of fiber : GPa
 G12 of fiber : GPa
 G23 of fiber : GPa
 Poisson's ratio of fiber (ν_{f12}) :
 Volume Fraction of Fiber (V_f) :

Em of Matrix : GPa
 Gm of matrix : GPa
 Poisson's ratio of matrix (ν_m) :
 Volume Fraction of Matrix (V_m) :

Properties of Composite Material

Unit selection for output :

E11 : GPa
 E22 : GPa
 G12 : GPa

G23 : GPa
 Poisson's ratio (ν_{12}) :

E i j : Elastic Modulus in direction i , j .
G i j : Shear Modulus in direction i , j .

The diagram illustrates a 3D coordinate system for a composite lamina. The longitudinal direction is labeled 1, the transverse direction is labeled 2, and the thickness direction is labeled 3. The elastic modulus components are labeled E11, E22, and E33. The shear modulus components are labeled G12 and G23. The diagram also shows the matrix and fiber components.

Fig. 1. GUI Overview

$$E_{22} = \frac{1}{S_{22}} = \frac{\left\{ \left[(A_{22} - A_{32}) V_m + V_f \right] \left[(A_{11} + A_{22} + A_{32}) V_f V_m \right] + \left[A_{11} (A_{22} + A_{32}) - 2A_{12} A_{21} \right] S_{11}^m V_m^2 + S_{11}^f V_f^2 \right\}}{\left[A_{22} (b_1 + b_2) V_m + A_{12} (b_3 + b_4) V_m + b_5 (A_{11} V_m + V_f) + A_{22}^2 S_{11}^m V_m^2 (A_{11} V_m + V_f) \right]}$$

$$G_{12} = \frac{1}{S_{66}} = \frac{(V + V_f A_{12}) G^f G^m}{V G^m + V_f A_{12} G^f}$$

$$G_{23} = \frac{1}{S_{44}} = \frac{(V + A_{12} V_f) G^f G^m}{G^m V_f + V A_{12} G^f}$$

$$\gamma_{12} = -\frac{S_{12}}{S_{11}} = \frac{\left\{ A_{12} V_m \left[V_f (S_{11}^f - S_{11}^m) + 2A_{21} V_m S_{11}^m \right] - (V + A_{12} V_f) \left[V_f S_{12}^f + (A_{11} + A_{22}) V_m S_{12}^m \right] \right\}}{\left\{ V_f^2 S_{11}^f + [-2A_{12} A_{21} + A_{11} (A_{22} + A_{32})] V_m^2 S_{11}^m + V_f V_m \left[(A_{22} + A_{32}) S_{11}^f + A_{11} S_{11}^m + 2A_{21} (-S_{12}^f + S_{12}^m) \right] \right\}}$$

where

$$b_1 = V_f V_m \left[A_{12} (S_{12}^m - S_{12}^f) + A_{11} (S_{11}^f + S_{11}^m) \right]$$

$$b_2 = V_f^2 (S_{22}^f + S_{11}^m) - 2 A_{12} A_{21} S_{11}^m V_m^2$$

$$b_3 = A_{21} V_m \left[2A_{32} S_{11}^m V_m - V_f (S_{22}^f - S_{23}^f + S_{11}^m + S_{12}^m) \right]$$

$$b_4 = V_f (S_{12}^m - S_{12}^f) - A_{32} V_m$$

$$b_5 = A_{32} V_f V_m (S_{12}^m - S_{23}^f) - A_{32}^2 S_{11}^m V_m^2 + S_{22}^f V_f^2$$

E_{11} = Longitudinal Young's modulus of Composite material.

E_{22} = Transverse Young's modulus of Composite material.

G_{12} = In-plane shear modulus of Composite material.

G_{23} = Out-of-plane shear modulus of Composite material.

γ_{12} = Poisson's ratio of Composite material.

3.3 Halpin-Tsai Model

[3]

The Halpin-Tsai model is specifically designed for unidirectional fiber-reinforced composites. It estimates the effective elastic properties (modulus, shear modulus, Poisson's ratio, etc.) based on the properties of the individual constituents (fibers and matrix) and their volume fractions.

This model accounts for the orientation and alignment of the fibers, assuming that they are aligned in a single direction.

Each of these methods provides a different level of accuracy and complexity in predicting the effective properties of composite materials. The choice of method depends on factors such as the microstructure of the composite, the alignment of the fibers, and the desired level of precision in the calculations. The GUI developed will allow users to select the appropriate method and input the necessary parameters for property calculations of composite materials.

The equations encoded in GUI for Halpin-Tsai model are:

$$E_{11} = E_f V_f + E_m V_m$$

E_{11} - longitudinal Young's modulus, E_f - fiber Young's modulus, V_f - fiber volume fraction, E_m - matrix Young's modulus, V_m - matrix volume in composite.

$$E_{22} = E_m \left(\frac{1 + \xi \eta V_f}{1 - \eta V_f} \right)$$

$$\eta = \frac{\frac{E_f}{E_m} - 1}{\frac{E_f}{E_m} + \xi}$$

where: E_{22} - transverse Young's modulus, E_f - fiber Young's modulus, V_f - fiber volume fraction, E_m - matrix Young's modulus, $\xi = 2$

$$G_{12} = G_m \left(\frac{1 + \xi \eta V_f}{1 - \eta V_f} \right)$$

$$\eta = \frac{\frac{G_f}{G_m} - 1}{\frac{G_f}{G_m} + \xi}$$

where: G_{12} - in-plane shear modulus, G_f - fiber Young's modulus, V_f - fiber volume fraction, G_m - matrix Young's modulus, $\xi = 1$

$$\gamma_{12} = \gamma_f V_f + \gamma_m V_m$$

where: γ_{12} - Poisson's ratio, γ_f - Poisson's ratio of fiber, γ_m - Poisson's ratio of matrix,

V_f - fiber volume fraction, V_m - matrix volume fraction.

4. GUI

The Graphical User Interface (GUI) is dedicated to computing properties of composite materials based on the attributes of their constituent materials i.e. fiber and matrix.

The screenshot displays the LaminaLab GUI with the following components:

- Title Bar:** LaminaLab
- Unit selection for input:** A dropdown menu set to "SI".
- Input Fields (Left Column):**
 - E11 of fiber : [] GPa
 - E22 of fiber : [] GPa
 - G12 of fiber : [] GPa
 - G23 of fiber : [] GPa
 - Poisson's ratio of fiber (ν_{f12}) : []
 - Volume Fraction of Fiber (V_f) : []
- Input Fields (Right Column):**
 - Em of Matrix : [] GPa
 - Gm of matrix : [] GPa
 - Poisson's ratio of matrix (ν_m) : []
 - Volume Fraction of Matrix (V_m) : []
- Buttons:**
 - Sample Data (Red)
 - Clear (Red)
 - User Guide (Grey)
 - Rule of Mixture (Red)
 - Mori-Tanaka (Red)
 - Halpin-Tsai (Red)
- Properties of Composite Material:**
 - Unit selection for output: A dropdown menu set to "SI".
 - E11 : [] GPa
 - E22 : [] GPa
 - G12 : [] GPa
 - G23 : [] GPa
 - Poisson's ratio (ν_{12}) : []
- Legend:**
 - E i j :** Elastic Modulus in direction i , j .
 - G i j :** Shear Modulus in direction i , j .
- Diagram:** A 3D perspective view of a rectangular composite block. The block is divided into a "MATRIX" region (light grey) and a "FIBER" region (darker grey). A coordinate system is shown with axes 1, 2, and 3. Axis 1 is labeled "Longitudinal direction" (green box) and has E_{11} at its end. Axis 2 is labeled "Transverse direction" (red box) and has E_{22} at its end. Axis 3 is vertical and has E_{33} at its end. The diagram illustrates the orientation of the fibers and the corresponding elastic modulus directions.

Fig. 2. GUI Overview

5. Test Case

5.1 Objective

To ensure the GUI's calculation module for composite material properties is accurate and functional, we will systematically input known material properties and dimensions. These results will then be compared against theoretically derived or experimentally determined values. This comprehensive test is designed to pinpoint any discrepancies, errors, or inaccuracies in the calculations, ultimately ensuring reliable and precise results from the GUI. Not only that, but the GUI's proficiency to handle edge cases, error scenarios, and varying input data will also be evaluated to ensure robustness and consistent calculation of composite material properties.

5.2 Input data

To perform accurate calculations for composite material properties, the GUI requires specific input data. This section provides detailed guidance about the information you need to provide.

5.1 Material Properties

The material properties refer to the characteristics of the individual constituents of the composite material. These properties include parameters such as:

- **Young's Modulus (E):** The measure of a material's stiffness.
- **Shear Modulus (G):** The measure of a material's resistance to shear deformation.
- **Poisson's Ratio (ν):** The ratio of lateral contraction to axial elongation under stress.

Ensure that you have accurate values for each constituent material. If you are uncertain about any of these values, refer to the material specifications or consult with a material expert. Also, Maintain uniform units throughout the input data. Ensure that all values are in the same measurement units to prevent calculation errors.

Let us consider a practical example:

Example: We have a composite material consisting of two constituents: AS4 Graphite Fiber and 3501-6 Epoxy Resin. The material properties are as follows:

- AS4 Graphite Fiber
 - Young's Modulus (E)
 - $E_{11} = 225 \text{ GPa}$
 - $E_{22} = 15 \text{ GPa}$
 - Shear Modulus (G)
 - $G_{12} = 15 \text{ GPa}$
 - $G_{23} = 7 \text{ GPa}$
 - Poisson's Ratio (ν)
 - $\nu_{12} = 0.2$
 - Volume fraction (V_f)
 - $V_f = 0.6$
- 3501-6 Epoxy Resin
 - Young's Modulus (E)
 - $E_{11} = 4.2 \text{ GPa}$
 - $E_{22} = 4.2 \text{ GPa}$
 - Shear Modulus (G)
 - $G_{12} = 1.567 \text{ GPa}$
 - $G_{23} = 1.567 \text{ GPa}$
 - Poisson's Ratio (ν)
 - $\nu_{12} = 0.34$
 - Volume fraction (V_m)
 - $V_m = 0.4$

By inputting this data accurately into the GUI, you will be able to calculate the desired composite material properties.

5.3 Calculations

Calculation of Composite Material Properties using Rule of Mixture –

The correspondance properties required to calculate properties of composite material using rule of mixtures are given as input into GUI.

LaminaLab

Unit selection for input : SI

E11 of fiber : GPa

E22 of fiber : GPa

G12 of fiber : GPa

G23 of fiber : GPa

Poisson's ratio of fiber (ν_{f12}) :

Volume Fraction of Fiber (V_f) :

Rule of Mixture

Sample Data

Em of Matrix : GPa

Gm of matrix : GPa

Poisson's ratio of matrix (ν_m) :

Volume Fraction of Matrix (V_m) :

Mori-Tanaka

Halpin-Tsai

Clear

User Guide

Properties of Composite Material

Unit selection for output : SI

E11 : GPa

E22 : GPa

G12 : GPa

G23 : GPa

Poisson's ratio (ν_{12}) :

E i j : Elastic Modulus in direction i , j .

G i j : Shear Modulus in direction i , j .

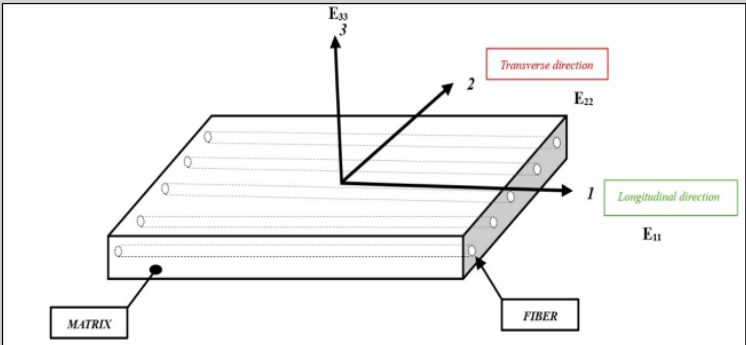


Fig. 3. Rule of Mixture

Calculation of Composite Material Properties using Mori-Tanaka model –

The correspondence properties required to calculate properties of composite material using mori-tanaka method are given as input into GUI.

LaminaLab

Unit selection for input :

Sample Data **Clear** **User Guide**

E11 of fiber : GPa

E22 of fiber : GPa

G12 of fiber : GPa

G23 of fiber : GPa

Poisson's ratio of fiber (ν_{f12}) :

Volume Fraction of Fiber (V_f) :

Em of Matrix : GPa

Gm of matrix : GPa

Poisson's ratio of matrix (ν_m) :

Volume Fraction of Matrix (V_m) :

Rule of Mixture **Mori-Tanaka** **Halpin-Tsai**

Properties of Composite Material

Unit selection for output :

E11 : GPa

E22 : GPa

G12 : GPa

G23 : GPa

Poisson's ratio (ν_{12}) :

E i j : Elastic Modulus in direction i , j .

G i j : Shear Modulus in direction i , j .

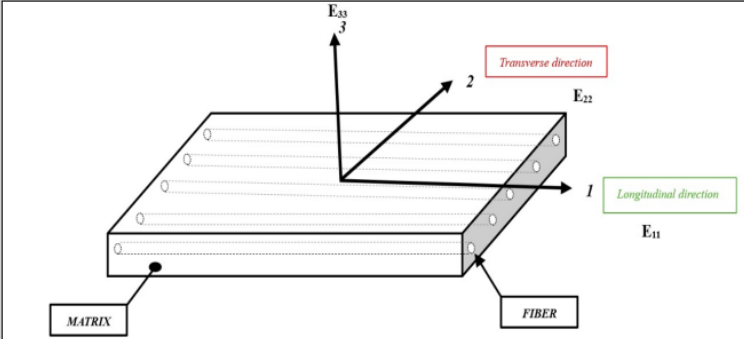


Fig. 4. Mori-Tanaka method

Calculation of Composite Material Properties using Halpin-Tsai equations –

The correspondence properties required to calculate properties of composite material using Halpin-Tsai equations are given as input into GUI.

LaminaLab

Unit selection for input :

Sample Data **Clear** **User Guide**

E11 of fiber : GPa

E22 of fiber : GPa

G12 of fiber : GPa

G23 of fiber : GPa

Poisson's ratio of fiber (ν_{f12}) :

Volume Fraction of Fiber (V_f) :

Em of Matrix : GPa

Gm of matrix : GPa

Poisson's ratio of matrix (ν_m) :

Volume Fraction of Matrix (V_m) :

Rule of Mixture **Mori-Tanaka** **Halpin-Tsai**

Properties of Composite Material

Unit selection for output :

E11 : GPa

E22 : GPa

G12 : GPa

G23 : GPa

Poisson's ratio (ν_{12}) :

E i j : Elastic Modulus in direction i , j .

G i j : Shear Modulus in direction i , j .

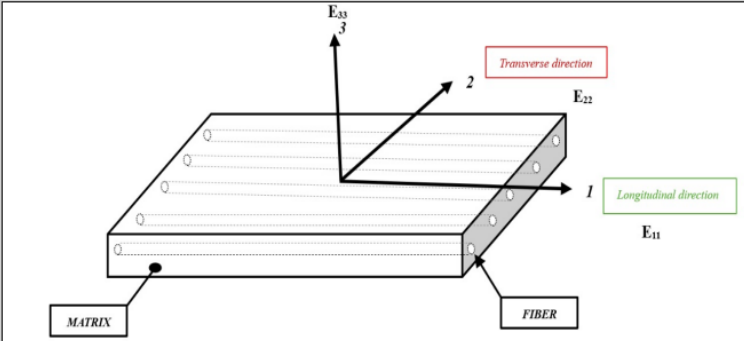


Fig. 5. Halpin-Tsai model

5.3 Data Validation

Ensuring accurate and valid input is crucial for obtaining reliable results when using the Composite Material Properties Calculator GUI. This section outlines the importance of data validation and provides guidelines for input accuracy.

Table 1. Measured and predicted properties of AS4/3501-6 UD composite material ($V_f = 0.6$) [2]

Material Property	Fiber (Gpa)	Matrix (Gpa)	Experimental Data	Current Data (Gpa)
E11	225	4.2	126	136.7
ν_{12}	0.2	0.34	0.28	0.25

Above given table is used for validating the results using Rule of Mixture.

Table 2. Measured and predicted properties of AS4/3501-6 UD composite material ($V_f = 0.6$) [2]

Material Property	Fiber (Gpa)	Matrix (Gpa)	Experimental Data	Current Data (Gpa)
E11	225	4.2	126	136.7
E22	15	4.2	11	8.756
G12	15	1.567	6.6	4.5
G23	7	1.567	3.9	3.3
ν_{12}	0.2	0.34	0.28	0.25

Above given table is used for validating the results using Mori-Tanaka model.

Table 2. Measured and predicted properties of composite material

(Epoxy resin and Glass fiber) ($V_f = 0.55$)

[3]

Material Property	Fiber (GPa)	Matrix (GPa)	Current Data (GPa)
E11	71	3.5	40.6
E22	71	3.5	13
G12	30	1.2	3.8
G23	-	-	-
ν_{12}	0.22	0.33	0.27

Above given table is used for validating the results using Halpin-Tsai equations.

After undergoing thorough testing and confirmation, the Composite Material Properties Calculator GUI has been extensively evaluated and validated for the Rule of Mixtures, Mori-Tanaka, and Halpin-Tsai models. The validation process entailed verifying the precision and dependability of the computed composite properties against established theoretical or experimental data for each model. The GUI has demonstrated its capacity to precisely calculate composite material properties using a wide range of models, highlighting its precision, and flexibility in handling various composite volume fractions, and constituent material characteristics. With successful validation through multiple methodologies, the GUI has been proven to be reliable in providing accurate and reliable results.

6. References -

1. <https://www.sciencedirect.com/topics/engineering/rule-of-mixture-equation>
2. Liu, L. and Huang, Z., 2014. A note on Mori-Tanaka's method. *Acta Mechanica Solida Sinica*, 27(3), pp.234-244.
3. Juzun, M., 2019. Influence of selected method to estimate composite material elasticity properties on results of finite element analysis. *Compos. Theory Pract*, 19, pp.34-3

7. Acknowledgements

We extend our heartfelt gratitude to the HCL team for their generous sponsorship and support, which played an instrumental role in the development and realization of this ongoing project.

We are also deeply grateful to Professor Dr. Ramesh Gupta and Professor Dr. Ankit Gupta for their invaluable guidance, mentorship, and continuous support throughout the development process. Their expertise, insights, and unwavering encouragement significantly contributed to the success of this project.

Additionally, we acknowledge the contributions of all individuals involved, whose efforts and dedication were essential in bringing this project to fruition.