

■ 粮食饲料 GRAIN&FEED

■ 能源化工 ENERGY & CHEMICALS

■ 除尘环保 DUST REMOVING & ENVIORNMENT PROTECTION

■ 水泥矿产 CEMENT & MINERALS



■ 生物制药 BIO-PHARMACEUTICALS



成都奇格
CHEEGERS MACHINERY

旋 转 阀 专 家

Rotary Valves for Bulk Solids Handling

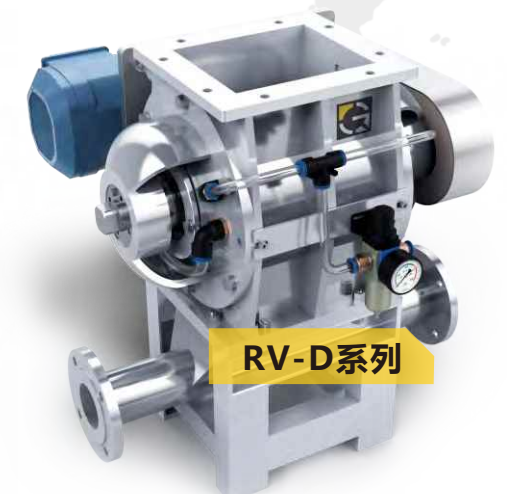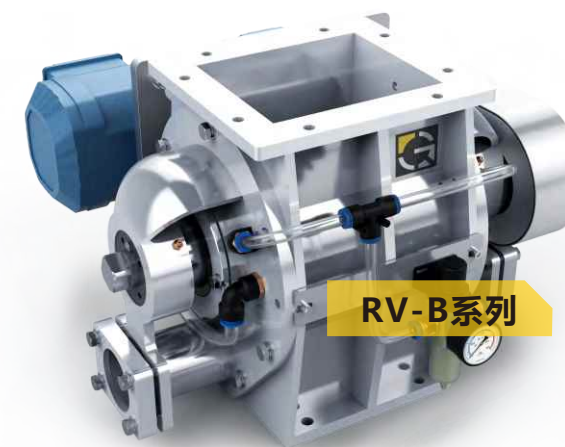

成都市奇格粮食机械制造有限公司
CHENGDU CHEEGERS MACHINERY CO.,LTD

■ 网址\WEB : cheegers.en.made-in-china.com

■ 电话\TEL : +86 13340983931(WhatsApp/ Wechat)

■ 邮箱\ EMAIL: amy@cheegers.com
sales@bulkhandle.cn



成都市奇格粮食机械制造有限公司是一家长期致力于各类散料用旋转阀、分路阀、插板阀、磁选器的研发和制造的公司，半个多世纪以来积累了丰富的旋转阀设计、制造经验。通过与国外同行及客户的长期交流合作，结合多年的市场经验，给国内外客户提供满足各类散装固体物料输送要求的解决方案，“CHEEGERS”品牌远销德国、意大利、加拿大、东南亚等30多个国家和地区，并不断拓宽销售网、增设服务机构。严格的质量监控和完善的后期服务，赢得了客户的一致认可。

Chengdu Cheegers Machinery Co.,Ltd is committed to researching and manufacturing rotary valve,diverter valve,slide gate valve and magnetic separator which used in bulk solids conveying over half a century,having accumulated rich experience in designing and producing. Through long-term communication and cooperation with overseas producers and customers, combined with rich market experience at home and abroad,Cheegers offers solutions to solve and meet various bulk solids conveying demands for clients."CHEEGERS" products are exported to over 30 countries and areas,like Germany,Italy,Canada,Southeast Asia,etc. Cheegers keeps broadening selling network and setting up more service agencies.With strict quality control and completed after-sales service,Cheegers gains consistent approval from customers.



产品特点

- 良好的锁气性能 Good airlock performance
- 广泛的物料应用 A wide handling range of materials
- 优异的清理能力 Excellent cleaning ability
- 极高的加工精度 High machining precision
- 不同的压力应用 Different pressure application
- 丰富的配置选项 Rich accessories options
- OEM及各类定制 OEM and all kinds of customization



锻造 Forging



TIG焊接 TIG welding



铸造 Casting



热喷涂 The thermal spraying



营业执照



旋转阀欧盟CE认证



分路阀欧盟CE认证





- 用于负压输送风网旋风卸料器下，采用分体铸造，全部部件内外经精加工后组合，外观精美大方，配置适合负压风网应用的排堵设计，能最大程度在不拆除设备的情况下排除堵料故障，轴端观察孔可随时了解密封效能，设备上端配置观察窗，实时了解卸料工况，本系列设备提供动力串联方案，使用单一动力，带动多台设备同时工作，降低能耗和设备采购投入。
- To be used under negative pressure conveying cyclone, flow-through rotary airlock valve adopts detached foundry, of which all components have been precisely processed before assembling. It has exquisite configuration and anti-blocking design, which can solve material stuck problem without dismantling. The hole at the end of bearing is for observing sealing efficiency at any time, and the observation window on the top is for following up the process of discharging. This type of valve offers series connection solution, using single power to drive multi-valves. Ultimately, it can save energy and reduce purchasing cost.



ISO9001认证




关风器专利证书



关风器专利证书



磁选器专利证书

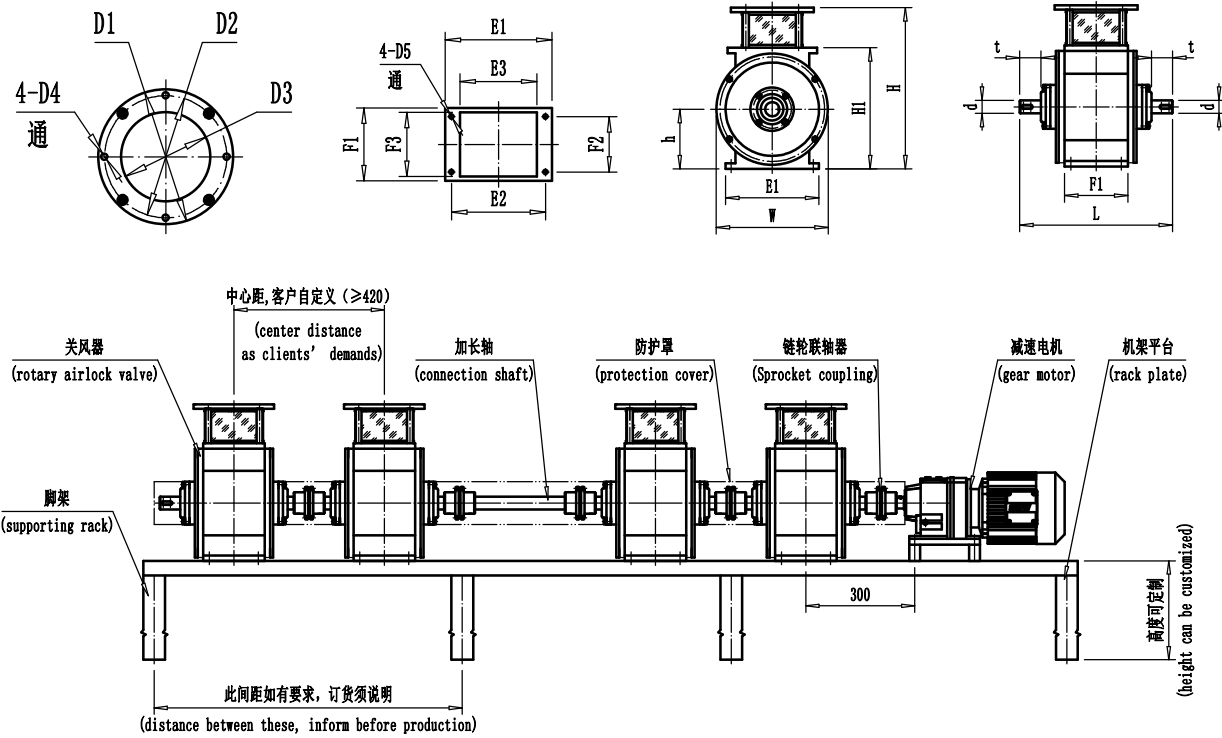

型号 (Model)	进出口尺寸 (Inlet & Outlet Dimension)			安装尺寸 (Installation Dimension)					外形尺寸 (Outer Dimension)									
	D3	E3	F3	D2	E2	F2	D4	D5	L	W	H	h	H1	D1	E1	F1	d	t
TGFY5	Ø145	180	150	Ø200	220	130	Ø8.5	Ø11	410	300	435	160	329	Ø222	250	170	Ø35	50
TGFY7	Ø155	182	160	Ø220	230	140	Ø8.5	Ø11	420	310	435	160	329	Ø250	260	180	Ø35	50
TGFY9	Ø185	182	210	Ø240	230	190	Ø8.5	Ø11	470	310	435	160	329	Ø270	260	230	Ø35	50
TGFY12	Ø205	208	250	Ø260	265	210	Ø11	Ø11	540	340	510	190	380	Ø290	300	270	Ø40	50
TGFY16	Ø245	240	260	Ø300	290	240	Ø11	Ø11	570	370	510	190	380	Ø330	320	280	Ø40	50

BFCP贯通正压关风器


BFCP Blow-through Rotary Airlock Valve




贯通正压关风器
BFCP Blow-through Rotary Airlock Valve

设备采用上端进料，直接水平喂料的设计，非常适合粉末状物料的稀相输送，设备直接对接输送管线安装。输送气流从设备一端进入，直接贯通转子叶片的V形料仓，混合物料后从出料口进入输送管线。这种设计可以非常有效的让气流清理并输送走残留在叶片夹缝中的粉状物料，保证良好的喂料效率。

Blow-through rotary airlock valve adopts horizontal feeding design, which is very suitable for dilute phase conveying of powdery materials. The valve directly connects to conveying pipe. Conveying air comes in from one side of the equipment and straightly goes through rotor blade's V-shaped chamber, mixing with materials and entering into the conveying pipe. Besides, residual materials will be blown away by the conveying air. As a result, it ensures good feeding efficiency.

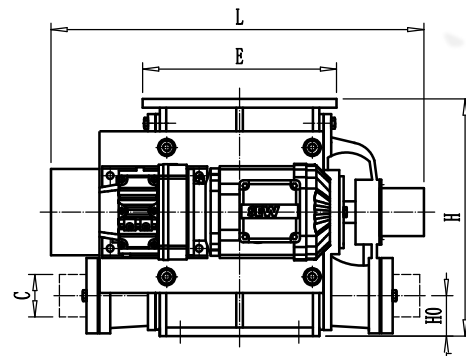

BFCP2.5~13.5

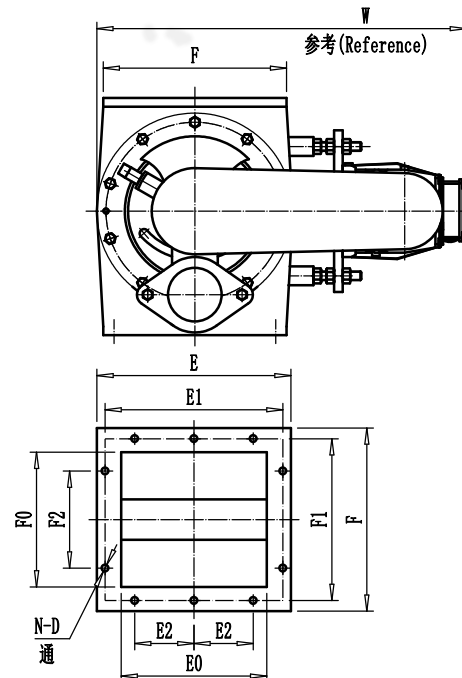

BFCP28~56

注：另有BFCP80、100、120、140等设备，此表中尚未列举。

(Remark: There are 80, 100, 120, 140 models, which are not listed in this sheet.)

型 号 (Model)	L	W	H	H0	E	E0	E1	E2	F	F0	F1	F2	C	N	D
BFCP2.5	475	~490	280	40	210	130	180	80	210	130	180	100	Ø45	8	Ø10
BFCP5.5	600	~580	340	50	280	200	250	150	250	170	220	120	Ø65	8	Ø12
BFCP8.5	655	~640	400	70	330	250	300	180	330	250	300	180	Ø70	8	Ø12
BFCP13.5	680	~685	440	70	360	270	330	180	340	240	300	180	Ø100	8	Ø14
BFCP28	820	~790	580	125	450	350	415	150	350	250	315	180	Ø110	10	Ø14
BFCP56	890	~850	670	131	510	410	475	180	410	310	375	200	Ø120	10	Ø14

BFCZ垂直正压关风器




BFCZ Drop-through Rotary Airlock Valve




垂直正压关风器
Drop-through Rotary Airlock Valve

该设备由正压锁风阀和气物混合加速室组成，主要应用于比重较重、磨蚀型较强且不易与输送气流混合的颗粒类物料，通过加速室的有效混合大大避免了物料对喂料器内部的冲击和磨蚀，其内部空气动力的设计大大提高输送效率和设备使用寿命。通过加速室的串联，可实现多料仓多点喂料到同一输送线的独立控制。

Consists of positive pressure airlock valve and material and air mixed feeding pipe, mainly used for highly corrosive and granular type materials. It avoids the attack and corrosion from material through high mixture efficiency of feeding pipe. The aerodynamic design inside the feeding pipe improves the conveying efficiency and working life. By connecting feeding pipe in series, materials from different hoppers can be conveyed through a same line.

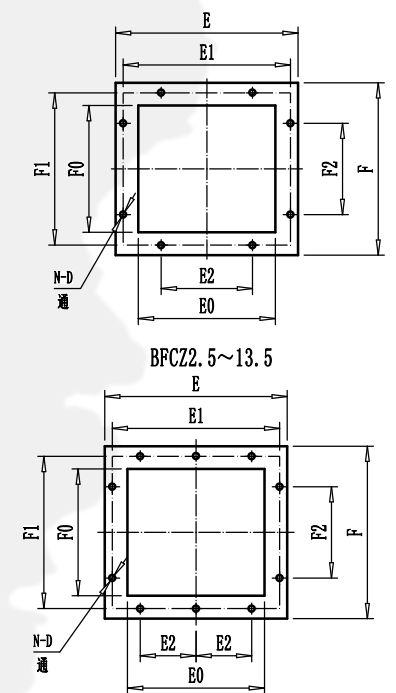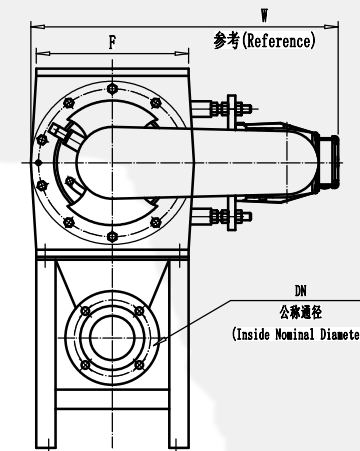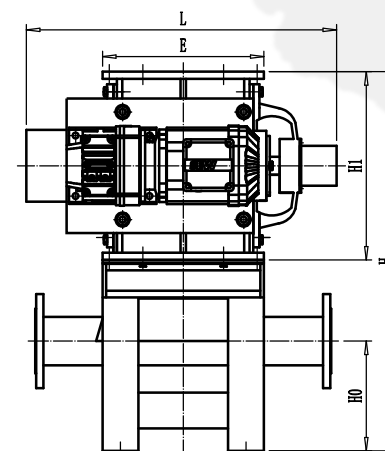

BFCZ2.5~13.5

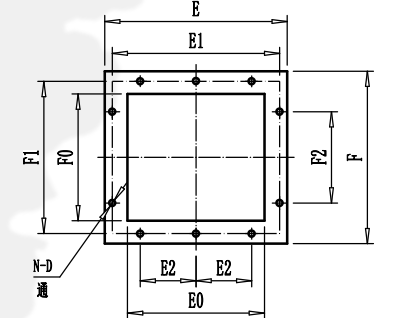

BFCZ28~56

注：另有BFCZ80、100、120、140等设备，此表中尚未列举。

(Remark: There are 80, 100, 120, 140 models, which are not listed in this sheet.)

型 号 (Model)	L	W	H	H0	H1	E	E0	E1	E2	F	F0	F1	F2	N	D	DN
BFCZ2.5	455	~490	570	150	280	210	130	180	80	210	130	180	100	8	Ø10	50
BFCZ5.5	580	~580	690	205	340	280	200	250	150	250	170	220	120	8	Ø12	65
BFCZ8.5	635	~640	810	245	400	330	250	300	180	330	250	300	180	8	Ø12	100
BFCZ13.5	660	~685	850	245	420	360	270	330	180	340	240	300	180	8	Ø14	100
BFCZ28	800	~790	1050	320	520	450	350	415	150	350	250	315	180	10	Ø14	125
BFCZ56	870	~850	1180	320	650	510	410	475	180	410	310	375	200	10	Ø14	150

RV-D.FC机械式强制清理旋转阀

RV-D.FC mechanical forced cleaning rotary valve



RV-D.FC机械式强制清理旋转阀
RV-D.FC mechanical forced cleaning rotary valve

- RV-D.FC机械式强制清理旋转阀内部采用特殊的结构设计，同步刮刀能强行将黏附在叶轮仓中的物料清理并带走，该机械适合输送粘性且不易流动的物料介质，新一代机型的叶轮优化设计，大大提高了同类传统机型装填效率，在同等规格情况下，提供更大的产量，有效降低采购成本。
- RV-D.FC mechanical forced cleaning rotary valve adopts specially-designed inner structure to forcibly clean the materials stick to the chambers of the rotor by scrapers. This model suits handling sticky and low-fluidity materials. With the latest design of the rotor, the filling efficiency of similar type traditional model has increased a lot, under the condition of the same specification, the output goes up and the purchasing cost reduces.

RV-D.QC快速清理旋转阀

RV-D.QC quick cleanin rotary valve



RV-D.QC快速清理旋转阀
RV-D.QC quick cleanin rotary valve

- RV-D.QC快速清理旋转阀快速分解的设计可以提供方便快捷的清理条件，结构紧凑，操作快捷，适合需要定期清理、清洁的特殊物料。高强度的设计，最大限度保障了反复清理和装配所需的配合精度。可根据不同的物料和工艺条件选择不同配置。
- RV-D.QC quick cleaning rotary valve has easily dismantling design.This model offers convenient cleaning condition,compact structure and simple operation.It' s very suitable for the special materials that need to be cleaned periodically.With high strength design,this model guarantees the precision needed in repeatedly cleaning and assembly.Different configurations depend on different handling materials as well as different processing conditions.

RV-D.PI 智能脉冲清理旋转阀

RV-D.PI smart pulsating cleaning rotary valve



RV-D.PI 智能脉冲清理旋转阀
RV-D.PI smart pulsating cleaning rotary valve

- RV-D.PI 智能脉冲清理旋转阀采用高压脉冲气流干涉的原理，协助叶轮仓中的物料排除，该设备体积小，清理效能高，非常适合应用于有粘性或易结拱的物料，有效避免物料不能及时排除带来的产量过低问题，附带的控制电脑可根据需要设置合理的喷吹频率、次序和间隔，节能高效的利用高压气源。
- RV-D.PI smart pulsating cleaning rotary valve adopts high pressure pulsating and air turbulence to clean the materials in the chambers of the rotor. This valve is small in size and has high cleaning efficiency, which suits handling the materials that are sticky and easily get agglomeration, efficiently avoiding the low output caused by not timely getting rid of the residual materials. With control device, the blowing frequency, sequence and interval can be adjusted as needs, and high pressure source can be fully made use of.

RV-D\B.M 系列微量旋转阀

RV-D\B.M series micro-feeding rotary valve



RV-D\B.M 系列微量旋转阀
RV-D\B.M series micro-feeding rotary valve

- RV-D\B.M 系列微量旋转阀喂料器是小容量，高卫生要求的选择，采用整体锻造阀体，在高精度加工中保证几号的抗暴抗变形的结构特性，结合不同配置提供防卡防破碎、锁气锁压、清洁卫生、定量限流等功能、与物料接触面可提供镜面抛光，防粘附，高耐磨和隔离的喷镀涂层。
- RV-D\B.M series micro-feeding rotary valve meets small output demand and high sanitation standard. It adopts the whole forged valve body. With high machining precision, it guarantees an extremely good configuration to against explosion and deformation. Combined with different accessories, it offers anti-blocking, anti-breakage, airlock, sanitation, limited flow rate functions, etc. The surface contacting with handling materials can adopt internal polish, high temperature resistant and isolation coating craft.

TWL 轻型喂料轮


TWL Light-duty Rotary Feeder



轻型喂料轮
Light-duty Rotary Feeder

该设备用于对负荷有要求的应用，比如高空悬挂安装或在母设备的依附安装，轻量化的设计能极大程度的减少设备负载，通过选配远程监控和调速配置。实现易安装、易维护、易操作的特点，大大方便生产现场的管理。以填料密封形式密封和填充物的磨损补偿设计，依然能达到良好密封效果。

Light-duty rotary feeder is used for the application which has special requirement of load, like air-suspension installation and the installation attached with the major equipment. Light-weight design can dramatically reduce equipment load. It would be much easier to install, maintain, operate and supervise through remote monitoring and speed controller. By using packing seal and filler wear compensation design, the valve can still ensure good sealing.

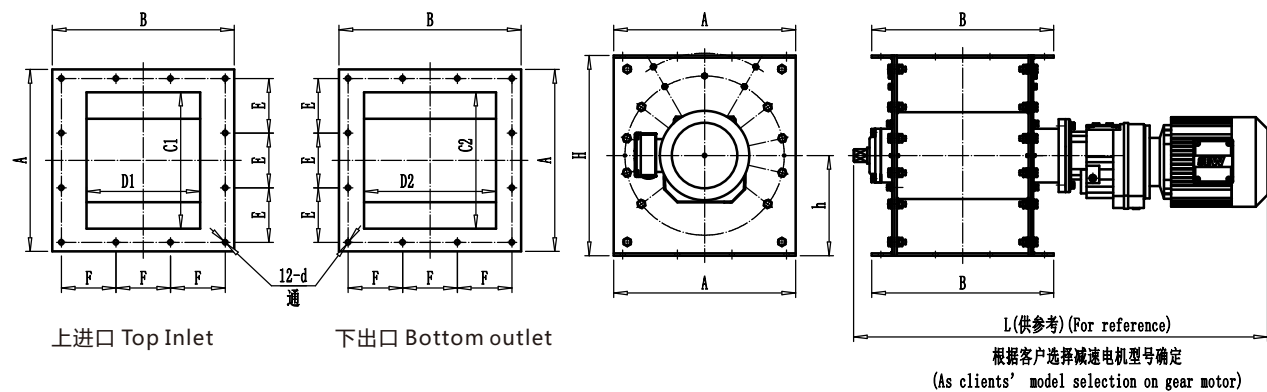

型号 (Model)	进出口尺寸 (Inlet & Outlet Dimension)				外形尺寸 (Outer Dimension)					安装尺寸 (Installation Dimension)		
	C1	D1	C2	D2	L	A	B	H	h	E	F	d
TWL5	280	170	280	210	810	380	320	380	190	113	93	Ø12
TWL7	280	170	280	210	830	380	320	380	190	113	93	Ø12
TWL9	280	230	280	270	890	380	380	380	190	113	113	Ø12
TWL12	300	250	300	290	910	400	400	440	220	120	120	Ø12
TWL16	300	310	300	350	970	400	460	440	220	120	140	Ø12
TWL20	350	300	350	340	960	450	450	450	225	136	136	Ø14
TWL25	350	330	350	370	1052.5	450	480	500	250	136	146	Ø14

TXL 卸灰阀

TXL Rotary Discharge valve




卸灰阀
Rotary Discharge valve


卸灰阀常用于气力输送系统和常压环境的喂料、排料。选择不同的叶轮和材料配置可以使用在除尘器，料斗或者仓筒下等各个环节。广泛被用于冶金，矿业，化工，食品等行业。

- 特征：
- 1.结构坚固，便于安装
 - 2.运转平稳，低噪音。
 - 3.两套滑动轴承和两套深沟球轴承,解决密封问题,并保证轴承的使用寿命。

Rotary Discharge valve is mostly used in ordinary pressure conveying system for discharging and feeding. It can also be used under dust filter, hopper and silo by assembling different spare parts. Wide applications in Metallurgy, Mining, Chemical, Food, etc. Characteristics: 1. Strong structure, convenient intallation. 2. Stable operation, low noise. 3. Two sets sliding bearings and deep groove ball bearings for better seals and longer working life.






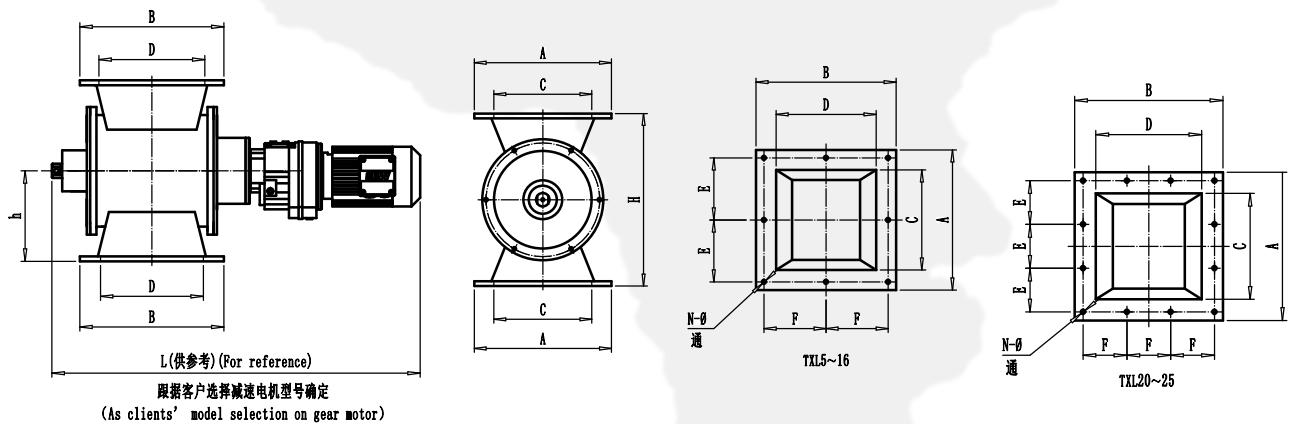


型号 (Model)	进出口尺寸 (Inlet & Outlet Dimension)		外形及安装尺寸 (Outer & Installation Dimension)							
	C	D	H	h	L	A	B	E	F	N-Ø
TXL5	200	200	400	200	~890	300	300	130	130	8-Ø12
TXL7	220	220	440	220	~910	320	320	140	140	8-Ø12
TXL9	240	240	440	220	~1020	340	340	150	150	8-Ø12
TXL12	260	260	440	220	~1040	360	360	160	160	8-Ø14
TXL16	300	300	460	230	~1080	400	400	180	180	8-Ø14
TXL20	350	300	520	260	~1045	450	400	136	120	14-Ø14
TXL25	350	350	520	260	~1105	450	450	136	136	14-Ø14

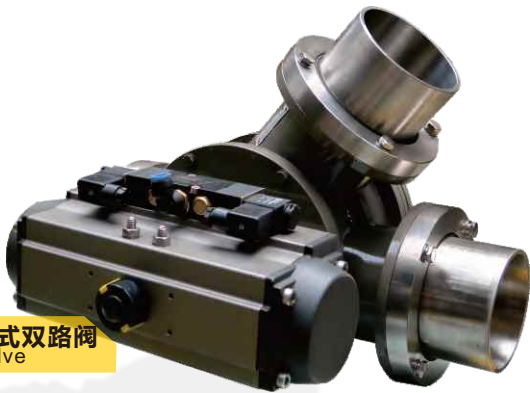

THFX旋塞双路阀主要用于散装固体物料在气力输送系统输送管道中改变物料输送方向。它可以将相同进料管的物料切换到不同管路中输送到不同的地方，或让物料绕过某些加工环节。执行装置有气动、电动和手动，机体材料有铸铁、碳钢和不锈钢。可以广泛用于气力输送系统在输送管网中散装固体材料的输送方向切换，通过各个环节的组合设计，结合PLC自动控制高效、安全的分配和输送物料

THFX plug diverter valve (two way valve) is mainly used to change the conveying direction of bulk and solid materials in pneumatic conveying system. Two way valve can convey the material to different places through connecting same feeding pipe to different pipes, or make the material circumvent some certain processing procedures. Actuator can be equipped with pneumatic drive, electric drive and manual operation.

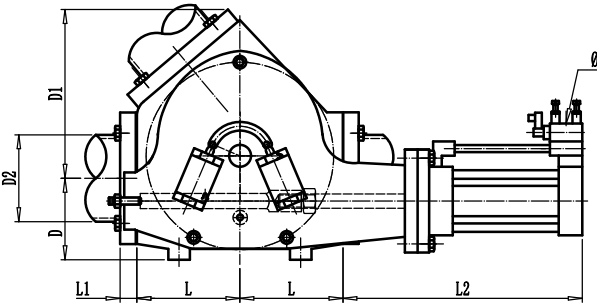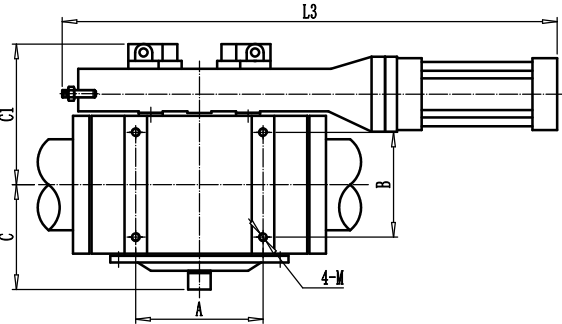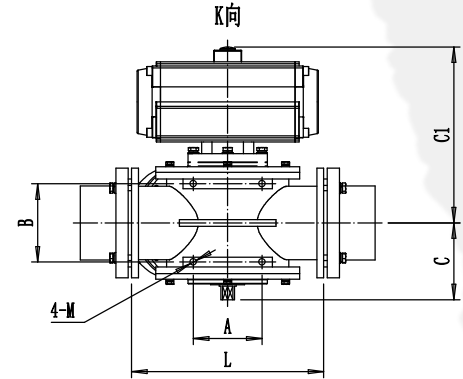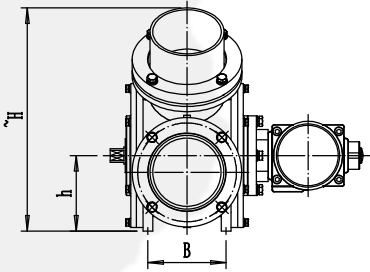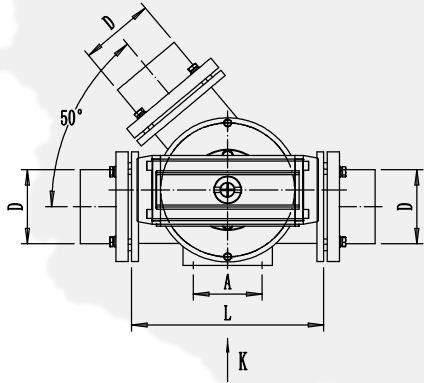

型 号 (Model)	外 形 及 安 装 尺 寸 (Outer & Installation Dimension)												
	A	B	C	C1	D	D1	D2	L	L1	L2	L3	M	Ø
THFX65×2	100	80	85	155	80	158	73	95	20	330	575	M8	8
THFX80×2	115	100	98	165	90	176	89	105	20	320	575	M10	8
THFX100×2	140	120	105	175	95	198	114	120	20	315	590	M10	10
THFX120×2	170	140	125	195	110	230	130	140	20	345	695	M12	10
THFX150×2	210	160	140	215	125	265	159	160	22	355	715	M12	12
THFX180×2	240	180	155	230	135	295	180	175	22	365	715	M12	12
THFX200×2	280	220	175	260	155	335	219	200	25	425	875	M12	16
THFX220×2	310	240	185	275	170	365	245	220	25	420	885	M12	16
THFX250×2	350	270	200	285	185	405	275	245	25	435	960	M12	16

规格(Model)	A	B	C	C1	D	L	4-M	H	h
THFX-G80×2	80	98	102	246.5	Φ89	240	4-M10	269.5	90
THFX-G100×2	100	114	112	256.5	Φ108	280	4-M10	325.5	110
THFX-G120×2	115	144	132	326.5	Φ133	320	4-M12	392.5	130
THFX-G150×2	150	168	145	340.5	Φ159	360	4-M12	449.5	160
THFX-G180×2	155	183	163	355.5	Φ194	420	4-M12	506	180
THFX-G200×2	200	199	177	394	Φ219	480	4-M12	571	210
THFX-G220×2	210	241	204	419	Φ245	520	4-M16	658	230
THFX-G250×2	210	278	243	453	Φ273	540	4-M16	686.5	250



重力分路阀(双路阀)
Gravity diverter valve (two way valve)

重力分路阀(双路阀)

Gravity diverter valve (two way valve)

■ 重力分路阀(双路阀)主要用于散装固体物料在常压输送管道中改变物料输送方向。它可以将相同进料管的物料切换到不同管路中输送到不同的地方，或让物料绕过某些加工环节。执行装置有气动、电动和手动，机体材料有铸铁、碳钢和不锈钢。可以广泛用于气力输送系统在输送管网中散装固体材料的输送方向切换，通过各个环节的组合设计，结合PLC自动控制高效、安全的分配和输送物料。

■ Gravity diverter valve (two way valve) is mainly used to change the conveying direction of bulk and solid materials in normal pressure conveying system. Two way valve can convey the material to different places through connecting same feeding pipe to different pipes, or make the material circumvent some certain processing procedures. Actuator can be equipped with pneumatic drive, electric drive and manual operation.



TCX系列磁选器
TCX Series Magnet Separator

TCX系列磁选器

TCX Series Magnet Separator

■ TCX系列磁选器广泛应用于小麦制粉、碾米、饲料、食品、医药等行业，在其加工厂的清理车间中，利用原料与杂质之间物理特性的不同，除去物料中含有的磁性杂质，执行清理车间最基本的任务。磁选器工作原理是使混入物料中的金属杂物经入口后因被磁场磁化而吸附在永磁体的表面，物料则从磁场区通过，经下端出口卸出机外，从而达到分离的目的。

■ TCX Series Magnet Separator is widely used in flour making, rice milling, feed producing, food processing, pharmacy, etc, with cleaning functioning in workshops by making use of the physical characteristics difference to get rid of the magnetic impurities and execute the basic cleaning task in workshops. The Operation Theory of Magnet Separator is to make the magnetic impurities magnetized by the permanent magnet and absorbed to the pole board, to make the raw material go through the magnetic area and discharged through the outlet.



现场应用

Onsite Applications

正压关风器

Blow-through rotary airlock valve



双路阀

Two way valve



负压关风器

Flow-through rotary airlock valve



卸灰阀

Rotary Discharge Valve



磁选器

Magnet Separator

