ARGUMAT



HERA

Reach-in and roll-in proofing cabinet

CONTENTS

Introduction
- ✓ The key points to know about proofing
- ✓ Challenges of the launch
- ✓ Targets
- ✓ Product range & Dimensions

Key selling points
- ✓ Promote cabinet size and composition
- ✓ Ergonomics
- ✓ Quality finished products
- ✓ Intuitive control panel (tutorial)

Benchmark

Summary
- ✓ Key points
- ✓ Available at launch

- Contents
- **Introduction**
  - ✓ Key points to know about proofing
  - ✓ Challenges
  - ✓ Targets
  - ✓ Product range & Dimensions
- Key selling points
  - ✓ Promote cabinet size and composition
  - ✓ Ergonomics
  - ✓ Quality finished products
  - ✓ Intuitive control panel
- Benchmark
- Summary
  - ✓ Key points
  - ✓ Available at launch

HERA

INTRODUCTION

- Contents
- Introduction
  - ✓ **Key points to know about proofing**
  - ✓ Challenges
  - ✓ Targets
  - ✓ Product range & Dimensions
- Key selling points
  - ✓ Promote cabinet size and composition
  - ✓ Ergonomics
  - ✓ Quality finished products
  - ✓ Intuitive control panel
- Benchmark
- Summary
  - ✓ Key points
  - ✓ Available at launch

PROOFING OVERVIEW

What is the purpose of proofing?

Proofing allows the dough to develop through the action of yeast or leavening agent.
=>The dough becomes **more elastic**, its **volume increases**, its **taste changes** and its **aromas develop**.



Important factors?

Temperature affects the action of the yeast. The yeast reaches its peak at around 28 to 30°C and is blocked at low temperatures around 2°C.

Hygrometry is essential to avoid forming a crust, and to allow baking products to rise properly.

What are the stages of proofing?

This process is divided into 3 stages: **fermentation, first rise, and final rise.**


Fermentation:
Strengthens the dough and helps to retain the gases.

First rise:
Relaxation of the dough, making it easier to work and shape

Final rise:
The volume of the dough increases, taking on a honeycomb structure.

- Contents
- Introduction
  - ✓ **Key points to know about proofing**
  - ✓ Challenges
  - ✓ Targets
  - ✓ Product range & Dimensions
- Key selling points
  - ✓ Promote cabinet size and composition
  - ✓ Ergonomics
  - ✓ Quality finished products
  - ✓ Intuitive control panel
- Benchmark
- Summary
  - ✓ Key points
  - ✓ Available at launch

What is the role of the cabinet in this process?

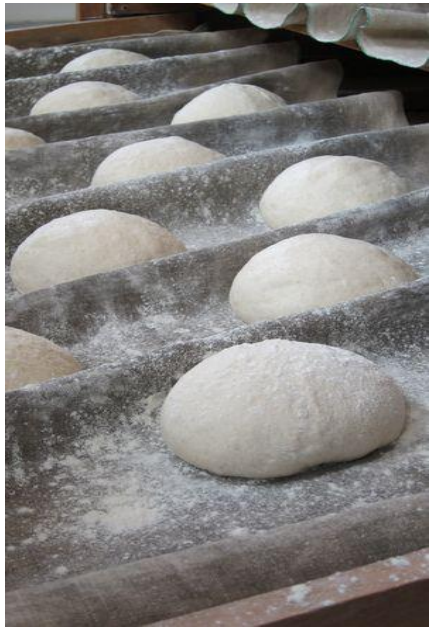

It is used during the **final rise** phase and also during the **fermentation** phase.

This equipment allows bakers to **control the proofing** phase over a period of time.

It provides the option to **speed up** the dough rising process, **slow it down** or even **retard it** for a set period of time

Improved quality of life with limited night work

Production can be continued throughout the day

High quality finished product

Proofing in the cabinet can be divided into 4 phases:

1. Pre-cooling
The temperature is lowered to cool the cabinet chamber. For gentle, gradual defrosting, or to rapidly cool fresh dough

2. Retarding
Maintain a constant low temperature (2-5°C) to retard the yeast

3. Proofing
The temperature is increased to activate the yeast, causing the dough to rise

4. Dormillon (sleep phase)
After a set period of time at the end of the proofing cycle, the temperature in the cabinet is lowered to keep it cool and to prevent over-proofing

Different proofing techniques


Direct proofing: rapid proofing

Kneading	Fermentation	Division	Rounding	First rise	Moulding	Final rise	Baking




Indirect proofing

Bulk fermentation: Long period of fermentation time for organisational flexibility

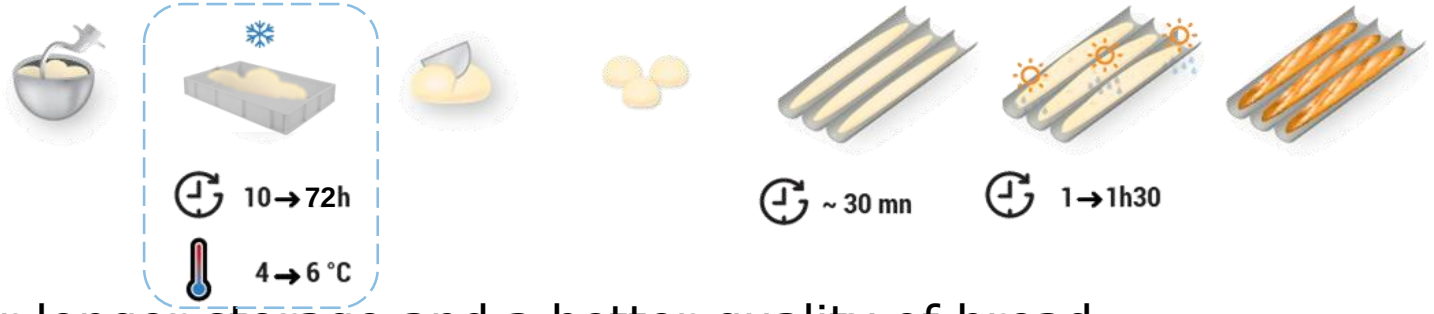


Slow proofing: For longer storage and a better quality of bread

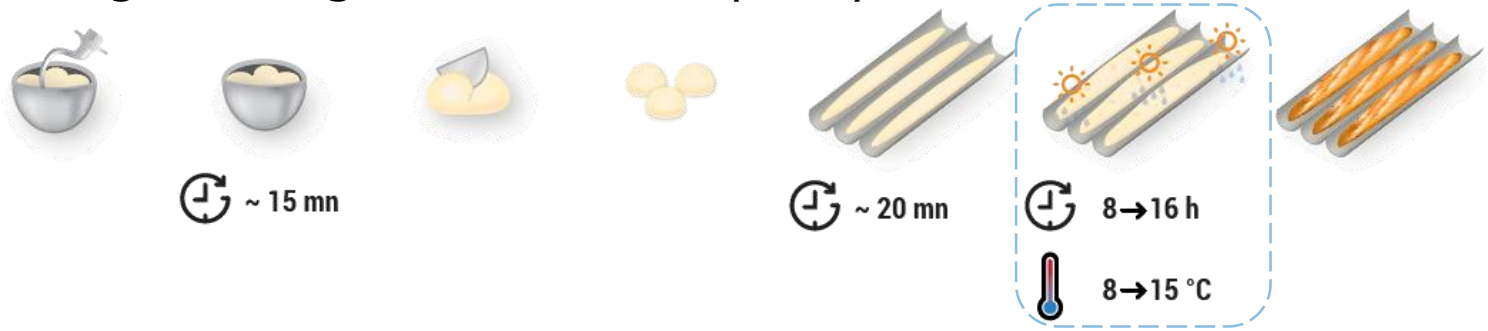


Paneo Process

*Indicative temperatures

<u>Controlled proofing with retarding</u>: retarded at low temperature for a long period to limit working at night

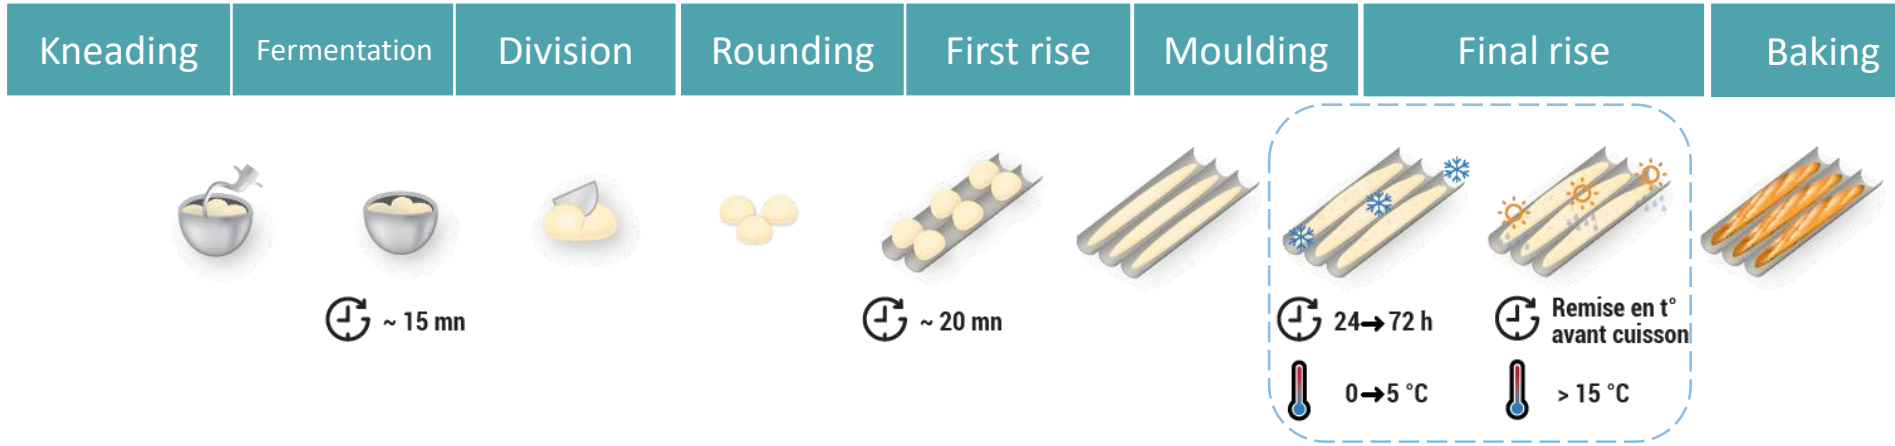

<u>Pre-proofing with retarding:</u> Retarding after proofing to respond quickly to unexpected demand

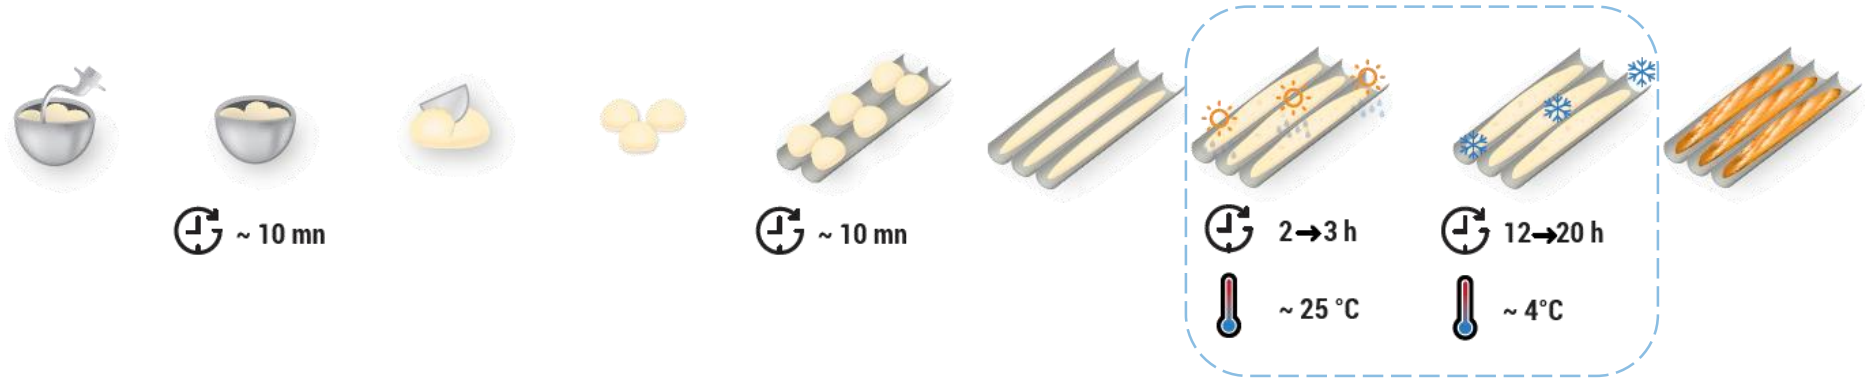


*Indicative temperatures

- Contents
- Introduction
  - ✓ **Key points to know about proofing**
  - ✓ Challenges
  - ✓ Targets
  - ✓ Product range & Dimensions
- Key selling points
  - ✓ Promote cabinet size and composition
  - ✓ Ergonomics
  - ✓ Quality finished products
  - ✓ Intuitive control panel
- Benchmark
- Summary
  - ✓ Key points
  - ✓ Available at launch

Stage where the cabinet comes into play depending on the type of proofing



	Direct proofing	Indirect proofing			
		Slow-proofing	Pre-proofing with retarding	Controlled proofing with retarding	Bulk fermentation
Fermentation					**X**
First rise					
Final rise	**X**	**X**	**X**	**X**	

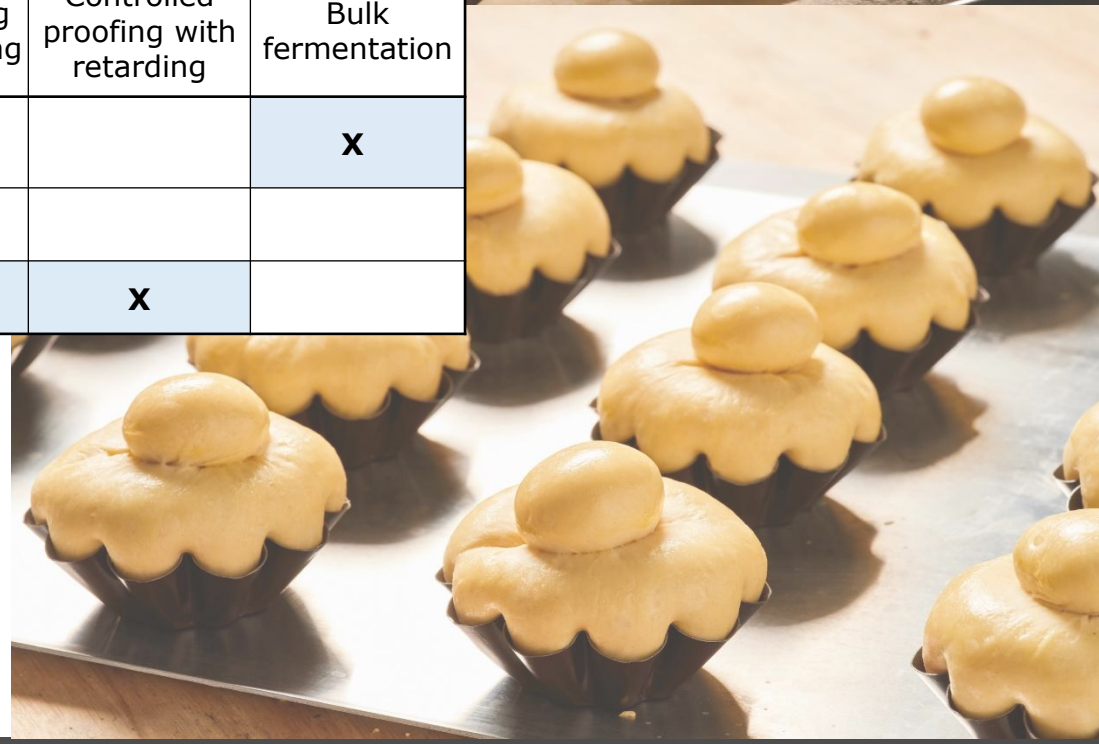

*Indicative temperatures

- Contents
- Introduction
  - ✓ Key points to know about proofing
  - ✓ **Challenges**
  - ✓ Targets
  - ✓ Product range & Dimensions
- Key selling points
  - ✓ Promote cabinet size and composition
  - ✓ Ergonomics
  - ✓ Quality finished products
  - ✓ Intuitive control panel
- Benchmark
- Summary
  - ✓ Key points
  - ✓ Available at launch

CHALLENGES



- Contents
- Introduction
  - ✓ Key points to know about proofing
  - ✓ **Challenges**
  - ✓ Targets
  - ✓ Product range & Dimensions
- Key selling points
  - ✓ Promote cabinet size and composition
  - ✓ Ergonomics
  - ✓ Quality finished products
  - ✓ Intuitive control panel
- Benchmark
- Summary
  - ✓ Key points
  - ✓ Available at launch

CHALLENGES

Renewing the ageing range of Bongard proofing cabinets

Respond to customer needs:
product improvements



Simplified operation:
a smart cabinet with the new Sensitiv'2 *(proofing)* touchscreen control panel



Standardised product range:

a new design in Bongard colours



- Contents
- Introduction
  - ✓ Key points to know about proofing
  - ✓ Challenges
  - ✓ **Targets**
  - ✓ Product range & Dimensions
- Key selling points
  - ✓ Promote cabinet size and composition
  - ✓ Ergonomics
  - ✓ Quality finished products
  - ✓ Intuitive control panel
- Benchmark
- Summary
  - ✓ Key points
  - ✓ Available at launch

TARGETS



- Contents
- Introduction
  - ✓ Key points to know about proofing
  - ✓ Challenges
  - ✓ **Targets**
  - ✓ Product range & Dimensions
- Key selling points
  - ✓ Promote cabinet size and composition
  - ✓ Ergonomics
  - ✓ Quality finished products
  - ✓ Intuitive control panel
- Benchmark
- Summary
  - ✓ Key points
  - ✓ Available at launch

TARGETS

Artisan bakers

- Bakery owners who want **regularity of production**: concept of **right of access**
- Bakers are becoming **increasingly perfectionist**: use meets their **requirements**
- **Less and less qualified** staff: requiring **simple and intuitive** operation
- **Bakers who are resistant to technology**: requiring **simple and intuitive** operation




Major retailers/Chain stores

- Bakery owners who want **regularity of production**: concept of **right of access**
- Less and **less qualified** staff: requiring **simple and intuitive** operation
- **Teams** where several people are involved in the **same cycle**: simplified **transfer of information**



- Contents
- Introduction
  - ✓ Key points to know about proofing
  - ✓ Challenges
  - ✓ Targets
  - ✓ **Product Range & Dimensions**
- Key selling points
  - ✓ Promote cabinet size and composition
  - ✓ Ergonomics
  - ✓ Quality finished products
  - ✓ Intuitive control panel
- Benchmark
- Summary
  - ✓ Key points
  - ✓ Available at launch

PRODUCT RANGE & DIMENSIONS

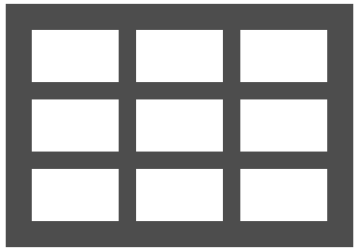

PRODUCT RANGE & DIMENSIONS

Preservation lines

- Proofing
- Retarding
- Blastfreezing & Conservation
- Final proofer
- Bread cooler

Proofing

BFA ⇨ **HERA-P**



BFM ⇨ **HERA-C**



CABINET
Fixed dimensions
+ plug & play

Retarding

BFA Paneo ⇨ **ATHENA**



CABINET
Fixed dimensions
+ plug & play

- Contents
- Introduction
  - ✓ Key points to know about proofing
  - ✓ Challenges
  - ✓ Targets
  - ✓ **Product Range & Dimensions**
- Key selling points
  - ✓ Promote cabinet size and composition
  - ✓ Ergonomics
  - ✓ Quality finished products
  - ✓ Intuitive control panel
- Benchmark
- Summary
  - ✓ Key points
  - ✓ Available at launch

PRODUCT RANGE & DIMENSIONS

HERA-P range, reach-in cabinet



Cabinet use	
Standard	•
Combined (Standard + Paneotrad)	€
Danish use (Without hygrostat) (1)	-€
ATHENA (Paneotrad) (2)	€
Type of control panel	
Sensitiv'2 Proofing Control Panel (with electronic hygrostat)	•
Electromechanical Control (with electromechanical hygrostat) (3)	-€
Door sensor	
Yes	•
No (4)	-
Door handle side	
Left	•
Right	o
Interiror/ exterior finish	
PVC interior and exterior	•
Stainless steel interior and exterior (5)	€

Type of refrigerant	
R448A on non-mounted refrigeration units and remote refrigeration units	•
R290 on mounted refrigeration units	•
Refrigeration unit	
Tropicalised refrigeration unit mounted	•
Tropicalised refrigeration unit non-mounted <8 m	o
Remote tropicalised unit > 8-20 m<	o
Silencer non-mounted < 8 m (6)	€
Remote silencer > 8-20 m< (6)	€
Compatible connection to CO2 system	-€
Electrical Connection	
230 V/SINGLE-PHASE +EARTH/50 Hz	•
208-220 V/SINGLE-PHASE+EARTH/60 Hz	o
Supplied	
Assembled	•
Assembled flat on its back	o
Unassembled	€

(1) Danish use only in 400x600 and 600x800
(2) ATHENA Paneotrad only in 600x800
(3) Electromechanical control on 400x600 and 600x800
(4) Door sensor is not available for 2C2P
(5) Only available with Sensitiv'2 proofing control Panel
(6) Only available for 600x800 1C1D and 600x800 2C2D

- Contents
- Introduction
  - ✓ Key points to know about proofing
  - ✓ Challenges
  - ✓ Targets
  - ✓ **Product Range & Dimensions**
- Key selling points
  - ✓ Promote cabinet size and composition
  - ✓ Ergonomics
  - ✓ Quality finished products
  - ✓ Intuitive control panel
- Benchmark
- Summary
  - ✓ Key points
  - ✓ Available at launch

PRODUCT RANGE & DIMENSIONS

The HERA-C range, reach-in cabinet



Cabinet use	
Standard	•
Combined (Standard + Paneotrad)	€
Type of control panel	
Sensitiv'2 Proofing Control Panel	•
Hygrostat	
Electronic	•
Door handle side	
Left	•
Right	o
Double-leaf door*	•
Finition Intérieure/Extérieure	
PVC interior and exterior	•
Stainless steel interior and exterior 304	€
Door Sensor	
Yes	•

Flour	
Without walk-in-flour	•
With insulating anti-slip floor + access ramp	€
Type of refrigerant	
R448A on non-mounted refrigeration units and remote refrigeration units	•
R290 on mounted refrigeration units	•
Refrigeration unit	
Mounted tropicalised	•
Non-mounted Tropicalised < 8 m	o
Remote tropicalised >8-20 m<	o
Non-mounted silent< 8 m	€
Silent remote >8-20 m<	€
Raccordement Electrique	
230 V/SINGLE-PHASE +EARTH/50 Hz	•
208-220 V/SINGLE-PHASE+EARTH/60 Hz	o
Livrée	
Assembled	•
Assembled flat on its back	o
Unassembled**	€

* Double-leaf door only available for 800x1000 cabinet
** 800x1000 cabinet is only supplied unassembled


RANGE & DIMENSIONS


REACH-IN CABINET

1 cell 1 door			
400 x 600 mm	400 x 800 mm	460 x 800 mm	600 x 800 mm

2 cells 2 doors	
400 x 600 mm	600 x 800 mm

1 cell 2 doors (double-leaf door)					
700 x 800 mm	765 x 800 mm	815 x 800 mm	915 x 800 mm	1015 X 800 mm	1115 x 800 mm

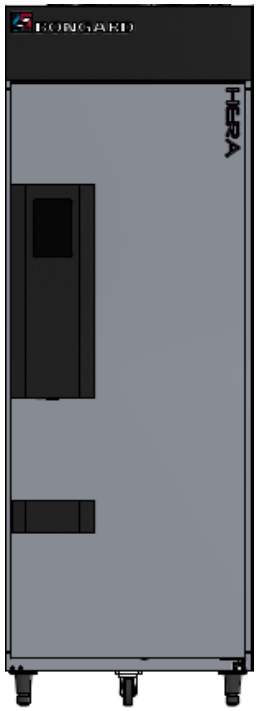

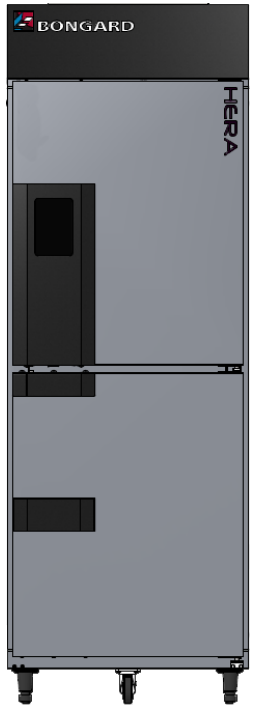




Note: 1 cell 2 doors retarder-proofers are only available in one set-up

ROLL-IN CABINET

400 X 600 mm	460 x 800 mm	600 x 800 mm	800 x 1000 mm
1 rack 400 X 600 mm	1 rack 400 X 800 ou 1 rack 460 x 800 mm	1 rack 600 X 800 ou 2 racks 400 x 600	1 rack 800 X 1000; 2 racks 460 X 800, 460 X 660 ou 400 X 800 mm



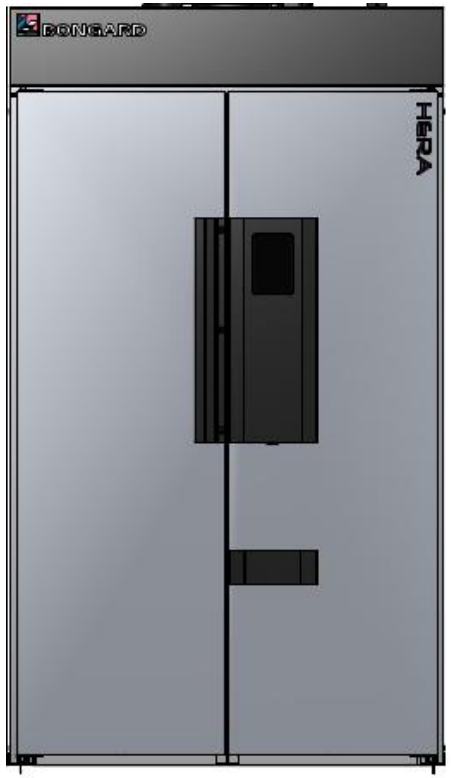

GAMME & DIMENSIONS

460x800 ROLL-IN CABINET

Need: Introduce a 600x800 trolley

Issue: Restricted space, the Hera-C 600x800 does not fit

Alternative: Suggest the HERA-C 460x800 with a warning

→ Taking out the trolley is less smooth



Std 600x800 trolley width
66cm



Width between the two bumpers
68cm



Brakes of castors
on std 600x800 trolleys touch the sides of the 460x800 cabinet

→ Be careful about your hands, when you take the trollley on the sides. It's better to place your hands on the top of the trolley.




Bongard strongly recommend the 600x800 HERA-C for a smooth use.

USAGE REMINDERS


	STANDARD HERA	DANISH USE HERA	DUAL MODE HERA	ATHENA
 **Heating element**	✕	✕	✕	
 **Hygrometry**	✕		✕	
 **Resistor defrosting**			✕	✕

USAGE REMINDERS

STANDARD HERA

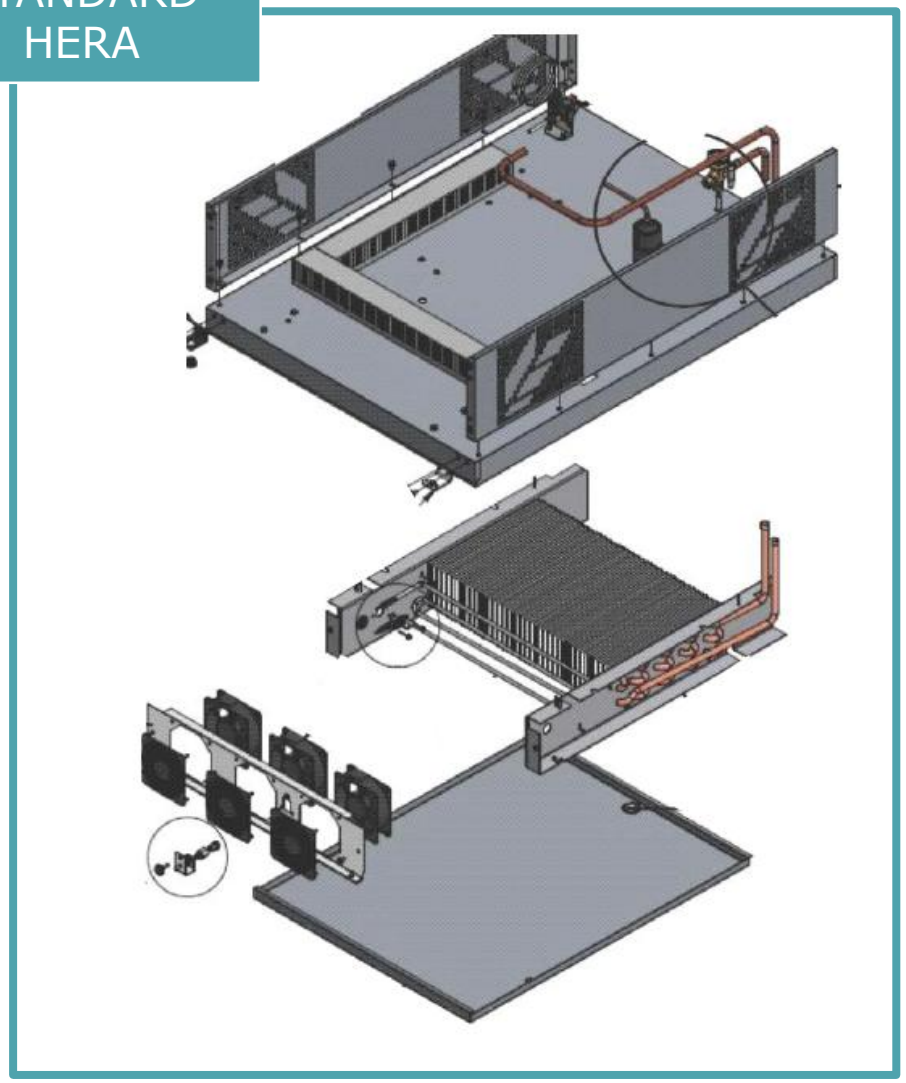


DUAL MODE HERA

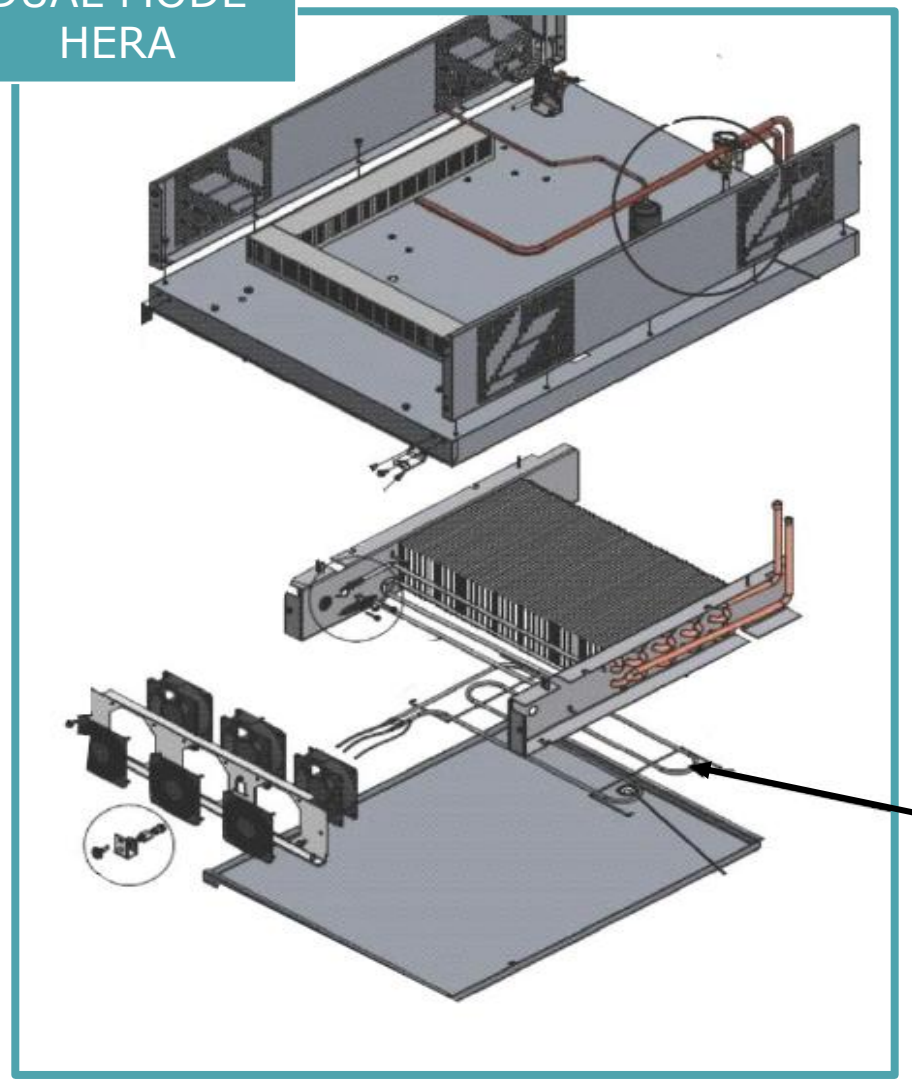



USAGE REMINDERS


With humidity


Without humidity

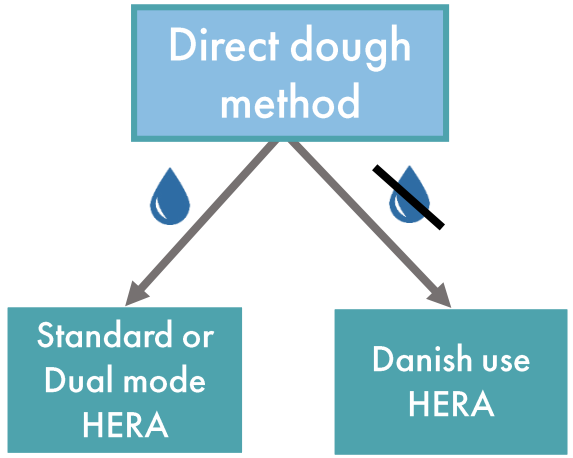

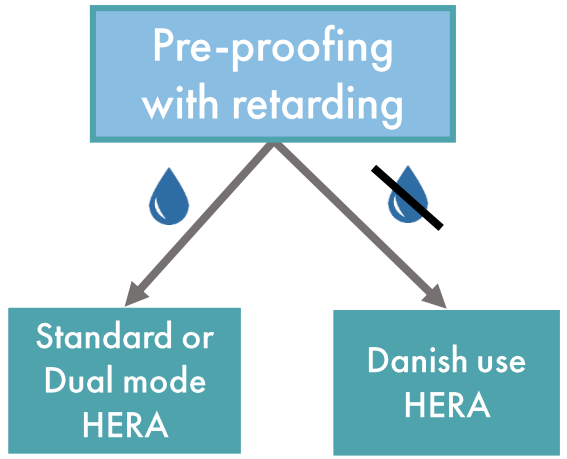

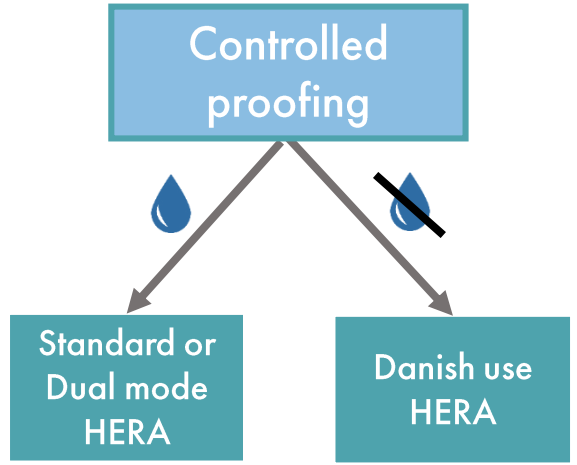

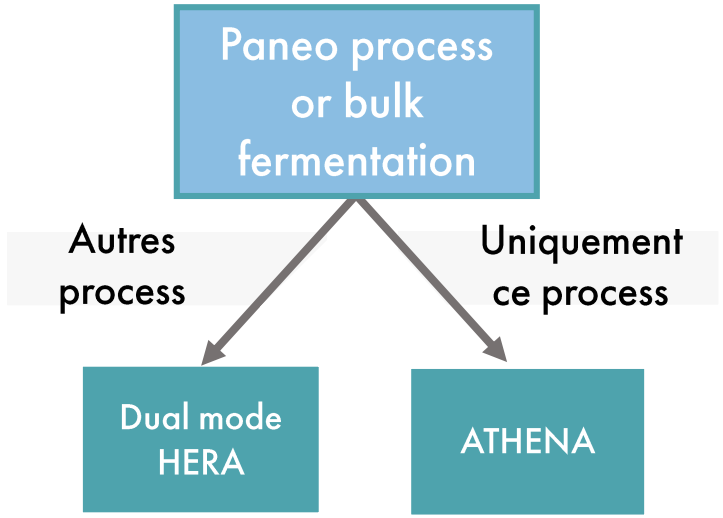

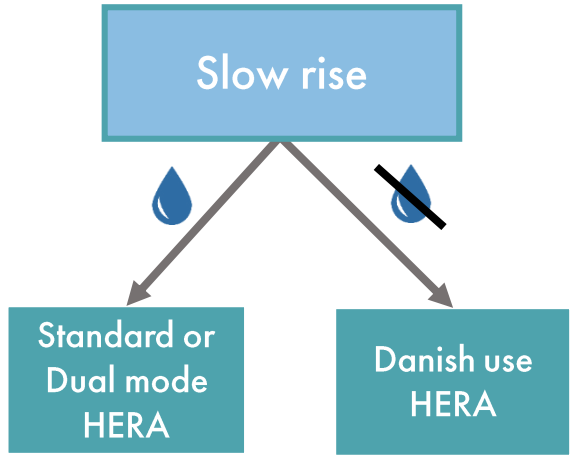

DIRECT PROOFING

INDIRECT PROOFING

- Contents
- Introduction
  - ✓ Key points to know about proofing
  - ✓ Challenges
  - ✓ Targets
  - ✓ Product Range & Dimensions
- **Key selling points**
  - ✓ Promote cabinet size and composition
  - ✓ Ergonomics
  - ✓ Quality finished products
  - ✓ Intuitive control panel
- Benchmark
- Summary
  - ✓ Key points
  - ✓ Available at launch

KEY SELLING POINTS



PROMOTE CABINET SIZE AND COMPOSITION

To get 24 levels with a space of 63mm, slides have been arranged in a slightly **depth-staggered pattern**



For guaranteed equipment reliability

- ✓ The panels are fitted with plastic hooks and male/female connections, with an integrated plastic seal in between.
- ✓ Cataphoresis-treated evaporator for improved corrosion resistance and extended durability
- ✓ Touchscreen protected by a bumper

And for optimum use:

- ✓ In both summer and winter with a tropicalised refrigeration unit fitted as standard (ambient temperatures up to 43°C)
- ✓ Greater production capacity increased to 24 slides (compared to 20 today), adjustable racks every 32 mm
- ✓ An easy-to-clean flat floor, available in stainless steel as an option

- Contents
- Introduction
  - ✓ Key points to know about proofing
  - ✓ Challenges
  - ✓ Targets
  - ✓ Product Range & Dimensions
- Key selling points
  - ✓ Promote cabinet size and composition
  - ✓ **Ergonomics**
  - ✓ Quality finished products
  - ✓ Intuitive control panel
- Benchmark
- Summary
  - ✓ Key points
  - ✓ Available at launch

ERGONOMICS: easy to use



Easy to load and unload

- ➢ Easy opening with several hand-grip areas:
  - the door itself
  - touchscreen control panel support using your right or left hand
- ➢ On-site reversible door to suit all bakeries
- ➢ Pivot hinge with return spring assists with door opening (>95°) and door closing (<95°)


Easy to move around

2 fixed castors + 1 swivel castor

- Contents
- Introduction
  - ✓ Key points to know about proofing
  - ✓ Challenges
  - ✓ Targets
  - ✓ Product Range & Dimensions
- Key selling points
  - ✓ Promote cabinet size and composition
  - ✓ Ergonomics
  - ✓ **Quality finished products**
  - ✓ Intuitive control panel
- Benchmark
- Summary
  - ✓ Key points
  - ✓ Available at launch

HIGH QUALITY FINISHED PRODUCTS

For soft, smooth and attractive bakery products:

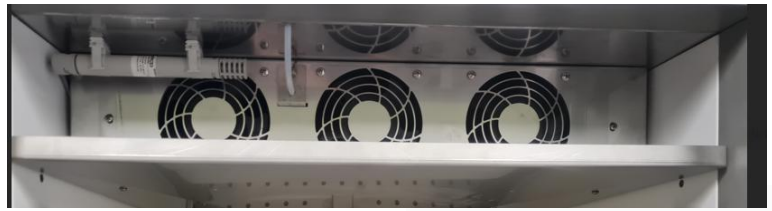

Automatic control of fan speed to avoid damaging bakery products:

- ✓ **When opening** the door, thanks to the **door sensor**
- ✓ **During the cycle** when the equipment is no producing hot or cold air

- Contents
- Introduction
  - ✓ Key points to know about proofing
  - ✓ Challenges
  - ✓ Targets
  - ✓ Product Range & Dimensions
- Key selling points
  - ✓ Promote cabinet size and composition
  - ✓ Ergonomics
  - ✓ Quality finished products
  - ✓ **Intuitive control panel**
- Benchmark
- Summary
  - ✓ Key points
  - ✓ Available at launch

INTUITIVE TOUCHSCREEN CONTROL PANEL

SENSITIV'2 fermentation tutorial here

Better visibility for easy use:

- ✓ All information can be seen at **a glance** on a 7-inch display
- ✓ Located at **eye level** (1.50m above the floor)
- ✓ **Control of current cycle** with display of temperature, and duration on the **standby screen**






INTUITIVE TOUCHSCREEN CONTROL PANEL

The 4 proofing phases are fully programmable

1st phase; Pre-cooling:
Before the retarding phase, which can go down **to -15°C**

3rd phase, Proofing:
Up to **20 fully customised proofing phases**.

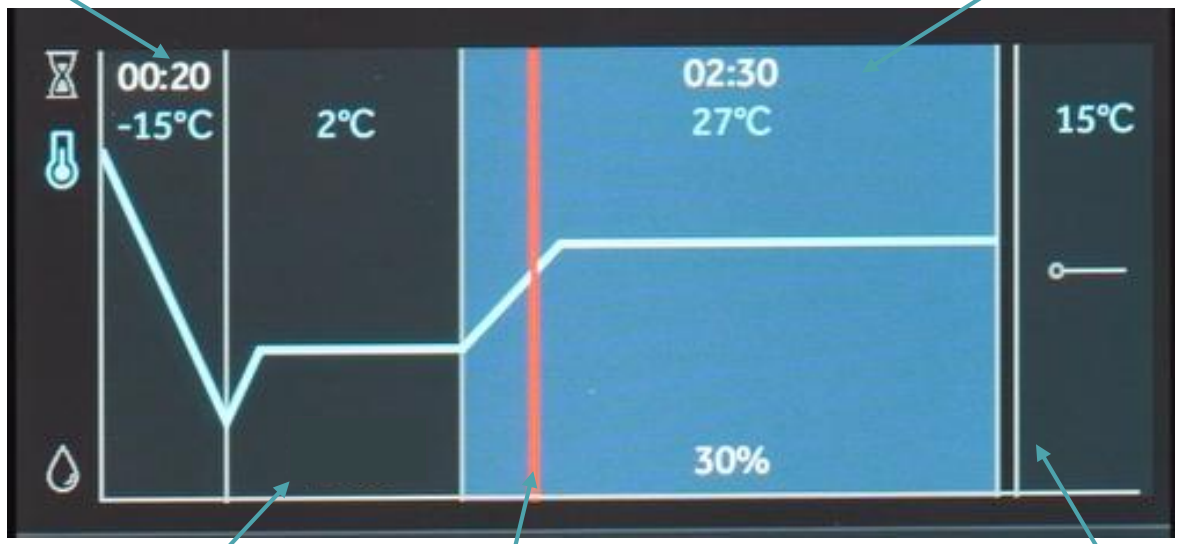

2nd phase, retarding at low temperature:
The duration of this phase is **automatically adjusted** by the cabinet based on the required cycle end time.

The red line indicates **the cycle progress**

4th phase, Dormillon (sleep phase):
After a customised **period of time** following the end of the proofing cycle, the cabinet will **automatically** be reduced to the required temperature.

- Contents
- Introduction
  - ✓ Key points to know about proofing
  - ✓ Challenges
  - ✓ Targets
  - ✓ Product Range & Dimensions
- Key selling points
  - ✓ Promote cabinet size and composition
  - ✓ Ergonomics
  - ✓ Quality finished products
  - ✓ Intuitive control panel
- **Benchmark**
- Summary
  - ✓ Key points
  - ✓ Available at launch

BENCHMARK



- Contents
- Introduction
  - ✓ Key points to know about proofing
  - ✓ Challenges
  - ✓ Targets
  - ✓ Product Range & Dimensions
- Key selling points
  - ✓ Promote cabinet size and composition
  - ✓ Ergonomics
  - ✓ Quality finished products
  - ✓ Intuitive control panel
- **Benchmark**
- Summary
  - ✓ Key points
  - ✓ Available at launch

BENCHMARK



CFI



PANEM



PANIMATIC



HENGEL

BENCHMARK /HERA-P, reach-in cabinet

	BONGARD	CFI	HENGEL	PANEM	PANIMATIC
Refrigerant gas (standard)	R448A/R290	R448A	R452A	R452A	
Hygrometry management	**Electronic** (std or electromechanical)	Electronic	Electronic (std or optional depending on size)		Electronic
Hygrometry range	**30 to 99%**		45 to 95%		30 to 90%
Min-max temperature	**-15°C 40°C**		-5°C 38°C		-10°C 35°C
Type of control panel	**-HMI touchscreen**	-V-link 7 touchscreen -Electromechanical available	-Bi-Tronic 2 -Electronic available	-High-touch 3 touchscreen –FXP (Electronic) -FPC (Electromechanical)	-Panel 2008 V2 (Electronic) -2000 Dormillon V2 (Electronic)
Control panel location	**At eye level (centre at 1.5m above the floor)**	At head height	At head height	Above the door (+ remote control panel, if Electromechanical)	Above the door
Connectivity	No	No	No	Yes	No
Number of levels and spacing	**24 (63mm)**		20 (60 mm) 27 (60 mm)	20 (63 mm) 25 (55 mm)	22 (60 mm)
Interior materials	PVC	PVC Stainless steel (optional)	Stainless steel	Stainless steel	
Exterior materials	PVC	PVC brushed stainless steel or steel (optional)	Coated steel Stainless steel (optional)	PVC + Stainless steel door	
PU insulation density (kg/m3)	42	42	43	35	
On-site door reversibility	Yes	Yes	No	Yes	No
Assisted door closure	**Yes (hinge)**	Yes (hinge)		Yes (magnet)	
Max. ambient temperature (standard unit)	**43°C**	43°C	38°C	43°	30°C
Castors + feet	**Yes (std)**	Yes (std)	Yes (optional)	Yes (optional)	Yes (std)
Humidity production	By injection nozzle			Humidity by optional boiler	With water supply available on request

BENCHMARK /HERA-C, roll-in cabinet

	BONGARD	CFI	HENGEL	PANIMATIC
Refrigerant gas (standard)	R448A/R290	R448A	R452A	
Hygrometry management	**Electronic** (std or electromechanical)	Electronic	Electronic (std or optional depending on size)	Electronic
Hygrometry range	30 à 90%	30 à 90%	45 à 95%	30 à 90%
Min-max temperature	**-15°C** **40°C**	-6°C 40°C	-5°C 38°C	-10°C 35°C
Rack height (mm)	1855	1855	1850	1880
Type of control panel	**-IHM tactile**	-V-link 7	-Bi-Tronic 2	-tableau 2008 V2 (Electronic -2000 Dormillon V2 (Electronic)
Interior materials	PVC stainless steel (optional)	PVC stainless steel (optional)	stainless steel	
Exterior materials	PVC stainless steel (optional)	PVC stainless steel ou steel (optional)	Acier laqué stainless steel (optional)	
PU insulation density (kg/m3)	42	42	43	
On-site door reversibility	Yes	Yes	No	No
Max. ambient temperature (standard unit)	**43°C**	43°C	38°C	30°C
Humidity production	By injection nozzle	Reinforced steam generator "Vapoo" (if stainless steel exterior)		With water supply available on request

- Contents
- Introduction
  - ✓ Key points to know about proofing
  - ✓ Challenges
  - ✓ Targets
  - ✓ Product Range & Dimensions
- Key selling points
  - ✓ Promote cabinet size and composition
  - ✓ Ergonomics
  - ✓ Quality finished products
  - ✓ Intuitive control panel
- **Benchmark**
- Summary
  - ✓ Key points
  - ✓ Available at launch

KEY POINTS- BENCHMARK

	BONGARD	CFI	PANEM	panimatic	hengel
Touchscreen control panel	X	X	X		
Min.Max. temperature	-15°C/40°C	-6°C / 40°C		-10°C/35°C	-5°C/ 40°C
Max. ambient temperature	43°C	43°C	43°	30°C	38°C
Number of levels	24 (63 mm)	24 (63 mm)	20 (63 mm) 25 (55 mm)	22 (60 mm)	20 (60 mm) 27 (60 mm)

KEY POINTS – BEFORE AND AFTER





WHAT REMAINS THE SAME

- ✓ **Cataphoresis-treated evaporator**
- ✓ **Tropicalised refrigeration unit**, but now available as standard
- ✓ There are still **4 phases** for the proofing process

ADVANTAGES

✓ **Better structure** => more durable product
(PVC profiles discontinued, panels fitted with plastic hooks and male/ female connections, higher slope of the condensate drain tray, more hermetic with its door, automatic fan control, 24 levels)
✓ **Intuitive, sleek touchscreen control panel**
(Profile management, easy and quick creation and start of programs)
✓ **Precise**
(Electronic hygrostat, Door sensor)

Baker feedbacks

«Results more regular than with the BFA »
Rise of the dough is regular inside the cabinet

« Humidity is better retained than with the BFA »
No dough drying out



« Time saving »
Easier and quicker to program, and more efficient

« More reliable»
More precise with its
Sensitiv’2 Proofing Control Panel

- Contents
- Introduction
  - ✓ Key points to know about proofing
  - ✓ Challenges
  - ✓ Targets
  - ✓ Product Range & Dimensions
- Key selling points
  - ✓ Promote cabinet size and composition
  - ✓ Ergonomics
  - ✓ Quality finished products
  - ✓ Intuitive control panel
- Benchmark
- Summary
  - ✓ **Key points**
  - ✓ Available at launch

KEY POINTS

An intelligent, reliable cabinet that can be adapted to suit each individual process for improved user comfort

Our main competitive advantages:

- ✓ **More intuitive product**: new **touchscreen control panel** to regulate all stages of the proofing process and to get a profile ma
- ✓ **More ergonomic product:** an **ingenious door** (several hand-grip areas, reversible door with assisted opening) and **easy cleaning**
- ✓ **Much more up to date:** new design in **Bongard colours**

- Contents
- Introduction
  - ✓ Key points to know about proofing
  - ✓ Challenges
  - ✓ Targets
  - ✓ Product Range & Dimensions
- Key selling points
  - ✓ Promote cabinet size and composition
  - ✓ Ergonomics
  - ✓ Quality finished products
  - ✓ Intuitive control panel
- Benchmark
- Summary
  - ✓ Key points
  - ✓ **Available at launch**

AVAILABLE AT LAUNCH



ARGUMAT