ARGUMAT





Soleo EVO

Modular electric decks oven

BONGARD

SUMMARY

- Introduction
- Range & dimensions
- Miscellaneous features
- Argument
- Benchmark
- + Points

Range & dimensions

As the **Soleo EVO** oven range is very extensive, it is important to distinguish the main features first:

Door type
Pastry-style or **Bread-style**

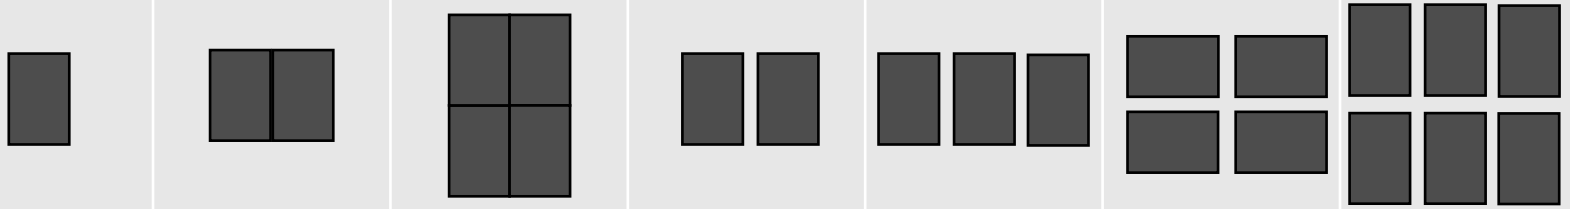
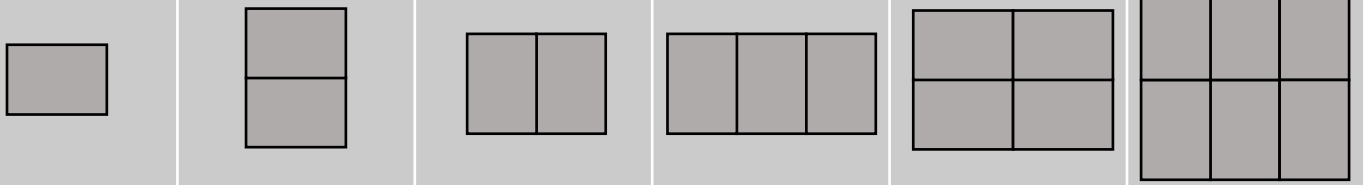
Deck number
From **1** to **5**

Baking area
From **0,25m²** to **1,98m²** per deck depending on model

Models / External dimensions
Varying between the **M1 SHOP** and the **M6**








Range & dimensions – SOLEO EVO Pastry-style door

SOLEO EVO Pastry-style door	M1 SHOP	M2 SHOP	M4 SHOP	M2 EVO	M3 EVO	M4 EVO	M6 EVO
Baking area per deck (m^2)	0,25	0,5	0,98	0,72	0,94	1,31	1,98
Useful baking width (mm)	405	815	803	935	1400	1400	1400
Useful baking depth (mm)	610	610	1220	770	670	935	1415
Number and orientation of tray 400x600 mm							
Number and orientation of tray 460x660 mm	/						
Oven width (mm)	936	1344	1344	1510	1978	1978	1978
Oven depth (strip) (mm)	856	856	1471	1022	921	1186	1666
Oven depth (hood) (mm)	1255	1271	1886	1437	1336	1601	2081



Range & dimensions – SOLEO EVO Bread-style door

SOLEO EVO Bread-style door	M4 SHOP	M2 EVO	M3 EVO	M4 EVO	M6 EVO
Baking area per deck (m²)	0,98	0,72	0,94	1,31	1,98
Useful baking width (mm)	803	935	1400	1400	1400
Useful baking depth (mm)	1220	770	670	935	1415
Number and orientation of tray 400x600 mm					
Number and orientation of tray 460x660 mm					
Oven width without lifter (mm)	1344	1510	1978	1978	1978
Oven depth (strip) without lifter (mm)	1651	1202	1101	1366	1846
Oven depth (hood) without lifter (mm)	2066	1617	1516	1781	2261
Oven depth with lifter (mm)	3910	3000	2810	3345	4325

With lifter = width + 200mm

Range & dimensions – Useful baking height

Useful height of a Pastry-style door :

- With "Low" deck : **180 mm**
- With "High" deck : **240 mm**



Useful height of a Bread-style door :

- With "Low" deck : **180 mm**
- With "High" deck : **225 mm**



More info (for Pastry- or Bread-style door) :

- Total height of a "Low" crown deck : **280 mm**
- Total height of a "High" crown deck : **340 mm**

Range & dimensions – Configurations "High" / "Low" decks

		SOLEO EVO 1 deck (2 possibilities)	SOLEO EVO 2 decks (3 possibilities)	SOLEO EVO 3 decks (4 possibilities)	SOLEO EVO 4 decks (5 possibilities)	SOLEO EVO 5 decks (3 possibilities)
Solutions with 0 "High" deck	*Deck 5*					Low
	Deck 4				Low	Low
	Deck 3			Low	Low	Low
	Deck 2		Low	Low	Low	Low
	Deck 1	Low	Low	Low	Low	Low
Solutions with 1 "High" deck	*Deck 5*					High
	Deck 4				High	Low
	Deck 3			High	Low	Low
	Deck 2		High	Low	Low	Low
	Deck 1	High	Low	Low	Low	Low
Solutions with 2 "High" decks	*Deck 5*					High
	Deck 4				High	High
	Deck 3			High	High	Low
	Deck 2		High	High	Low	Low
	Deck 1		High	Low	Low	Low
Solutions with 3 "High" decks	*Deck 4*				High	
	Deck 3			High	High	
	Deck 2			High	High	
	Deck 1			High	Low	
Solutions with 4 "High" decks	*Deck 4*				High	
	Deck 3				High	
	Deck 2				High	
	Deck 1				High	

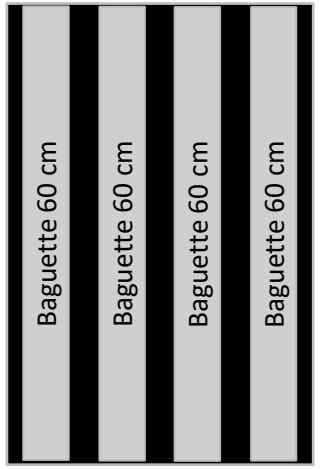
Maximum 5 decks on all SOLEO EVO (except for the M1 SHOP with maximum 4 decks).
The SHOP Pastry-style door models are composed exclusively of "Low" crown decks.

Range & dimensions – Product by product – Pastry-style door

4 baguettes of 60 cm per deck

SOLEO EVO Pastry-style door	M1 SHOP
Baking area per deck (m²)	0,25
Useful baking width (mm)	405
Useful baking depth (mm)	610
Number and orientation of tray 400x600 mm	
Number and orientation of tray 460x660 mm	/

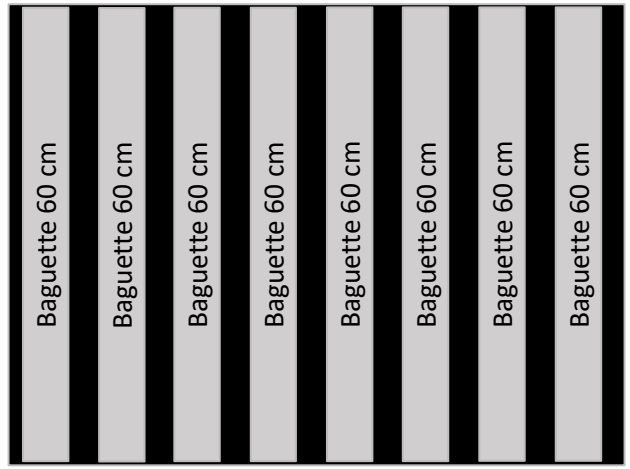
Oven width (mm)	936
Oven depth (strip) (mm)	856
Oven depth (hood) (mm)	1255





Range & dimensions – Product by product – Pastry-style door

8 baguettes of 60 cm per deck

SOLEO EVO Pastry-style door	M2 SHOP
Baking area per deck (m²)	0,5
Useful baking width (mm)	815
Useful baking depth (mm)	610
Number and orientation of tray 400x600 mm	
Number and orientation of tray 460x660 mm	
Oven width (mm)	1344
Oven depth (strip) (mm)	856
Oven depth (hood) (mm)	1271



Range & dimensions – Product by product – Pastry-style door

SOLEO EVO Pastry-style door	M4 SHOP
Baking area per deck (m²)	0,98
Useful baking width (mm)	803
Useful baking depth (mm)	1220
Number and orientation of tray 400x600 mm	
Number and orientation of tray 460x660 mm	
Oven width (mm)	1344
Oven depth (strip) (mm)	1471
Oven depth (hood) (mm)	1886

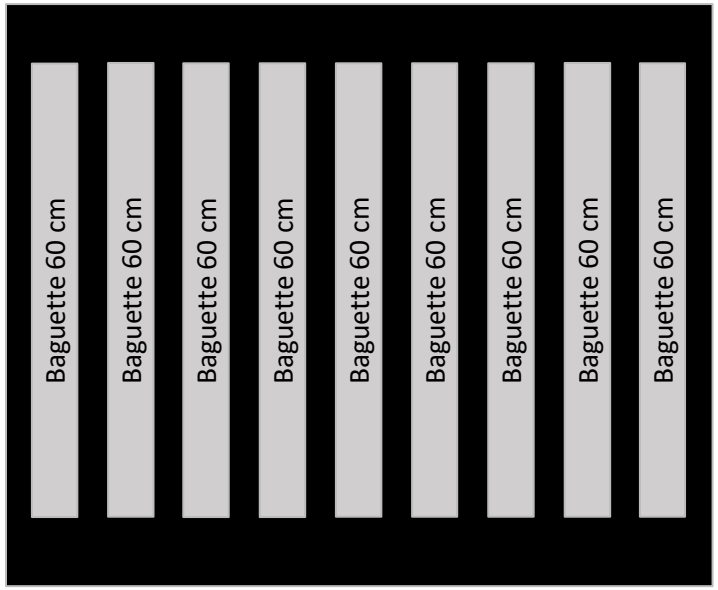
16 baguettes of 60 cm per deck



Range & dimensions – Product by product – Pastry-style door

SOLEO EVO Pastry-style door	M2 EVO
Baking area per deck (m²)	0,72
Useful baking width (mm)	935
Useful baking depth (mm)	770
Number and orientation of tray 400x600 mm	
Number and orientation of tray 460x660 mm	
Oven width (mm)	1510
Oven depth (strip) (mm)	1022
Oven depth (hood) (mm)	1437

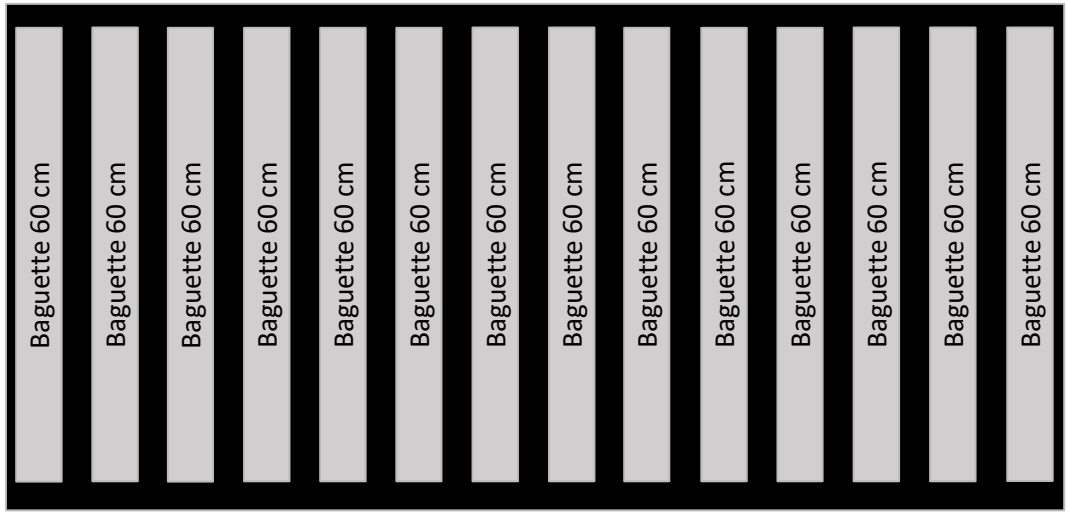
9 baguettes of 60 cm per deck




Range & dimensions – Product by product – Pastry-style door

SOLEO EVO Pastry-style door	M3 EVO
Baking area per deck (m²)	0,94
Useful baking width (mm)	1400
Useful baking depth (mm)	670
Number and orientation of tray 400x600 mm	
Number and orientation of tray 460x660 mm	
Oven width (mm)	1978
Oven depth (strip) (mm)	921
Oven depth (hood) (mm)	1336

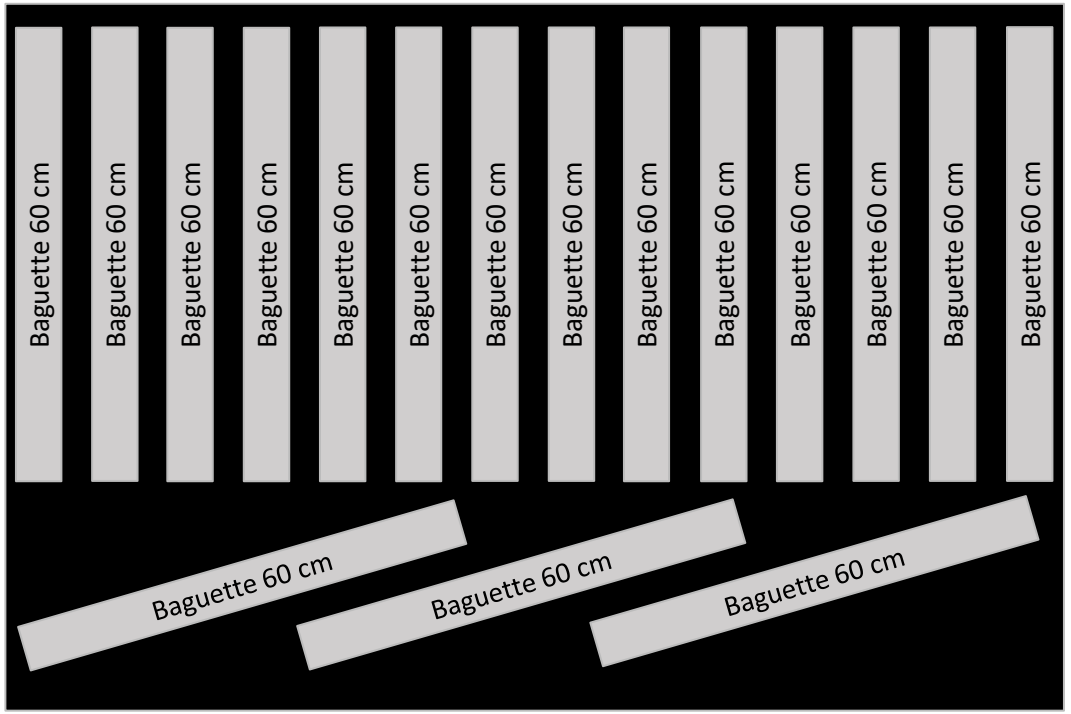
14 baguettes of 60 cm per deck





Range & dimensions – Product by product – Pastry-style door

SOLEO EVO Pastry-style door	M4 EVO
Baking area per deck (m²)	1,31
Useful baking width (mm)	1400
Useful baking depth (mm)	935
Number and orientation of tray 400x600 mm	
Number and orientation of tray 460x660 mm	
Oven width (mm)	1978
Oven depth (strip) (mm)	1186
Oven depth (hood) (mm)	1601

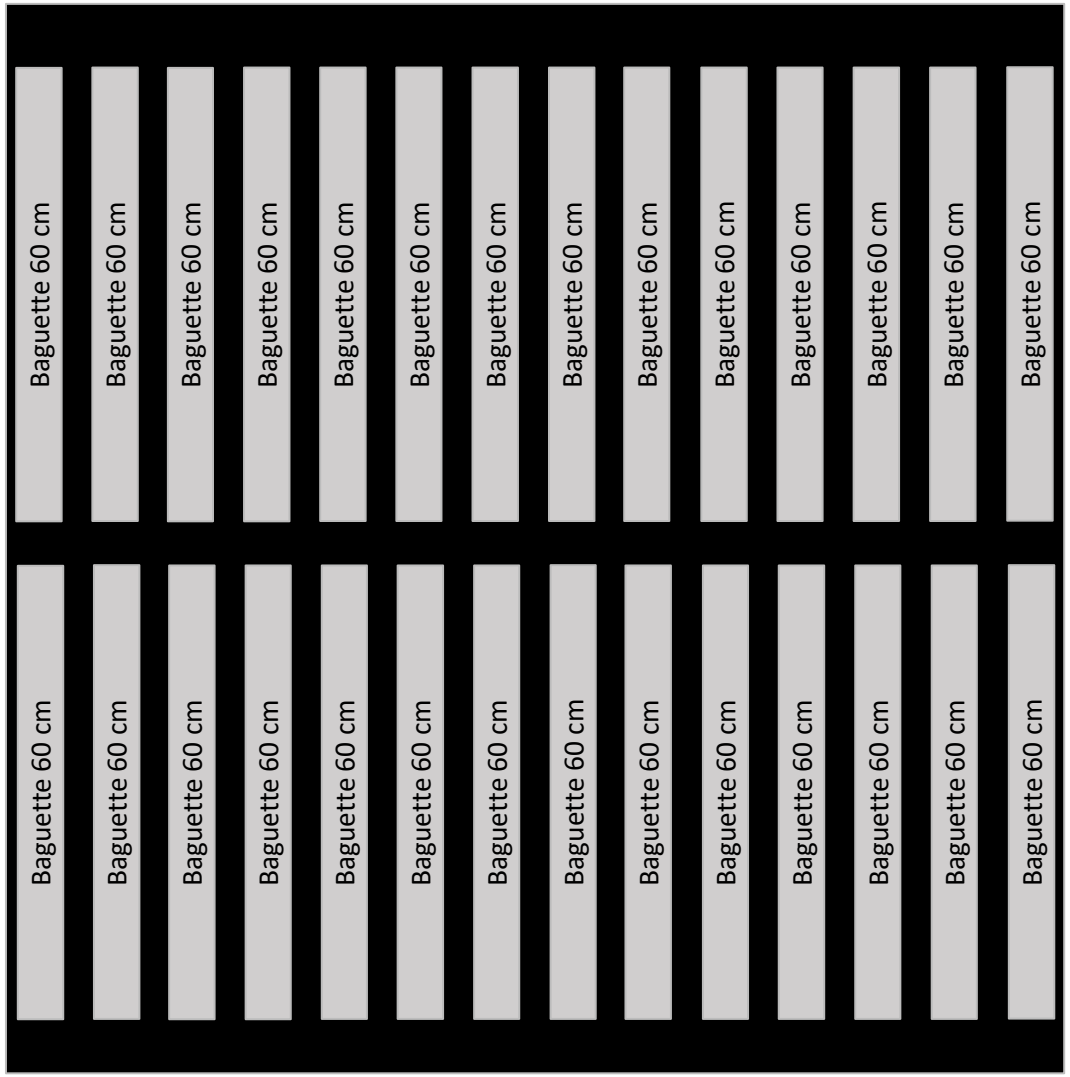
17 baguettes of 60 cm per deck





Range & dimensions – Product by product – Pastry-style door

SOLEO EVO Pastry-style door	M6 EVO
Baking area per deck (m²)	1,98
Useful baking width (mm)	1400
Useful baking depth (mm)	1415
Number and orientation of tray 400x600 mm	
Number and orientation of tray 460x660 mm	
Oven width (mm)	1978
Oven depth (strip) (mm)	1666
Oven depth (hood) (mm)	2081

28 baguettes of 60 cm per deck



Range & dimensions – Product by product – Bread-style door

SOLEO EVO Bread-style door	M4 SHOP
Baking area per deck (m²)	0,98
Useful baking width (mm)	803
Useful baking depth (mm)	1220
Number and orientation of tray 400x600 mm	
Number and orientation of tray 460x660 mm	
Oven width without lifter (mm)	1344
Oven depth (strip) without lifter (mm)	1651
Oven depth (hood) without lifter (mm)	2066
Oven depth with lifter (mm)	3910

Avec élévateur = largeur + 200mm

16 baguettes of 60 cm per deck

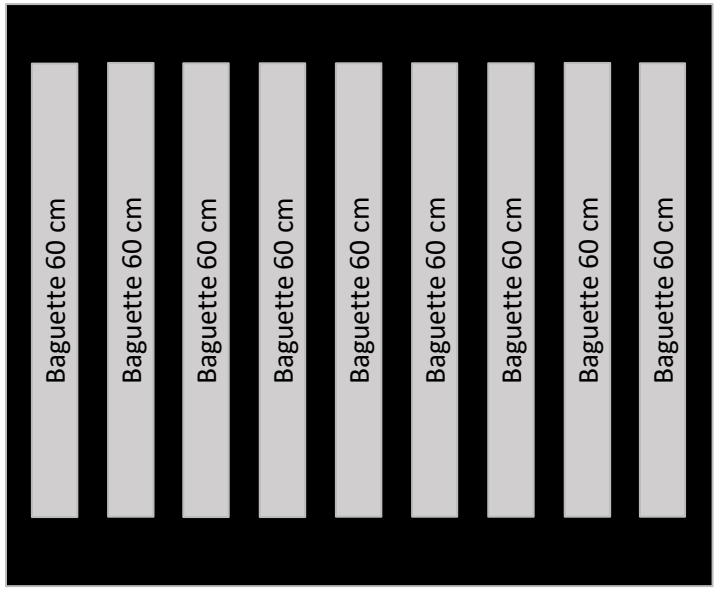


Range & dimensions – Product by product – Bread-style door

SOLEO EVO Bread-style door	M2 EVO
Baking area per deck (m²)	0,72
Useful baking width (mm)	935
Useful baking depth (mm)	770
Number and orientation of tray 400x600 mm	
Number and orientation of tray 460x660 mm	
Oven width without lifter (mm)	1510
Oven depth (strip) without lifter (mm)	1202
Oven depth (hood) without lifter (mm)	1617
Oven depth with lifter (mm)	3000

With lifter = width + 200mm

9 baguettes of 60 cm per deck

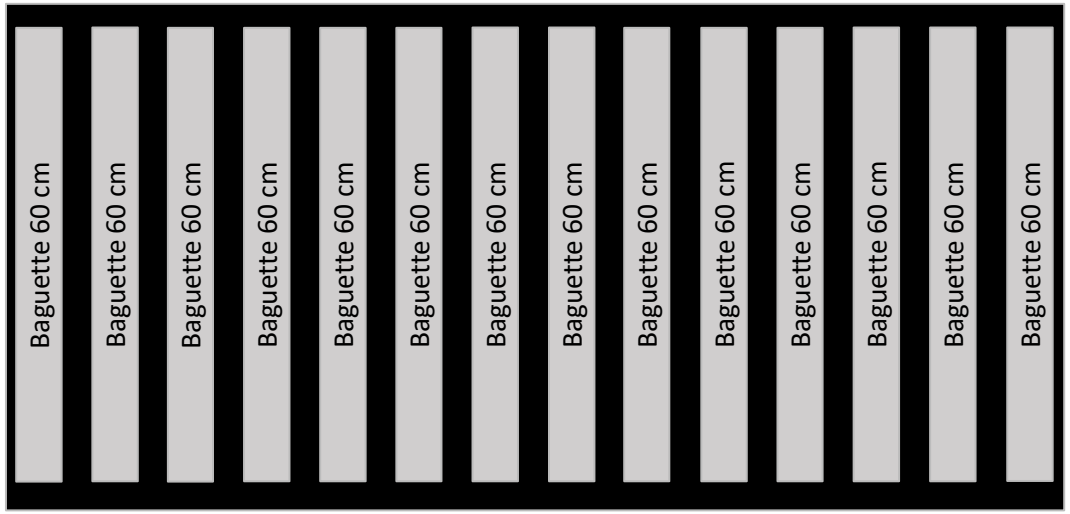


Range & dimensions – Product by product – Bread-style door


SOLEO EVO Bread-style door	M3 EVO
Baking area per deck (m²)	0,94
Useful baking width (mm)	1400
Useful baking depth (mm)	670
Number and orientation of tray 400x600 mm	
Number and orientation of tray 460x660 mm	
Oven width without lifter (mm)	1978
Oven depth (strip) without lifter (mm)	1101
Oven depth (hood) without lifter (mm)	1516
Oven depth with lifter (mm)	2810

With lifter = width + 200mm

14 baguettes of 60 cm per deck

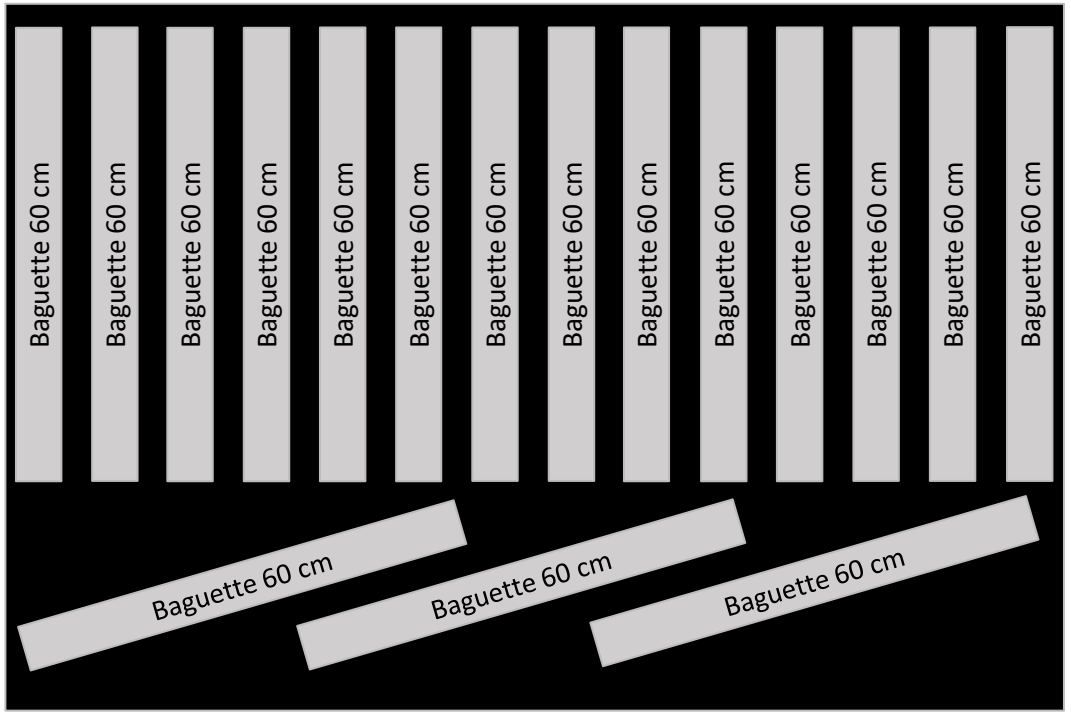


Range & dimensions – Product by product – Bread-style door



SOLEO EVO Bread-style door	M4 EVO
Baking area per deck (m²)	1,31
Useful baking width (mm)	1400
Useful baking depth (mm)	935
Number and orientation of tray 400x600 mm	
Number and orientation of tray 460x660 mm	
Oven width without lifter (mm)	1978
Oven depth (strip) without lifter (mm)	1366
Oven depth (hood) without lifter (mm)	1781
Oven depth with lifter (mm)	3345

With lifter = width + 200mm

17 baguettes of 60 cm per deck

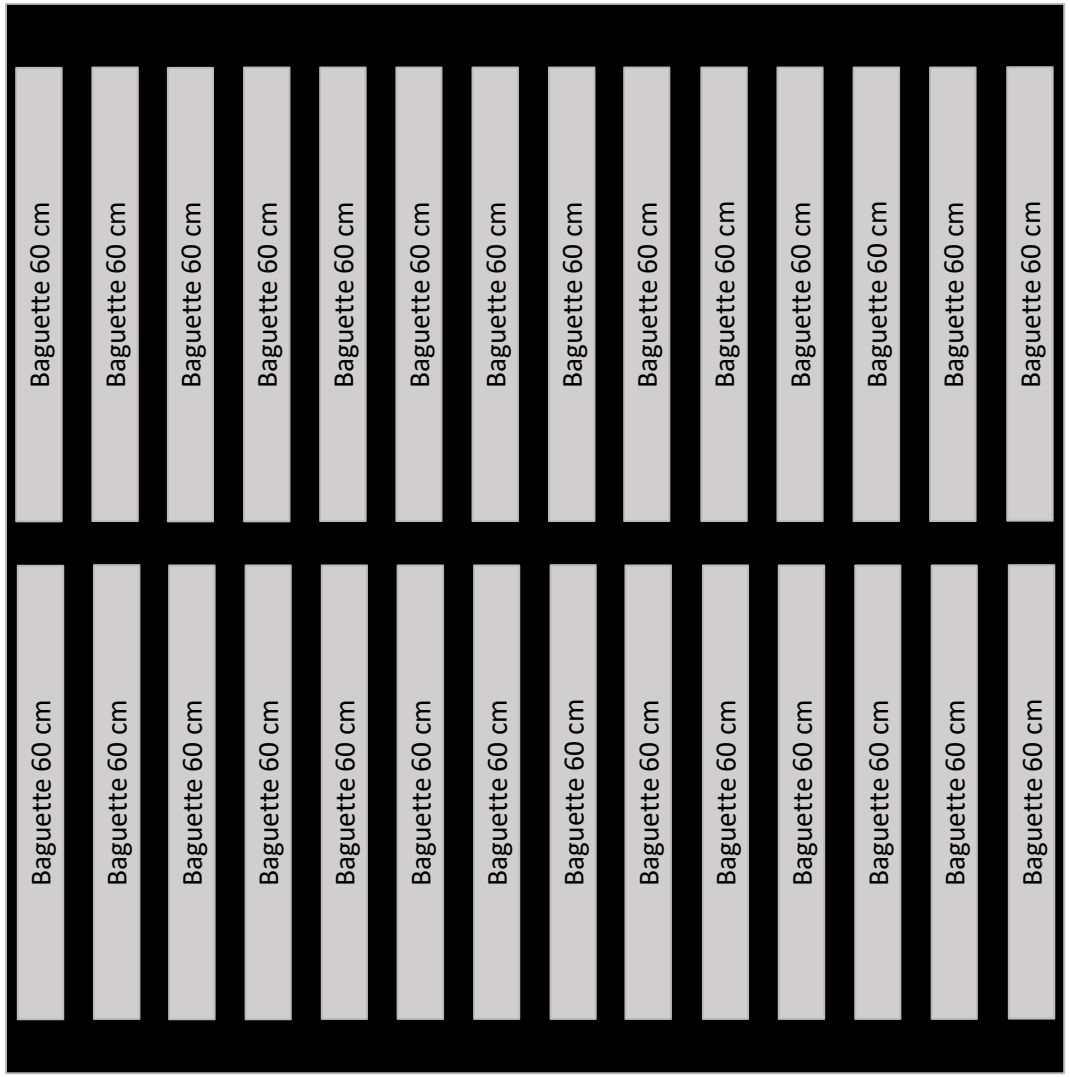


Range & dimensions – Product by product – Bread-style door

SOLEO EVO Bread-style door	M6 EVO
Baking area per deck (m²)	1,98
Useful baking width (mm)	1400
Useful baking depth (mm)	1415
Number and orientation of tray 400x600 mm	
Number and orientation of tray 460x660 mm	
Oven width without lifter (mm)	1978
Oven depth (strip) without lifter (mm)	1846
Oven depth (hood) without lifter (mm)	2261
Oven depth with lifter (mm)	4325

With lifter = width + 200mm

28 baguettes of 60 cm per deck



BONGARD

Miscellaneous features – Loading type

The **Pastry-style door** can be used with an **angle bar-style belt loader** that is set between the deck and the door. This loader allows loading but requires unloading with a shovel.

The **manual loader** is always used for half-width deck to ease its handling. Contrariwise, the M2 shop EvO is always loaded in full deck.





Miscellaneous features – Loading type

The **Bread-style door** is especially developed to be used with an **integrated lifter**.



Benefits :

The window opens and closes as the loader passes through, **without the baker having to operate** the opening handle.

It allows both **loading AND unloading**.



The rod-operated loader is attached to stops (fixed on oven or chair, or foldable on chair).

Miscellaneous features – Loading type

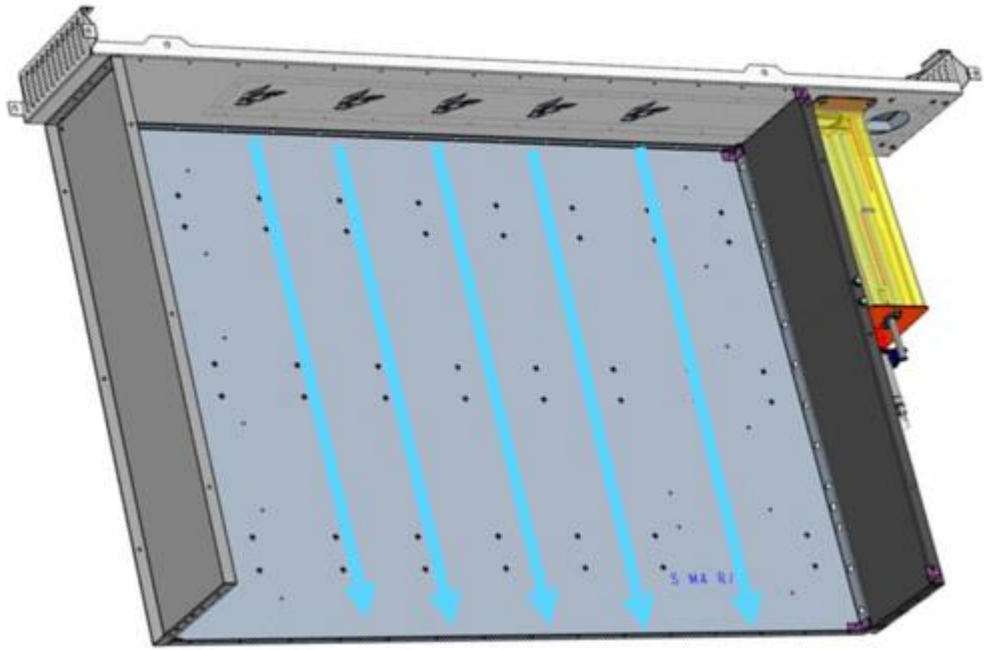
	Full-width integrated lifter	Half-width integrated lifter
M4 SHOP	X	
M2 EVO	X	
M3 EVO	X	X
M4 EVO	X	X
M6 EVO		X





Miscellaneous features – Steam injection

Steam diffusion optimization thanks to the natural circulation through the baking chamber from back to the decompression valve in the front.



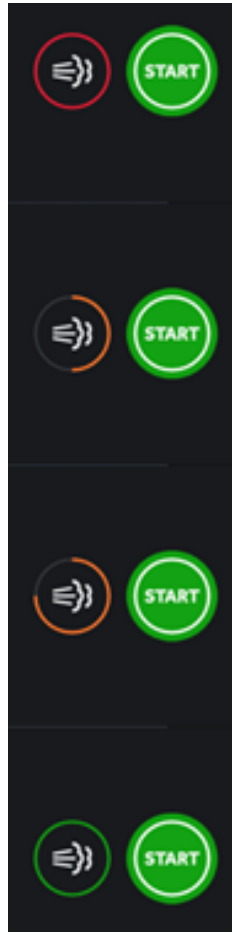
Soleo EvO is equipped with a steam generator per deck with water meter : guaranteeing delivery of **accurate quantity of steam**.

Miscellaneous features – Steam injection

With Sensitiv’2, steam injection is **managed in ml** thanks to a water meter per deck, for more and more precision.

With Ergocom steam injection is still managed in seconds.





Miscellaneous features – SENSITIV’2 control panel

The SOLEO EVO range is provided with the **SENSITIV’2 touch control panel** as standard, which intelligently manages the decks of the oven via its 7-inch screen.

Its clear and simple interface makes it very easy to use and offers a wide range of settings.



Miscellaneous features – SENSITIV'2 control panel

Baking management in manual mode or in Recipe mode.

Recipe creation (temperature, duration, steam injection and oura vents operation).

Scheduling of delayed baking start-ups per deck and per day.

Manage custom permissions depending on the user profile (authorization or not to modify the saved recipes, access settings, etc.).

Bongard Connect, service allowing remote maintenance access for Technicians.

Customize the oven and access the "Energy Saving" function.

Consultation of the oven production and energy statistics.



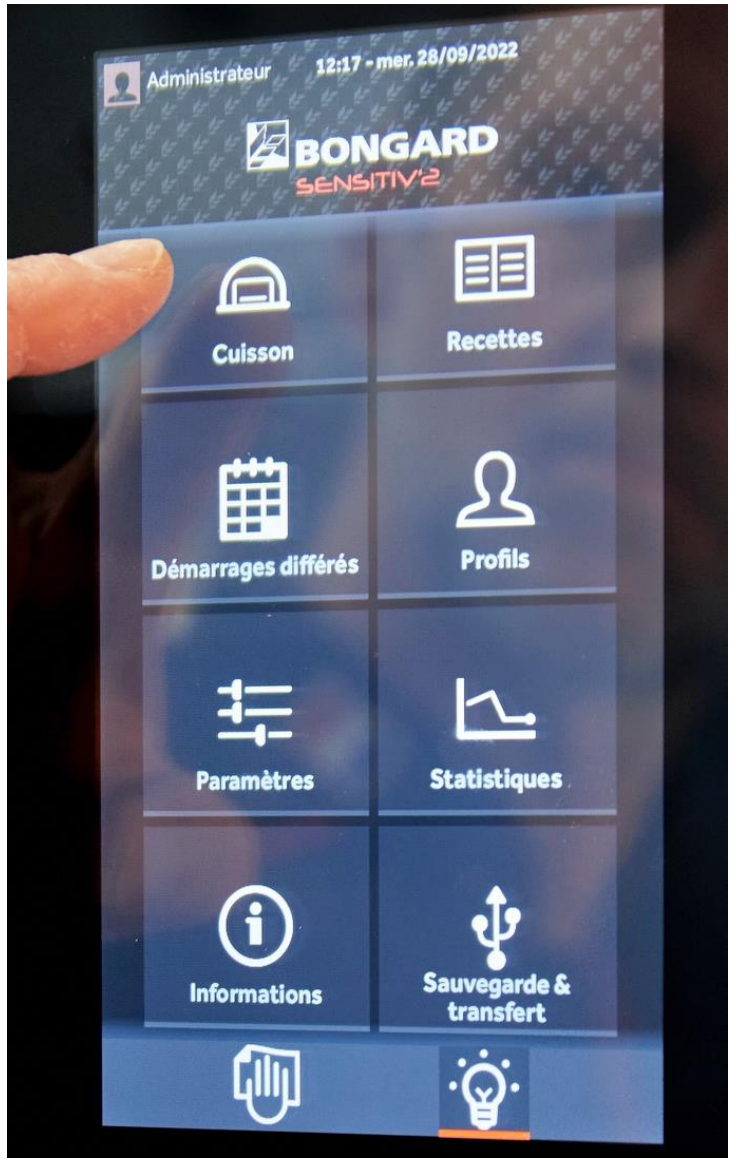
Miscellaneous features – SENSITIV'2 control panel

One single control panel to manage the whole oven.

The oven can also be equipped (as an option) with a SENSITIV'2 control for each deck. However, this feature does not offer as many possibilities as a centralized touch control.

Please note :

Ergonomics: on 4 & 5 deck ovens, the 1st deck control will be very low
Recipes: must be duplicated on each control
Delayed starts: must be programmed on each control
Profiles: must be created on each control




Miscellaneous features – Pizza decks

Pizza Pratico deck available on the **SOLEO EVO M2 SHOP et M2**.

Fully independent
Heating temperature: 400°C
Max. power: 3,5 kW

Heating chamber dimensions :
L x P x H = 63 x 43 x 11,5 cm






2 pizzas ⌀ 30 cm

Miscellaneous features – Pizza decks


Étage Pizza EVO available on the **SOLEO EVO M2** Bread-style door.

Centralized Sensitiv’2 or Ergocom par deck
Heating temperature : 400°C
Max. power : 7,8 kW

Heating chamber dimensions :
L x P x H = 94 x 63 x 11,5 cm



6 pizzas ⌀ 30 cm



2 pizzas ⌀ 45 cm





Miscellaneous features – Proofboxes

Proofbox (H975mm)		M2 SHOP	M2 EVO	M3 EVO	M4 EVO	M6 EVO
Width	(mm)	1344	1510	1978	1978	1978
Depth	(mm)	856	1202	1101	1366	1846
Characteristics						
400 x 600 / 460 x 660 trays capacity	(plaques)	6	12	12	24	24
Space between trays	(mm)	75	75	75	75	75
Entrance direction	(mm)	400/460	600/660	400/460	600/660	600/660
Number of door		1	1	2	2	2
Power supply	(W)	1240	1240	1240	1240	1240
Temperature		Ambient T° at 50°C				
Weight	(kg)	106	124	145	169	176
Humidity control		With electromechanical hygrostat				

Temperature and humidity can be adjusted according to the products.





Argument – Versatile

An oven suitable for baking :

- Pastries
- *Viennoiseries*
- Fresh dough or cold dough (Paneotrad-type)
- Frozen or pre-cooked raw products
- Snacking: savory tarts, pizza





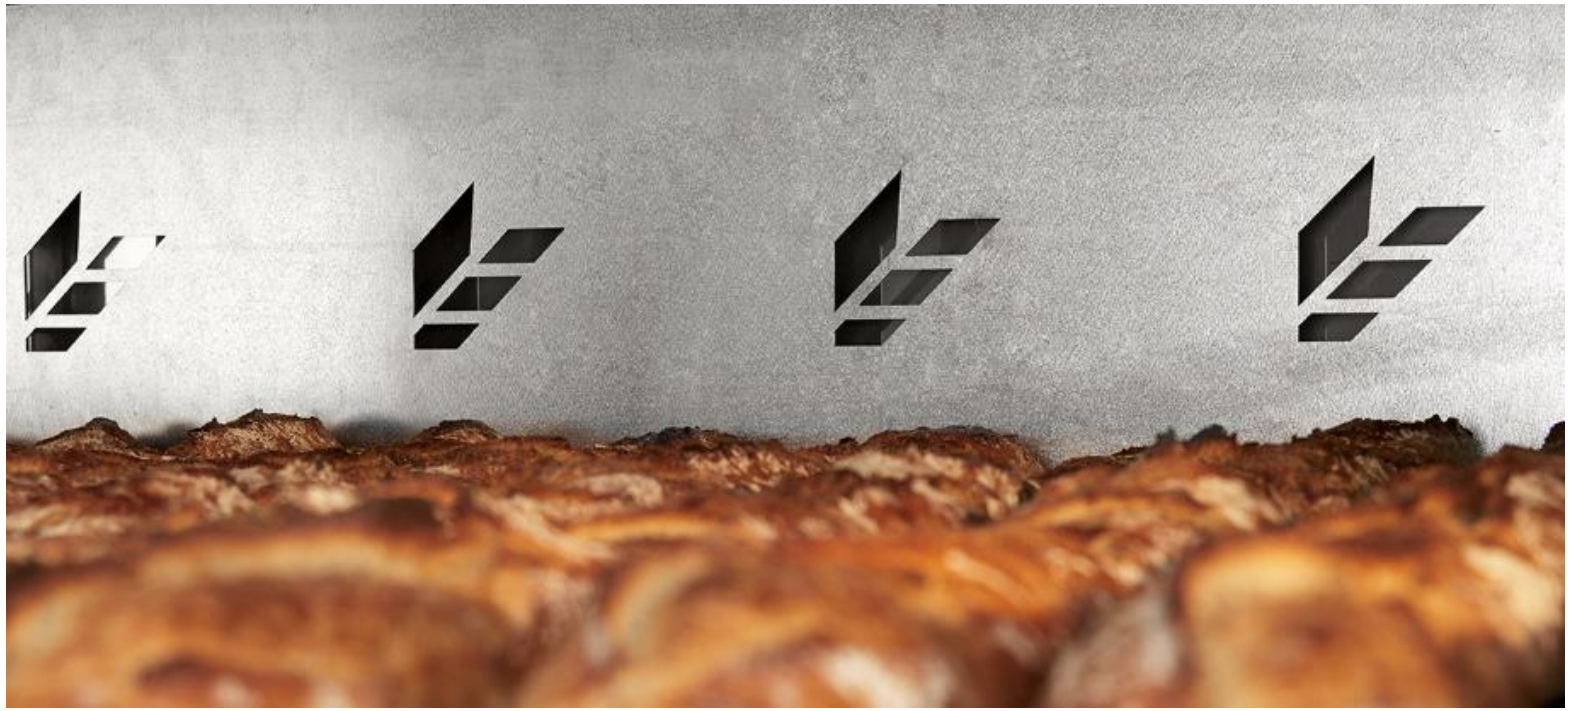




Argument – High-performance

A **compact AND high-performance** oven :

- 18 kg raw dough per m²/hour as standard on EVO models.
- 15 kg raw dough per m²/hour on SHOP models.



Argument – Ergonomic

Ease of work before the oven :

- Integrated lifter on Bread-style door decks.



- Trays loading side by side



Easy cleaning :

- “Smooth deck patent”



- Easily removable window for cleaning, without tool on Bread-style door decks.



Argument – Ergonomic

Handle and panel control **on the same side** to facilitate work in front of the oven.











Argument – Compact

The **M1 SHOP et M2 SHOP** ovens are particularly suitable for HORECA business thanks to their compacity.

These ovens, like the other Soleo EVO ovens in the range, are **perfectly suited to baking the breads, brioches and desserts** that accompany restaurant menus.





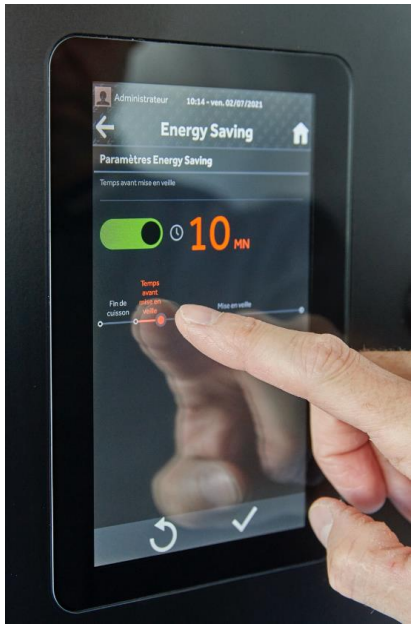


Argument – Economical

Excellent door seal: no energy loss

“Energy Saving” function: avoid leaving the oven switched on when not in use

Better insulation than the competition



	SOLEO EVO	MIWE
Isolation on the left side (mm)	90 mm	80 mm
Isolation on the right side (mm)	80 mm	60 mm
Technical box	130 mm	60 mm
Headband	90 mm	50 mm

Argument – Economical



Combining **THE SOLEO** Evo oven with a pizza deck reaching 400 °C allows you to quickly bake "real pizzas" with minimum footprint, all without compromising on the quality of the bread.



The hood available as an option. If the oven is used without steam, it is possible to choose only an insulating strip.





The drawer offers space to place the trays at the front of the oven and thus to finalise preparations.








The base is fully customisable and can be fitted with a simple tray rack, or a proof box with humidity management.



The temperature and humidity can be adjusted according to the products to be proofed in the proof box.

Benchmark – M2 SHOP et M2 EVO

M2 and M2 EvO oven	Bongard		MAP		Pavailler	Fringand		
	M2 shop	M2 EvO	E40	E50	Rubis Neo R2	Modelec		
Useful width	815	935	630	830	680	600	750	900
Useful depth	610	770	860	860	990	800	800	800
Oven width	1344	1510	1002	1240	990	1200	1340	1500
Oven depth	853	1017	1530	1530	1400	1300	1300	1300
Useful area for 1 deck	0,50	0,72	0,52	0,71	0,67	0,48	0,6	0,72
Paneo bag.	8	9+2	7	9		7	8	10
400 X 600 T								

M2- continued	Bongard		Sveba Dhalen		Salva		Miwe		Wiesheu	
	M2 shop EvO	M2 EvO	D1	D2	EM20 +pizza	NXM20 +pizza	Condo		Ebo 68 et 86 S, M & L	
Useful width	815	935	635	950	826	961	600 /620	800	605	805
Useful depth	610	770	820	820	682	931	800/780	600	905	705
Oven width	1344	1510	1075	1390	1317	?	900	1100	930	1130
Oven depth	853	1017	1070	1070	1140	?	1210	1010	1358	1158
Useful SA for 1 shelf	0,50	0,72	0,52	0,78	0,56	0,89	0,48	0,48	0,55	0,56
Paneo bag.	8	9+2			8		7	8	8	8
400 X 600 T										










- SOLEO EVO baking area is equal to that of the 900 Modelec. But our oven is **30cm less in depth and 7cm less in width**
- SOLEO EVO baking area is equal to that of the E50 Map oven. But our oven is **55cm less in depth**, and only 18cm more in width

Benchmark – M3 EVO

M3 oven	Bongard	Pavailler	Fringand	MAP	Miwe		Sveba Dahlen	Salva	
	M3 EvO	Neo R3	Modelec	E60	Condo		D3	E20/30	NXE20 +pizza
Useful width	1400	1420	1500	1260	1200	1400	1580	1226	1421
Useful depth	670	680	800	860	800	800	820	682	931
Oven width	1888	1760	2100	1690	1500	1700	2020	?	
Oven depth	900	1110	1300	1560	1210	1210	1070	?	
Useful baking area for 1 deck	0,94	0,97	1,2	1,08	0,96	1,12	1,29	0,83	1,32
Paneo bag.	14 + 2	12 +2	13 + 4	11 + 4	10 + 4	12 + 4	14 +4		
400 X 600 T									
400 X 600 T									














- SOLEO EVO M3: **the shortest oven on the market** without being the widest

Benchmark – M4 EVO

M4 EvO oven	Bongard	Pavailler	Fringand		Sveba Dhalen	Salva	Miwe
	M4 EvO	Rubis Neo R4	Modelec		D2-E	EMD-20+piz	Condo
Useful width	1400	1350	1200	1500	1265	1226	1400
Useful depth	935	950	800	1000	820	882	800
Oven width	1888	1690	1800	2100	1705		1700
Oven depth	1150	1400	1300	1515	1070		1210
Useful baking area for 1 deck	1,31	1,28	0,96	1,5	1,04	1,08	1,12
Paneo bag.	14 + 6				10 + 4	10 + 4	12 + 4
400 X 600 T							
460 X 660 T							

- Only Fringand and SOLEO EVO M4 ovens **accept export trays** (Modelec + 20cm in width and + 35cm in depth vs Soleo EvO)

Benchmark – M6 EVO

M6 EvO	Bongard	Pavailler	Fringand	Sveba		Salva		Miwe
	M6 EvO	Rubis Neo R6	Modelec	D4	D2 -New Double D	ED20- 30	NXD-20	Condo
Useful width	1400	1250	1200	1895	1265	1226	1421	1200
Useful depth	1415	1330	1400	820	1660	1282	1698	1200
Oven width	1888	1610	1800	2335	1705	1717		1500
Oven depth	1640	1806	1925	1070	1910	1740		1610
Useful baking area for 1 deck	1,98	1,66	1,68	1,55	2,1	1,57	2,41	1,44
Paneo bag.	28+6	2 X 11 + 6		16 + 6				2 X 10
400 X 600 T								
pl 460 X 660								

+ Points of SOLEO EVO

- **Versatile range for bakers, confectioners, and HORECA**
- **High-performance**
- **Ergonomics**
- **Compact**
- **Economical**
- **Modular**