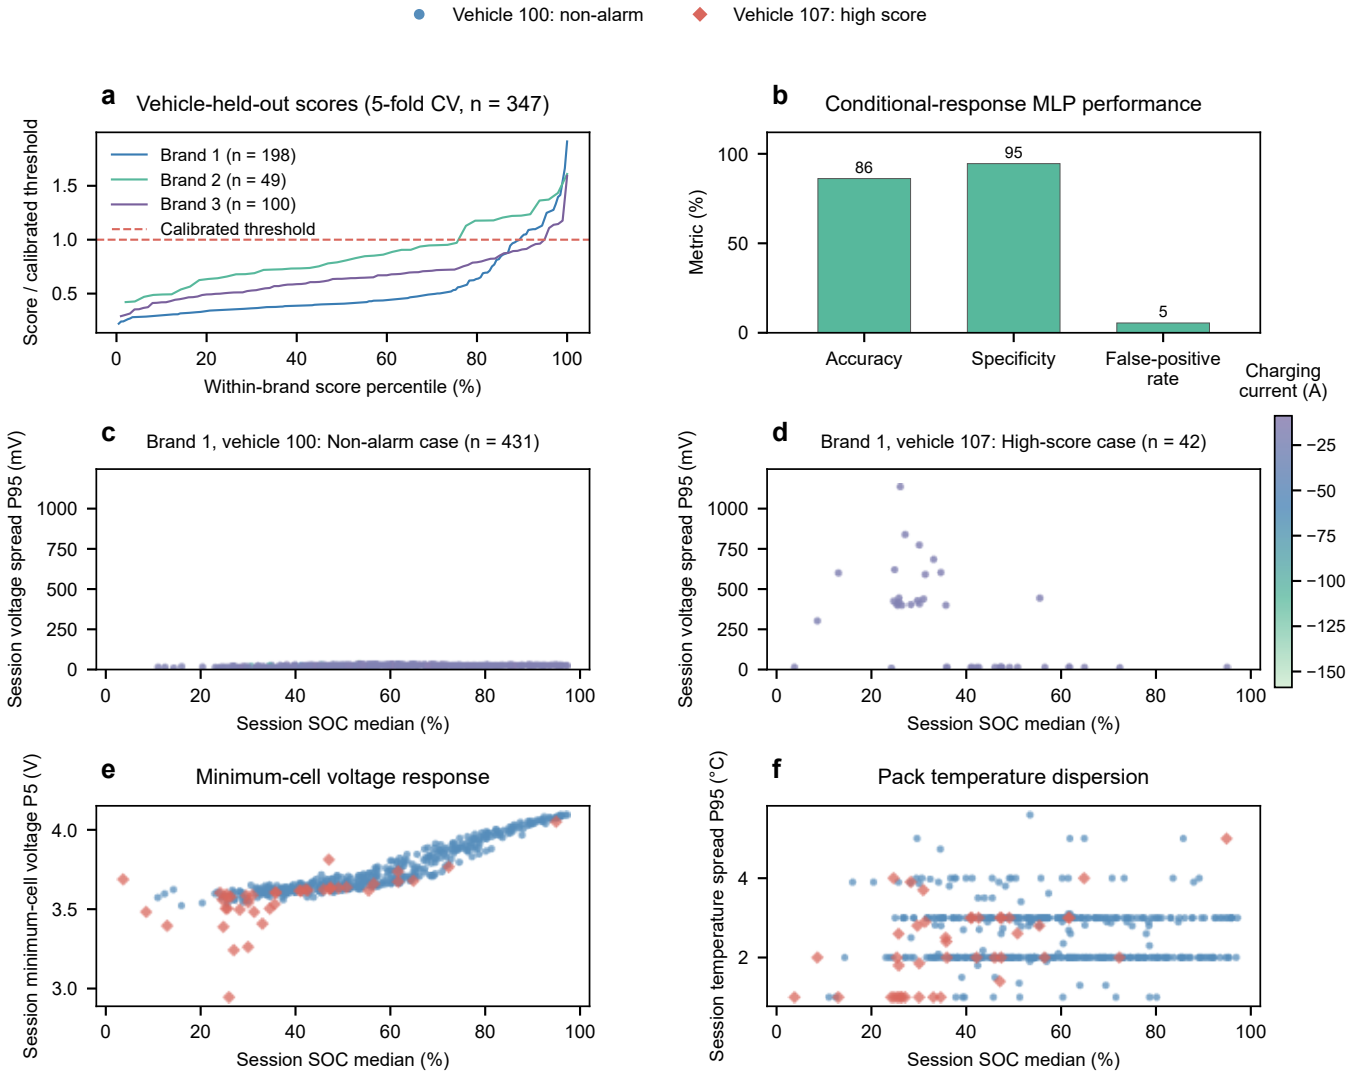

Vehicle 100: non-alarm
Vehicle 107: high score
a
Vehicle-held-out scores (5-fold CV, n = 347)
Brand 1 (n = 198)
Brand 2 (n = 49)
Brand 3 (n = 100)
Calibrated threshold
Score / calibrated threshold
Within-brand score percentile (%)
b
Conditional-response MLP performance
Metric (%)
86
95
5
Accuracy
Specificity
False-positive rate
Charging current (A)
c
Brand 1, vehicle 100: Non-alarm case (n = 431)
Session voltage spread P95 (mV)
Session SOC median (%)
d
Brand 1, vehicle 107: High-score case (n = 42)
Session voltage spread P95 (mV)
Session SOC median (%)
e
Minimum-cell voltage response
Session minimum-cell voltage P5 (V)
Session SOC median (%)
f
Pack temperature dispersion
Session temperature spread P95 (°C)
Session SOC median (%)