



RTL8710BN-VM1

SINGLE-CHIP 802.11b/g/n 1T1R WLAN SoC

DATASHEET

(CONFIDENTIAL: Development Partners Only)

Rev. 2.5

2017/06/08

Track ID: JATR



Realtek Semiconductor Corp.

No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

Tel.: +886-3-578-0211. Fax: +886-3-577-6047

www.realtek.com

COPYRIGHT

©2017 Realtek Semiconductor Corp. All rights reserved. No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language in any form or by any means without the written permission of Realtek Semiconductor Corp.

DISCLAIMER

Realtek provides this document “as is”, without warranty of any kind. Realtek may make improvements and/or changes in this document or in the product described in this document at any time. This document could include technical inaccuracies or typographical errors.

TRADEMARKS

Realtek is a trademark of Realtek Semiconductor Corporation. Other names mentioned in this document are trademarks/registered trademarks of their respective owners.

USING THIS DOCUMENT

This document is intended for the software engineer’s reference and provides detailed programming information.

Though every effort has been made to ensure that this document is current and accurate, more information may have become available subsequent to the production of this guide.

REVISION HISTORY

Revision	Release Date	Summary
2.5	2017/07/25	This document

Table of Contents

1. PRODUCT OVERVIEW	10
1.1. GENERAL DESCRIPTION	10
1.2. ORDERING INFORMATION	10
1.3. FEATURES	11
1.4. PACKAGE TYPES AND PIN DESCRIPTIONS	13
1.4.1. RTL8710BN (QFN32)	13
1.4.2. Pin Descriptions	13
2. BLOCK DIAGRAM	20
2.1. FUNCTIONAL BLOCK DIAGRAM	20
2.2. WIFI APPLICATION DIAGRAM	21
2.3. POWER SUPPLY APPLICATION DIAGRAM	22
3. MEMORY ORGANIZATION	23
3.1. INTRODUCTION	23
3.2. MEMORY MAP AND REGISTER BOUNDARY ADDRESSES	23
3.3. INTERNAL ROM	24
3.4. INTERNAL SRAM	24
3.5. EXTERNAL SPI NOR FLASH	24
3.5.1. Features	24
3.5.2. Supported NOR Flash List	25
3.5.3. Electrical Specifications	26
4. EXCEPTION TABLE	27
5. PINMUX ALTERNATE FUNCTIONS	29
6. PMU	31
6.1. FEATURES	31
6.2. POWER MODE AND POWER CONSUMPTION	31
6.3. SHUTDOWN MODE	31
6.4. DEEP SLEEP MODE	32
6.4.1. Power Domain	32
6.4.2. Wakeup Source	33
6.5. DEEP STANDBY MODE	33
6.5.1. Power Domain	33

6.5.2.	Wakeup Source.....	34
6.6.	SLEEP POWER GATE	34
6.6.1.	Power Domain	34
6.6.2.	Wakeup source.....	34
6.7.	SLEEP CLOCK GATE	35
6.7.1.	Power Domain	35
6.7.2.	Wakeup source.....	35
7.	FIRMWARE PROTECTION.....	37
7.1.	RAM READ PROTECTION	37
8.	WIFI	38
8.1.	GENERAL	38
8.2.	STANDARDS SUPPORTED	38
8.3.	WLAN MAC FEATURES	38
8.4.	WLAN PHY FEATURES	39
9.	BASIC TIMER	40
9.1.	INTRODUCTION	40
9.2.	FEATURES	40
10.	CAPTURE TIMER.....	41
10.1.	INTRODUCTION	41
10.2.	FEATURES	41
11.	PWM TIMER.....	42
11.1.	INTRODUCTION	42
11.2.	FEATURES	42
11.3.	FUNCTION DESCRIPTION	42
11.3.1.	PWM mode.....	42
12.	RTC	44
12.1.	INTRODUCTION	44
12.2.	FEATURES	44
12.3.	CLOCK AND PRESCALERS.....	44
12.4.	RTC RESET	45
13.	BACKUP REGISTER.....	46
13.1.	INTRODUCTION	46
13.2.	BACKUP REGISTER API	46

13.3.	BACKUP REGISTER RESET	46
14.	UART.....	47
14.1.	INTRODUCTION	47
14.2.	FEATURES	47
14.3.	BAUD RATE	47
14.4.	UART INTERFACE SIGNAL LEVELS.....	48
15.	SPI.....	49
15.1.	INTRODUCTION	49
15.2.	FEATURES	50
16.	I2C	51
16.1.	INTRODUCTION	51
16.2.	FEATURES	52
17.	I2S.....	53
17.1.	INTRODUCTION	53
17.2.	FEATURES	53
17.3.	FUNCTION DESCRIPTION.....	53
17.3.1.	<i>Clock Type.....</i>	53
18.	ADC.....	54
18.1.	INTRODUCTION	54
18.2.	FEATURES	54
18.3.	CHANNEL DESCRIPTION.....	54
19.	GDMA.....	55
19.1.	INTRODUCTION	55
19.2.	FEATURES OF GDMA.....	55
20.	WGT (WATCHDOG TIMER)	56
20.1.	INTRODUCTION	56
20.2.	FEATURES	56
21.	GPIO	57
21.1.	INTRODUCTION	57
21.2.	FEATURES OF GPIO	57
22.	SECURITY ENGINE	58
22.1.	INTRODUCTION	58
22.2.	FEATURES	58

23.	USOC (USB DEVICE)	59
23.1.	INTRODUCTION	59
23.2.	FEATURES	59
24.	SDIO/GSPI DEVICE	60
24.1.	INTRODUCTION	60
24.2.	FEATURES	60
24.3.	BUS TIMING SPECIFICATION	60
25.	ELECTRICAL CHARACTERISTICS	63
25.1.	TEMPERATURE LIMIT RATINGS	63
25.2.	POWER SUPPLY DC CHARACTERISTICS	63
25.3.	DIGITAL IO PIN DC CHARACTERISTICS	63
25.3.1.	<i>Electrical Specifications</i>	63
26.	MECHANICAL DIMENSIONS	65
26.1.	PACKAGE SPECIFICATION	65
26.1.1.	QFN32	65

List of Tables

TABLE 1 RTL8710BN-VM1 FEATURES	11
TABLE 2 PIN DESCRIPTION.....	13
TABLE 3 POWER ON TRAP PINS	14
TABLE 4 RF PIN	14
TABLE 5 CHIP EN.....	14
TABLE 6 POWER PINS	14
TABLE 7 XTAL PINS	15
TABLE 8 ADC PINS.....	15
TABLE 9 USB PINS.....	16
TABLE 10 RTL8710BN-VM1 GPIO	16
TABLE 11 RTL8710BN-VM1 MEMORY MAP.....	23
TABLE 12 FLASH SUPPORTED	25
TABLE 13 FLASH BUS DC PARAMETERS	26
TABLE 14 EXCEPTION TABLE	27
TABLE 15 PINMUX ALTERNATE FUNCTION MAPPING	29
TABLE 16 POWER MODE BRIEF SUMMARY AND TYPICAL POWER CONSUMPTION AND RESUME TIME	31
TABLE 17 DEEP SLEEP MODE POWER DOMAIN	32
TABLE 18 DEEP SLEEP WAKEUP SOURCE	33
TABLE 19 DEEP STANDBY POWER DOMAIN.....	33
TABLE 20 DEEP STANDBY WAKEUP SOURCE.....	34
TABLE 21 SLEEP POWER GATE WAKEUP SOURCE	34
TABLE 22 SLEEP CLOCK GATE WAKEUP SOURCE	35
TABLE 23 BASIC TIMER FEATURES	40
TABLE 24 CAPTURE TIMER FEATURES	41
TABLE 25 PWM TIMER FEATURES	42
TABLE 26 UART BAUD RATE	47
TABLE 27 SDIO INTERFACE TIMING PARAMETERS	60
TABLE 28 TEMPERATURE LIMIT RATINGS.....	63
TABLE 29 POWER SUPPLY DC CHARACTERISTICS	63
TABLE 30 TYPICAL DIGITAL IO DC PARAMETERS (3.3V CASE)	63
TABLE 31 TYPICAL DIGITAL IO DC PARAMETERS (1.8V CASE)	64

List of Figures

FIGURE 2 RTL8710BN-VM1 QFN32 PIN ASSIGNMENTS	13
FIGURE 5 BLOCK DIAGRAM	20
FIGURE 6 SINGLE-BAND 11N (1x1) SOLUTION	21
FIGURE 7 POWER SUPPLY ARCHITECTURE	22
FIGURE 8 SHUTDOWN MODE	31
FIGURE 9 DEEP SLEEP MODE	32
FIGURE 10 DEEP STANDBY MODE	33
FIGURE 11 SPI SERIAL FORMAT (SCPH = 0)	49
FIGURE 12 SPI SERIAL FORMAT (SCPH = 1)	49
FIGURE 13 SLAVE SELECTION	50
FIGURE 14 I2C START STOP CONDITION	51
FIGURE 15 MASTER/SLAVE AND TRANSMITTER/RECEIVER RELATIONSHIPS	51
FIGURE 16 7-BIT ADDRESS FORMAT	52
FIGURE 17 10-BIT ADDRESS FORMAT	52
FIGURE 18 SDIO BUS TIMING	60
FIGURE 19 QFN32 PACKAGE SPECIFICATION	65

1. Product Overview

1.1. General Description

RTL8710BN-VM1 is a highly integrated single-chip low power 802.11n Wireless LAN (WLAN) network controller. It combines an ARM-CM4 MCU, WLAN MAC, a 1T1R capable WLAN baseband, and RF in a single chip. It also provides a bunch of configurable GPIOs which are configured as digital peripherals for different applications and control usage.

RTL8710BN-VM1 integrates internal memories for complete WIFI protocol functions. The embedded memory configuration also provides simple application developments.

1.2. Ordering Information

<i>Part Number</i>	<i>Package</i>	<i>Status</i>
RTL8710BN-VM1	QFN32	MP

1.3. Features

Table 1 RTL8710BN-VM1 Features

Feature list			RTL8710BN-VM1
Package	trays and tape-in-reel		(5x5mm^2)
			QFN32
Integrated core	Core type		ARM CM4F
	Core clock maximum freq.		125MHz
Memory	Internal ROM		512KB
	Internal SRAM		256KB
	External FLASH		128M Bytes
FPU	Float process unit		Yes
SWD/JTAG			SWD
Backup register	Backup register for power save		16B
Boot Reason			Yes
F/W protection			Yes
Read protection	RAM read protection		4KB
WIFI	802.11 B/G/N		Yes
BOR	BOR Detection		Yes
peripherals	UART	Normal-UART	1
		Log-UART	1
	SPI Master	Max. 31.25Mbps	1
	SPI Slave	Max. 31.25Mbps	1
	I2C	Max. 400Kbps	2
	ADC	VBAT	1
		Normal	0
	GDMA	2*6 channels	2
	GPIO	IN/OUT/INT	17
	I2S		0
	RTC	D/H/M/S	1
		OUTPUT	1

	Timer	Basic timer use 32K	4
		Advanced timer use XTAL	2
	PWM	OUTPUT	6
		INPUT Capture	2
	WDG		1
	USB device		0
	SDIO 2.0 Device		1
External 32K	External 32K		1
Dsleep Wakepin	Deep sleep wake pin		4

1.4. Package Types and Pin Descriptions

1.4.1. RTL8710BN-VM1 (QFN32)

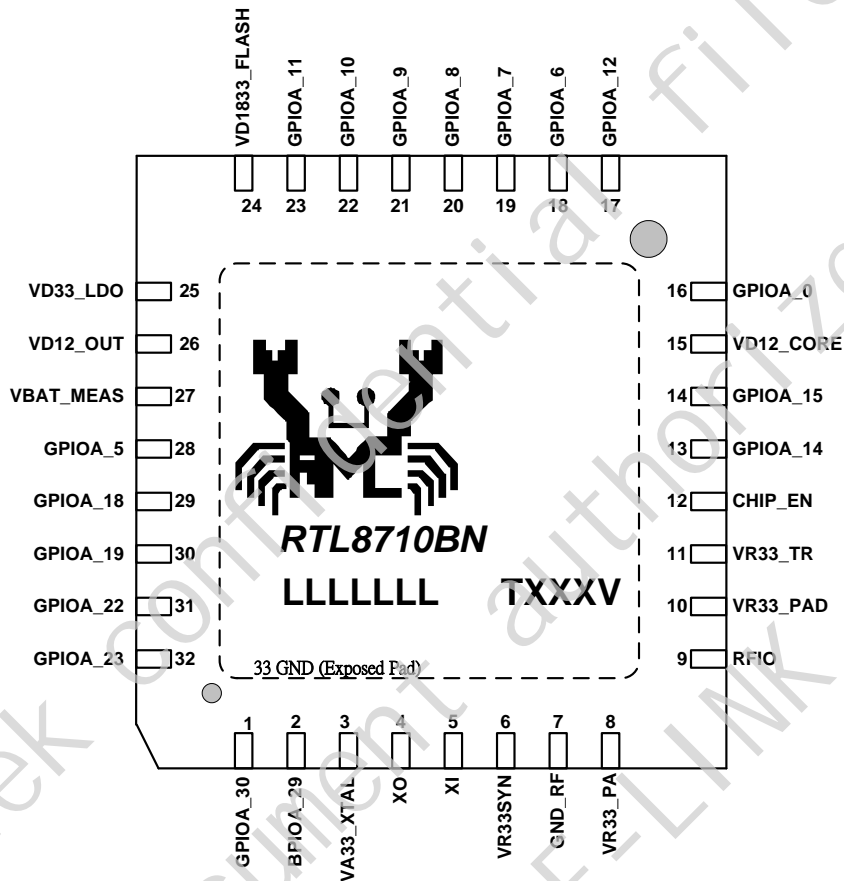


Figure 1 RTL8710BN-VM1 QFN32 Pin Assignments

1.4.2. Pin Descriptions

The following signal type codes are used in the tables:

Table 2 Pin Description

I:	Input	O:	Output
T/S:	Tri-State bi-directional input/output pin	S/T/S:	Sustained Tri-State
O/D:	Open Drain	P:	Power pin

1.4.2.1 Power On Trap Pin

Table 3 Power On Trap Pins

<i>Symbol</i>	<i>Type</i>	<i>RTL8710BN-VM1</i>	<i>Description</i>
TEST_MODE_SEL	I	16	Shared with GPIOA_0 1: Enter into test/debug mode 0: Normal operation mode
UART_DOWNLOAD	I	1	Shared with GPIOA_30 1: Boot from flash 0: Download image from UART
SPS_LDO_SEL	I	NA	Shared with GPIOA_3 1: LDO 0: SWR

1.4.2.2 RF pin

Table 4 RF pin

<i>Symbol</i>	<i>Type</i>	<i>RTL8710BN-VM1</i>	<i>Description</i>
RF_IO	IO	9	WL RF signal

1.4.2.3 CHIP EN

Table 5 CHIP EN

<i>Symbol</i>	<i>Type</i>	<i>RTL8710BN-VM1</i>	<i>Description</i>
CHIP_EN	I	12	Enable chip. 1: enable chip; 0: shutdown chip

1.4.2.4 Power Pins

Table 6 Power Pins

<i>Symbol</i>	<i>Type</i>	<i>RTL8710BN-VM1</i>	<i>Description</i>
VA33_XTAL	P	3	3.3V for Crystal Oscillator
VA12_XTAL	P	NA	1.2V for Crystal Oscillator

VR33_SYN	P	6	3.3V for RF Synthesizer
VR12_SYN	P	NA	1.2V for RF Synthesizer
VR33_PA	P	8	3.3V for RF Power amplifier
VR33_PAD	P	10	3.3V for RF
VR33_TR	P	11	3.3V for RF
VR12_TR	P	NA	1.2V for RF
VD12_CORE	P	15	1.2V for digital core power
VD1833_FLASH	P	24	3.3V/1.8V for Flash IO power
VD33_LDO	P	25	Linear Regulator input from 3.3V to 1.2V
VD33_SPS	P	NA	Switching/Linear Regulator input from 3.3V to 1.2V
VD12_OUT	P	26	1.2V output from Linear Regulator
SW_LX	P	NA	1.2V output from Switching/Linear Regulator
GND_SPS	P	NA	Ground for Switching/Linear Regulator
VA33_USB	P	NA	3.3V power for USB Analog
VA12_USB	P	NA	1.2V power for USB Analog

1.4.2.5 XTAL Pins

Table 7 XTAL Pins

Symbol	Type	RTL8710BN_VM1	Description
XI	I	5	40MHz OSC Input Input of 40MHz Crystal Clock Reference
XO	O	4	Output of 40MHz Crystal Clock Reference

1.4.2.6 ADC Pins

Table 8 ADC Pins

Symbol	Type	RTL8710BN_VM1	Description
ADC_1	I	NA	ADC input pin, 3.3V tolerance
VBAT_MEAS	I	27	ADC input pin, 5V tolerance
ADC_3	I	NA	ADC input pin, 3.3V tolerance

1.4.2.7 USB Pins

Table 9 USB Pins

<i>Symbol</i>	<i>Type</i>	<i>RTL8710BN_VM1</i>	<i>Description</i>
USB_DP	I/O	NA	USB differential bus
USB_DM	I/O	NA	USB differential bus
USB_RREF	I	NA	External reference resistor for USB Analog, 1% accuracy

1.4.2.8 GPIO Pins

Table 10 RTL8710BN-VM1 GPIO

<i>Symbol</i>	<i>Type</i>	<i>RTL8710BN_VM1</i>	<i>Description</i>
GPIOA_14	I/O	13	PWM0
			SWD_CLK
GPIOA_15	I/O	14	PWM1
			SWD_DATA
GPIOA_13	I/O	NA	PWM4
GPIOA_0	I/O	16	PWM2
			EXT_32K
			WL_LED
GPIOA_16	I/O	NA	UART2_Log_RXD
			PWM1
			RTC_OUT
GPIOA_17	I/O	NA	UART2_Log_TXD
			PWM2
GPIOA_25	I/O	NA	UART1_RXD
GPIOA_26	I/O	NA	UART1_TXD
GPIOA_28	I/O	NA	I2C1_SCL
GPIOA_27	I/O	NA	I2C1_SDA
GPIOA_12	I/O	17	PWM3
GPIOA_4	I/O	NA	UART0_TXD



			SPI1_MOSI
			SPI0_MOSI
			I2C0_SDA
GPIOA_1	I/O	NA	UART0_RXD
			SPI1_CLK
			SPI0_SCK
			I2C0_SCL
GPIOA_2	I/O	NA	UART0_CTS
			SPI1_CS
			SPI0_CS
			I2C1_SDA
GPIOA_3	I/O	NA	UART0_RTS
			SPI1_MISO SPS_LDO_SEL
			SPI0_MISO
			I2C1_SCL
GPIOA_6	I/O	18	SPIC_CS
			SD_D2
GPIOA_7	I/O	19	SPIC_DATA1
			SD_D3
GPIOA_8	I/O	20	SPIC_DATA2
			SD_CMD
GPIOA_9	I/O	21	SPIC_DATA0
			SD_CLK
GPIOA_10	I/O	22	SPIC_CLK
			SD_D0
GPIOA_11	I/O	23	SPIC_DATA3
			SD_D1
GPIOA_5	I/O	28	SDIO_SIDEHAND_INT
			PWM4
GPIOA_18	I/O	29	UART0_RXD
			SPI1_CLK



			SPI0_SCK
			I2C1_SCL
			SD_D2
			TIMER4_TRIG
			I2S_MCK
GPIOA_19	I/O	30	UART0_CTS
			SPI1_CS
			SPI0_CS
			I2C0_SDA
			SD_D3
			TIMER5_TRIG
			I2S_SD_TX
GPIOA_20	I/O	NA	SD_CMD
			I2S_SD_RX
GPIOA_21	I/O	NA	SD_CLK
			PWM3
			I2S_CLK
GPIOA_22	I/O	31	UART0_RTS
			SPI1_MISO
			SPI0_MISO
			I2C0_SCL
			SD_D0
			PWM5
			I2S_WS
GPIOA_23	I/O	32	UART0_TXD
			SPI1_MOSI
			SPI0_MOSI
			I2C1_SDA
			SD_D1
			PWM0
GPIOB_1	I/O	NA	SPI1_CLK

			SPI0_SCK
GPIOB_0	I/O	NA	SPI1_CS
			SPI0_CS
GPIOB_2	I/O	NA	SPI1_MISO
			SPI0_MISO
GPIOB_3	I/O	NA	SPI1_MOSI
			SPI0_MOSI
GPIOB_4	I/O	NA	SWD_CLK
			I2S_MCK
GPIOB_5	I/O	NA	SWD_DATA
			I2S_SD_TX
GPIOA_24	I/O	NA	I2S_SD_RX
GPIOA_31	I/O	NA	I2S_CLK
GPIOB_6	I/O	NA	I2S_WS
GPIOA_30	I/O	1	UART2_Log_TXD
			I2C0_SDA
			PWM3
			RTC_OUT
GPIOA_29	I/O	2	UART2_Log_RXD
			I2C0_SCL
			PWM4

2. Block Diagram

2.1. Functional Block Diagram

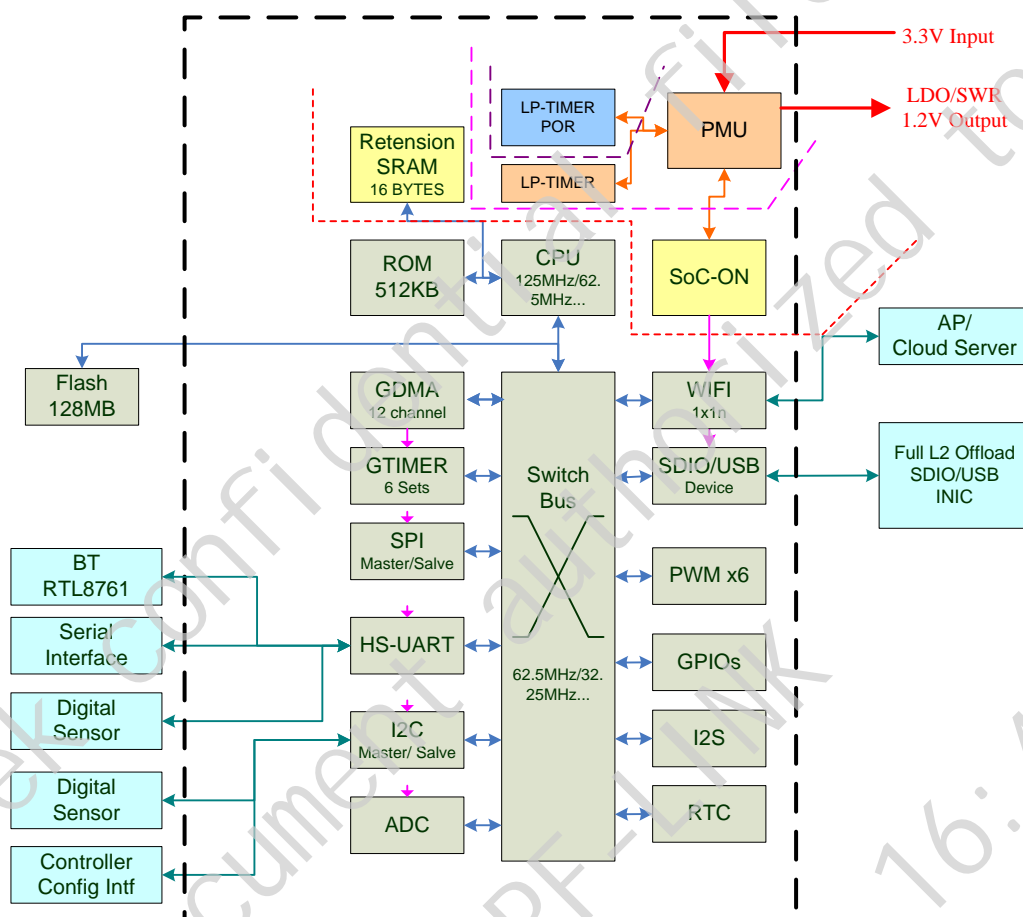


Figure 2 Block Diagram

2.2. WIFI Application Diagram

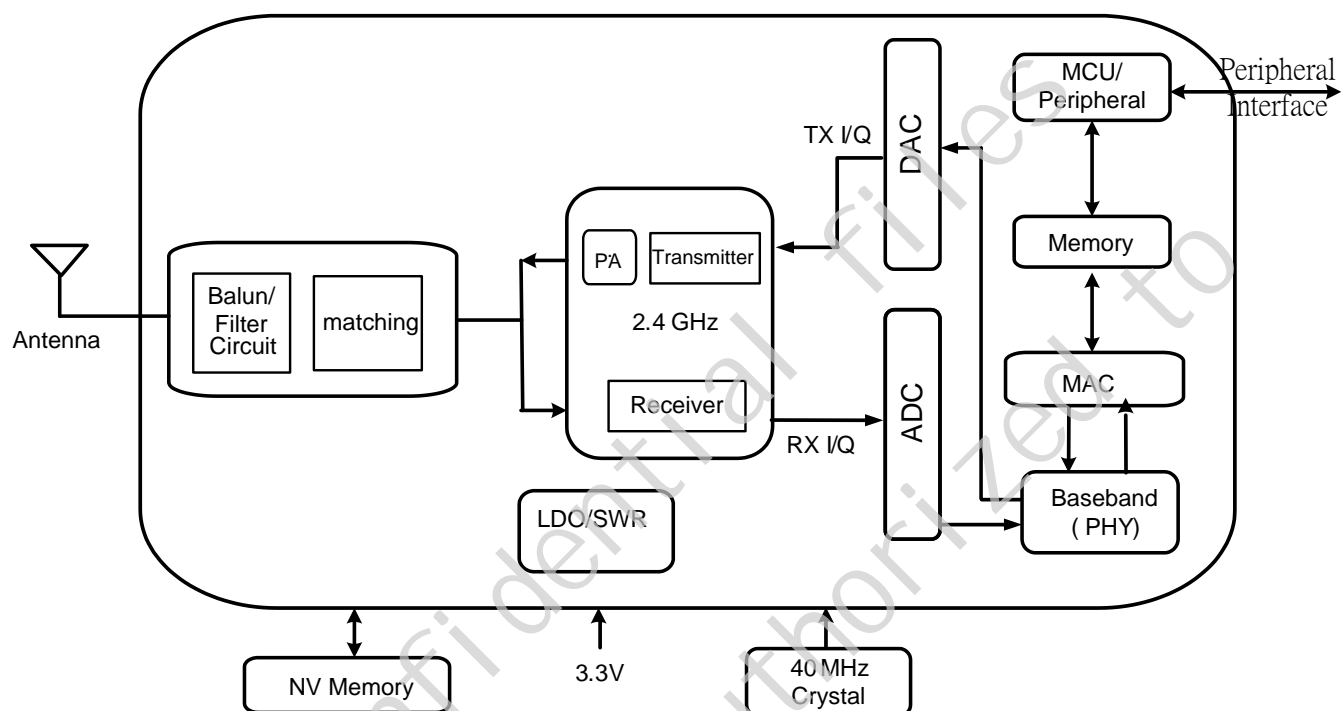


Figure 3 Single-Band 11n (1x1) Solution

2.3. Power Supply Application Diagram

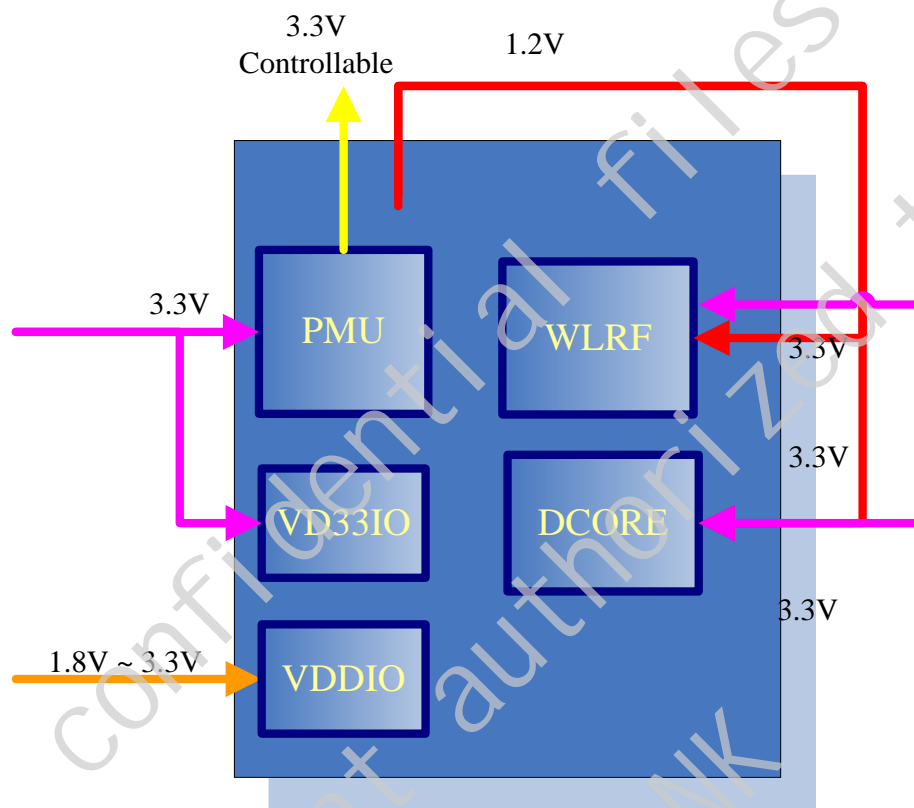


Figure 4 Power Supply Architecture

The integrated Power Management Unit (PMU) provides the following features:

- 1.2V LDO/SWR(Switching Regulator)
- 3.3V power source integrated power cut controlled by FW.

3. Memory organization

3.1. Introduction

Program memory, data memory, registers and I/O ports are organized within the same linear 4-Gbyte address space.

RTL8710BN-VM1 integrates ROM, internal SRAM, NOR flash controller to provide applications with a variety of memory requirements.

The bytes are coded in memory in Little Endian format. The lowest numbered byte in a word is considered the word's least significant byte and the highest numbered byte the most significant.

All the memory areas that are not allocated to on-chip memories and peripherals are considered "Reserved". For the detailed mapping of available memory and register areas, please refer to the Memory map and register boundary addresses chapter and peripheral chapters.

3.2. Memory map and register boundary addresses

Table 11 RTL8710BN-VM1 memory map

<i>Name</i>	<i>Physical address</i>	<i>size</i>	<i>IP function</i>
ROM	0x0000_0000~0x0007_FFFF	512KB	Internal ROM memory
SRAM	0x1000_0000~0x1001_FFFF	256KB	Internal SRAM memory
FLASH	0x0800_0000~0x0FFF_FFFF	128MB	External Flash memory
SYSON	0x4000_0000~0x4000_0FFF	4KB	SYS Control
GPIO	0x4000_1000~0x4000_17FF	2KB	GPIO Control
Timer	0x4000_2000~0x4000_2FFF	4KB	Timer Control
LOGUART	0x4000_3000~0x4000_33FF	1KB	UART for Log
RTC	0x4000_3400~0x4000_37FF	1KB	RTC control
Cache	0x4000_3C00~0x4000_4FFF	1KB	Flash cache control
ADC	0x4001_0000~0x4001_0FFF	4KB	ADC control
SPIC	0x4002_0000~0x4002_0FFF	4KB	SPI flash controller
UART0	0x4004_0000~0x4004_03FF	1KB	UART0 control
UART1	0x4004_0400~0x4004_07FF	1KB	UART1 control
SPI0	0x4004_2000~0x4004_23FF	1KB	SPI0 control
SPI1	0x4004_2400~0x4004_27FF	1KB	SPI1 control
I2C0	0x4004_4000~0x4004_43FF	1KB	I2C0 control
I2C1	0x4004_4400~0x4004_47FF	1KB	I2C1 control
SDIO	0x4005_0000~0x4005_3FFF	16KB	SDIO device control

GDMA0	0x4006_0000~0x4006_07FF	2KB	GDMA0 control
GDMA1	0x4006_1000~0x4006_17FF	2KB	GDMA1 control
I2S	0x4006_2000~0x4006_23FF	1KB	I2S control
IPSEC	0x4007_0000~0x4007_3FFF	16KB	Security control
WIFI	0x4008_0000~0x400B_FFFF	256KB	WIFI register
USB SIE	0x400C_0000~0x400C_0FFF	4KB	USB SIE control
USOC	0x400C_2000~0x400C_2FFF	4KB	USB device register

3.3. Internal ROM

512KB ROM is integrated to provide high access speed, low leakage memory. The ROM memory clock speed is up to 125MHz. The ROM lib provides the following functions:

- Boot Code and MCU initialization
- Peripheral Drivers & API
- Non-flash booting functions and drivers
- Security function libs

3.4. Internal SRAM

Max. 256KB SRAM is integrated to provide instruction, data, and buffer usage. The maximum clock speed is up to 125MHz.

CHIP	RTL8710BN_VM1
SRAM	256KB

3.5. External SPI NOR Flash

3.5.1. Features

- SPI baud rate:
 - 100/83/71/62/50MHz ...
- Execute in place (XIP):
 - we supports a memory-mapped I/O interface for read operation
 - Support 32K I/D read cache, 2-way associative
 - Support decryption on the fly
- SPI mode:
 - SPI/Dual SPI/DIO SPI/Quad SPI/QIO SPI
- Flash size

- Support up to 128M Bytes flash size

3.5.2. Supported NOR Flash List

Table 12 Flash supported

Vendor	Part Number	Density	Voltage	IO	Max. Clock
MXIC	MX25L1633E	2MB	3.3V	4I/O	85MHz
MXIC	MX25L3236F	4MB	3.3V	4I/O	104MHz(6 dummy cycle) 133MHz(10 dummy cycle)
MXIC	MX25L6433F	8MB	3.3V	4I/O	80MHz (6 dummy cycle) 133MHz (10 dummy cycle)
MXIC	MX25L12845G	16MB	3.3V	4I/O	70MHz
MXIC	MX25L1606E	2MB	3.3V	2O	80MHz
MXIC	MX25V8006E	1MB	3.3V	2O	70MHz
MXIC	MX25V1635F	2MB	3.3V	4I/O	80MHz
MXIC	MX25V8035F	1MB	3.3V	4I/O	104MHz
MXIC	KH25L8006EM2I-12G	1MB	3.3V	2O	80MHz
MXIC	KH25L1606EM2I-12G	2MB	3.3V	2O	80MHz
MXIC	MX25R1635FM1IH0	2MB	1.8/3.3V	4I/O	80MHz
Winbond	W25Q80DV	1MB	3.3V	4I/O	104MHz
Winbond	W25Q16DV	2MB	3.3V	4I/O	104MHz
Winbond	W25Q32FV	4MB	3.3V	4I/O	104MHz
Winbond	W25R64FV	8MB	3.3V	4I/O	104MHz
Winbond	W25R128FV	16MB	3.3V	4I/O	104MHz
Micron	N25Q032A13ESE40E	4MB	3.3V	4I/O	108MHz
Micron	N25Q064A13ESED0E	8MB	3.3V	4I/O	108MHz
Micron	N25Q128A	16MB	3.3V	4I/O	108MHz
Micron	N25Q00AA13GSF40F	128MB	3.3V	4I/O	108MHz
Gigadevice	GD25Q80C	1MB	3.3V	4I/O	120MHz
Gigadevice	GD25Q16C	2MB	3.3V	4I/O	120MHz
Gigadevice	GD25Q32C	4MB	3.3V	4I/O	120MHz

Gigadevice	GD25Q64C	8MB	3.3V	4I/O	120MHz
Gigadevice	GD25Q128C	16MB	3.3V	4I/O	80MHz
HuaHong	BH25D80A	2MB	3.3V	20	108MHz
ESMT	EN25QH16A	2MB	3.3V	4I/O	104MHz

3.5.3. Electrical Specifications

Table 13 Flash Bus DC Parameters

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Units	Notes
V_{IH}	Input-High Voltage	LVTTL	2.0	-	-	V	1
V_{IL}	Input-Low Voltage	LVTTL	-	-	0.8	V	2
V_{OH}	Output-High Voltage	-	2.4	-	-	V	3
V_{OL}	Output-Low Voltage	-	-	-	0.4	V	3
I_{IL}	Input-Leakage Current	$V_{IN}=3.3V$ or 0	-10	± 1	10	μA	-
I_{OZ}	Tri-State Output-Leakage Current	-	-10	± 1	10	μA	-
R_{PU}	Input Pull-Up Resistance	-	-	75	-	K Ω	4
R_{PD}	Input Pull-Down Resistance	-	-	75	-	K Ω	4

Note 1: V_{IH} overshoot: $V_{IH} (MAX)=VDDH + 2V$ for a pulse width $\leq 3ns$.

Note 2: V_{IL} undershoot: $V_{IL} (MIN)=-2V$ for a pulse width $\leq 3ns$.

Note 3: The output current buffer is 8mA for the flash address and data bus; and is 8mA for Flash control signals.

Note 4: These values are typical values checked in the manufacturing process and are not tested.

4. Exception table

Table 14 Exception table

Exception Number	Exception Type	Description
	Reset	Reset
	NMI	Nonmaskable interrupt (external NMI input). The WDG is linked to the NMI vector
	Hard Fault	All fault conditions if the corresponding fault handler is not enabled
	MemManager Fault	Memory management fault; Memory Protection Unit (MPU) violation or access to illegal locations
	Bus Fault	Bus error; occurs when Advanced High-Performance Bus (AHB) interface receives an error response from a bus slave (also called prefetch abort if it is an instruction fetch or data abort if it is a data access)
	Usage Fault	Exceptions resulting from program error or trying to access coprocessor (the Cortex-M4 does not support a coprocessor)
	RSVD	-
	SVC	Supervisor Call
	Debug Monitor	Debug monitor (breakpoints, watchpoints, or external debug requests)
	RSVD	-
	PendSV	Pendable Service Call
	SYSTICK	System Tick Timer
[0]	System_ISR	
[1]	WDG	Watch dog global interrupt
[2]	Timer0	Timer0 global interrupt
[3]	Timer1	Timer1 global interrupt
[4]	Timer2	Timer2 global interrupt
[5]	Timer3	Timer3 global interrupt
[6]	SPI0	SPI0 global interrupt for communication spi
[7]	GPIO	GPIO portA global interrupt
[8]	UART0	UART0 global interrupt
[9]	SPI_FLASH	SPI Flash global interrupt
[10]	UART1	UART1 global interrupt
[11]	Timer4	Timer4 global interrupt
[12]	SDIO_Dev	SDIO device global interrupt
[13]	I2S0	I2S0 global interrupt
[14]	Timer5	Timer5 global interrupt
[15]	WL_DMA	Wlan Host global interrupt
[16]	WL_PROTOCOL	Wlan Firmware Wlan global interrupt

[17]	CRYPTO	IPsec global interrupt
[18]	SPI1	SPI1 global interrupt for communication spi
[19]	Peripheral_ISR	See Below Table
[20]	GDMA0_Channel0	GDMA0 channel 0 global interrupt
[21]	GDMA0_Channel1	GDMA0 channel 1 global interrupt
[22]	GDMA0_Channel2	GDMA0 channel 2 global interrupt
[23]	GDMA0_Channel3	GDMA0 channel 3 global interrupt
[24]	GDMA0_Channel4	GDMA0 channel 4 global interrupt
[25]	GDMA0_Channel5	GDMA0 channel 5 global interrupt
[26]	I2C0	I2C0 global interrupt
[27]	I2C1	I2C1 global interrupt
[28]	uart log	log uart intr
[29]	adc	adc intr
[30]	rdp_int	cpu rdp protection int
[31]	rtc_int	rtc timer int
[32]	GDMA1_CHANNEL0_IRQ	GDMA1 channel 0 global interrupt
[33]	GDMA1_CHANNEL1_IRQ	GDMA1 channel 1 global interrupt
[34]	GDMA1_CHANNEL2_IRQ	GDMA1 channel 2 global interrupt
[35]	GDMA1_CHANNEL3_IRQ	GDMA1 channel 3 global interrupt
[36]	GDMA1_CHANNEL4_IRQ	GDMA1 channel 4 global interrupt
[37]	GDMA1_CHANNEL5_IRQ	GDMA1 channel 5 global interrupt
[38]	USB_IRQ	USOC interrupt
[39]	RXI300_IRQ	
[40]	USB_SIE	USB SIE interrupt

5. Pinmux Alternate Functions

Table 15 Pinmux Alternate Function mapping

8710BN	GPIO	UART	SPI Master	SPI Slave	SPI Flash	I2C	SDIO	PWM/TIMER	EXT32K	I2S	Others
✓	PA_14							PWM0	SWD_CLK		
✓	PA_15							PWM1	SWD_DATA		
	PA_13							PWM4			
✓	PA_0							PWM2	ext_32K		
	PA_16	UART2_log_RXD						PWM1	RTC_OUT		
	PA_17	UART2_log_TXD						PWM2			
	PA_25	UART1_RXD									
	PA_26	UART1_TXD									
	PA_28					I2C1_SCL					
	PA_27					I2C1_SDA					
✓	PA_12							PWM3			
	PA_4	UART0_TXD	SPI1_MOSI	SPI0_MOSI		I2C0_SDA					
	PA_1	UART0_RXD	SPI1_CLK	SPI0_SCK		I2C0_SCL					
	PA_2	UART0_CTS	SPI1_CS	SPI0_CS		I2C1_SDA					
	PA_3	UART0_RTS	SPI1_MISO	SPI0_MISO		I2C1_SCL					
✓	PA_6				SPIC_CS		SD_D2				
✓	PA_7				SPIC_DATA1		SD_D3				
✓	PA_8				SPIC_DATA2		SD_CMD				
✓	PA_9				SPIC_DATA0		SD_CLK				
✓	PA_10				SPIC_CLK		SD_D0				
✓	PA_11				SPIC_DATA3		SD_D1				
✓	PA_5						SDIO_SIDEBAND_INT	PWM4			WAKEUP_1
✓	PA_18	UART0_RXD	SPI1_CLK	SPI0_SCK		I2C1_SCL	SD_D2	TIMER4_TRIG		I2S_MCK	WAKEUP_0
✓	PA_19	UART0_CTS	SPI1_CS	SPI0_CS		I2C0_SDA	SD_D3	TIMER5_TRIG		I2S_SD_TX	ADC1 (8710BN Not Support)
	PA_20						SD_CMD			I2S_SD_RX	ADC3

	PA_21						SD_CLK	PWM3		I2S_CLK	
✓	PA_22	UART0_RTS	SPI1_MISO	SPI0_MISO		I2C0_SCL	SD_D0	PWM5		I2S_WS	WAKEUP_2
✓	PA_23	UART0_TXD	SPI1_MOSI	SPI0_MOSI		I2C1_SDA	SD_D1	PWM0			WAKEUP_3
	PB_1		SPI1_CLK	SPI0_SCK							
	PB_0		SPI1_CS	SPI0_CS							
	PB_2		SPI1_MISO	SPI0_MISO							
	PB_3		SPI1_MOSI	SPI0_MOSI							
	PB_4								SWD_CLK	I2S_MCK	
	PB_5								SWD_DATA	I2S_SD_TX	
	PA_24									I2S_SD_RX	
	PA_31									I2S_CLK	
	PB_6									I2S_WS	
✓	PA_30	UART2_log_TXD				I2C0_SDA		PWM3	RTC_OUT		
✓	PA_29	UART2_log_RXD				I2C0_SCL		PWM4			

6. PMU

6.1. Features

6.2. Power Mode and Power Consumption

Table 16 Power Mode Brief Summary and Typical Power Consumption and Resume Time

Power Mode	Power Consumption		
	Typical	Maximum	Units
Deep Sleep Mode	7	7	uA
Deep Standby Mode	70	70	uA
Sleep Power Gate	120	120	uA
Sleep Clock Gate	350	350	uA

6.3. Shutdown Mode

- CHIP_EN deasserts to shutdown whole chip without external power cut components required.

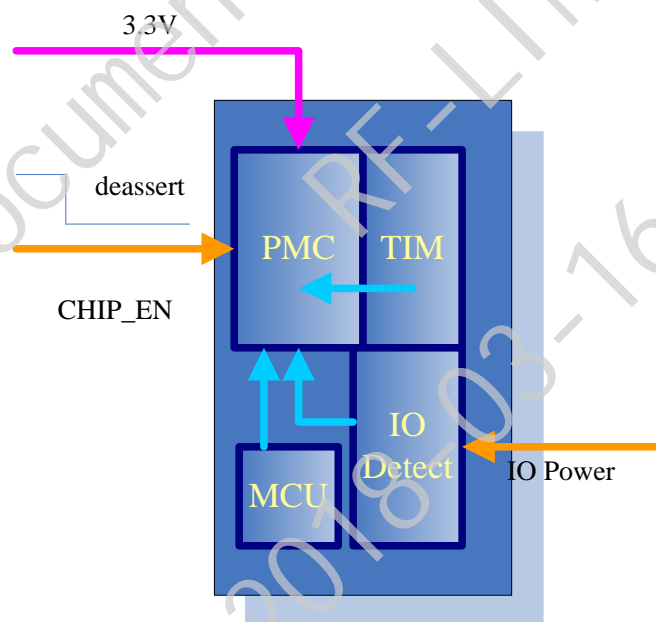


Figure 5 Shutdown Mode

6.4.2. Wakeup Source

Table 18 Deep Sleep Wakeup Source

Wakeup source	Wakeup	Comment
low precision timer	YES	
Dsleep Wake pin	YES	GPIOA_5 GPIOA_18 GPIOA_22 GPIOA_23

6.5. Deep Standby Mode

- CHIP_EN keeps high. Entering into Deep Sleep mode by API.

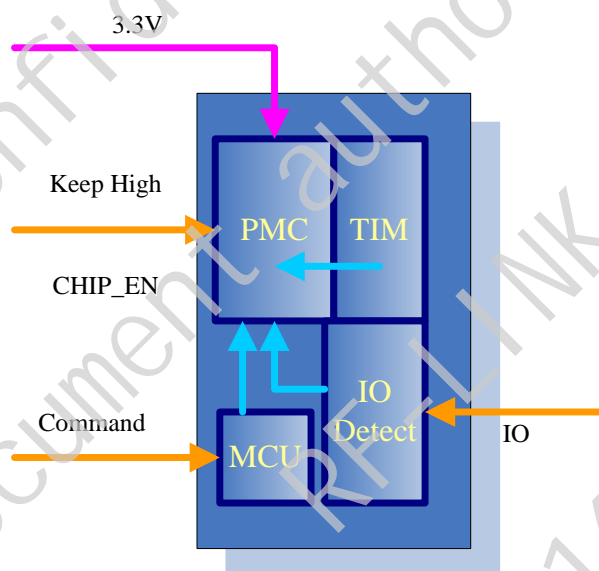


Figure 7 Deep Standby Mode

6.5.1. Power Domain

Table 19 Deep Standby Power Domain

functions	Power State	comment
cortex-M3-M4 core	OFF	
system clock	OFF	

<i>SRAM</i>	OFF	
<i>Regulator</i>	OFF	
<i>Peripherals</i>	OFF	
<i>Backup register</i>	ON	16B
<i>RTC</i>	ON	
<i>System timer</i>	ON	1
<i>low precision timer</i>	ON	1
<i>wake pin</i>	ON	4

6.5.2. Wakeup Source

Table 20 Deep Standby Wakeup Source

<i>Wakeup source</i>	<i>Wakeup</i>	<i>Comment</i>
<i>Wake pin</i>	YES	GPIOA_5 GPIOA_18 GPIOA_22 GPIOA_23
<i>RTC</i>	YES	
<i>System timer</i>	YES	
<i>low precision timer</i>	YES	

6.6. Sleep Power Gate

6.6.1. Power Domain

Sleep mode turn off power domain including cortex-M4 core, and system clock. System is not required to restart after wakeup.

6.6.2. Wakeup source

Table 21 Sleep Power Gate Wakeup Source

<i>Wakeup source</i>	<i>Wakeup</i>	<i>comment</i>
<i>GPIO interrupt</i>	YES	High/Low active
<i>general purpose timer</i>	YES	

<i>wlan</i>	YES	
<i>ADC</i>	YES	
<i>UART</i>	YES	
<i>I2C</i>	YES	
<i>SDIO/GSPI</i>	YES	
<i>USB</i>	YES	
<i>Wake pin</i>	YES	GPIOA_5 GPIOA_18 GPIOA_22 GPIOA_23
<i>RTC</i>	YES	
<i>System timer</i>	YES	
<i>low precision timer</i>	YES	

6.7. Sleep Clock Gate

6.7.1. Power Domain

Sleep mode turn off system clock. System is not required to restart after wakeup.

6.7.2. Wakeup source

Table 22 Sleep Clock Gate Wakeup Source

<i>Wakeup source</i>	<i>Wakeup</i>	<i>comment</i>
<i>GPIO interrupt</i>	YES	High/Low active
<i>general purpose timer</i>	YES	
<i>wlan</i>	YES	
<i>ADC</i>	YES	
<i>UART</i>	YES	
<i>I2C</i>	YES	
<i>SDIO/GSPI</i>	YES	
<i>USB</i>	YES	

<i>Wake pin</i>	YES	GPIOA_5 GPIOA_18 GPIOA_22 GPIOA_23
<i>RTC</i>	YES	
<i>System timer</i>	YES	
<i>low precision timer</i>	YES	

7. Firmware Protection

7.1. RAM Read Protection

- Top 4k RAM cannot be read.
- RDP Interrupt will happen when invalid access happen.
- RDP image should be encrypted use RDP KEY,
- RDP image can only be decrypted and load to RDP RAM use IPSEC.
- KEY
 - 16B RDP key should be written to EFUSE RDP key area
 - Hidden EFUSE 0xB0~0xBF
 - Cannot read back again. (HW protect)
 - Auto-load to IPSEC when boot.
- Enable
 - Hidden EFUSE 0xC0[0].
 - Cannot be closed after open.

8. WIFI

8.1. General

- CMOS MAC, Baseband PHY, and RF in a single chip for 802.11b/g/n compatible WLAN
- Complete 802.11n solution for 2.4GHz band
- 72.2Mbps receive PHY rate and 72.2Mbps transmit PHY rate using 20MHz bandwidth
- 150Mbps receive PHY rate and 150Mbps transmit PHY rate using 40MHz bandwidth
- Compatible with 802.11n specification
- Backward compatible with 802.11b/g devices while operating in 802.11n mode

8.2. Standards Supported

- 802.11b/g/n compatible WLAN
- 802.11e QoS Enhancement (WMM)
- 802.11i (WPA, WPA2). Open, shared key, and pair-wise key authentication services
- WIFI WPS support
- WIFI Direct support
- Light Weight TCP/IP protocol

8.3. WLAN MAC Features

- Frame aggregation for increased MAC efficiency (A-MSDU, A-MPDU)
- Low latency immediate High-Throughput Block Acknowledgement (HT-BA)
- Long NAV for media reservation with CF-End for NAV release
- PHY-level spoofing to enhance legacy compatibility
- Power saving mechanism

8.4. WLAN PHY Features

- 802.11n OFDM
- One Transmit and one Receive path (1T1R)
- 20MHz and 40MHz bandwidth transmission
- Short Guard Interval (400ns)
- DSSS with DBPSK and DQPSK, CCK modulation with long and short preamble
- OFDM with BPSK, QPSK, 16QAM, and 64QAM modulation. Convolutional Coding Rate: 1/2, 2/3, 3/4, and 5/6
- Maximum data rate 54Mbps in 802.11g and 150Mbps in 802.11n
- Fast receiver Automatic Gain Control (AGC)

9. Basic timer

9.1. Introduction

The basic timers TIM0/TIM1/TIM2/TIM3 consist of a 32-bit auto-reload counter without prescaler.

They may be used as generic timers for time-base generation.

9.2. Features

Table 23 Basic timer features

<i>Name</i>	<i>TIM0/1/2/3</i>
<i>channels</i>	1
<i>clock source</i>	32k
<i>resolution</i>	32bit
<i>prescaler</i>	8bit
<i>counter mode</i>	Up
<i>one pulse mode</i>	-
<i>PWM mode with polarity selection</i>	-
<i>statistic pulse width</i>	-
<i>statistic pulse number</i>	-
<i>interrupt generation</i>	•
<i>DMA generation</i>	-
<i>input pin</i>	-
<i>output pin</i>	-

10. Capture timer

10.1. Introduction

The Capture timer (TIM4) consists of a 16-bit auto-reload counter driven by a 8-bit programmable prescaler.

It may be used for a variety of purposes, including measuring the pulse lengths or numbers of input signals.

10.2. Features

Table 24 Capture timer features

<i>Name</i>	<i>TIM4</i>
<i>channels</i>	1
<i>clock source</i>	XTAL
<i>resolution</i>	16bit
<i>prescaler</i>	8bit
<i>counter mode</i>	Up
<i>one pulse mode</i>	-
<i>PWM mode with polarity selection</i>	-
<i>statistic pulse width</i>	•
<i>statistic pulse number</i>	•
<i>interrupt generation</i>	•
<i>DMA generation</i>	•
<i>input pin</i>	1 input capture
<i>output pin</i>	-

11. PWM timer

11.1. Introduction

The PWM timer (TIM5) consists of a 16-bit auto-reload counter driven by a 8-bit programmable prescaler.

It may be used for a variety of purposes, including measuring the pulse lengths of input signals (input capture) or generating output waveforms (PWM).

Pulse lengths and waveform periods can be modulated from a few microseconds to several milliseconds using the timer prescaler.

11.2. Features

Table 25 PWM timer features

<i>Name</i>	<i>TIM5</i>
<i>channels</i>	6
<i>clock source</i>	XTAL
<i>resolution</i>	16bit
<i>prescaler</i>	8bit
<i>counter mode</i>	Up
<i>one pulse mode</i>	•
<i>PWM mode with polarity selection</i>	•
<i>statistic pulse width</i>	-
<i>statistic pulse number</i>	-
<i>interrupt generation</i>	•
<i>DMA generation</i>	•
<i>input pin</i>	1 input capture
<i>output pin</i>	6 PWM out

11.3. Function description

11.3.1. PWM mode

Pulse Width Modulation mode allows you to generate a signal with a frequency determined by the value of the TIMx_ARR register and a duty cycle determined by the value of the CCRx field of TIMx_CCRx register.

Period: = (ARR + 1) * T_{CNT}

$$\text{Duty cycle: } D_{PWM} = \frac{(CCR_x + 1) * T_{CNT}}{T_{PWM}}$$

$$\text{Where } T_{CNT} = T_{XTAL} * (PSC + 1)$$

The PWM mode can be selected independently on each channel (one PWM per OCx output) by setting '0' in the OCxM bits in the TIMx_CCRx register. You must enable the corresponding preload register by setting the OCxPE bit in the TIMx_CCRx register, and eventually the auto-reload preload register by setting the ARPE bit in the TIMx_CR register.

As the preload registers are transferred to the shadow registers only when an update event occurs, before starting the counter, you have to initialize all the registers by setting the UG bit in the TIMx_EGR register.

OCx polarity is software programmable using the CCxP bit in the TIMx_CCRx register. It can be programmed as active high or active low.

In PWM mode, TIMx_CNT and CCRx (in TIMx_CCRx) are always compared to determine whether $TIMx_CNT \leq CCRx$ (in TIMx_CCRx). The PWM signal OCx is active as long as $TIMx_CNT \leq CCRx$ (in TIMx_CCRx), otherwise it becomes inactive.

The timer is only able to generate PWM in edge-aligned mode.

12. RTC

12.1. Introduction

The real-time clock (RTC) is an independent BCD timer/counter.

One 32-bit registers contain the seconds, minutes, hours (12 or 24-hour format) expressed in binary coded decimal format (BCD).

One 32-bit registers contain the days expressed in binary format.

Daylight saving time compensation can also be performed.

Additional two 32-bit registers contain the programmable alarm seconds, minutes, hours and days.

A digital calibration feature is available to compensate for some deviation.

After backup domain reset, all RTC registers are protected against possible parasitic write accesses.

As long as the supply voltage remains in the operating range, the RTC never stops, regardless of the device status (Run mode, low power mode or under reset).

12.2. Features

- Time with seconds, minutes, hours, days (12 or 24-hour format).
- Daylight saving compensation programmable by software.
- One programmable alarm with interrupt function. The alarms can be triggered by any combination of the time fields.
- Maskable interrupts/events:
 - - Alarm
- Digital calibration circuit
- Register write protection

12.3. Clock and Prescalers

A programmable prescaler stage generates a 1 Hz clock which is used to update the calendar. To minimize power consumption, the prescaler is split into 2 programmable prescalers.

A 9-bit asynchronous prescaler configured through the PREDIV_A bits of the RTC_PRER register.

A 9-bit synchronous prescaler configured through the PREDIV_S bits of the RTC_PRER register.

Note: It is recommended to configure the asynchronous prescaler to a high value to minimize consumption.

Default, the asynchronous prescaler division factor is set to 128, and the synchronous division factor to 256, to obtain an internal clock frequency of 1 Hz (ck_spre) with 32.768 kHz as RTCLK

f_{clk_apre} is given by the following formula:

$$f_{clk_apre} = \frac{f_{RTCLK}}{PREDIV_A + 1}$$

f_{clk_spre} is given by the following formula:

$$f_{clk_spre} = \frac{f_{clk_apre}}{PREDIV_S + 1}$$

12.4. RTC Reset

	<i>RTC Reset</i>	<i>RTC Wakeup</i>
Power Off	Y	N/A
Hardware Reset	Y	N/A
Deep Sleep	Y	N/A
Deep Standby	N	Y
Sleep	N	Y
System Reset	N	N/A
Vector Reset	N	N/A

13. BACKUP Register

13.1. Introduction

The backup register are 32-bits registers used store 32 bytes of user application data, Backup registers are not reset by a system, or when the device wakes up from the Standby mode.

byte0~byte3 are reserved for system, and byte4-byte31 are reserved for user.

13.2. BACKUP Register API

<i>Backup Register API</i>	<i>Introduction</i>
< BKUP_Write >	■ backup register dwrod write
< BKUP_Read >	■ backup register dwrod read
< BKUP_Set >	■ set some bits of backup register
< BKUP_Clear >	■ clear some bits of backup register

13.3. BACKUP Register Reset

	<i>RTC Reset</i>
<i>Power Off</i>	Y
<i>Hardware Reset</i>	Y
<i>Deep Sleep</i>	Y
<i>Deep Standby</i>	N
<i>Sleep</i>	N
<i>System Reset</i>	N
<i>Vector Reset</i>	N

14. UART

14.1. Introduction

The Universal Asynchronous Receiver Transmitter (UART) module offers a flexible means of full duplex data exchange with external equipment requiring an industry standard NRZ asynchronous serial data format.

It offers a very wide range of baud rates using a fractional baud rate generator.

Low power Rx mode is implemented by monitoring Rx baud rate error and own frequency drift.

This chip integrates three UART modules:

- 2 normal UART with low power or high speed.
- 1 LOGUART with high speed.

14.2. Features

- Support UART format: 1 start bit, 7/8 data bits, 0/1 parity bit and 1/2 stop bit
- Support a very wide range of baud rate, 110~6Mbps.
- APB3 bus interface
- Support DMA mode
- Support auto flow control
- Support interrupt control
- Support IrDA
- Support loopback mode for test
- Differentiate clk for Tx path and Rx path
- Fractional baud rate generator for Tx path and Rx path
- Support low power Rx path without XTAL & PLL, Baud rate 110~500000.
- Monitor and eliminate Rx baud rate error and own frequency drift automatically for new Rx path
- Transmit and Receive Data FIFO
- Programmable Receive Data FIFO Trigger Level

14.3. Baud Rate

Table 26 UART Baud Rate

	<i>High Rate</i>	<i>Low Power</i>
<i>clock select</i>	40MHz XTAL	8MHz

supported baud rate(bps)	1200, 9600, 14400, 19200, 28800, 38400, 57600, 76800, 115200, 128000, 153600, 230400, 406800, 500000, 921600, 1000000, 1382400, 1444400, 1500000, 1843200, 2000000, 2100000, 2764800, 3000000, 3250000, 3692300, 3750000, 4000000, 6000000	1200, 9600, 14400, 19200, 28800, 38400, 57600, 76800, 115200, 128000, 153600, 230400, 406800, 500000
--------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------

14.4. UART Interface Signal Levels

The UART signal level ranges from 1.8V to 3.3V. The host provides the power source with the targeted power level to the RTL8710BN-VM1 UART interface via the IO power.

15. SPI

15.1. Introduction

RTL8710BN-VM1 support Motorola Serial Peripheral Interface (SPI) – A four-wire, full-duplex serial protocol from Motorola.

There are four possible combinations for the serial clock phase and polarity. The clock phase (SCPH) determines whether the serial transfer begins with the falling edge of the slave select signal or the first edge of the serial clock.

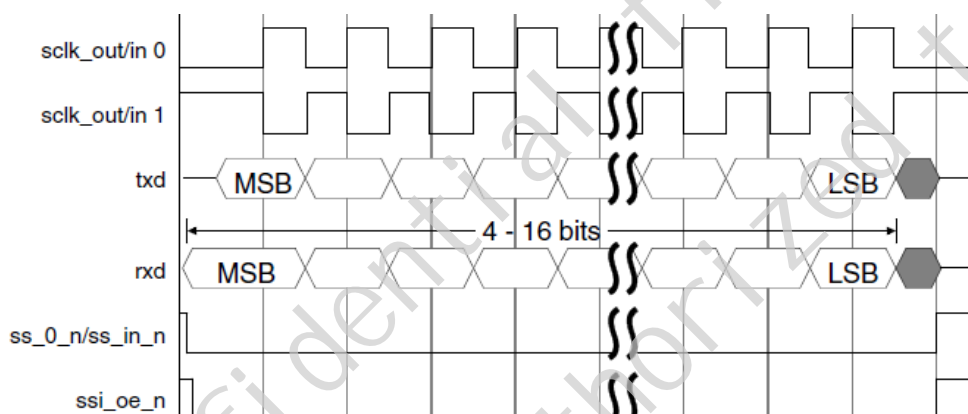


Figure 8 SPI Serial Format (SCPH = 0)

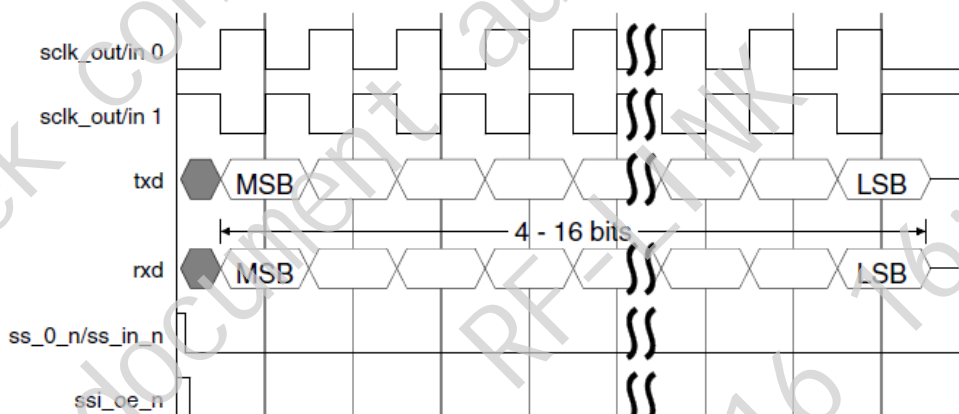
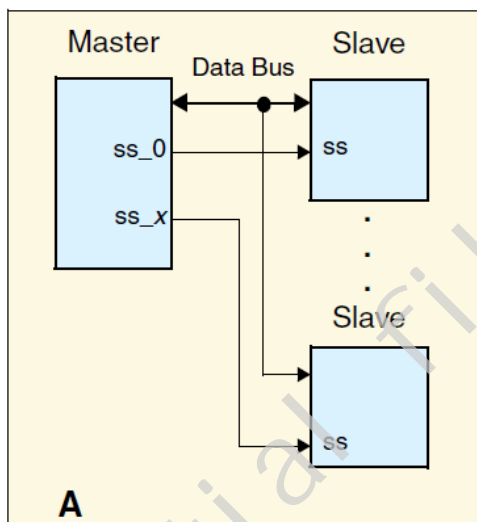


Figure 9 SPI Serial Format (SCPH = 1)

The slave select line is held high when the SPI is idle or disabled.



ss = slave select line

Figure 10 Slave Selection

15.2. Features

- Motorola SPI Interface Operations support
- Support maximum 2 SPI port
- Support Master (SPI1 only), and Slave(SPI0 only) mode
- Support DMA to offload CPU bandwidth
- high speed SPI with baud rate up to 31.25MHz
- Programmable clock bit-rate
- Programmable clock polarity and phase
- Master just support 1 hardware CS, you can use GPIO to control more SPI salve.

16. I2C

16.1. Introduction

The I2C bus is a two-wire serial interface, consisting of a serial data line (SDA) and a serial clock (SCL).

When the bus is idle, both the SCL and SDA signals are pulled high through internal pull-up resistors. When the master wants to start a transmission on the bus, the master issues a START condition. This is defined to be a high-to-low transition of the SDA signal while SCL is 1. When the master wants to terminate the transmission, the master issues a STOP condition. This is defined to be a low-to-high transition of the SDA line while SCL is 1. When data is being transmitted on the bus, the SDA line must be stable when SCL is 1.

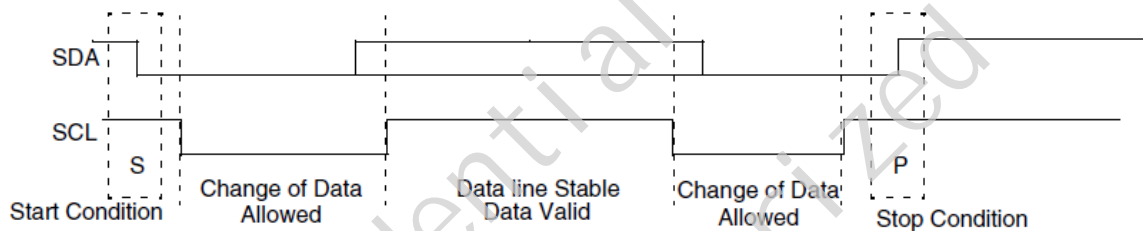


Figure 11 I2C start stop condition

I2C bus carry information between the devices connected to the bus. Each device is recognized by a unique address and can operate as either a “transmitter” or “receiver,” depending on the function of the device.

Devices can also be considered as masters or slaves when performing data transfers. A master is a device that initiates a data transfer on the bus and generates the clock signals to permit that transfer. At that time, any device addressed is considered a slave.

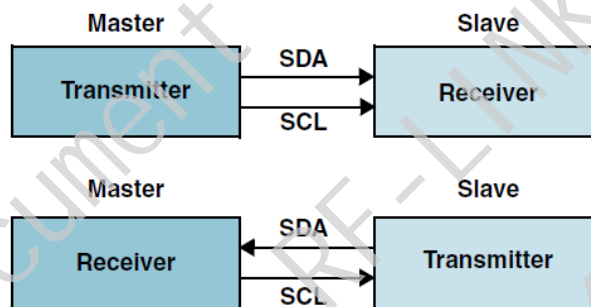


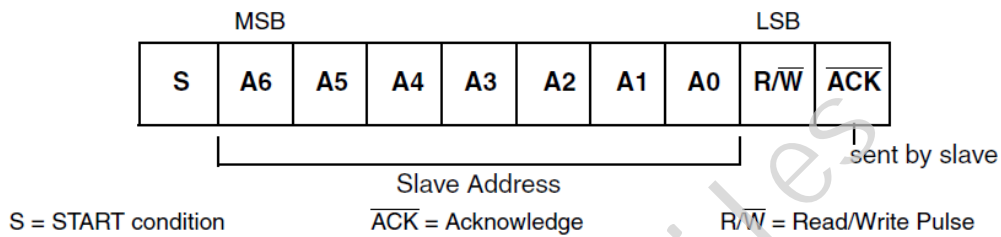
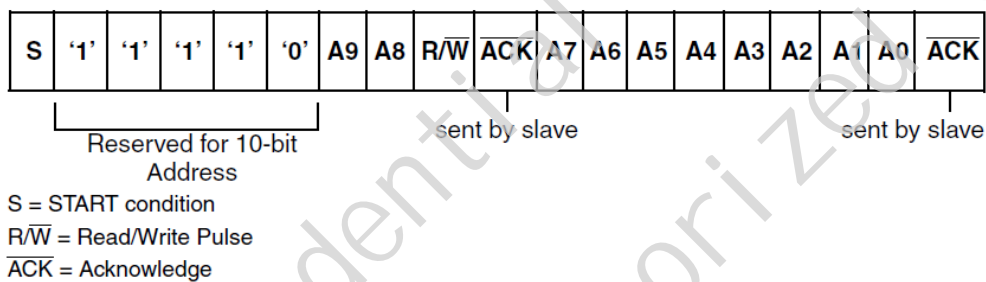
Figure 12 Master/Slave and Transmitter/Receiver Relationships

RTL8710BN-VM1 can operate in standard mode (with data rates 0 to 100 Kb/s), fast mode (with data rates less than or equal to 400 Kb/s), high-speed mode (with data rates less than or equal to

3.4 Mb/s) are not supported.

RTL8710BN-VM1 can communicate with devices only of these modes as long as they are attached to the bus. Additionally, fast mode devices are downward compatible. For instance, fast mode devices can communicate with standard mode devices in 0 to 100 Kb/s I2C bus system. However, standard mode devices are not upward compatible and should not be incorporated in a fast-mode I2C bus system as they cannot follow the higher transfer rate and unpredictable states would occur.

There are two address formats: the 7-bit address format and the 10-bit address format.

7-bit Address Format

Figure 13 7-bit address format
10-bit Address Format

Figure 14 10-bit address format

16.2. Features

- Support maximum 2 I2C port
- Two speeds:
 - Standard mode (0 to 100 Kb/s)
 - Fast mode (<400 Kb/s)
 - Not support High-speed mode (<3.4 Mb/s)
- Master or Slave I2C operation
- 7- or 10-bit addressing
- Transmit and receive buffers
- TX and RX DMA support
- Slave mode address match wakeup for power save

17. I2S

17.1. Introduction

I2S (Inter IC Sound) is a standard communication structure using in digital audio systems. Since the digital audio signals in consumer audio market are being processed by a number of VLSI ICs, standardized communication structure could increase system flexibility.

17.2. Features

- Sample bit: 16 bit, 24 bit
- Sample rate: 8K, 16K, 24K, 32K, 48K, 96K, 7.35K, 14.7K, 22.05K, 29.4K, 44.1K, 88.2K
- IIS throughput: 0.512Mbps (16K*32bit) ~ 6.144Mbps (96K*64bit)
- IIS channel number: mono, stereo
- Integrated DMA engine to minimize SW efforts
- Master or slave mode support
- Support Mono and Stereo TX or RX or TX&RX mode
- Not support PCM mode

17.3. Function Description

17.3.1. Clock Type

- SCLK : 6.144MHz, 3.072MHz, 2.048Mhz, 1.536MHz, 1.024MHz, 0.512MHz, 0.256MHZ
- MCLK : 24.576Mhz, 12.288Mz, 8.192MHz, 6.144MHz, 4.096Mhz, 2.048Mhz
- WS(Sample Rate): 96K, 48K, 32K, 24K, 16K, 8K ()
- MCLK=4SCLK=256WS (24bit)
- MCLK=8SCLK=256WS (16bit)

18. ADC

18.1. Introduction

RTL8710BN-VM1 integrates one ADC with as many as four channels: One internal channel and three external channels.

18.2. Features

Item	Spec.	Description
Channel	4 independent channels	1 internal channel 3 external channels
Input Power	0~3.3V or 0~5V	CH1 & CH3: 0~3.3V CH2: 0~5V
Input Signal Bandwidth	<60Hz	
Resolution	12-bits	Bit Number
DMA Mode	Support	
One Shot Mode	Support	Support Timer(TIM3) trigger one shot sampling without CPU active for save power
Sample Rate	Max. 1MHz per channel, Configurable	Sampling frequency
Wakeup Method	buffer threshold and event trigger	

18.3. Channel Description

	Internal	PinName	Voltage
CH0	Y	N/A	N/A
CH1	N	GPIOA19/ADC_1	0~3.3V
CH2	N	VBAT_MEAS	0~5V
CH3	N	GPIOA_20/ADC_3	0~3.3V

19. GDMA

19.1. Introduction

General purpose direct memory access (GDMA) is used to transfer data between peripherals and memory as well as memory to memory without CPU actions.

RTL8710BN-VM1 integrate two GDMA modules, One GDMA module has 6 channels to manage the data transfer between memory and peripherals.

19.2. Features of GDMA

- Dual port DMA with totally 12 channels
- Single FIFO per channel for source and destination
- Support memory-memory, memory-peripheral, peripheral-memory, and peripheral-peripheral DMA transfer
- Support multi block transfer
- Maximum block size is 4095
- Programmable source and destination addresses; address increment, decrement, no change or address auto-reload
- Configurable endian
- Support block level flow control
- DMA interrupt for complete or error

20. WGT (watchdog timer)

20.1. Introduction

The watchdog timer regains control in case of system failure (due to a software error) to increase application reliability. The WDT can generate a reset or an interrupt when the counter reaches a given timeout value.

20.2. Features

- Watch dog timer is count with $32.768\text{KHz}/(\text{divfactor}+1)$. Dividing factor is $1\sim 0\text{xFFFF}$.
- Timeout value: $1\text{ms} \sim 8190\text{s}$
- Configurable reset or interrupt generation with the given timeout value
- Watch dog timer disable/enable/refresh

21. GPIO

21.1. Introduction

RTL8710BN-VM1 GPIO IP controls the output data and direction of external I/O pads. It also can read back the data on external pads using memory-mapped registers.

RTL8710BN-VM1 support two port: PORT_A(0~31) and PORT_B(0~6).

Port A can be programmed to accept external signals as interrupt sources on any of the bits of the signal. The type of interrupt is programmable with one of the following settings:

- Active-high and level
- Active-low and level
- Rising edge
- Falling edge

NOTICE: Both edge interrupt is not support.

The interrupts can be masked by programming the `gpio_int_mask` register. The interrupt status can be read before masking (called raw status) and after masking.

Whenever Port A is configured for interrupts, the data direction must be set to Input. If the data direction register is reprogrammed to Output, then any pending interrupts are not lost. However, no new interrupts are generated.

If the user has configured Port A to include the interrupt feature, the GPIO can be configured to either include or exclude a debounce capability using the `GPIO_DEBOUNCE` parameter.

The external signal can be debounced to remove any spurious glitches that are less than one period of the external debouncing clock.

21.2. Features of GPIO

- GPO and GPI function
- Support interrupt detection with configurable polarity per GPIO
- Internal weak pull up and pull low per GPIO
- Multiplexed with other specific digital functions
- `GPIO_DEBOUNCE` to remove any spurious glitches

22. Security Engine

22.1. Introduction

The Security engine provides fast and energy efficient hardware encryption and decryption service for RTL8710BN-VM1.

22.2. Features

- Provide low SW computing and high performance encryption
- Efficient CPU/DMA access support
- Block size up to 32KB.
- Supported authentication algorithms:
 - MD5
 - SHA-1
 - SHA-2 (SHA-224 / SHA-256)
 - HMAC-MD5
 - HMAC-SHA1
 - HMAC-SHA2
- Supported Encryption / Decryption mechanisms:
 - DES (CBC / ECB)
 - 3DES (CBC / ECB)
 - AES-128 (CBC / ECB / CTR)
 - AES-192 (CBC / ECB / CTR)
 - AES-256 (CBC / ECB / CTR)

23. USOC (USB device)

23.1. Introduction

USOC is USB device controller that is compliant with the USB 2.0 specification.

The USOC module connects SIE to AHB system bus so that USB can work in two modes:

- iNIC mode, all SIE data transfer is through AHB bus.
- NIC mode or Dongle mode, all SIE data transfer is through legacy TDE/RDE interface.

In two modes, register access path are all enabled to get the highest flexibility to configure SIE, or other system block such as WLON/SYSON.

23.2. Features

- Support USB 2.0
- Support HS/FS/LS mode
- Internal DMA support, DMA works based on register settings
- Support high performance Ethernet to WIFI transformation
- Support non-flash booting in the use if Ethernet to WIFI transformation card
- 1.5KByte bulk-in buffer and 1.5KByte bulk-out buffer
- Switch NIC and iNIC mode by register settings
- Interrupt mitigation
- Error handling
- Support Mass storage and network device

24. SDIO/GSPI device

24.1. Introduction

The SDIO Controller supports the Secure Digital I/O communication protocol and Realtek SPI protocol.

24.2. Features

- Support SDIO 2.0 SDR25
- CIS can be configured with internal non-volatile memory for fast card detection
- Realtek SPI provides high efficiency SPI interface with interrupt and full duplex mode
- Support high performance Ethernet to WIFI transformation
- Support non-flash booting in the use if Ethernet to WIFI transformation card
- Clock rate variable up to 50 MHz
- Internal DMA support

24.3. Bus Timing Specification

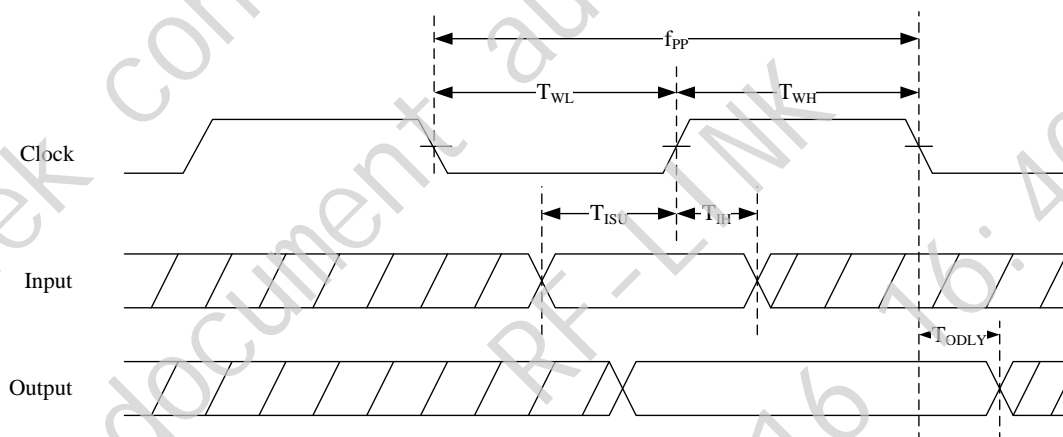


Figure 15 SDIO bus timing

Table 27 SDIO Interface Timing Parameters

NO	Parameter	Mode	MIN	MAX	Unit
f_{PP}	Clock Frequency	Default	0	25	MHz
		HS	0	50	MHz
T_{WL}	Clock Low Time	DEF	10	-	ns
		HS	7	-	ns

T_{WH}	Clock High Time	DEF	10	-	ns
		HS	7	-	ns
T_{ISU}	Input Setup Time	DEF	5	-	ns
		HS	6	-	ns
T_{IH}	Input Hold Time	DEF	5	-	ns
		HS	2	-	ns
T_{ODLY}	Output Delay Time	DEF	-	14	ns
		HS	-	14	ns

Realtek confidential files
The document authorized to
RF-LINK
2018-03-16 16:40:42

25. Electrical Characteristics

25.1. Temperature Limit Ratings

Table 28 Temperature Limit Ratings

<i>Parameter</i>	<i>Minimum</i>	<i>Maximum</i>	<i>Units</i>
<i>Storage Temperature</i>	-55	+125	°C
<i>Ambient Operating Temperature</i>	-20	+85	°C
<i>Junction Temperature</i>	0	+125	°C

25.2. Power Supply DC Characteristics

Table 29 Power Supply DC Characteristics

<i>Symbol</i>	<i>Parameter</i>	<i>Minimum</i>	<i>Typical</i>	<i>Maximum</i>	<i>Units</i>
<i>VA33, VD33IO, SW_HV3</i>	3.3V Supply Voltage	3.0	3.3	3.6	V
<i>VDD_IO</i>	Digital IO Supply Voltage	1.62	1.8~3.3	3.6	V
<i>VA12_AFE, VA12_SYN, VA12_RF</i>	1.2V Core Supply Voltage	1.08	1.2	1.32	V
<i>IDD33</i>	3.3V Rating Current (with internal regulator and integrated CMOS PA)	-	-	450	mA
<i>IDD_IO</i>	IO Rating Current (including VDD_IO)			200	mA
<i>IDD_IO_33</i>	3.3V IO Rating Current			50	mA

25.3. Digital IO Pin DC Characteristics

25.3.1. Electrical Specifications

Table 30 Typical Digital IO DC Parameters (3.3V Case)

<i>Symbol</i>	<i>Parameter</i>	<i>Conditions</i>	<i>Min.</i>	<i>Typ.</i>	<i>Max.</i>	<i>Units</i>
<i>V_{IH}</i>	Input-High Voltage	LVTTL	2.0	-	-	V

V_{IL}	Input-Low Voltage	LVTTL	-	-	0.8	V
V_{OH}	Output-High Voltage	LVTTL	2.4	-	-	V
V_{OL}	Output-Low Voltage	LVTTL	-	-	0.4	V
I_{T+}	Schmitt-trigger High Level		1.78	1.87	1.97	V
I_{T-}	Schmitt-trigger Low Level		1.36	1.45	1.56	V
I_{IL}	Input-Leakage Current	$V_{IN}=3.3V$ or 0	-10	± 1	10	μA

Table 31 Typical Digital IO DC Parameters (1.8V Case)

<i>Symbol</i>	<i>Parameter</i>	<i>Conditions</i>	<i>Min.</i>	<i>Typ.</i>	<i>Max.</i>	<i>Units</i>
V_{IH}	Input-High Voltage	CMOS	0.65x Vcc	-	-	V
V_{IL}	Input-Low Voltage	CMOS	-	-	0.35x Vcc	V
V_{OH}	Output-High Voltage	CMOS	Vcc-0.45	-	-	V
V_{OL}	Output-Low Voltage	CMOS	-	-	0.45	V
I_{T+}	Schmitt-trigger High Level		1.02	1.09	1.14	V
I_{T-}	Schmitt-trigger Low Level		0.67	0.73	0.87	V
I_{IL}	Input-Leakage Current	$V_{IN}=1.8V$ or 0	-10	± 1	10	μA

26. Mechanical Dimensions

26.1. Package Specification

26.1.1. QFN32

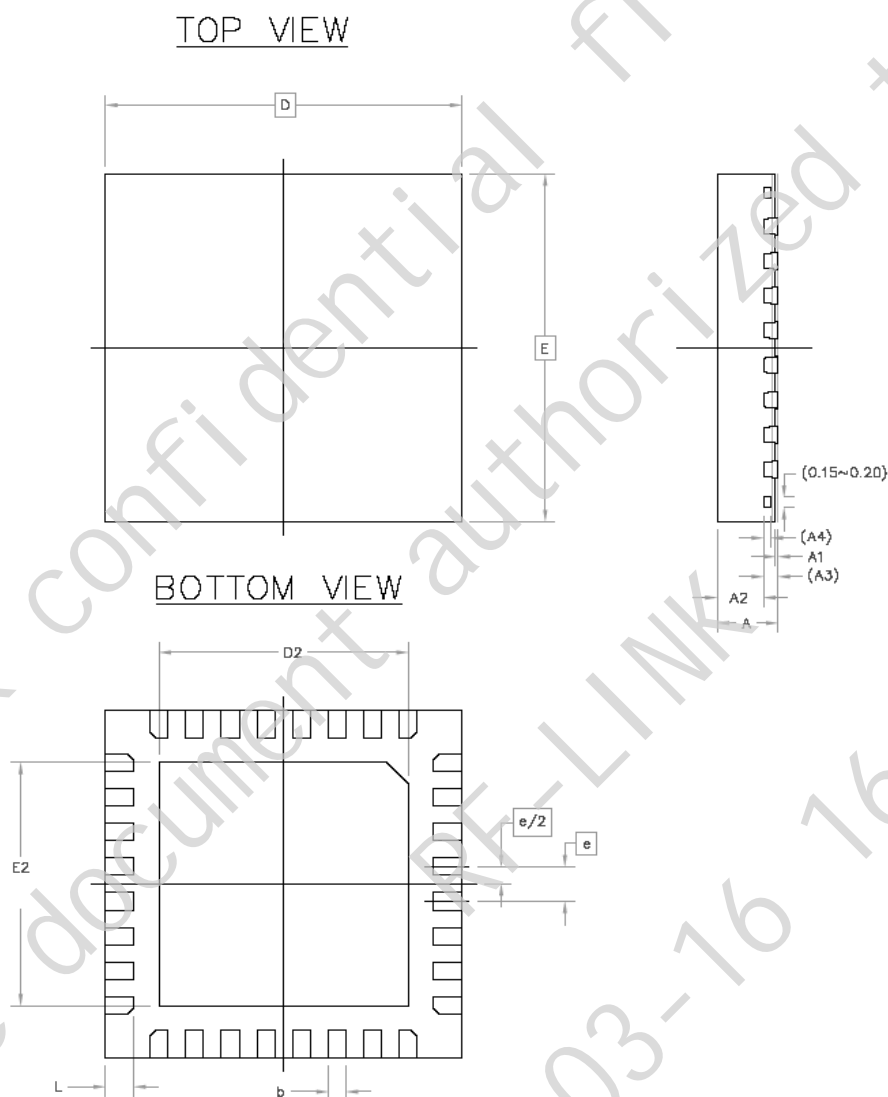


Figure 16 QFN32 Package Specification

Table 32 QFN32 Package Specification

Symbol	Dimension in mm			Dimension in inch		
	Min	Nom	Max	Min	Nom	Max
A	0.80	0.85	0.90	0.031	0.033	0.035

A1	0.00	0.02	0.05	0.000	0.001	0.002
A3	0.20 REF			0.008 REF		
A4	0.10 REF			0.004 REF		
b	0.18	0.25	0.30	0.007	0.010	0.012
D/E	5.00 BSC			0.020 BSC		
D2/E2	3.25	3.50	3.75	0.128	0.138	0.148
e	0.50 BSC			0.020 BSC		
L	0.30	0.40	0.50	0.012	0.016	0.020

Notes :

1. CONTROLLING DIMENSION : MILLIMETER(mm).
2. REFERENCE DOCUMENTL : JEDEC MO-220.