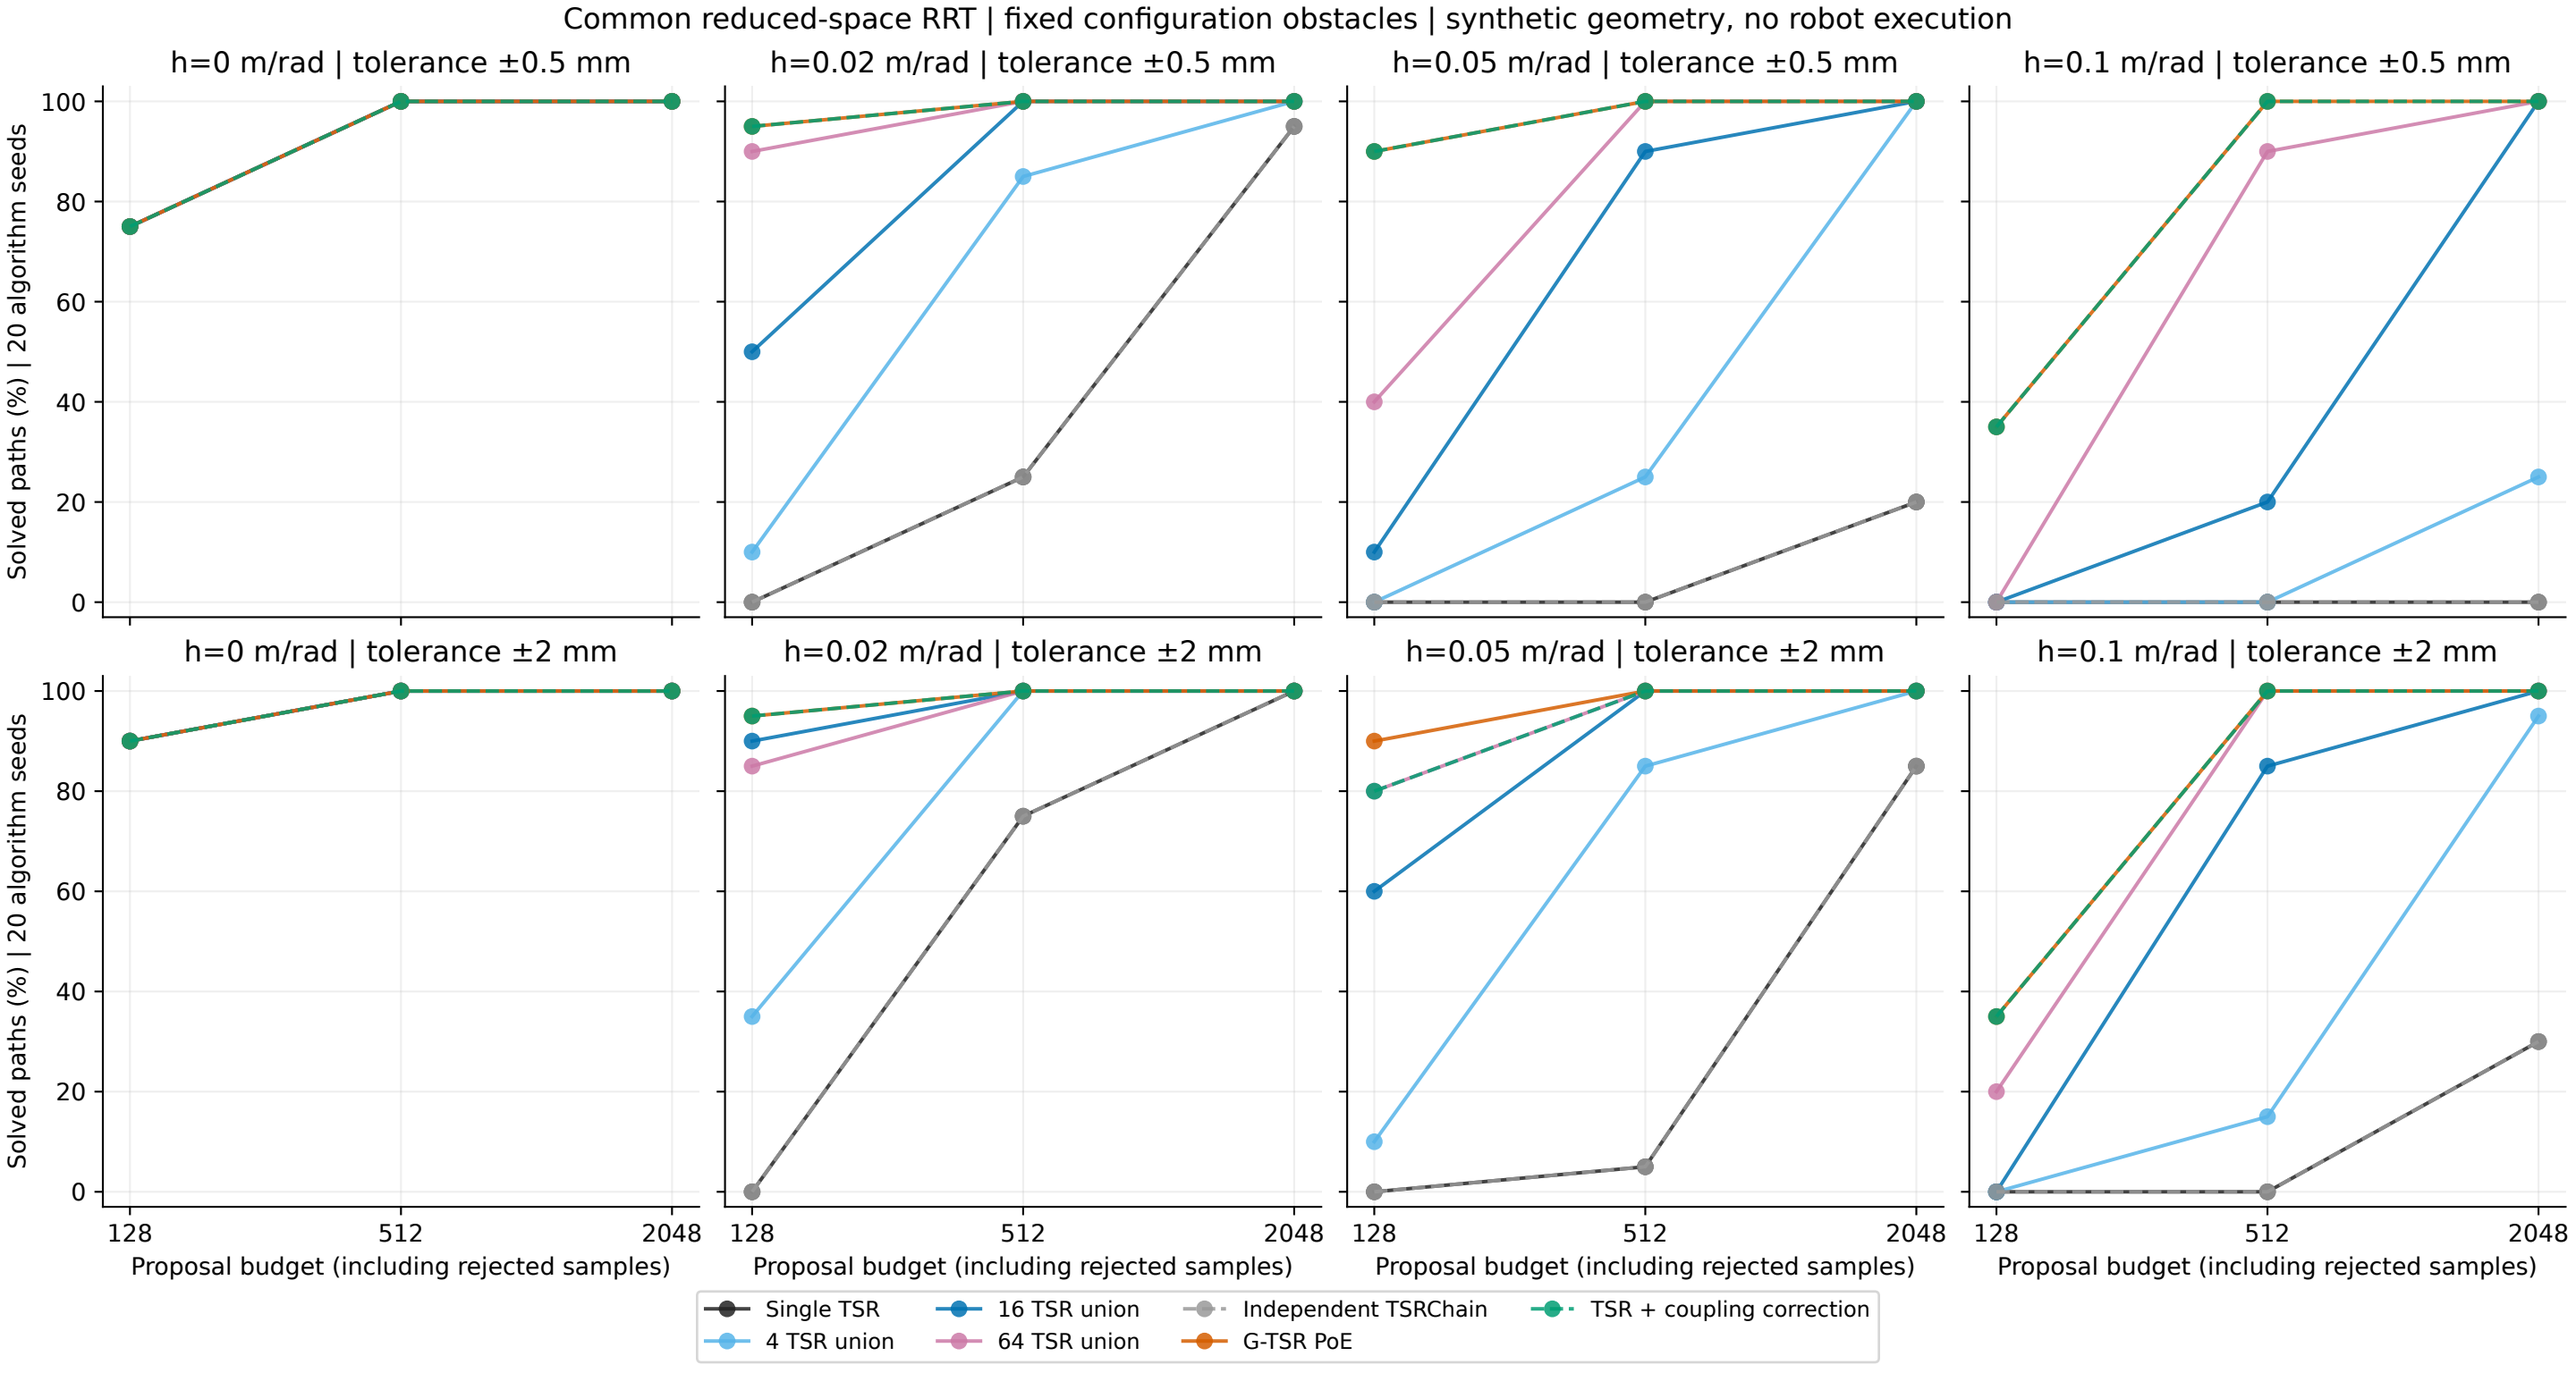
Common reduced-space RRT | fixed configuration obstacles | synthetic geometry, no robot execution
h=0 m/rad | tolerance ±0.5 mm
h=0.02 m/rad | tolerance ±0.5 mm
h=0.05 m/rad | tolerance ±0.5 mm
h=0.1 m/rad | tolerance ±0.5 mm
h=0 m/rad | tolerance ±2 mm
h=0.02 m/rad | tolerance ±2 mm
h=0.05 m/rad | tolerance ±2 mm
h=0.1 m/rad | tolerance ±2 mm
Solved paths (%) | 20 algorithm seeds
0
20
40
60
80
100
128
512
2048
Proposal budget (including rejected samples)
Single TSR
4 TSR union
16 TSR union
64 TSR union
Independent TSRChain
G-TSR PoE
TSR + coupling correction