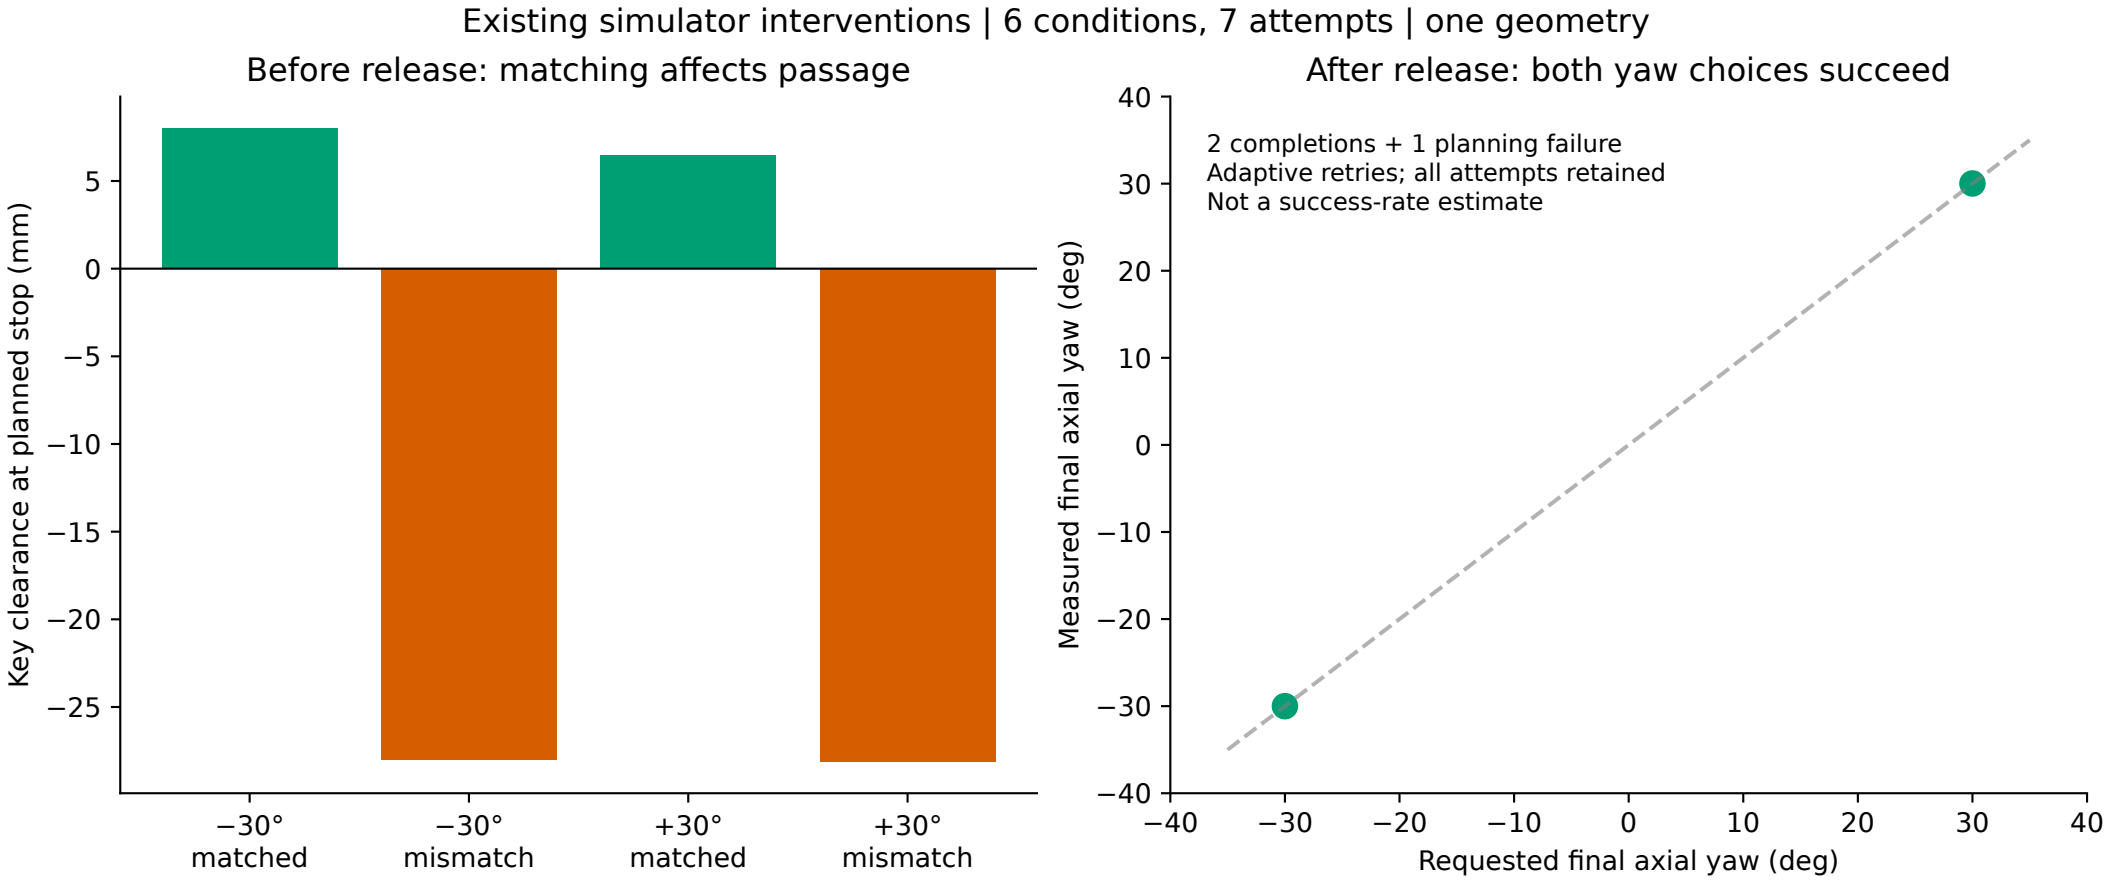
Existing simulator interventions | 6 conditions, 7 attempts | one geometry
Before release: matching affects passage
Key clearance at planned stop (mm)
5
0
−5
−10
−15
−20
−25
−30° matched
−30° mismatch
+30° matched
+30° mismatch
After release: both yaw choices succeed
2 completions + 1 planning failure
Adaptive retries; all attempts retained
Not a success-rate estimate
Measured final axial yaw (deg)
40
30
20
10
0
−10
−20
−30
−40
−40
−30
−20
−10
0
10
20
30
40
Requested final axial yaw (deg)