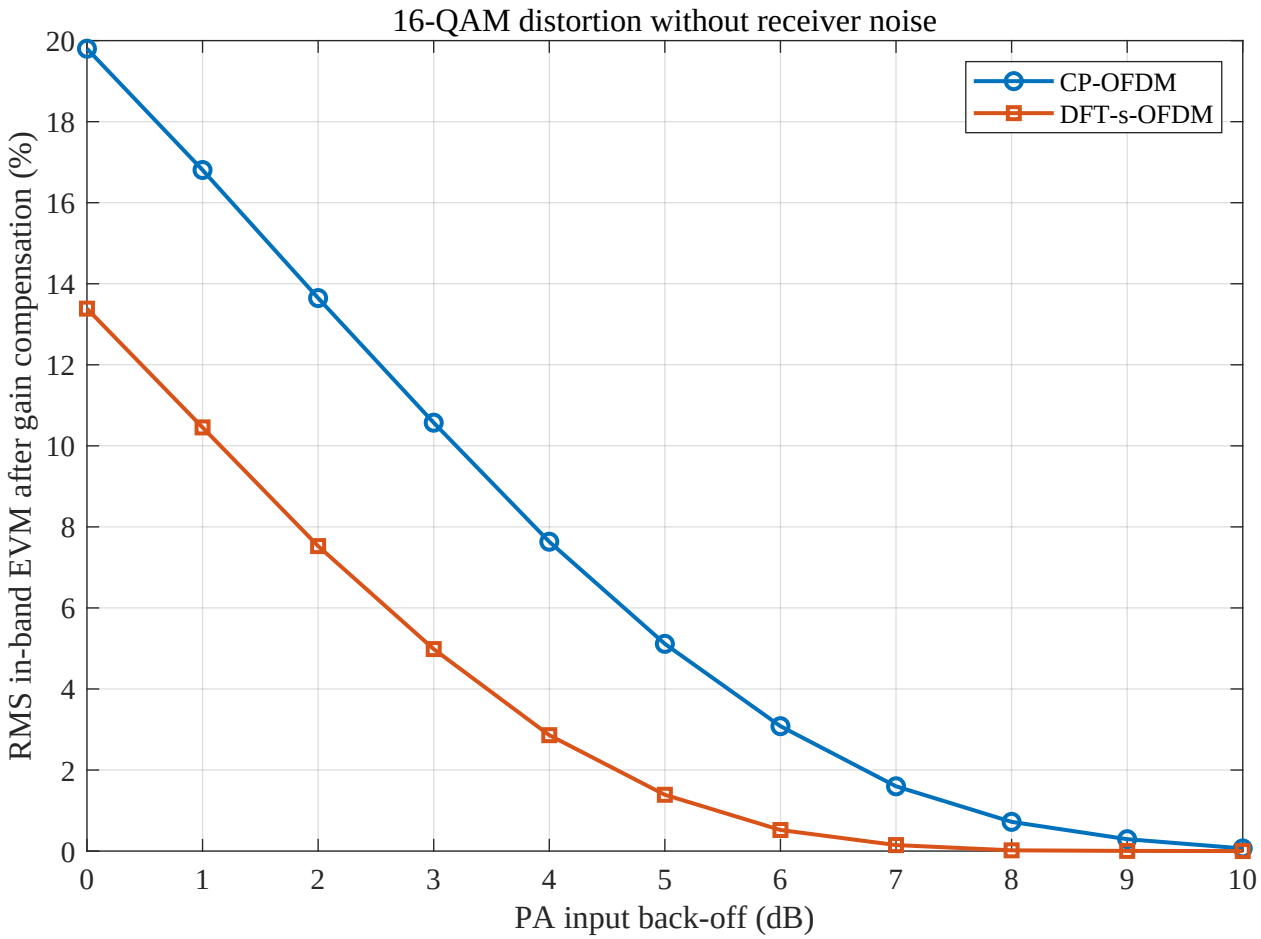
16-QAM distortion without receiver noise
RMS in-band EVM after gain compensation (%)
PA input back-off (dB)
CP-OFDM
DFT-s-OFDM
0
2
4
6
8
10
12
14
16
18
20
0
1
2
3
4
5
6
7
8
9
10