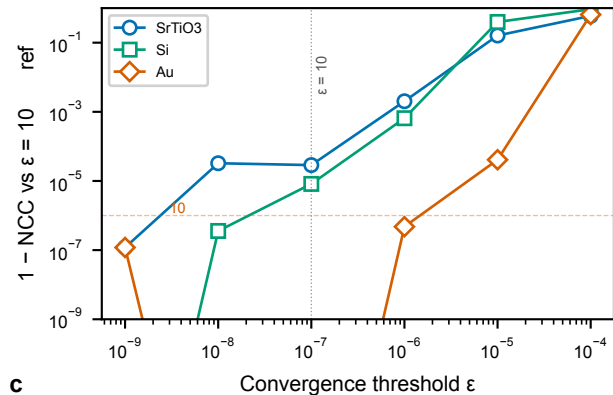
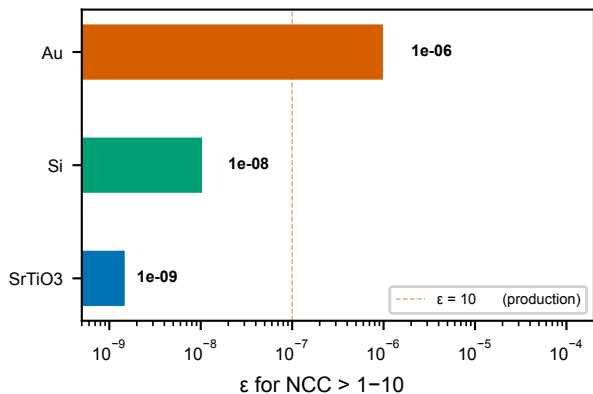
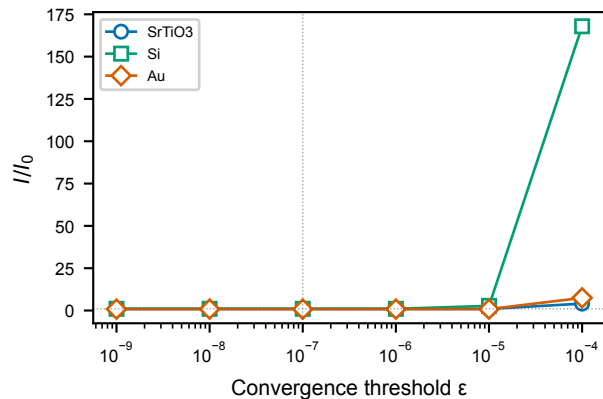


a**c****b**

ϵ sweep: $\Delta z = 0.4 \text{ \AA}$, $t \approx 200 \text{ \AA}$

SrTiO₃ [001] @ 30 keV, 497 slices

Si [001] @ 100 keV, 502 slices

Au [001] @ 300 keV, 499 slices

NCC > $1-10^{-6}$ at $\epsilon \leq$:

SrTiO₃: 10^{-9}

Si: 10^{-8}

Au: 10^{-6}

Key finding:

$\epsilon \leq 10^{-7}$ is universally safe
for all 3 crystal classes.
Au converges fastest ($\epsilon=10^{-6}$),
Si requires $\epsilon \leq 10^{-8}$ for
NCC > $1-10^{-6}$.

Production setting $\epsilon = 10^{-7}$
validated for all materials.