





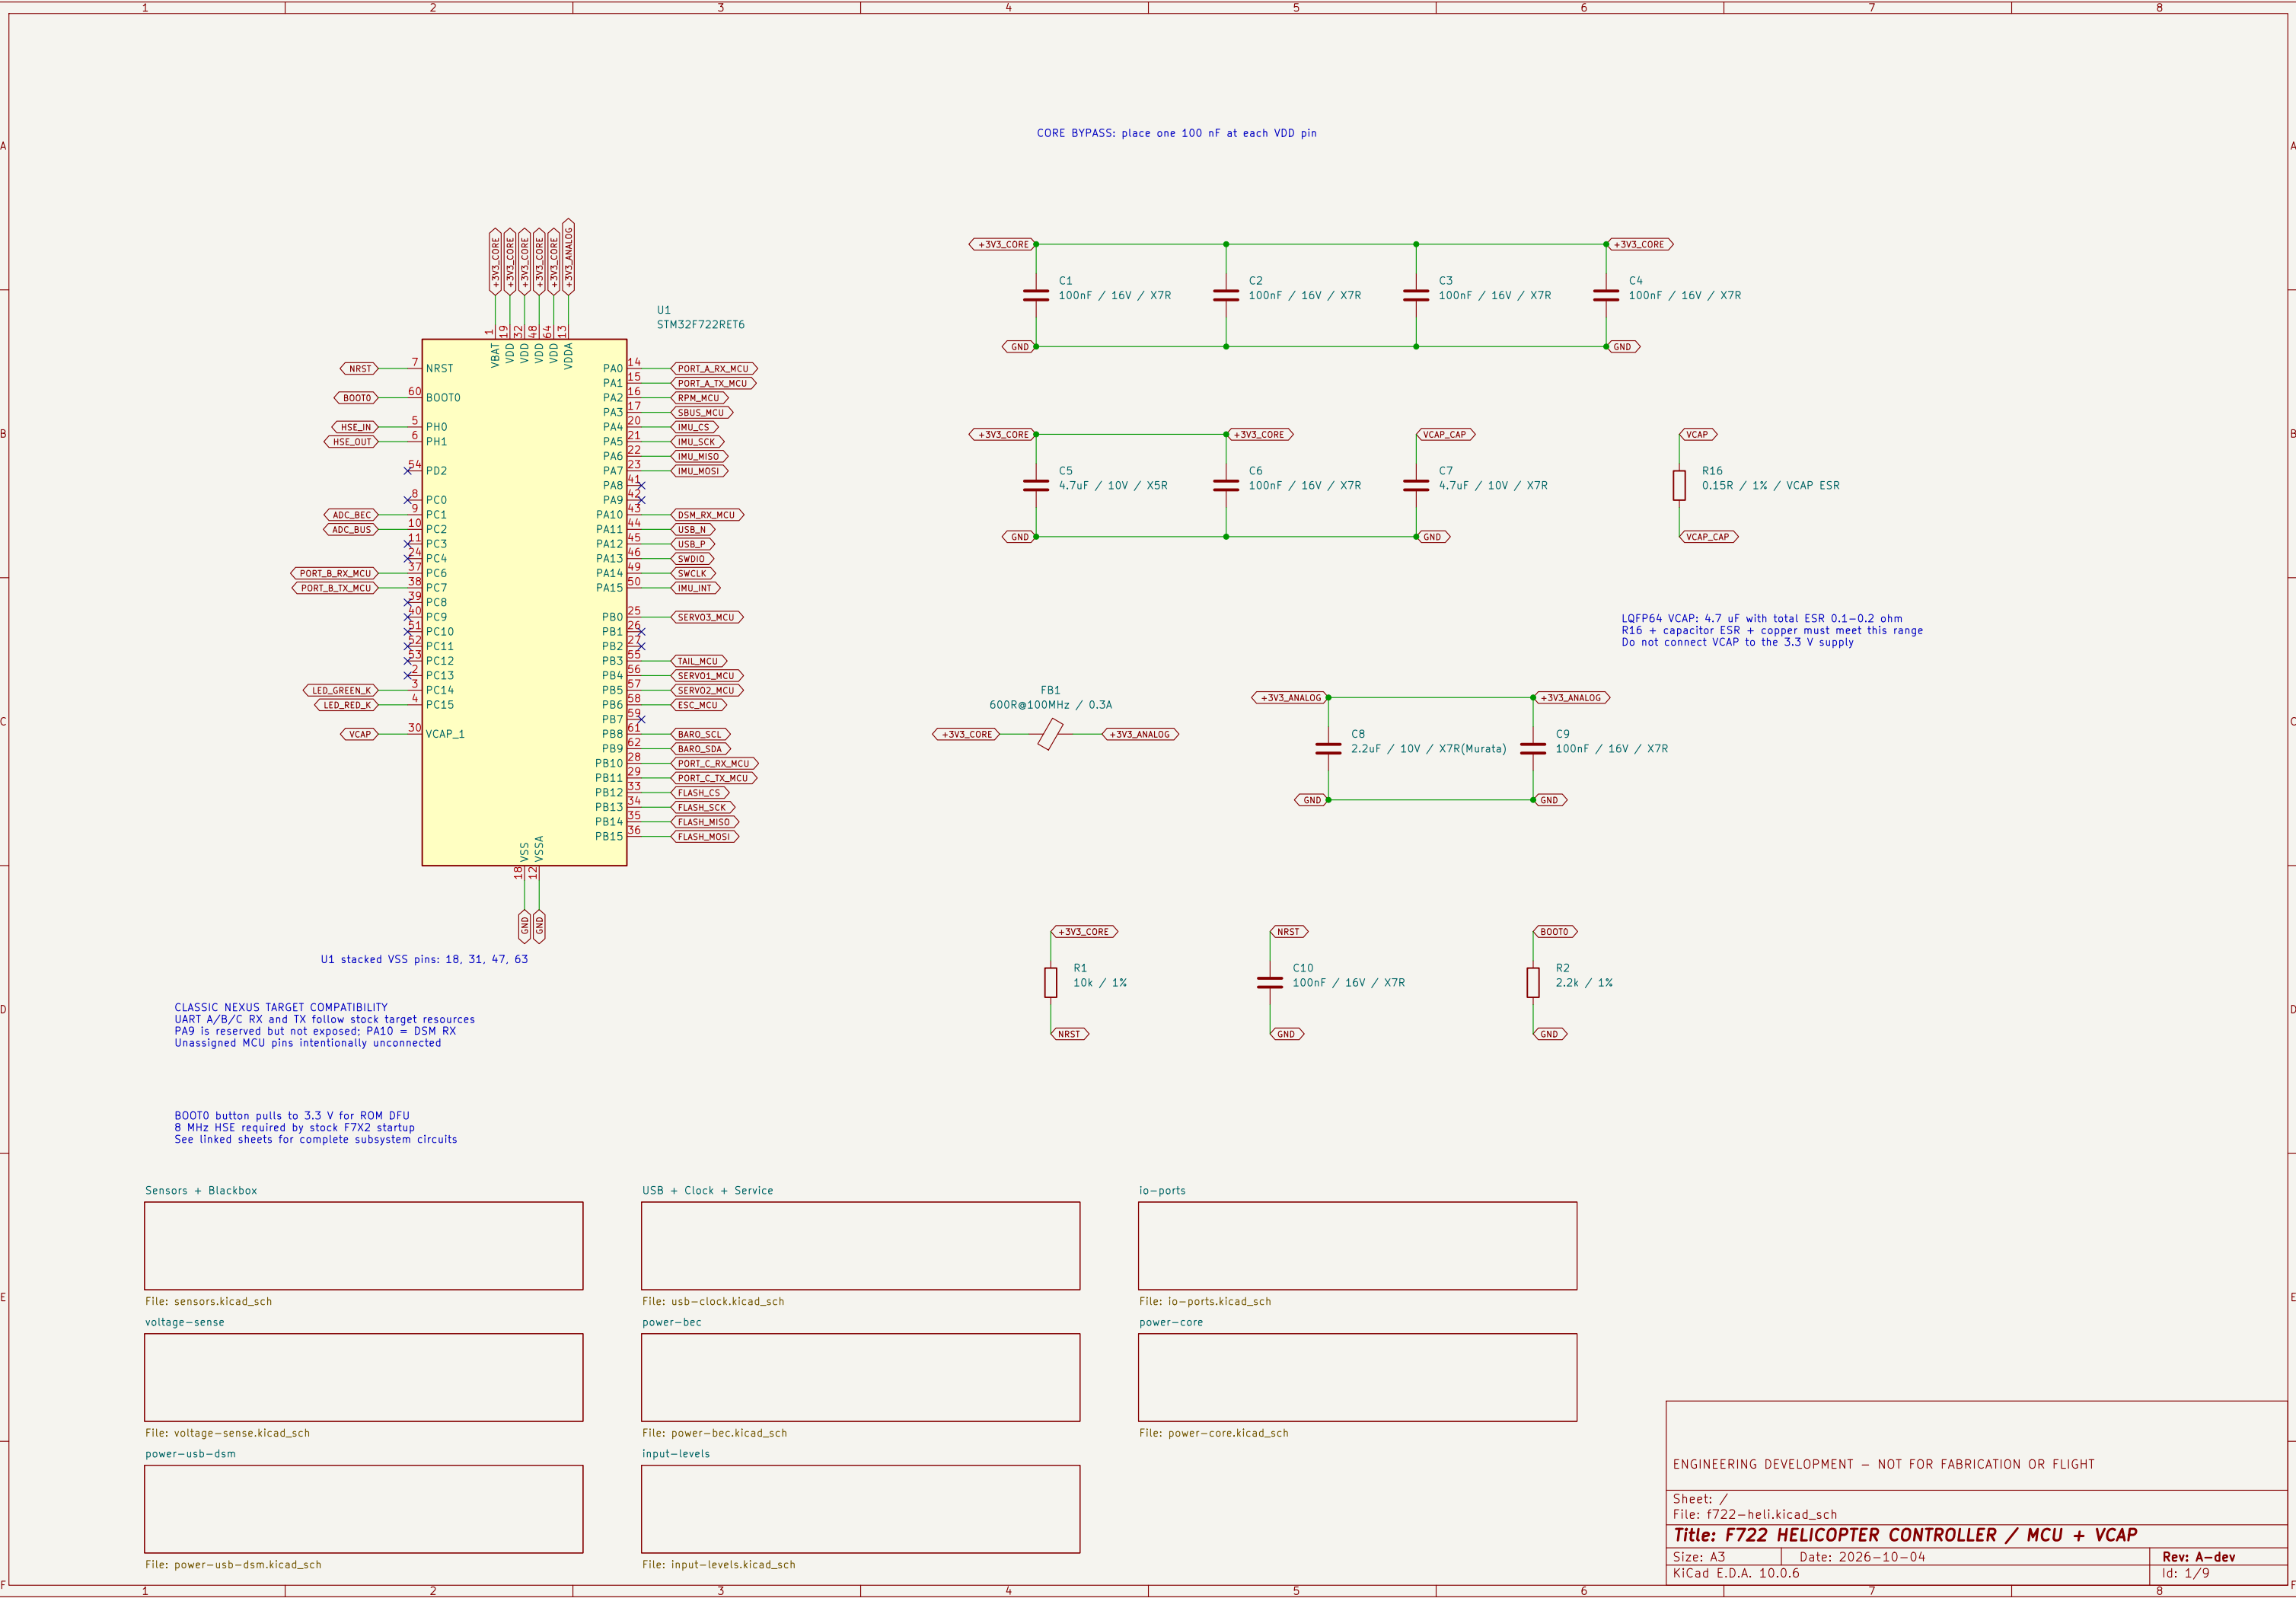

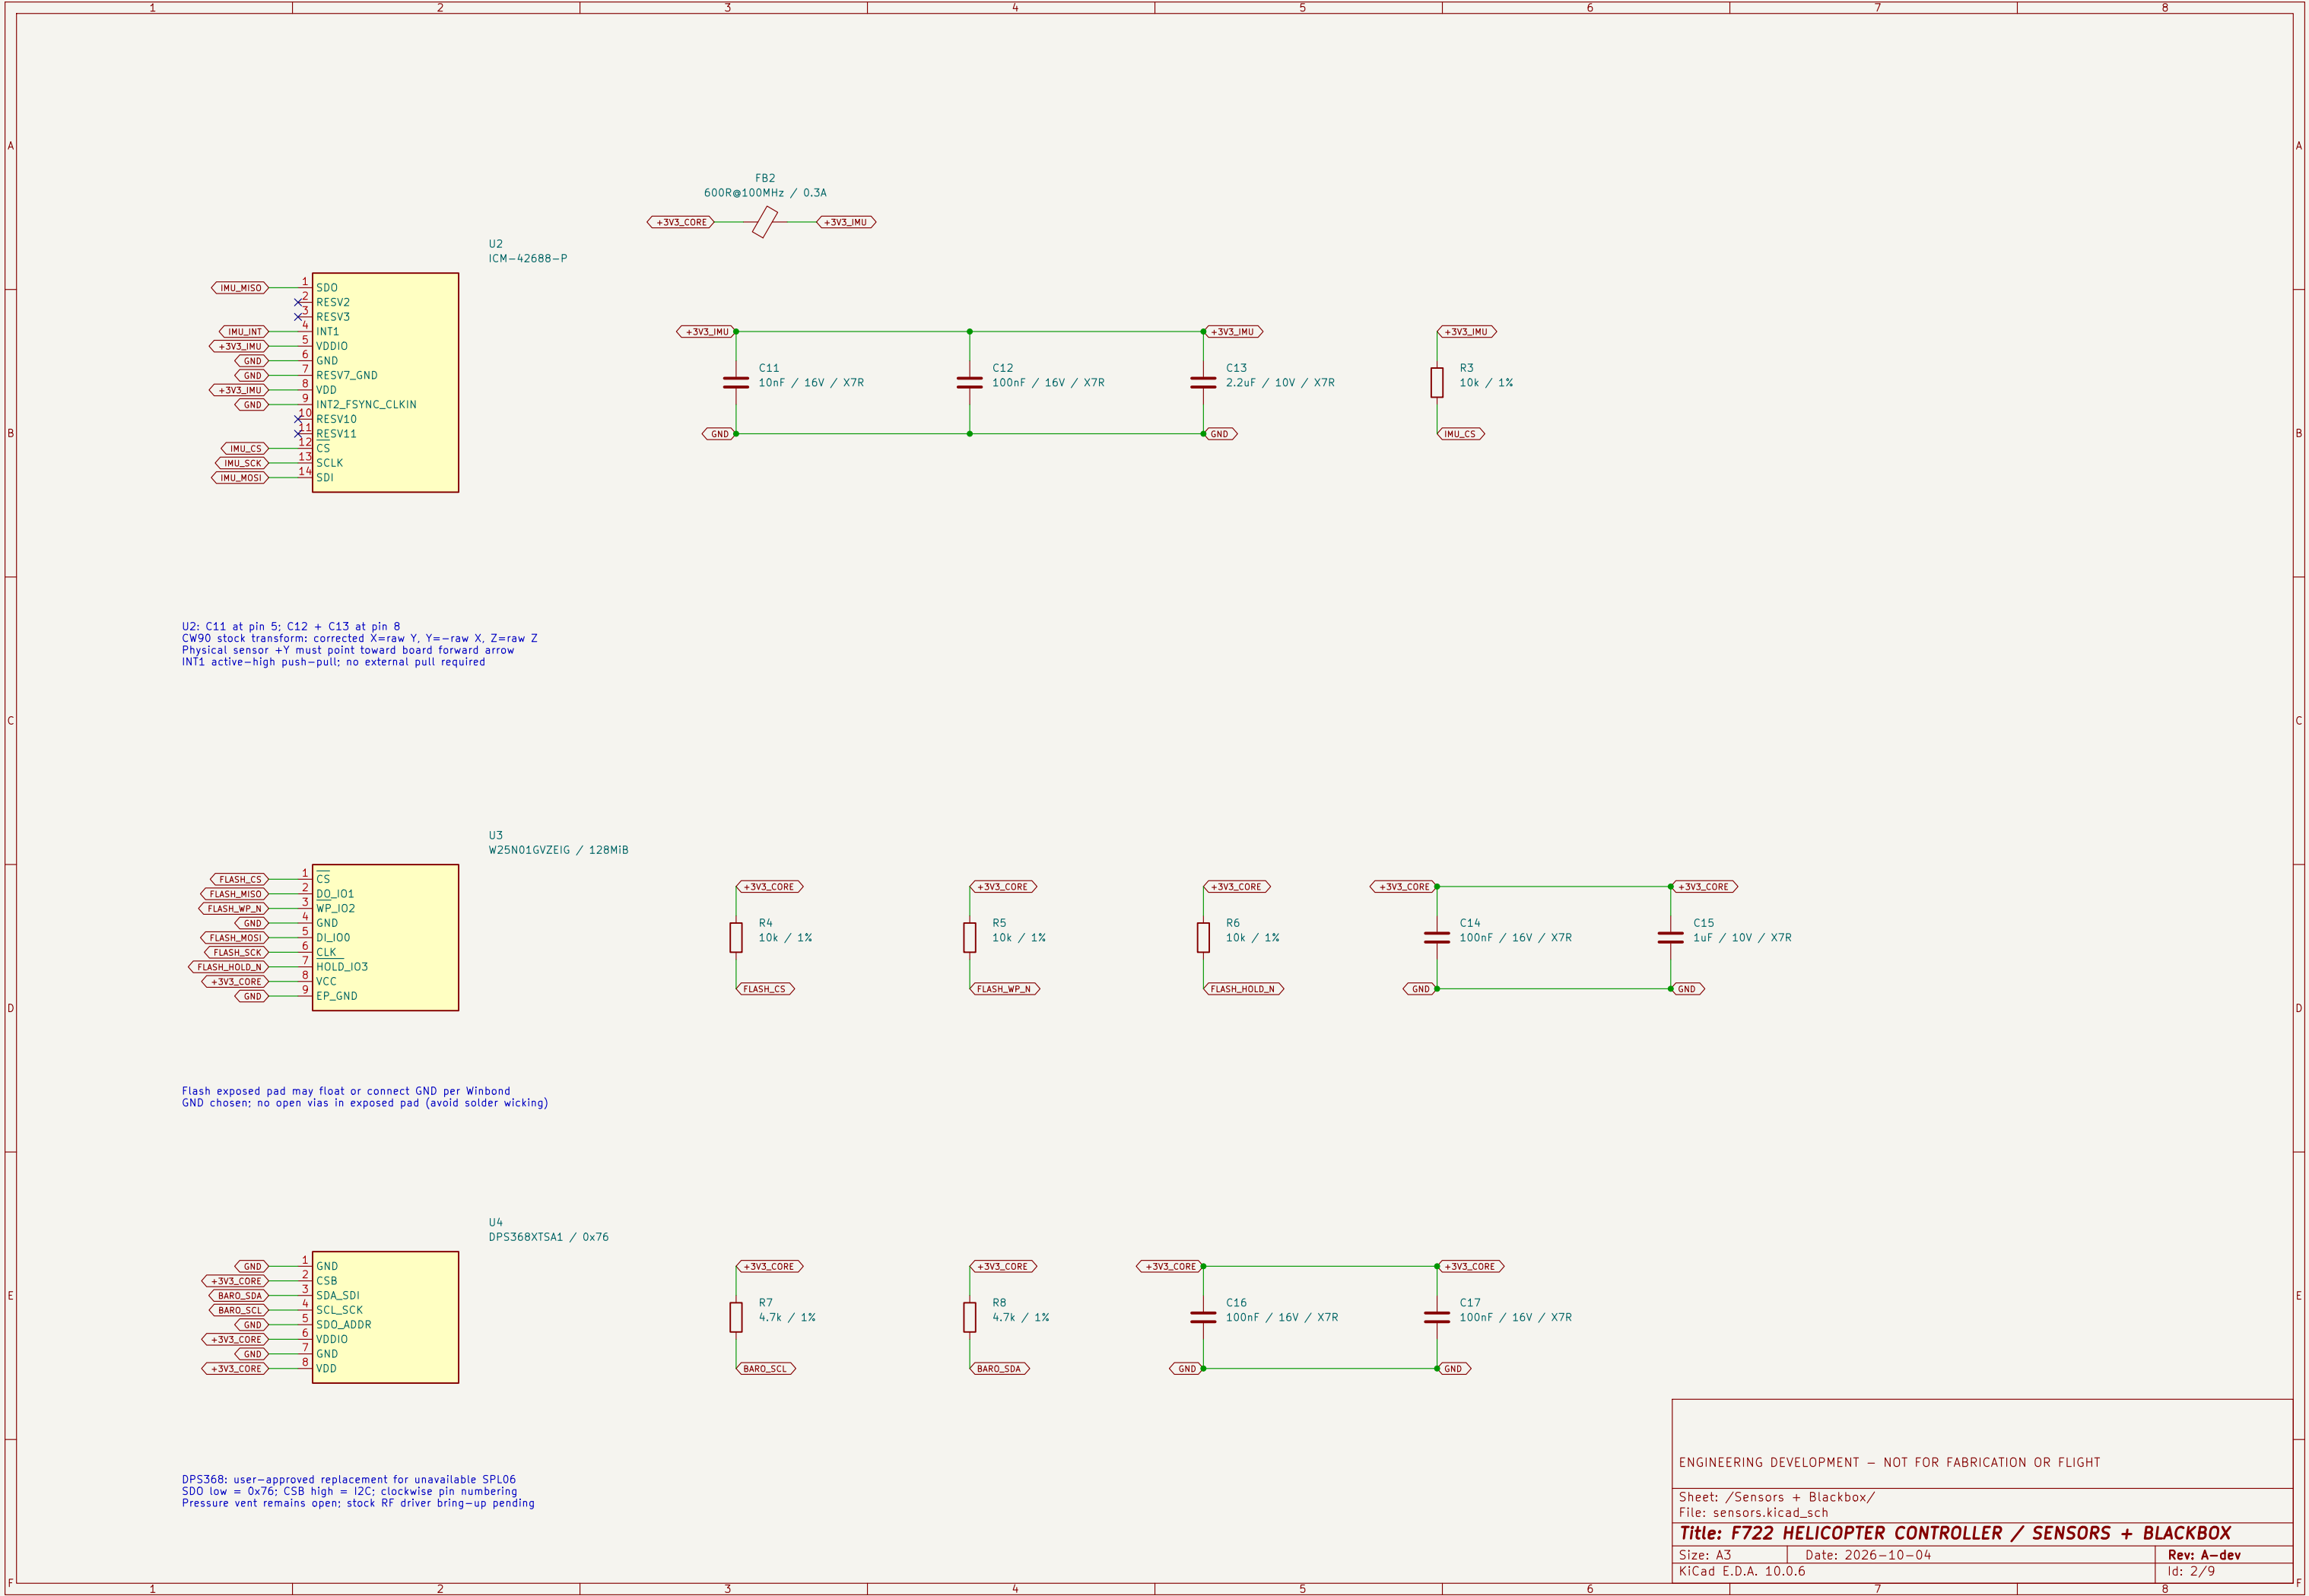

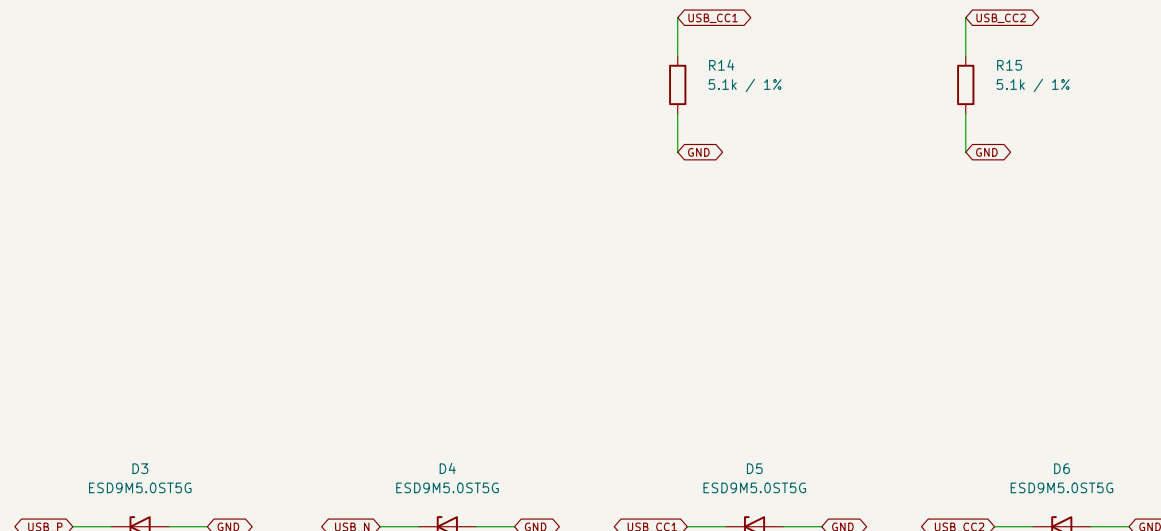



USB FS: embedded driver includes termination; direct D+ / D- routes
Pair all four connector D contacts correctly for cable orientation
Ground-only ESD avoids signal-to-VBUS steering backfeed
USB total direct capacitance and protection reviewed on power sheet



Sheet: /USB + Clock + Service/
File: usb-clock.kicad_sch

Id: 3/9

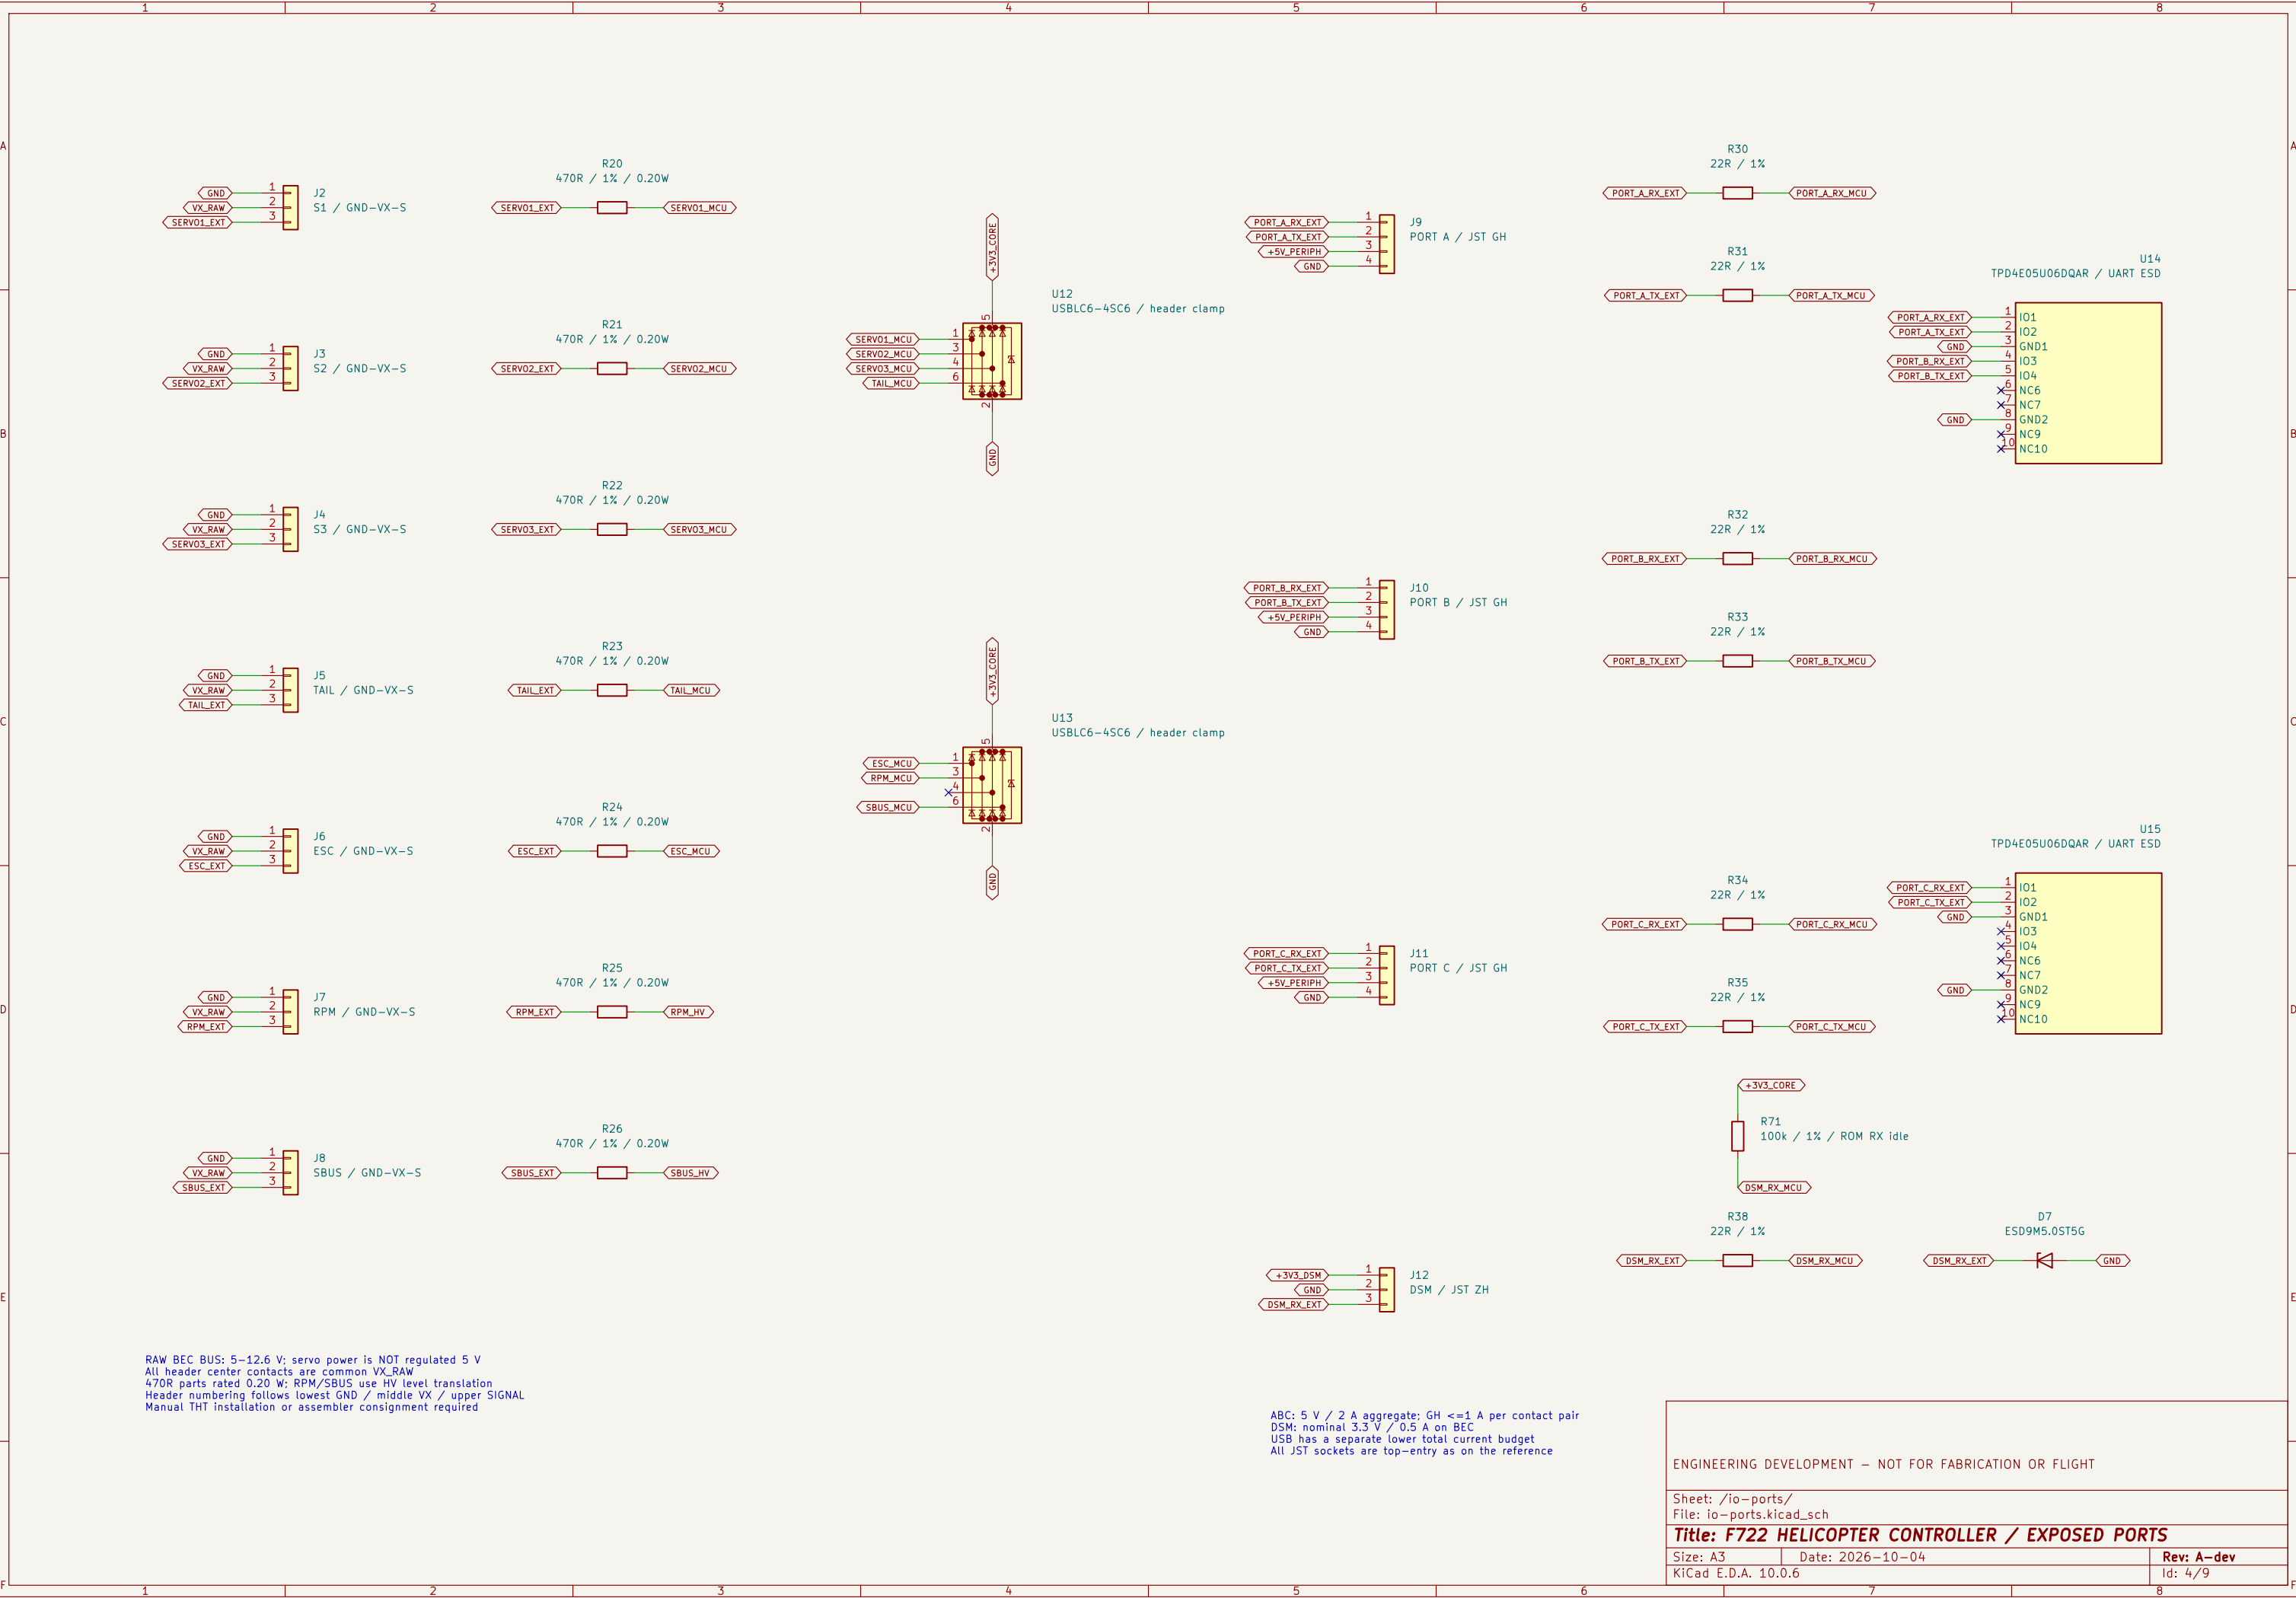
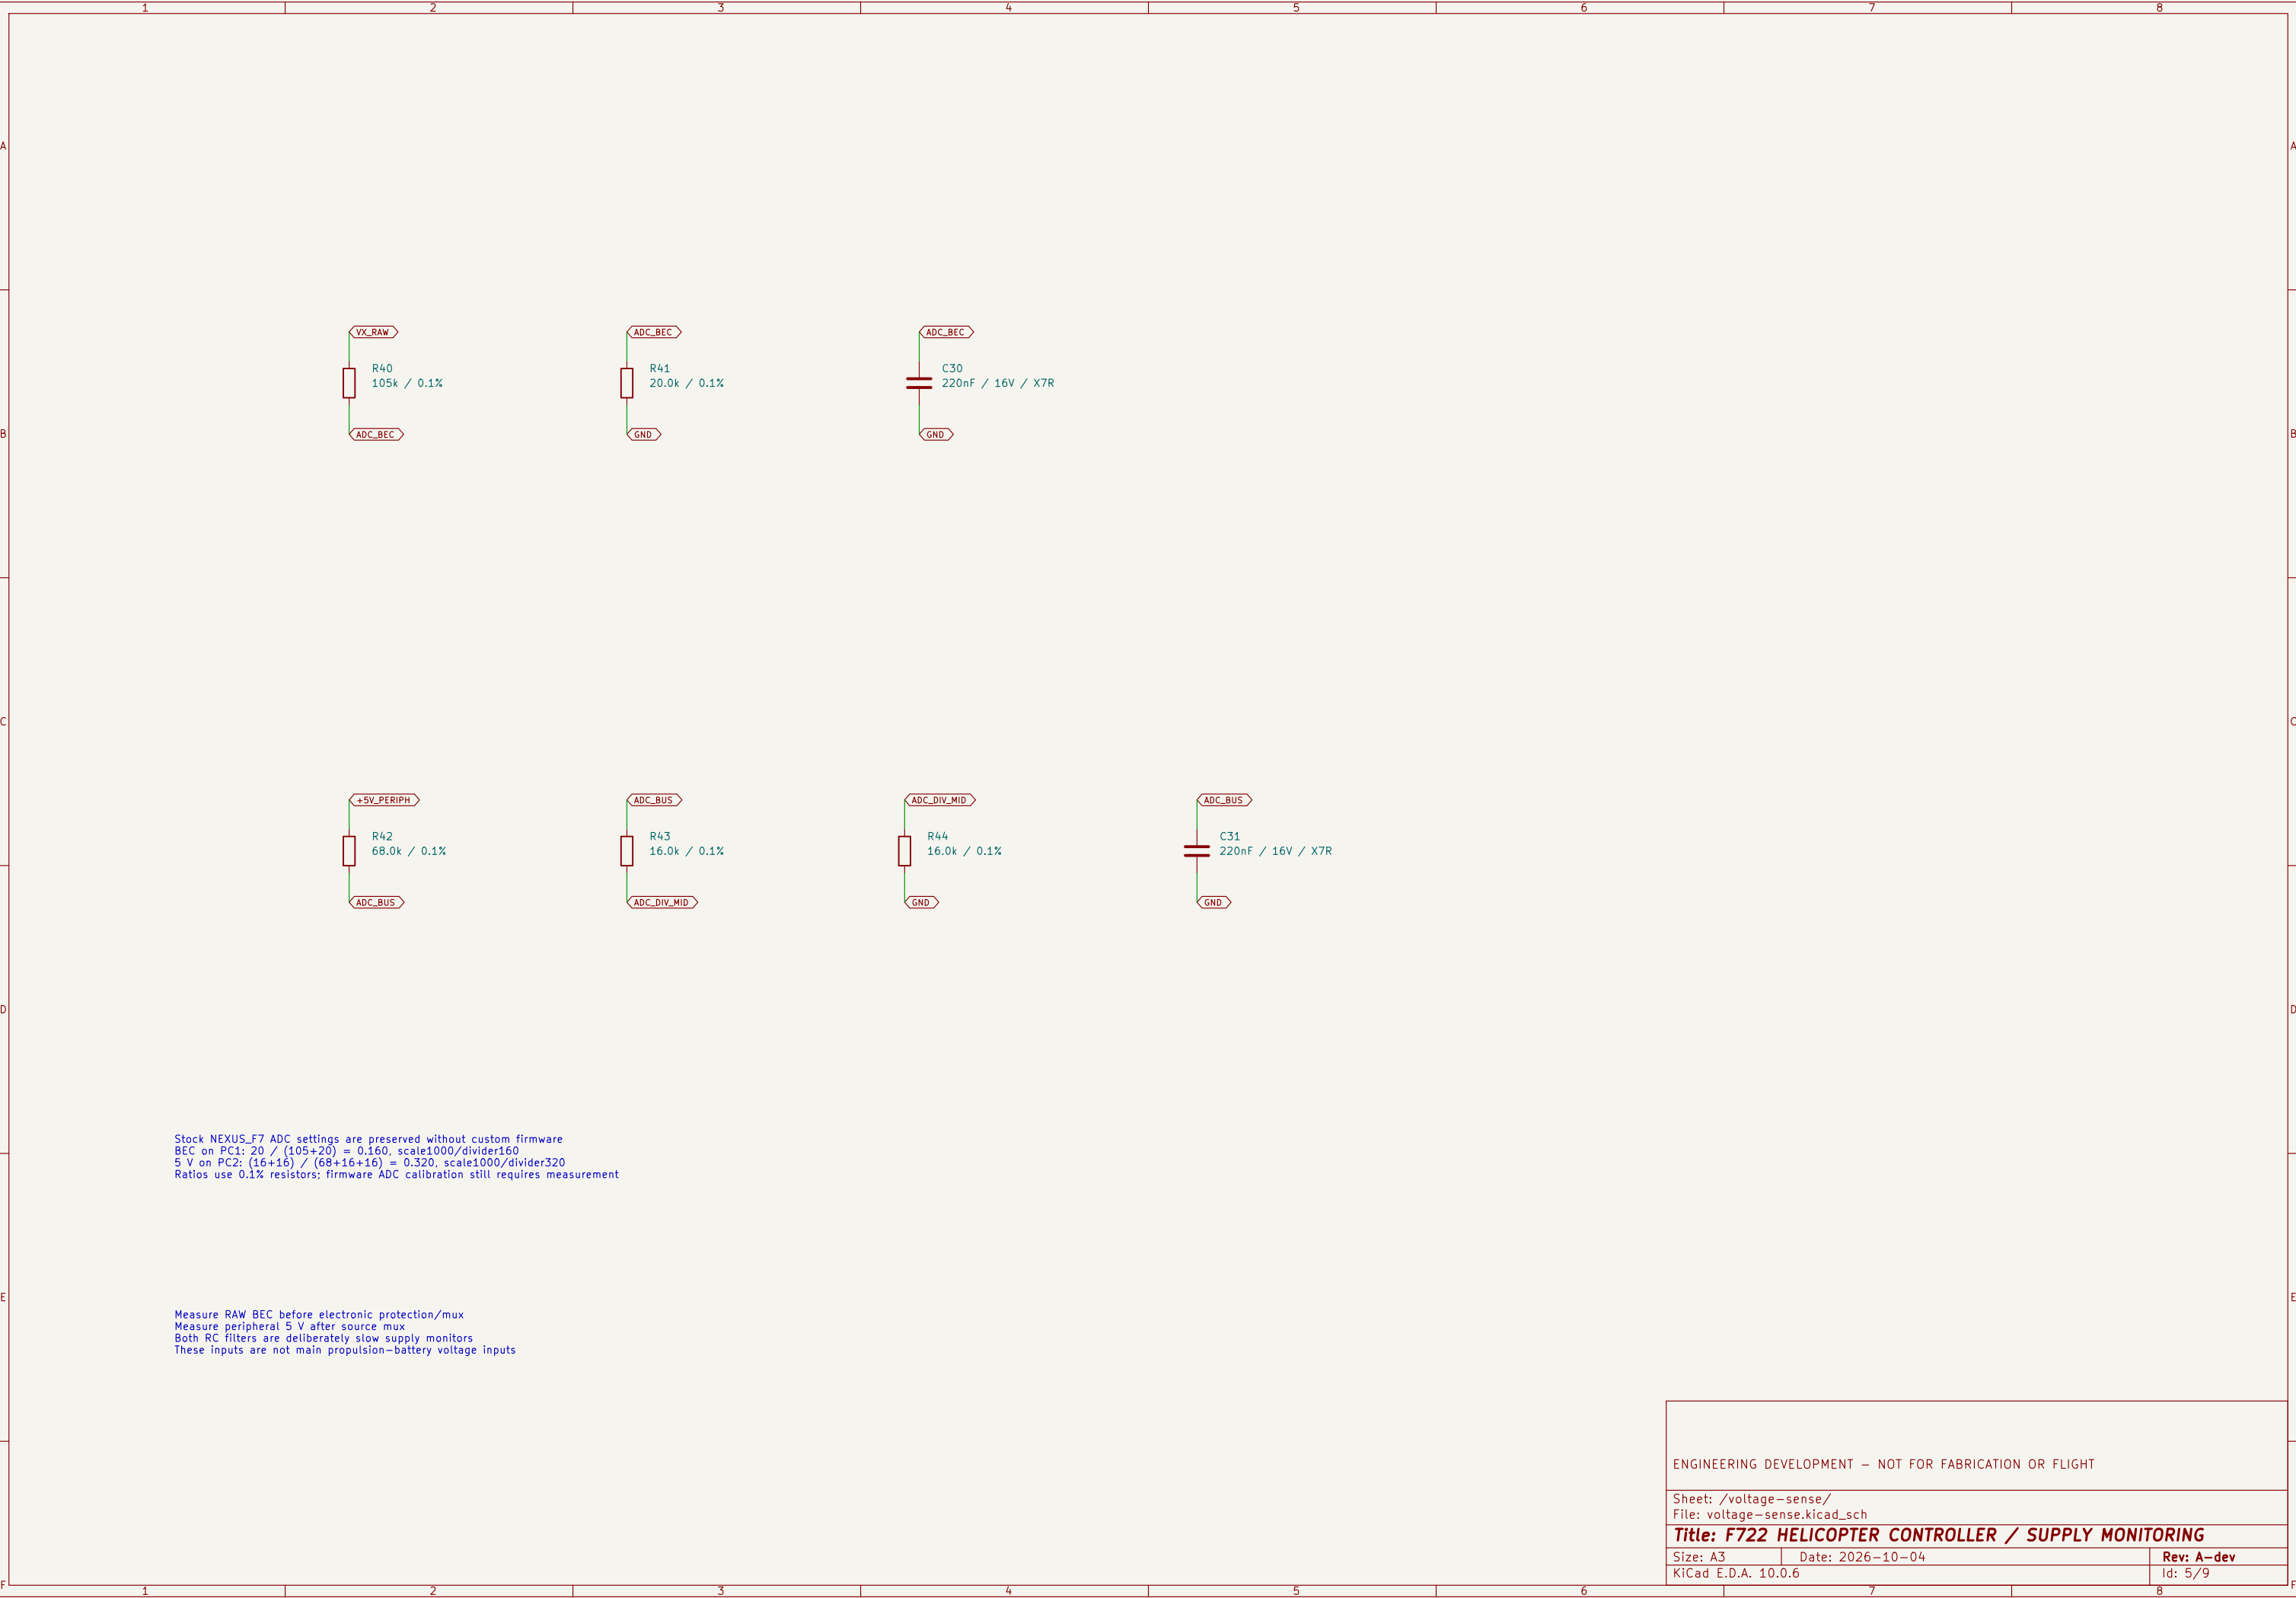
</

