



## Synchronous rectifier and output capacitors and LC filter

Routing between the drain of the MOSFET and the IC pin must be particularly optimized  
Route traces between sync. MOSFETs and transformer outputs as short as possible

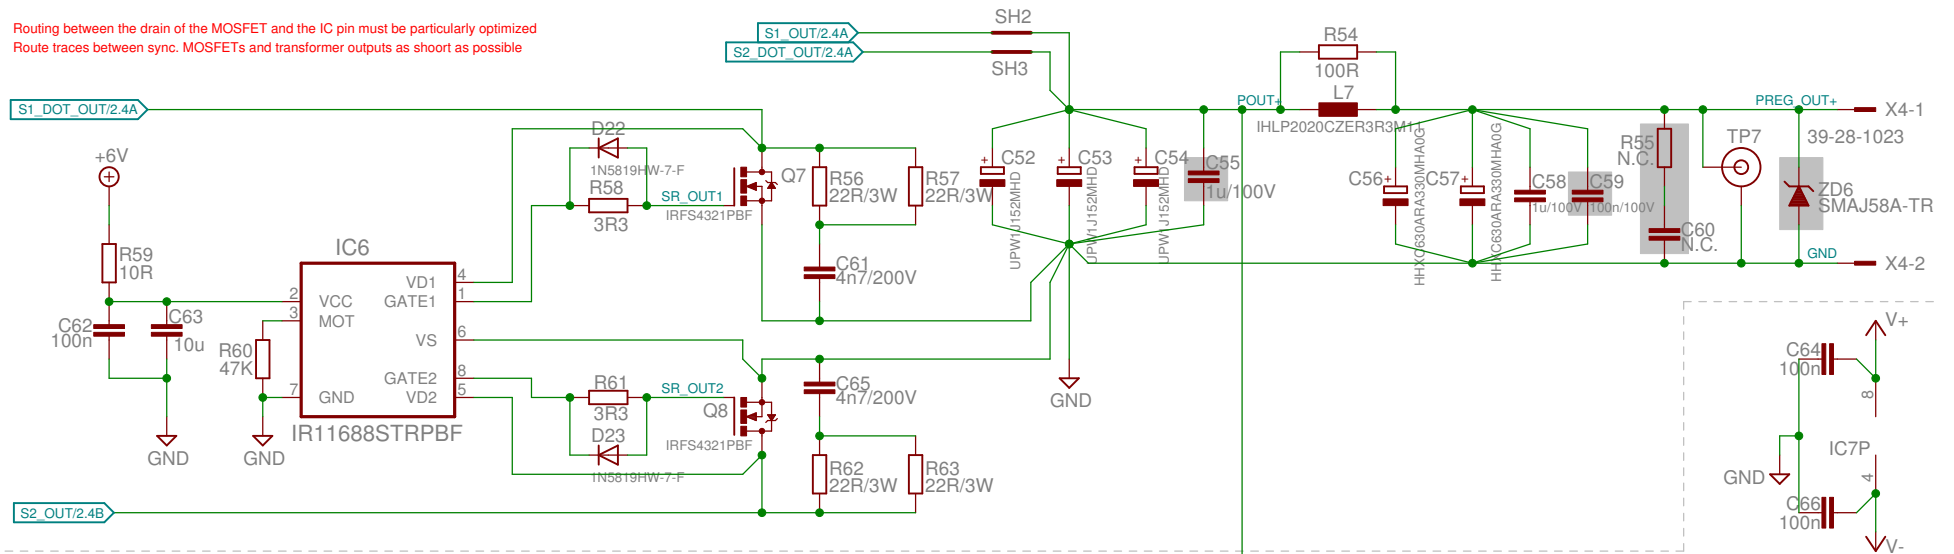

## Voltage control loop + tracker

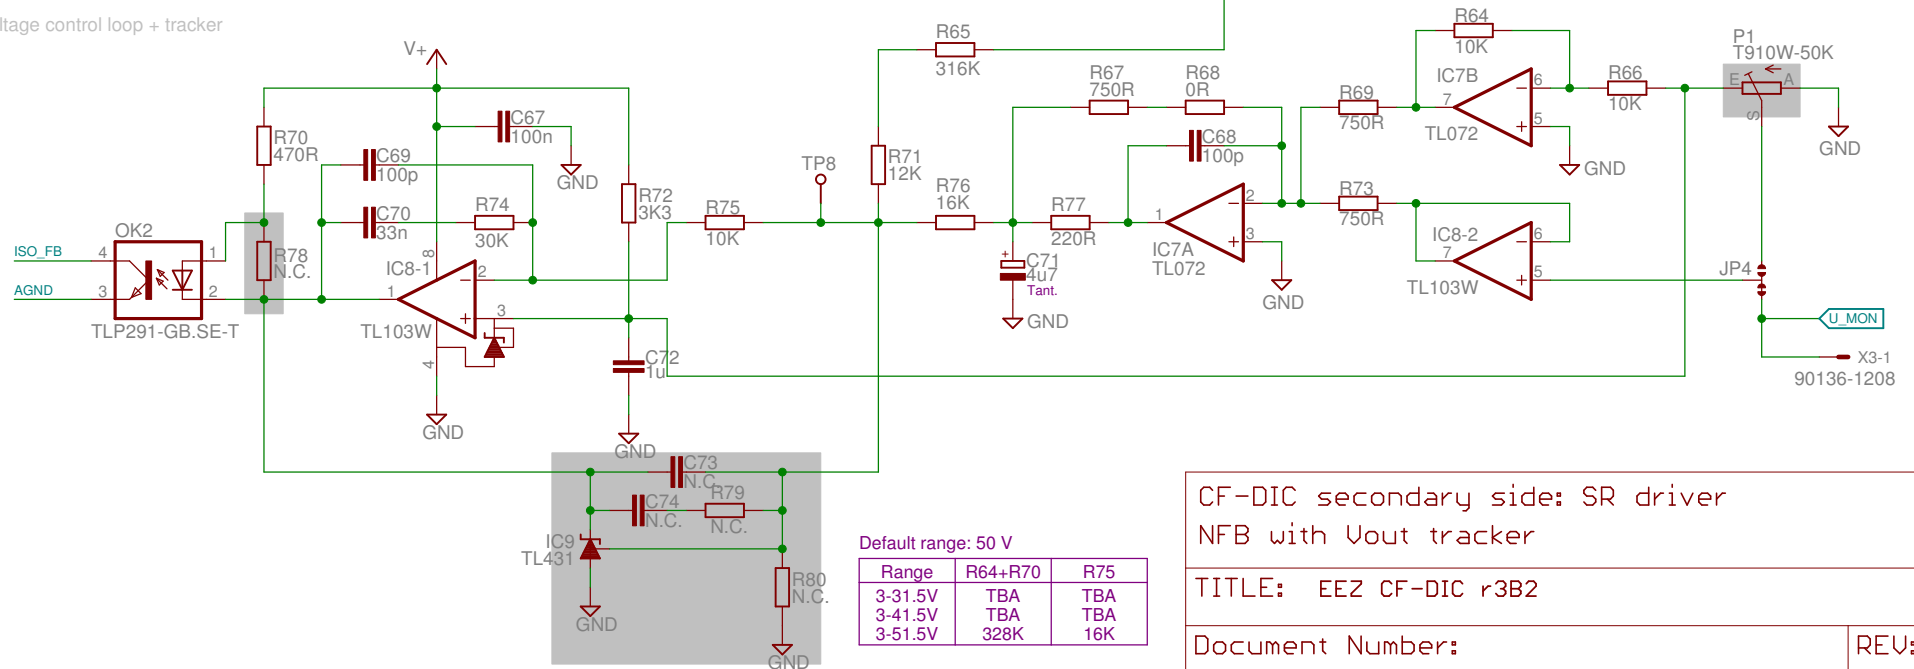

Default range: 50 V

| Range   | R64+R70 | R75 |
|---------|---------|-----|
| 3-31.5V | TBA     | TBA |
| 3-41.5V | TBA     | TBA |
| 3-51.5V | 328K    | 16K |

CF-DIC secondary side: SR driver  
NFB with Vout tracker

TITLE: EEZ CF-DIC r3B2

Document Number:

REV:

Date: 29. 07. 2018. 08:54

Sheet: 3/3