



Synchronous rectifier and output capacitors and LC filter

Routing between the drain of the MOSFET and the IC pin must be particularly optimized
Route traces between sync. MOSFETs and transformer outputs as short as possible

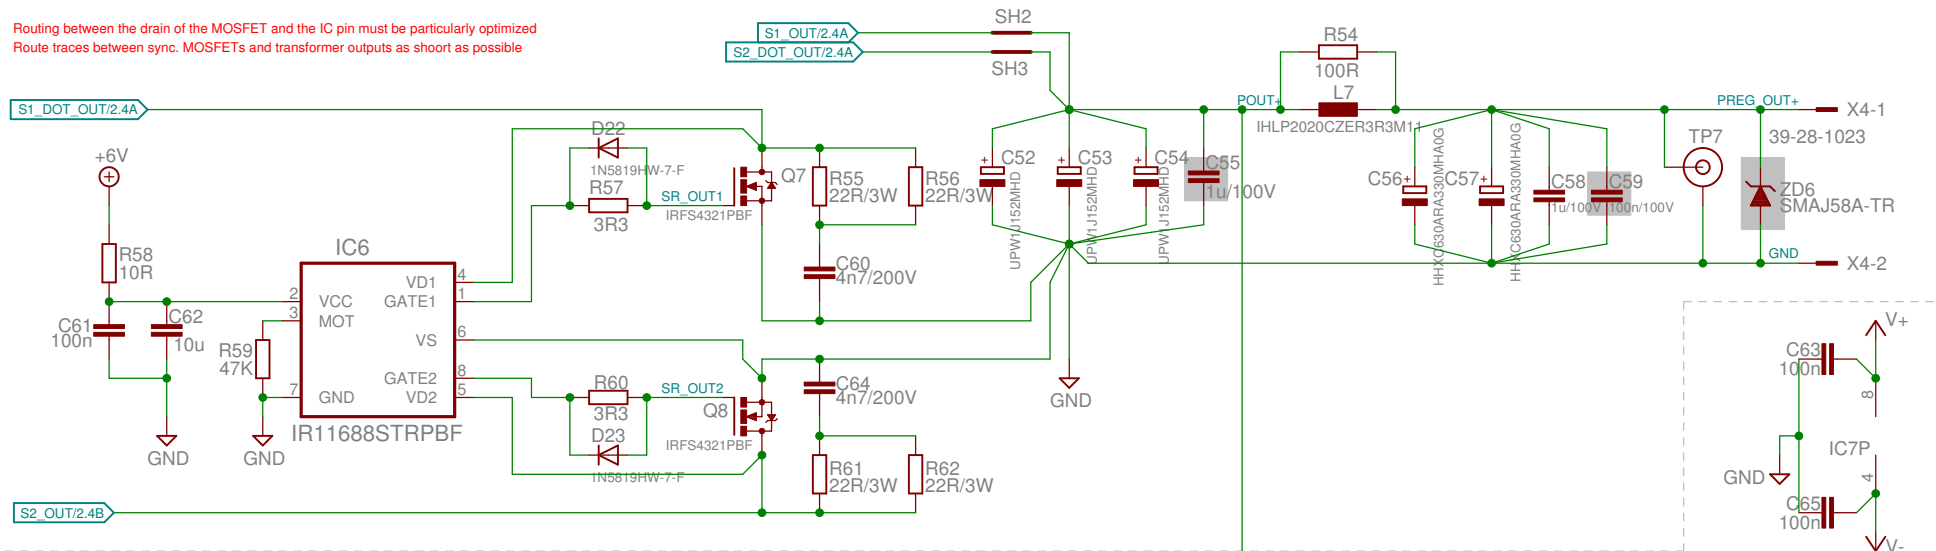

Voltage control loop + tracker

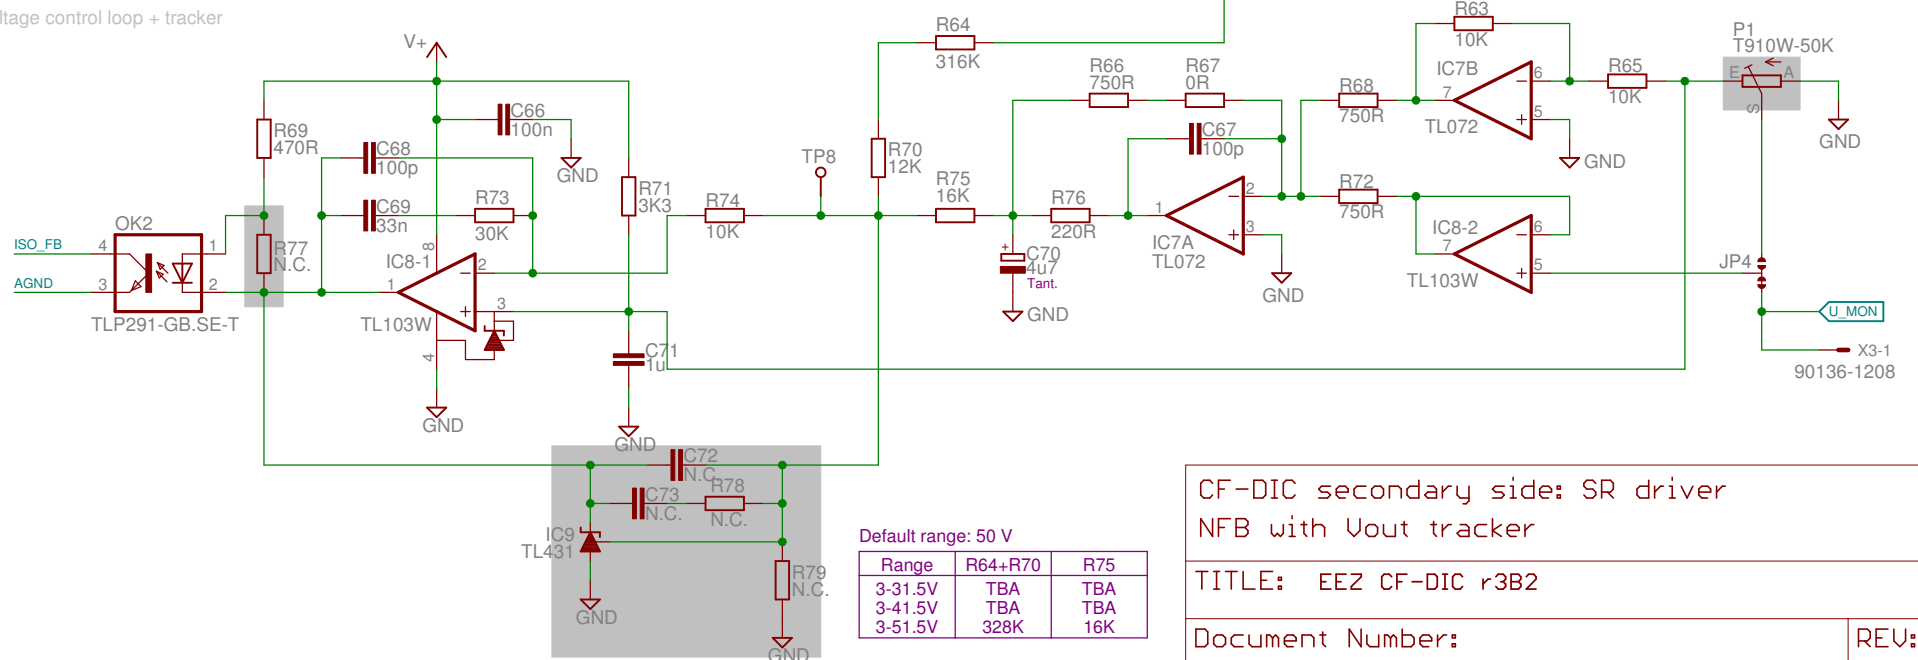

Default range: 50 V

Range	R64+R70	R75
3-31.5V	TBA	TBA
3-41.5V	TBA	TBA
3-51.5V	328K	16K

CF-DIC secondary side: SR driver
NFB with Vout tracker

TITLE: EEZ CF-DIC r3B2

Document Number:

REV:

Date: 28. 07. 2018. 09:08

Sheet: 3/3