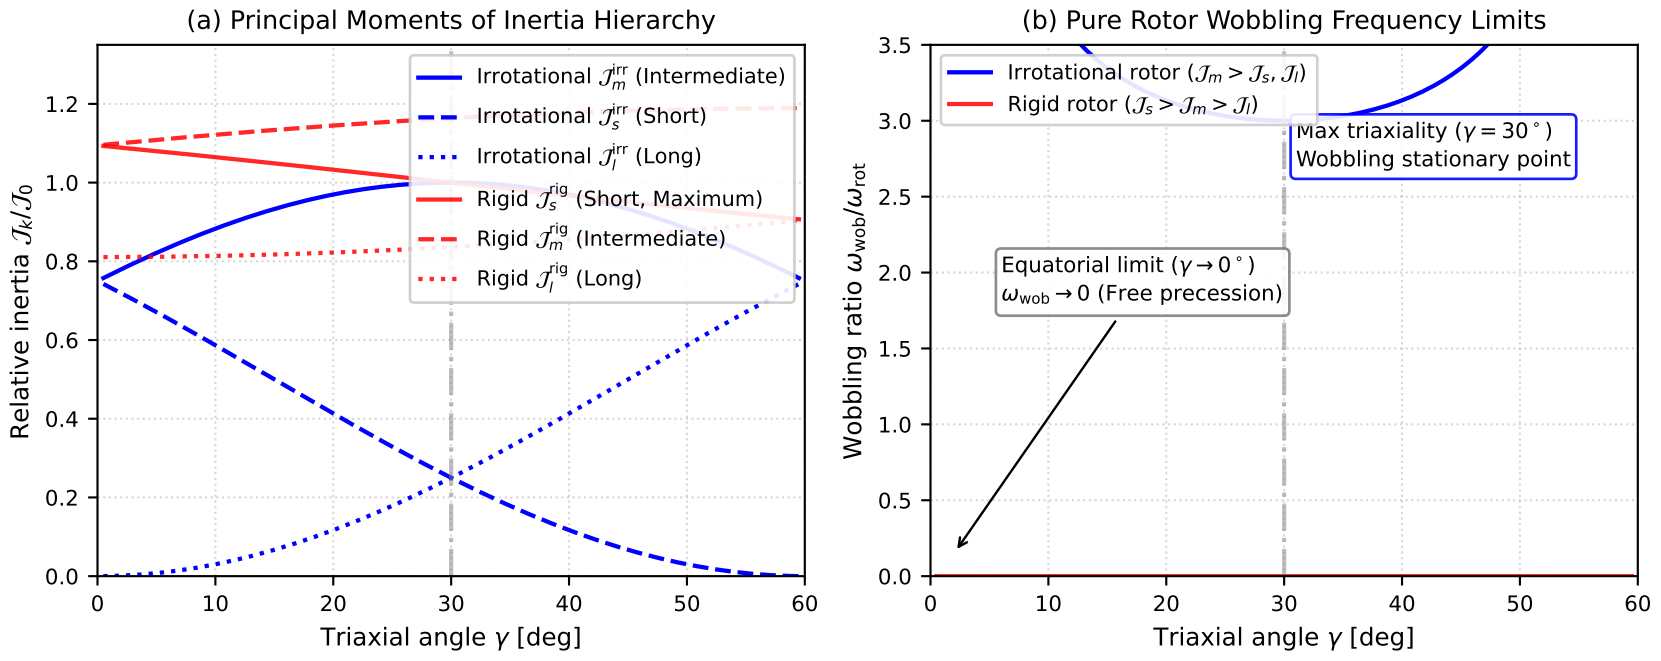
(a) Principal Moments of Inertia Hierarchy
Relative inertia $\mathcal{J}_k/\mathcal{J}_0$
Triaxial angle γ [deg]
Irrotational $\mathcal{J}_m^{\mathrm{irr}}$ (Intermediate)
Irrotational $\mathcal{J}_s^{\mathrm{irr}}$ (Short)
Irrotational $\mathcal{J}_l^{\mathrm{irr}}$ (Long)
Rigid $\mathcal{J}_s^{\mathrm{rig}}$ (Short, Maximum)
Rigid $\mathcal{J}_m^{\mathrm{rig}}$ (Intermediate)
Rigid $\mathcal{J}_l^{\mathrm{rig}}$ (Long)
(b) Pure Rotor Wobbling Frequency Limits
Wobbling ratio $\omega_{\mathrm{wob}}/\omega_{\mathrm{rot}}$
Triaxial angle γ [deg]
Irrotational rotor ($\mathcal{J}_m > \mathcal{J}_s, \mathcal{J}_l$)
Rigid rotor ($\mathcal{J}_s > \mathcal{J}_m > \mathcal{J}_l$)
Max triaxiality ($\gamma = 30^\circ$)
Wobbling stationary point
Equatorial limit ($\gamma \to 0^\circ$)
$\omega_{\mathrm{wob}} \to 0$ (Free precession)