



(a) Receiver ablation under sweep

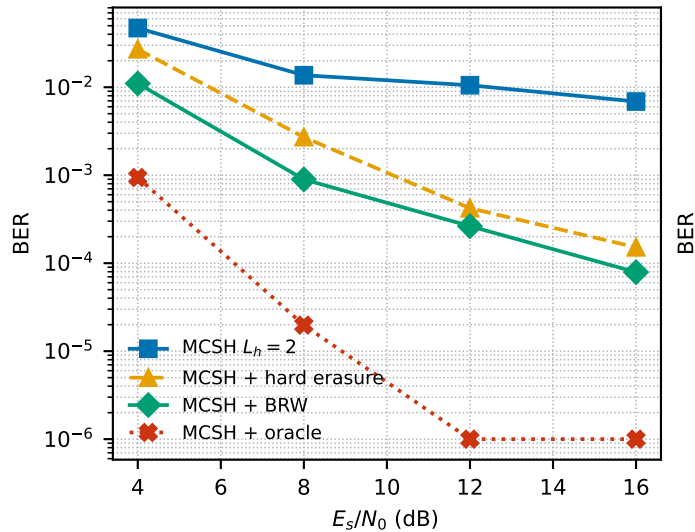

(b) BRW jammer-variance mismatch

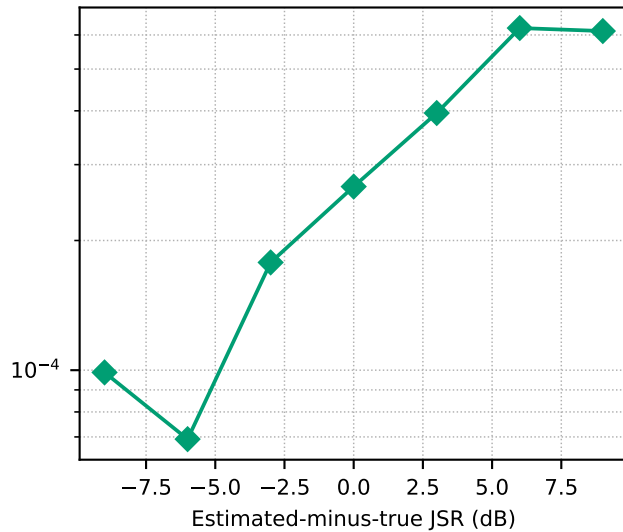

(c) Zero-delay reactive limit

