




(a) Delay-collision spectrum — dashed = probabilistic, solid = reactive

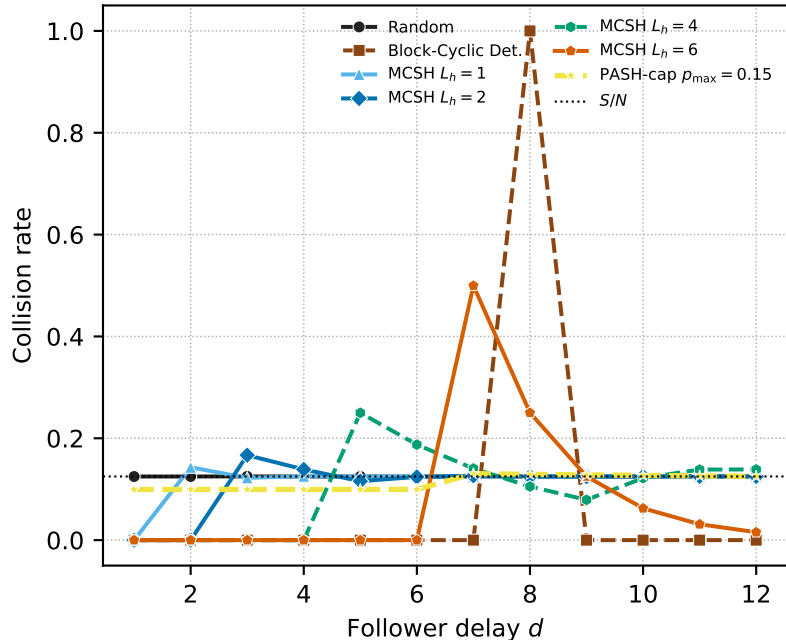


(b) Risk-predictability tradeoff

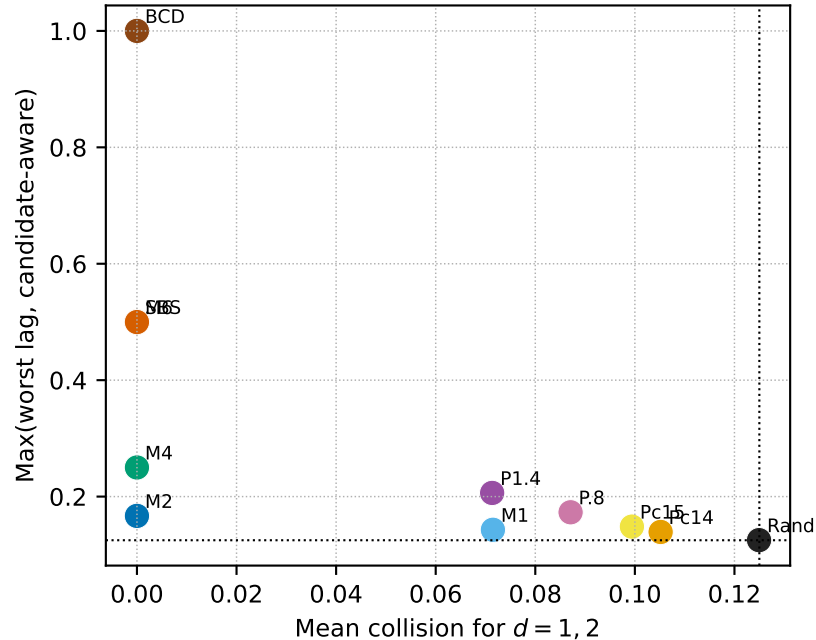

(c) Coded stress test (mixture-LLR)

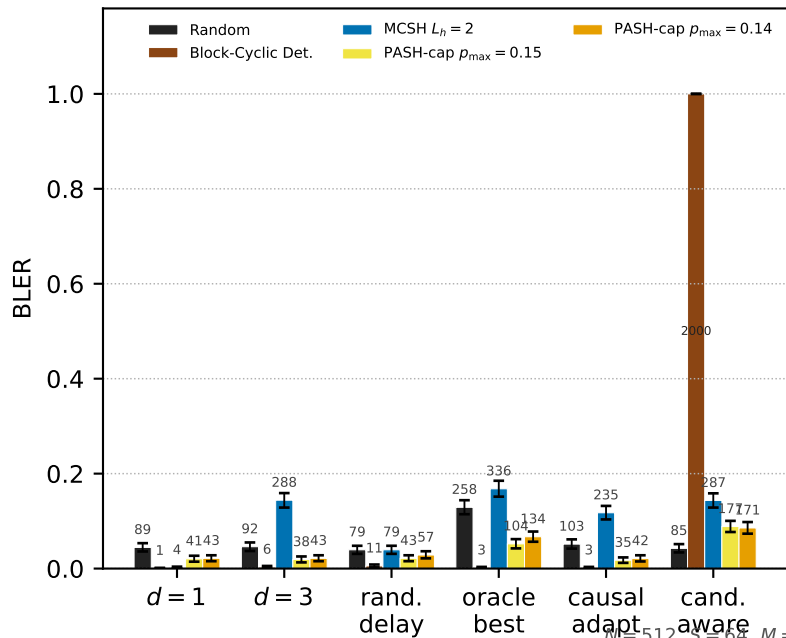

(d) Receiver ablation (candidate-aware)

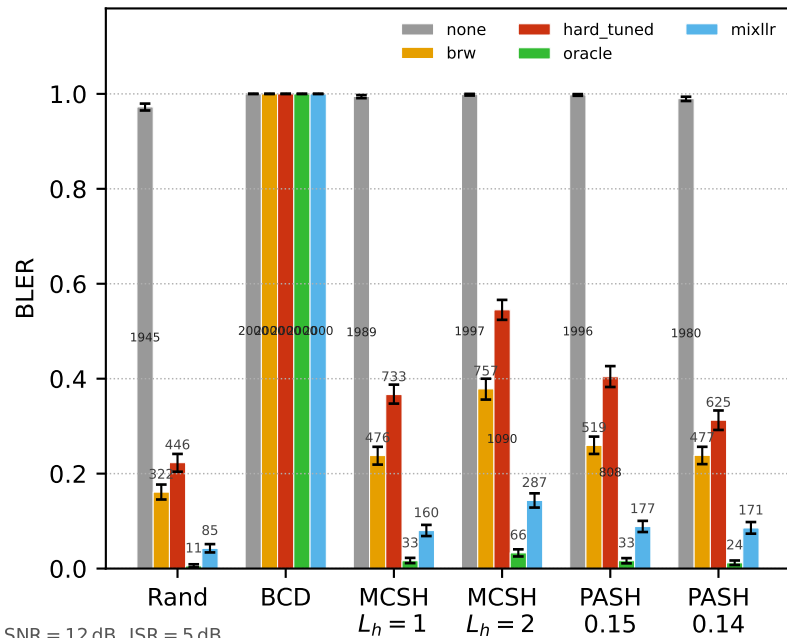

$N=512, S=64, M=32, \text{SNR}=12 \text{ dB}, \text{JSR}=5 \text{ dB}$