

Name: _____

Rensselaer Polytechnic Institute
Department of Electrical, Computer, and Systems Engineering
ECSE 4530: Digital Signal Processing, Fall 2019

Exam #1. Closed book, closed notes.
October 10, 2019, 10:00-11:20 AM

Show all work for full credit.


- Electronic devices are not permitted.
- Reduce expressions involving exponentials, sines, and cosines as much as possible.
- If the sinc function is needed, use the definition $\text{sinc}(x) = \frac{\sin x}{x}$.
- Geometric series formula: $\sum_{n=0}^{\infty} a^n = \frac{1}{1-a}, \quad |a| < 1.$
- Finite sum formula: $\sum_{n=0}^{N-1} a^n = \frac{1-a^N}{1-a}, \quad a \neq 1.$
- Finite sum formula: $\sum_{n=M}^{N-1} a^n = \frac{a^M - a^N}{1-a}, \quad a \neq 1.$
- When in doubt, show your work.

Good luck!


1		15
2		20
3		20
4		25
5		20
Total		100

Intentionally left blank.


1. (15 points.) Consider a linear time invariant (LTI) system with input $x[n]$, impulse response $h[n]$, and output $y[n]$ as shown below.




- (a) (5 points.) Compute the output for the system given as below. Your answer should be given as a function of $x[n]$, $h[n]$ and $y[n]$ in the most compact form.



- (b) (5 points.) Compute the output for the cascade system given as below where $*$ is the convolution operator. Your answer should be given as a function of $x[n]$, $h[n]$ and $y[n]$ in the most compact form.

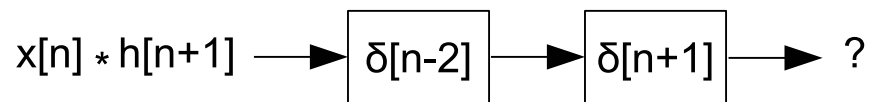

- (c) (5 points.) The response of the system to the input $x_1[n] = \sin\left(\frac{\pi}{2}n\right)$ is $y_1[n] = 2\sin\left(\frac{\pi}{2}n\right)$. Determine the response $y_2[n]$ of the system to $x_2[n] = e^{j\frac{\pi}{2}(n-1)}$. **Hint:** Consider the eigenfunctions of discrete time LTI systems.



Blank page for extra work

2. (20 points.) You can use any method you prefer in each case, but simplify your answer as much as possible.

(a) (5 points.) Find $y[n] = h[n] * x[n]$ for $x[n] = a^n u[-n]$ and $h[n] = u[n+3] - u[n-2]$. Assume $a > 1$ is a real number.

(b) (5 points.) Compute the output $y[n] = h[n] * x[n]$ for $x[n] = u[n+1]$ and $h[n] = (-2)^n u[n]$.

(c) (10 points.) A discrete time LTI system is described by the following difference equation:

$$y[n] - 0.25y[n-1] + 0.5y[n-2] + y[n-3] = 3x[n] - 3x[n-2].$$

What is the output of this system $y[n]$ for $x[n] = j^n$? **Hint:** Eigenfunctions.

Blank page for extra work

3. (20 points.) Consider the following pole-zero diagrams (z planes) in Figure 1 corresponding to the z -transforms of the right-sided (i.e. $h[n] = 0$ for $n < 0$) impulse responses $h_1[n]$, $h_2[n]$ and $h_3[n]$.

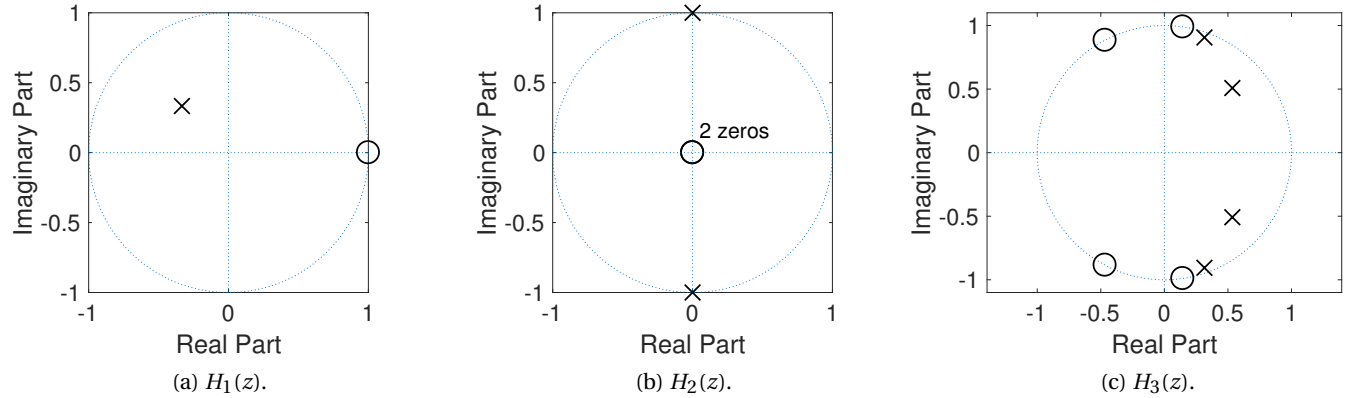


Figure 1: Three pole-zero plots.

- (a) (10 points.) For each of $h_1[n]$, $h_2[n]$ and $h_3[n]$, discuss whether $h[n]$ can be a real valued impulse response or not. Explain your reasoning. Note that you do not need to compute any explicit formula for the z -transforms.

- (b) (5 points.) Determine a z -transform $H_2(z)$ that is consistent with the pole-zero plot in Figure 1-(b) (middle plot). It's OK to leave the result as the product of factors in the numerator and denominator instead of multiplying it all out.

- (c) (3 points.) Determine an impulse response $h_2[n]$ that is consistent with the pole-zero plot. Note that your $H_2(z)$ should resemble something in the z-transform table.
- (d) (2 points.) Is a system which has $h_1[n]$ as impulse response (with the pole-zero plot in Figure 1-(a) (left plot)) stable? Is this system causal?

Blank page for extra work

4. (25 points.) Discrete time signal and DTFT pairs

Six different real discrete time signals $x_1[n]$, $x_2[n]$, $x_3[n]$, $x_4[n]$, $x_5[n]$, $x_6[n]$ are shown in Figure 2 in time domain. The magnitudes of the Discrete Time Fourier transforms (DTFTs) of six signals $X_a(\omega)$, $X_b(\omega)$, $X_c(\omega)$, $X_d(\omega)$, $X_e(\omega)$, $X_f(\omega)$ are given in Figure 3 (over one period). Match each signal in Figure 2 with its corresponding DTFT magnitude in Figure 3, and summarize your findings in the following table and then explain your reasoning for each of the six signals below it. The idea here is to use your knowledge of DTFT properties, such as oddness, evenness, Parseval's relation, $\sum_{n=-\infty}^{\infty} x[n] = X(0)$ and $x[0] = \frac{1}{2\pi} \int_{2\pi} X(\omega) d\omega$.

$x[n]$	$X(\omega)$
$x_1[n]$	
$x_2[n]$	
$x_3[n]$	
$x_4[n]$	
$x_5[n]$	
$x_6[n]$	

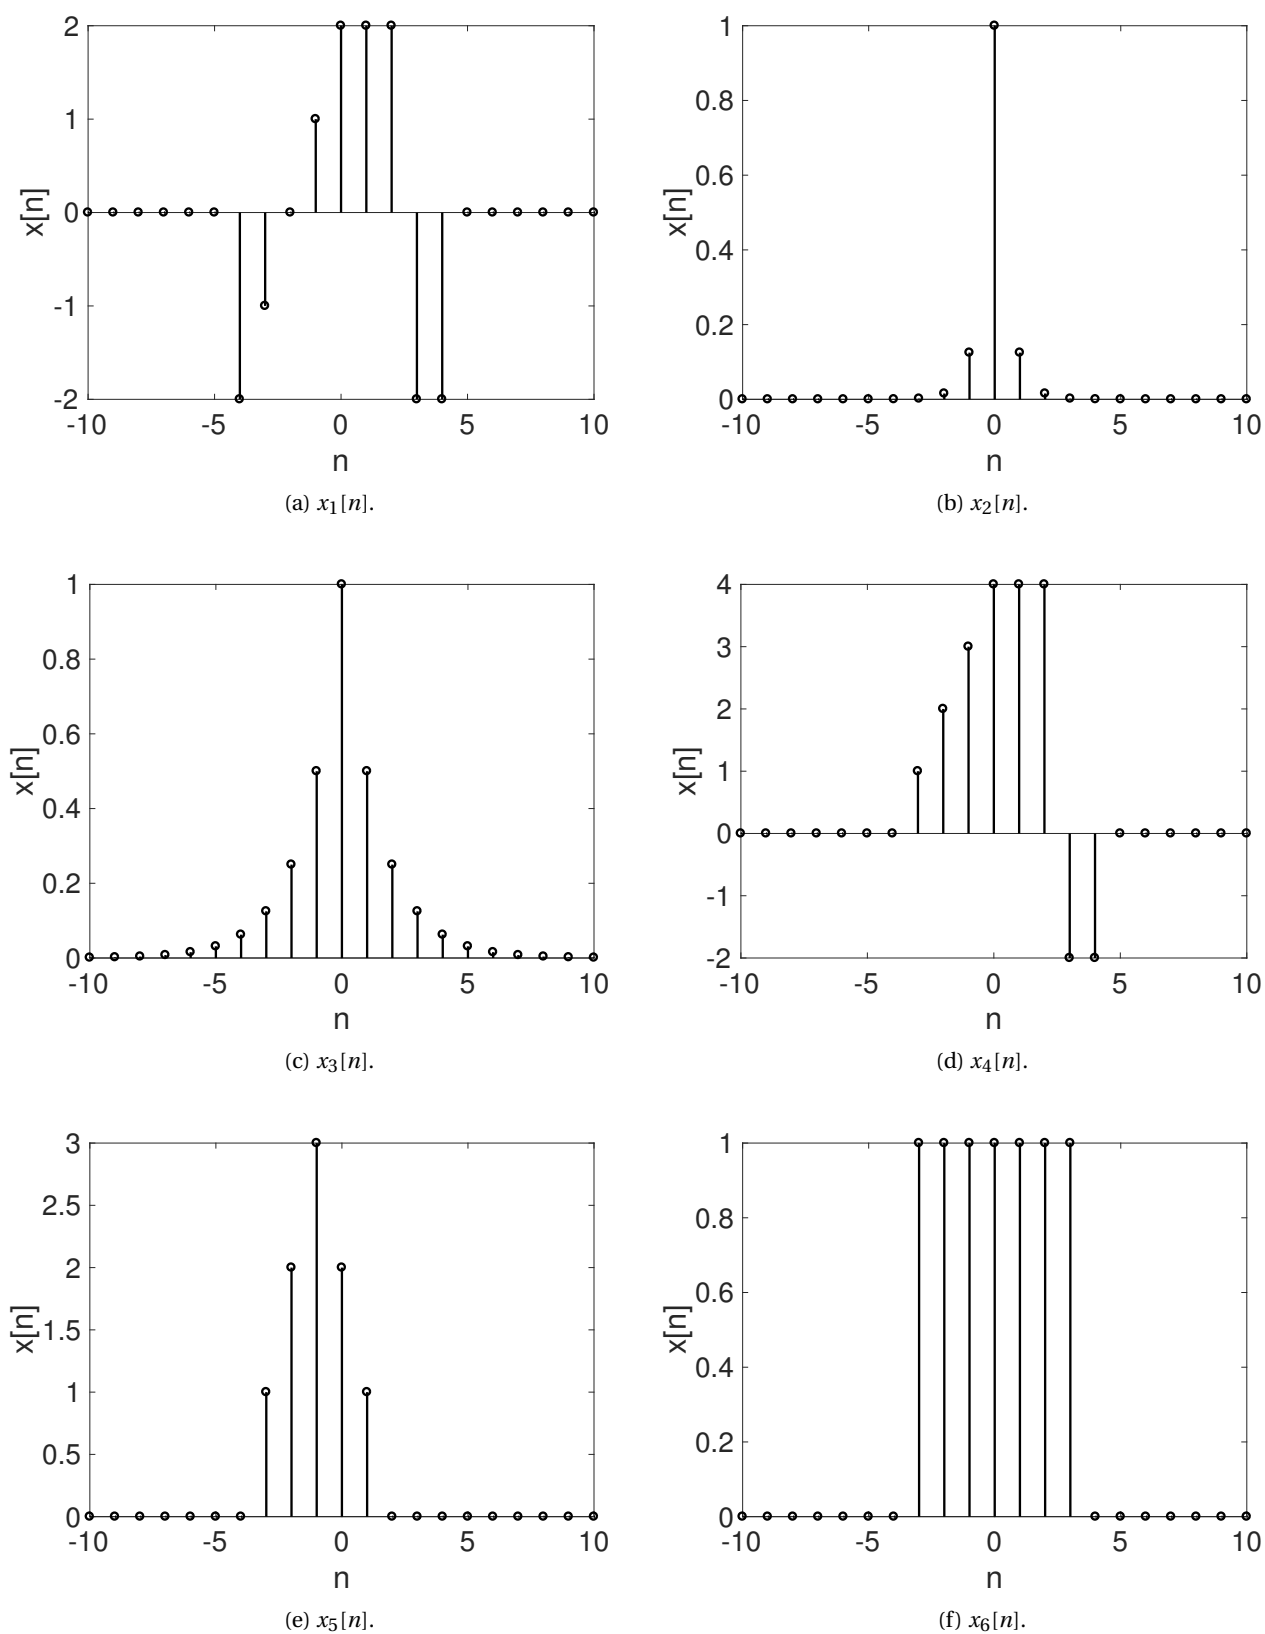


Figure 2: Time domain.







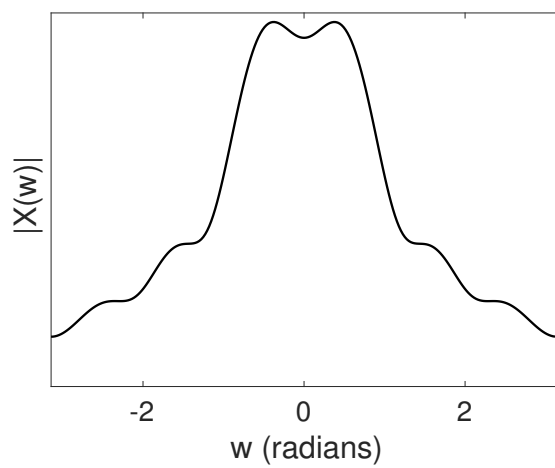
(a) $X_a(\omega)$.(b) $X_b(\omega)$.(c) $X_c(\omega)$.(d) $X_d(\omega)$.(e) $X_e(\omega)$.(f) $X_f(\omega)$.

Figure 3: Frequency domain.

Blank page for extra work

5. (20 points.) We have a clock signal $x(t)$ that is 2 Volt for T seconds and then 0 Volts for T seconds, then repeats, as shown below. Note that the clock rate is $1/T = 1$ MHz.

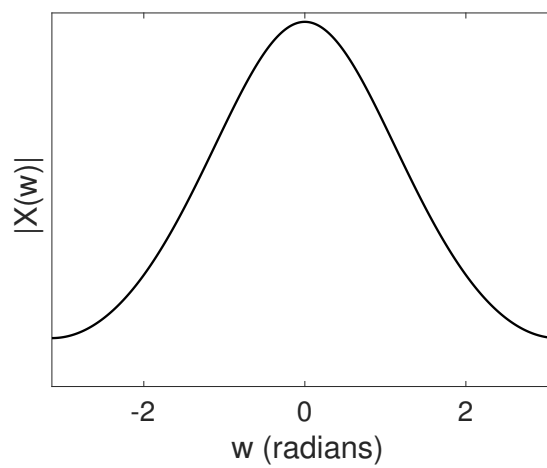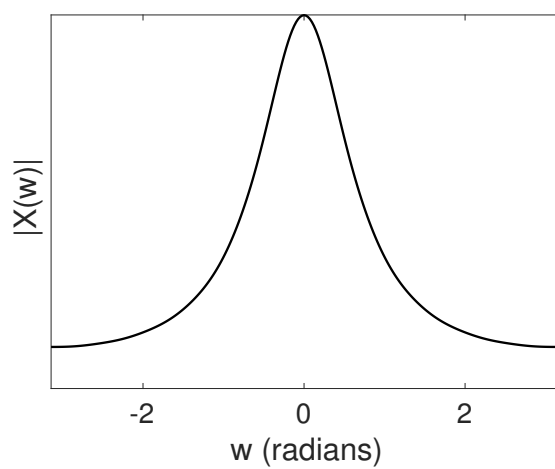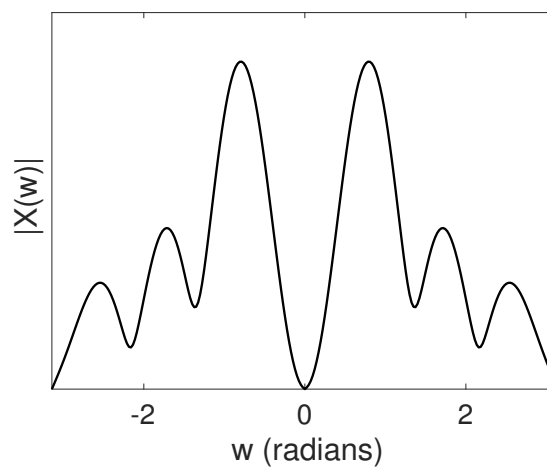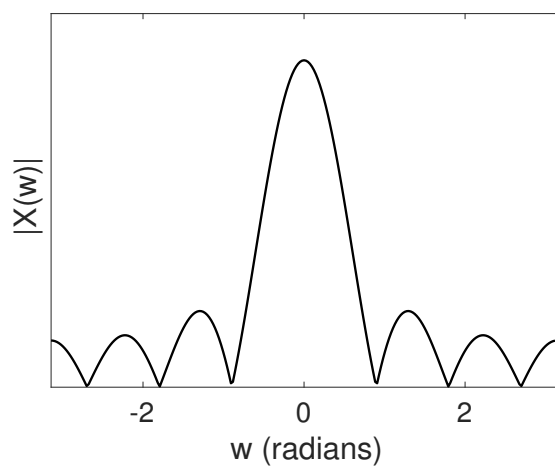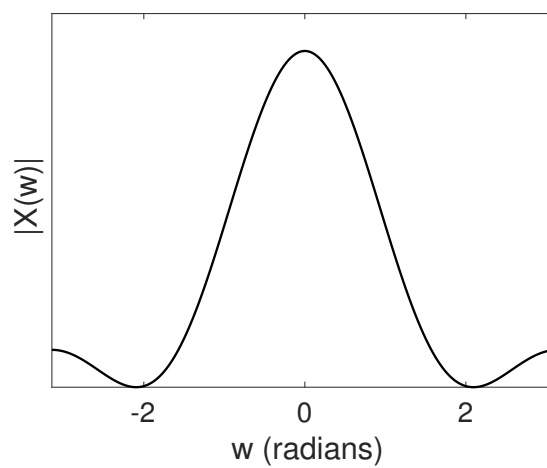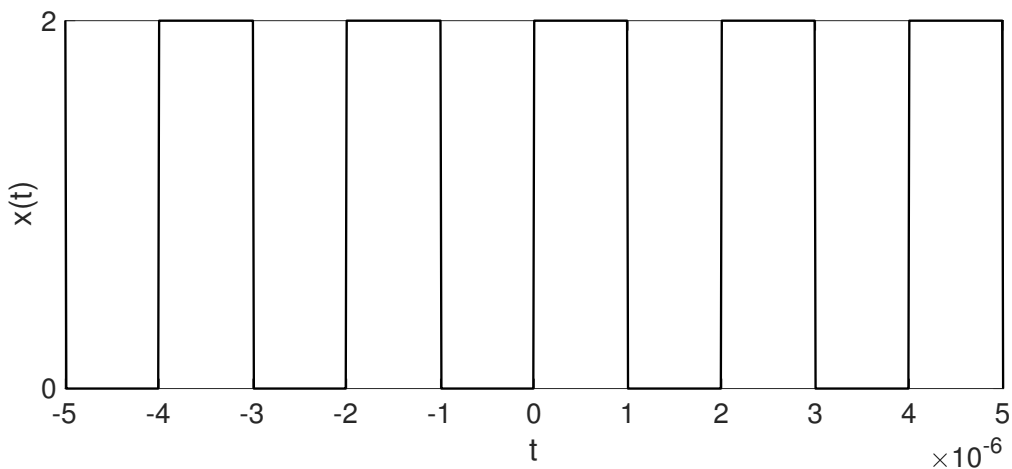

- (a) (5 points.) Find a Fourier series representation of $x(t)$. Call these coefficients a_k .

- (b) (8 points.) The clock signal must propagate through a wire to get to its intended destination. The wire has a impulse response of $h(t) = \text{sinc}^2(t/T)$. Plot the frequency response of the channel, $H(\omega)$.

Hint:

$$\frac{\sin(At)}{\pi t} \xleftrightarrow{FT} \begin{cases} 1, & |\omega| \leq A \\ 0, & |\omega| > A. \end{cases}$$

- (c) (7 points.) Find an expression for the Fourier series coefficients b_k of the output clock signal $y(t) = x(t) * h(t)$.

Blank page for extra work

Blank page for extra work