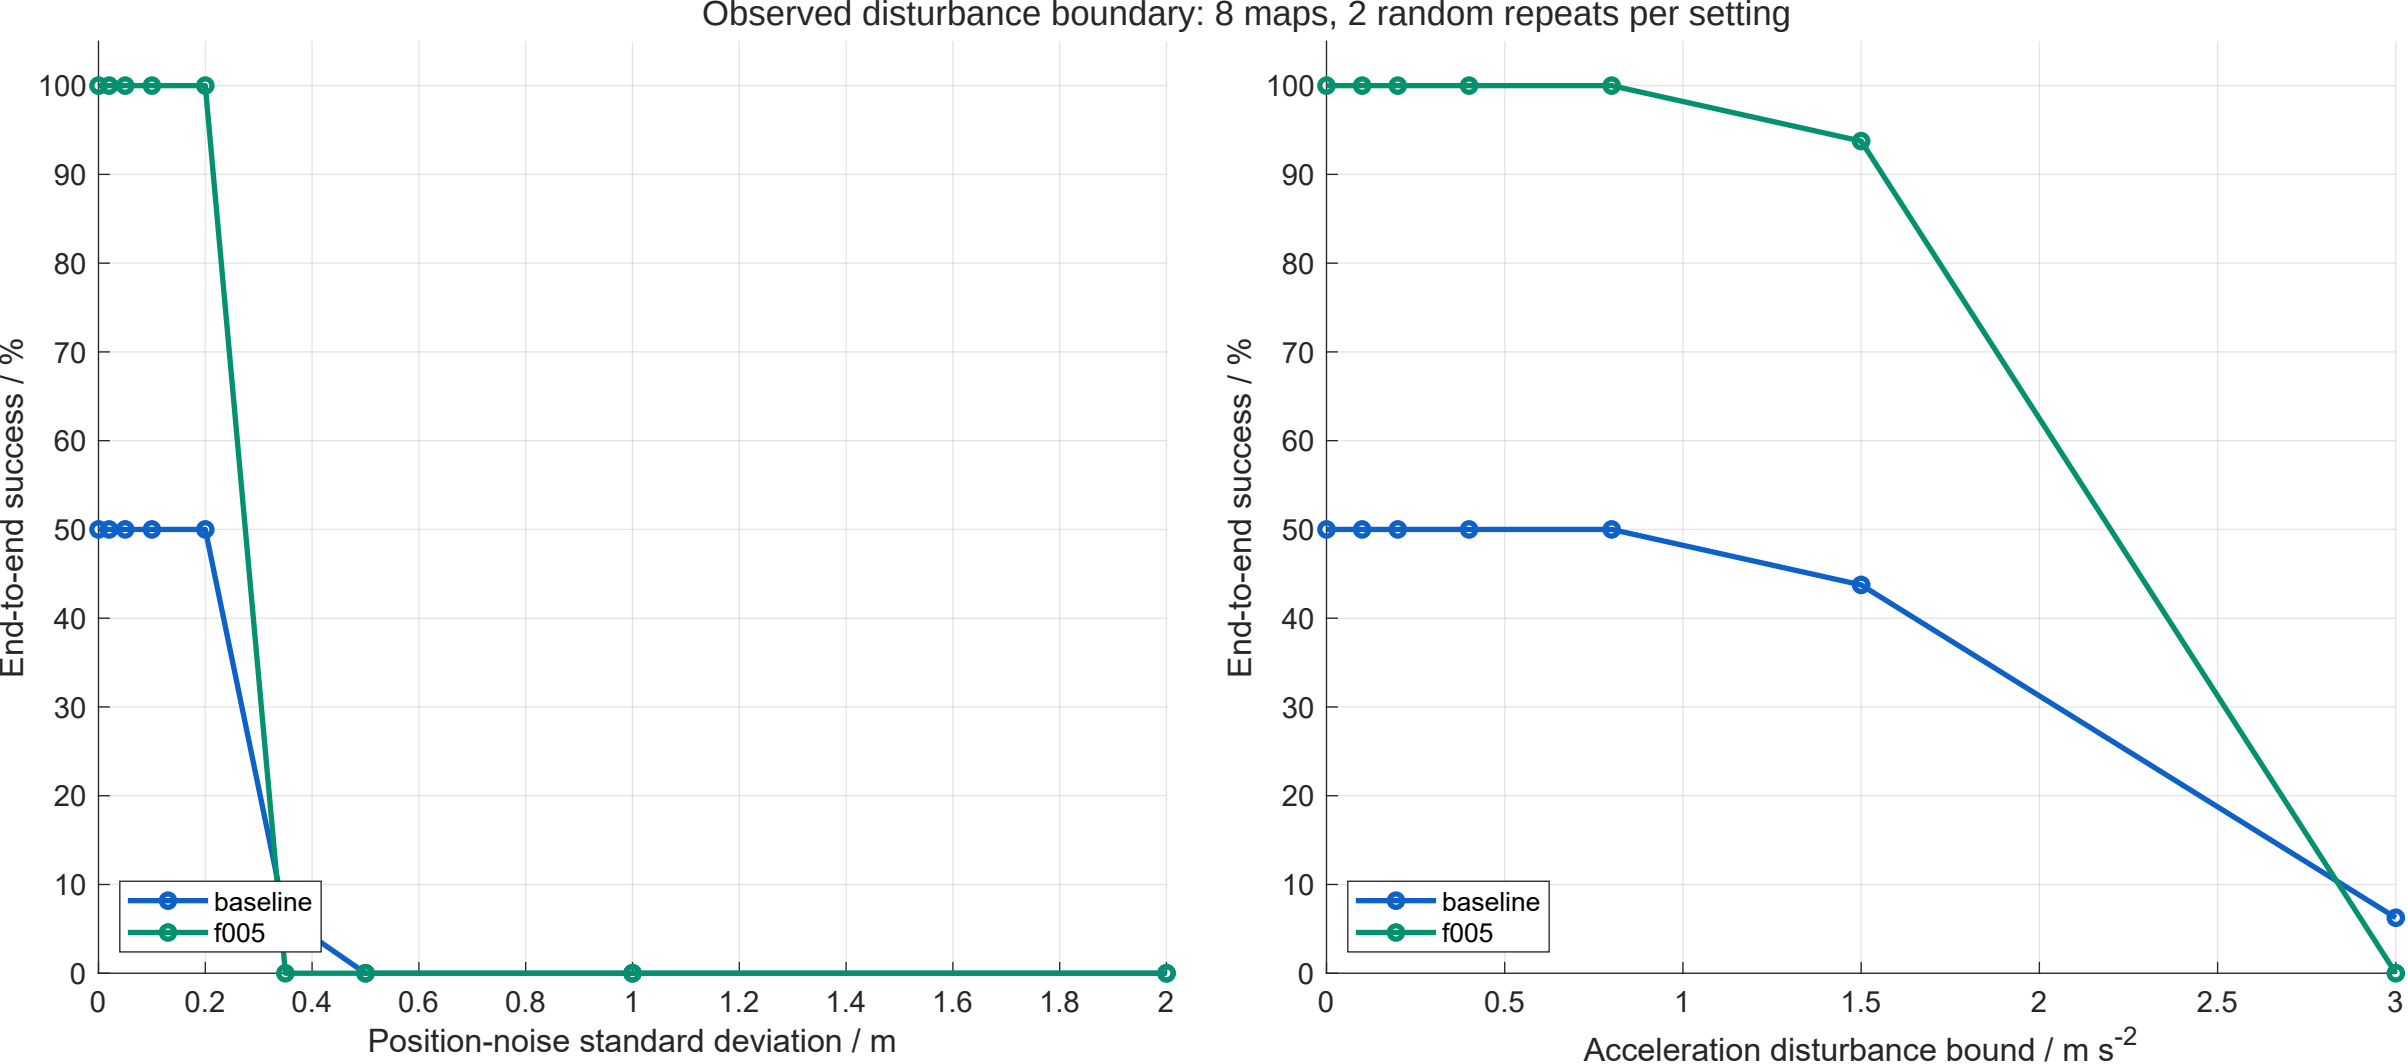
Observed disturbance boundary: 8 maps, 2 random repeats per setting
End-to-end success / %
Position-noise standard deviation / m
Acceleration disturbance bound / m s-2
baseline
f005
0
10
20
30
40
50
60
70
80
90
100
0
0.2
0.4
0.6
0.8
1
1.2
1.4
1.6
1.8
2
0.5
1.5
2.5
3