


KVChime: D_i Map and TLB Interfaces

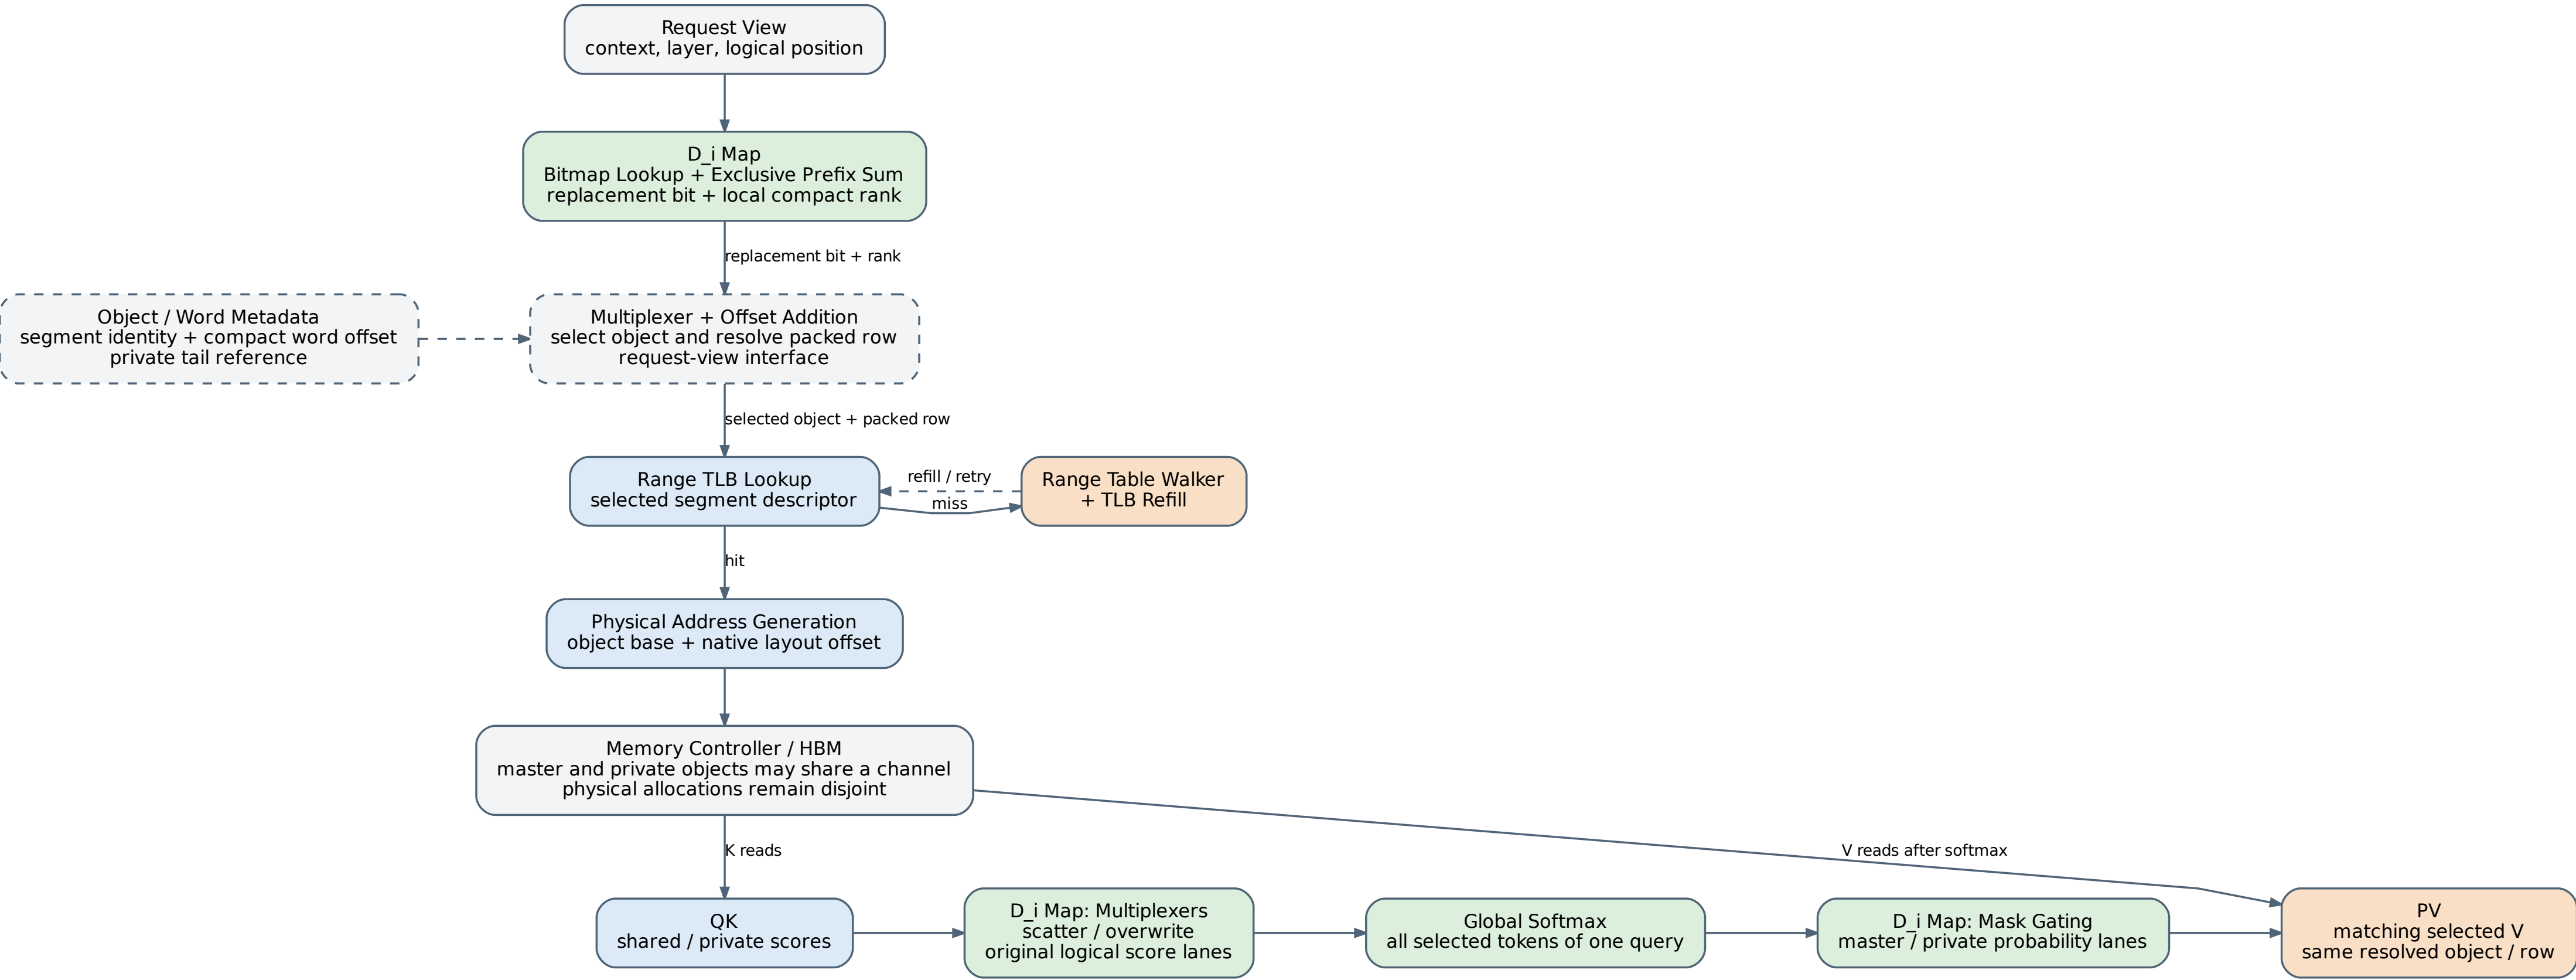

D_i determines the selected version and logical-lane correspondence; TLB resolves physical addresses.
The same D_i map governs the two phase-specific routing blocks.
Dashed boxes are view interfaces, not additional completed RTL blocks.
Packed V consumption follows the same row order; reverse RTL itself does not compact probabilities.